
INCH-POUND
MIL-F-15160/63C
29 October 1990
SUPERSEDING
MIL-F-15160/63B
20 October 1978


MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F63

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160

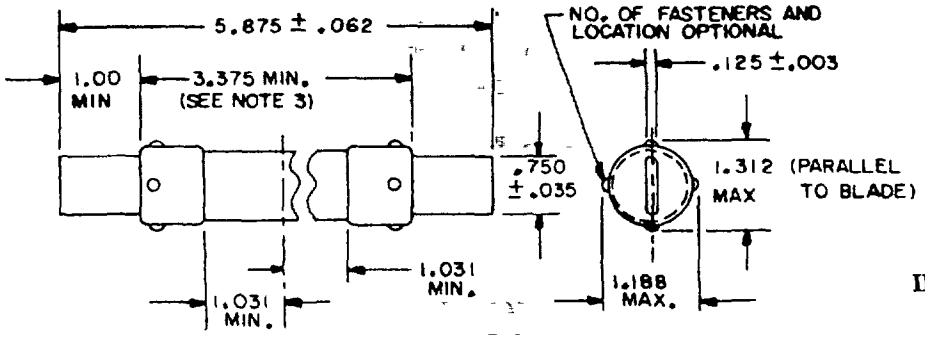



INCHES	MM
0 003	0 08
0 035	0 89
0 62	1.57
0.125	3 18
0 750	19 05
1 00	25 40
1 031	26 19
1.188	30 18
1.312	33.32
3.375	85 73
5.875	149 23

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for information only and are based on 1 inch = 25 4 mm
3. The length of the cylindrical body may be less than the indicated value if other acceptable interference means (pins through blades, collars, and so forth) are provided to prevent mounting the fuse in a fuseholder that will accommodate a fuse rated in the next lower bracket of current ratings

FIGURE 1. *Style F63, characteristic C*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

Physical.

Material

Case – Glass melamine
Knifeblade – Brass, copper, bronze, or copper alloy
Finish – Nickel or bright alloy plate, silver plated when specified
Terminal strength – MIL-STD-202, method 211, test condition E, 5 pound-inch torque between ferrules and fuse body.

Electrical

Current rating – See table I
Current carrying capacity – 110 percent of rated current
Voltage rating – See table I
Characteristic – Characteristic C only
Overload interrupt – Within 2 hour at 135 percent of rated current, and within 6 minutes at 200 percent
Short circuit interrupt – 200,000A at 500 Vac (symmetrical), 150,000A at 500 Vdc
Shock – MIL-STD-202, method 207, HI shock
Vibration – MIL-STD-202, method 204, test condition A (except 5g, 500 Hz).

2. *Type designation.* Type designation shall be as specified in table I

3. *Qualification.* Required.

TABLE I. *Type designation* [1]

Style	Characteristic	Voltage	Current
F63	C	500	70A
F63	C	500	80A
F63	C	500	90A
F63	C	500	100A

[1]For silver plated terminals, the designator "S" is added after the current rating

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be.

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

NOTE: If labels are used, 5 additional samples of any rating are required.

Sample size. The number of group III samples shall be twelve samples each of the maximum and minimum current ratings. The samples shall be divided as shown in table II.

TABLE II. *Short circuit tests.*

Number of samples	Short circuit current	Test voltage
3	5,000A	500 Vac[1]
3	200,000A	500 Vac[1]
3	5,000A	500 Vdc
3	150,000A	500 Vdc

[1]A 600 volt ac test voltage may be used

INSPECTION ROUTINE:

AC short circuit test AC short circuit tests shall be performed at the currents shown in table II at not less than 500 volts, single phase, and not greater than 20 percent power factor, lagging. The current shall be applied within plus or minus 10 degrees of the zero point of the voltage wave.

DC short circuit test DC short circuit tests shall be performed at the currents shown in table II at not less than 500 volts. The rate of rise shall be between 25,000,000 and 30,000,000 amperes per second.

Cross-reference. For applicable cross-reference see table III The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.

TABLE III *Cross-reference*

Superseding No	Superseded numbers for CAGE				
	81349	96906	71400	71424	72076
F63C500V70A	F63H70R0C	MS15252-1	KLC 70	A5Y70-11	GSCL-70
F63C500V80A	F63H80R0C	MS15252-2	KLC 80	A5Y80-11	GSCL-80
F63C500V90A	F63H90R0C	MS15252-3	KLC 90	A5Y90-11	GSCL-90
F63C500V100A	F63H100RC	MS15252-4	KLC 100	A5Y100-11	GSCL-100

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity:
Navy – SH
(Project 5920-0447-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.