
INCH-POUND
MIL-F-15160/64C
29 October 1990
SUPERSEDING
MIL-F-15160/64B
20 October 1978


MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F64

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160.

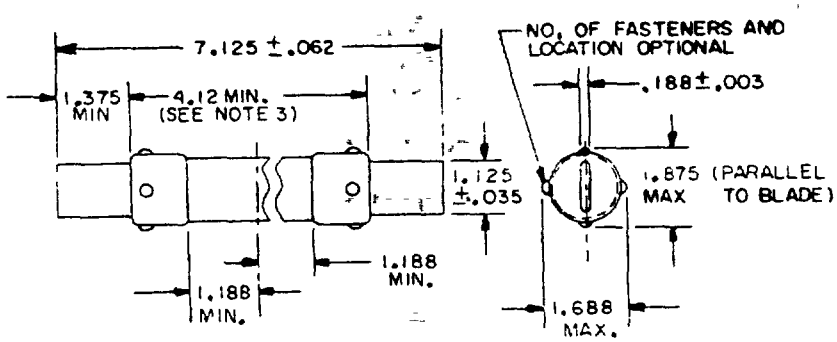

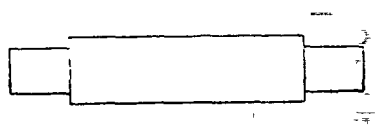

ALTERNATE CONSTRUCTION WITH TERMINAL ATTACHED INSIDE THE TUBE

INCHES	MM
0 003	0 08
0.035	0 89
0 62	1.57
0 188	4 78
1.125	28.58
1 188	30.20
1.375	34.93
1.688	42.88
1 875	47 63
4 12	104.65
7.125	180 98

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for information only and are based on 1 inch = 25 4 mm
3. The length of the cylindrical body may be less than the indicated value if other acceptable interference means (pins through blades, collars, and so forth) are provided to prevent mounting the fuse in a fuseholder that will accommodate a fuse rated in the next lower bracket of current ratings

FIGURE 1 *Style F64, characteristic C*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

Physical

Material

Case – Glass melamine
Knifeblade – Brass, copper, bronze, or copper alloy
Finish – Nickel or bright alloy plate, silver plated when specified
Terminal strength – MIL-STD-202, method 211, test condition E, 5 pound-inch torque

Electrical:

Current rating – See table I
Current carrying capacity – 110 percent of rated current
Voltage rating – See table I
Characteristic – Characteristic C only
Overload interrupt – Within 2 hours at 135 percent of rated current; and within 8 minutes at 200 percent
Short circuit interrupt – 200,000A at 500 Vac (symmetrical), 150,000A at 500 Vdc
Shock – MIL-STD-202, method 207, HI shock
Vibration – MIL-STD-202, method 204, test condition A (except 5g, 500 Hz)

Temperature rise Temperature rise shall be not greater than the values shown in table II.

2. *Type designation* Type designation shall be as specified in table I

3. *Qualification* Required

TABLE I *Type designation* [1]

Style	Characteristic	Voltage	Current
F64	C	500	110A
F64	C	500	125A
F64	C	500	150A
F64	C	500	175A
F64	C	500	200A

[1]For silver plated terminals, the type designator "S" is added after the current rating

TABLE II. *Allowable temperature rise*

Casing or body		Terminal	
Thermometer	Thermocouple	Thermometer	Thermocouple
50 °C	90 °C	60 °C	90 °C

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be:

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

NOTE: If labels are used, 5 additional samples of any rating are required.

Sample size. The number of group III samples shall be twelve samples each of the maximum and minimum current ratings. The samples shall be divided as shown in table III.

TABLE III. *Short circuit tests*

Number of samples	Short circuit current	Test voltage
3	5,000A	500 Vac[1]
3	200,000A	500 Vac[1]
3	5,000A	500 Vdc
3	150,000A	500 Vdc

[1]A 600 volt ac test voltage may be used

INSPECTION ROUTINE:

AC short circuit test. AC short circuit tests shall be performed at the currents shown in table III at not less than 500 volts, single phase, and not greater than 20 percent power factor, lagging The current shall be applied within plus or minus 10 degrees of the zero point of the voltage wave

DC short circuit test. DC short circuit tests shall be performed at the currents shown in table III at not less than 500 volts The rate of rise shall be between 25,000,000 and 30,000,000 amperes per second.

Cross-reference For applicable cross-reference see table IV. The existing stocks of superseded items may be used When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.

TABLE IV. *Cross-reference.*

Superseding No	Superseded numbers for CAGE				
	81349	96906	71400	71424	72076
F64C500V110A	F64H110RC	MS15253-1	KLC 110	A5Y110-21	GSCL-110
F64C500V125A	F64H125RC	MS15253-2	KLC 125	A5Y125-21	GSCL-125
F64C500V150A	F64H150RC	MS15253-3	KLC 150	A5Y150-21	GSCL-150
F64C500V175A	F64H175RC	MS15253-4	KLC 175	A5Y175-21	GSCL-175
F64C500V200A	F64H200RC	MS15253-5	KLC 200	A5Y200-21	GSCL-200

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity:
Navy – SH
(Project 5920-0447-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.