
INCH-POUND
MIL-F-15160/65C
29 October 1990
SUPERSEDING
MIL-F-15160/65B
20 October 1978


MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F65

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160.

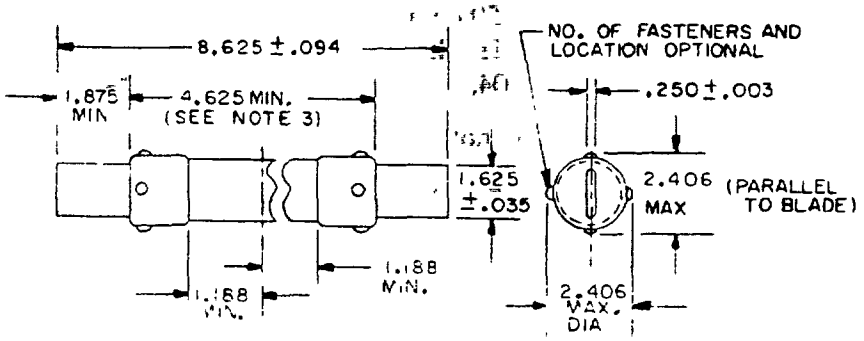

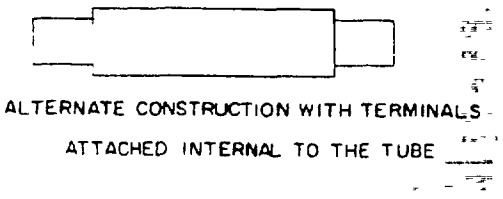

INCHES	MM
0 003	0.08
0.035	0.89
0 062	1.57
0 094	2.39
0.250	6 35
1.188	30 17
1 625	41.28
1.875	47.63
2.406	61 1
4 625	117 48
8 625	219 08

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for information only and are based on 1 inch = 25 4 mm
3. The length of the cylindrical body may be less than the indicated value if other acceptable interference means (pins through the blades, collars, and so forth) are provided to prevent mounting the fuse in a fuseholder that will accommodate a fuse rated in the next lower bracket of current ratings

FIGURE 1. *Style F65, characteristic C.*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

Physical:

Material

Case – Glass melamine
Knifeblade – Brass, copper, bronze, or copper alloy
Finish – Nickel or bright alloy plate, silver plated when specified
Terminal strength – MIL-STD-202, method 211, test condition E, 5 pound-inch torque.

Electrical:

Current rating – See table I
Current carrying capacity – 110 percent of rated current
Voltage rating – See table I
Characteristic – Characteristic C only
Overload interrupt – Within 2 hours at 135 percent of rated current; and within 10 minutes at 200 percent
Short circuit interrupt – 200,000A at 500 Vac (symmetrical), 150,000A at 500 Vdc
Shock – MIL-STD-202, method 207, HI shock
Vibration – MIL-STD-202, method 204, test condition A (except 5g, 500 Hz).

Temperature rise. Temperature rise shall be not greater than the values shown in table II.

2. *Type designation.* Type designation shall be as specified in table I.

3. *Qualification* Required.

TABLE I. *Type designation.*[1]

Style	Characteristic	Voltage	Current rating
F65	C	500	225A
F65	C	500	250A
F65	C	500	300A
F65	C	500	350A
F65	C	500	400A

[1]For silver plated terminals, the designator "S" is added after the current rating

TABLE II. *Allowable temperature rise.*

Casing or body		Terminal	
Thermometer	Thermocouple	Thermometer	Thermocouple
50 °C	90 °C	60 °C	90 °C

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspections The number of qualification samples required shall be

a. 24 samples maximum current rating of each voltage and design
b. 24 samples minimum current rating of each voltage and design.

NOTE: If labels are used, 5 additional samples of any rating are required

Sample size. The number of group III samples shall be twelve samples each of the maximum and minimum current ratings. The samples shall be divided as shown in table III.

TABLE III. *Short circuit tests.*

Number of samples	Short circuit current	Test voltage
3	5,000A	500 Vac[1]
3	200,000A	500 Vac[1]
3	5,000A	500 Vdc
3	150,000A	500 Vdc

[1]A 600 volt ac test voltage may be used

INSPECTION ROUTINE:

AC short circuit test. AC short circuit tests shall be performed at the currents shown in table III at not less than 500 volts, single phase, and not greater than 20 percent power factor, lagging The current shall be applied within plus or minus 10 degrees of the zero point of the voltage wave.

DC short circuit test. DC short circuit tests shall be performed at the currents shown in table III at not less than 500 volts. The rate of rise shall be between 25,000,000 and 30,000,000 amperes per second.

Cross-reference For applicable cross-reference see table IV. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.

TABLE IV. *Cross-reference.*

Superseding No	Superseded numbers for CAGE				
	81349	96906	71400	71424	72076
F65C500V225A	F65H225RC	MS15254-1	KLC 225	A5Y225-21	GSCL-225
F65C500V250A	F65H250RC	MS15254-2	KLC 250	A5Y250-21	GSCL-250
F65C500V300A	F65H300RC	MS15254-3	KLC 300	A5Y300-21	GSCL-300
F65C500V350A	F65H350RC	MS15254-4	KLC 350	A5Y350-21	GSCL-350
F65C500V400A	F65H400RC	MS15254-5	KLC 400	A5Y400-21	GSCL-400

PACKAGING:

Unit packaging The standard unit pack shall be 5 pieces.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities:
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity:
Navy – SH
(Project 5920-0447-19)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:49Z
Check the source to verify that this is the current version before use.