INCH-POUND
MIL-PRF-15160/65F
w/AMENDMENT 2
10 April 2019
SUPERSEDING
MIL-PRF-15160/65F
w/AMENDMENT 1
21 March 2017

PERFORMANCE SPECIFICATION SHEET

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F65

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-15160.

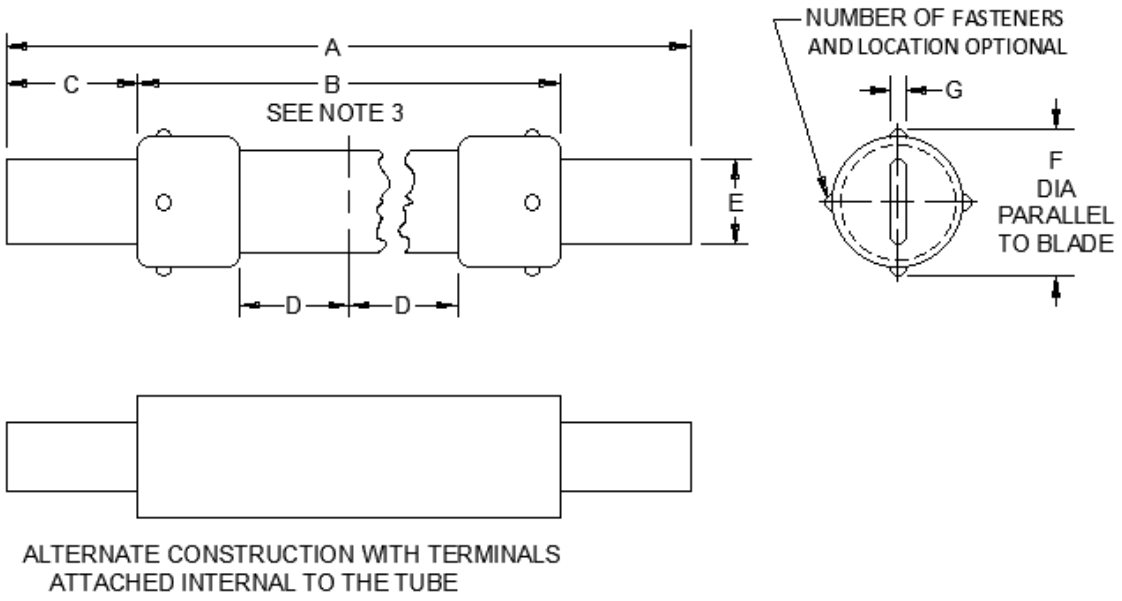


FIGURE 1. Style F65, characteristic C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	
A	8.531	8.719	216.69	221.36
B	4.625	---	117.48	---
C	1.875	---	47.63	---
D	1.188	---	30.18	---

Ltr	Inches		mm	
	Min	Max	Min	Max
E	1.590	1.660	40.39	42.16
F	---	2.406	---	61.11
G	.247	.253	6.27	6.43

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The length of the cylindrical body may be less than the indicated value if other acceptable interference means (pins through blades, collars, and so forth) are provided to prevent mounting the fuse in a fuseholder that will accommodate a fuse rated in the next lower bracket of current ratings.

FIGURE 1. Style F65, characteristic C - Continued.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Case: Glass melamine.

Knifeblade: Brass, copper, bronze, or copper alloy.

Finish: Nickel or bright alloy plate, silver plated when specified.

Terminal strength: MIL-STD-202-211, test condition E, 5 pound-inch torque.

Electrical:

Current rating: See table I.

Current carrying capacity: 110 percent of rated current.

Voltage rating: See table I.

Characteristic: Characteristic C only.

Overload interrupt: Within 2 hour at 135 percent of rated current; and within 10 minutes at 200 percent.

Short circuit interrupt: 200,000 A at 500 V ac (symmetrical), 150,000 A at 500 V dc.

Shock: MIL-STD-202-207, HI shock.

Vibration: MIL-STD-202-204, test condition A (except 5g, 500 Hz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): The PIN shall be constructed from table I (e.g., F65C500V225A).

TABLE I. Part or Identifying Number. 1/

Style	Characteristic	Voltage	Current
F65	C	500V	225A
			250A
			300A
			350A
			400A

1/ For silver plated terminals, the designator "S" is added after the current rating.

Temperature rise: Temperature rise shall be not greater than the values shown in table II.

TABLE II. Allowable temperature rise.

Casing or body		Terminal	
Thermometer	Thermocouple	Thermometer	Thermocouple
50°C	90°C	60°C	90°C

VERIFICATION:

Qualification inspection is not applicable for this specification sheet and is replaced by acceptance testing which shall consist of group A and group B inspection of MIL-PRF-15160.

Cross-reference: For applicable cross-reference see table III. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

TABLE III. Cross-reference.

Superseding number	Superseded numbers for CAGE	
	81349	96906
F65C500V225A	F65H225R0C	MS15254-1
F65C500V250A	F65H250R0C	MS15254-2
F65C500V300A	F65H300R0C	MS15254-3
F65C500V350A	F65H350R0C	MS15254-4
F65C500V400A	F65H400R0C	MS15254-5

Referenced documents. In addition to MIL-PRF-15160, this document references the following:

MIL-STD-202-204
MIL-STD-202-207
MIL-STD-202-211

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AT, CR4, MI
Navy - AS, CG, MC, OS
Air Force - 19

(Project 5920-2019-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the Assist Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:49Z
Check the source to verify that this is the current version before use.