The documentation and process conversion measures necessary to comply with this revision shall be completed by 8 February 1995

INCH-POUND

MIL-S-19500/561B
8 September 1994
SUPERSEDING
MIL-S-19500/561A
23 April 1993

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, SILICON, SWITCHING
TYPE 2N6193, JANTX, JANTXV, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for PNP, silicon, switching transistors. Three levels of product assurance are provided for each device type as specified in MIL-S-19500. Two levels of product assurance are provided for each unencapsulated device type. See 6.4 for JAN level.

1.2 Physical dimensions. See figure 1 (TO-39) and figures 2 and 3 for JANHC and JANKC (die) dimensions.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25°C.

P_T 1/ T_A = +25°C	P_T 2/ T_C = +25°C	V_{CBO}	V_{CEO}	V_{EBO}	I_C	I_B	T_{STG} and T_J
W	W	V dc	V dc	V dc	A dc	A dc	°C
1.0	10	100	100	6.0	5.0	1.0	-55 to +200

1/ Derate linearly 5.71 mW/°C for T_A > +25°C.
2/ Derate linearly 57.1 mW/°C for T_C > +25°C.

1.4 Primary electrical characteristics at T_A = +25°C.

Limits	h_{FE} at V_{CE} = 2.0 V dc 1/			$R_{\theta JC}$ °C/W
	h_{FE1} I_C = 0.5 A dc	h_{FE2} I_C = 2.0 A dc	h_{FE3} I_C = 5.0 A dc	
				°C/W
Min	60	60	40	
Max		240		17.5

1/ Pulsed (see 4.5.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Research Laboratory, ATTN: AMSRL-EP-RD, Fort Monmouth, NJ 07703-5601, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

Limits	$\lvert h_{fe} \rvert$ f = 10 MHz V_{CE} = 10 V dc I_C = 0.5 A dc	C_{obo} 100 kHz ≤ f < MHz V_{CB} = 10 V dc I_E = 0	Switching t_{on} See figure 5	Switching t_{off} See figure 6	$V_{CE(sat)1}$ 1/ I_C = 2.0 A dc I_B = 0.2 A dc	$V_{BE(sat)1}$ 1/ I_C = 2.0 A dc I_B = 0.2 A dc
		pF	µs	µs	V dc	V dc
Min	3.0					
Max	15	300	0.2	2.2	0.7	1.2

1/ Pulsed (see 4.5.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS


3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-S-19500 and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-S-19500.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-S-19500 and on figures 1, 2, and 3 herein.

3.3.1 Lead material and finish. Lead material shall be Kovar or Alloy 52. Lead finish shall be gold-plated, tin-plated, or solder dipped in accordance with MIL-S-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

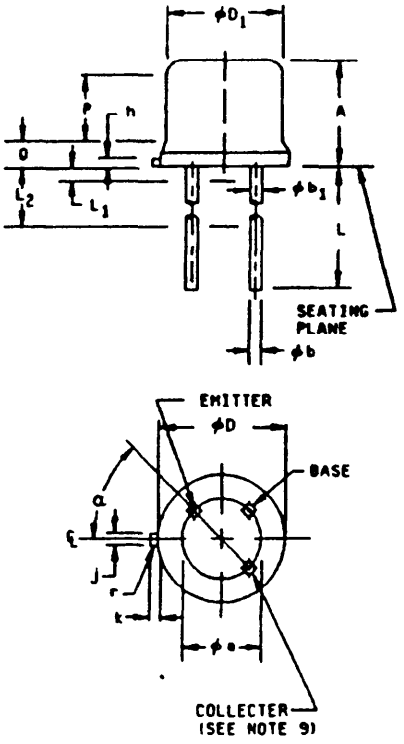


Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
A	.240	.260	6.10	6.60	
ϕa	.200 TP		5.08 TP		7
ϕb	.016	.021	0.41	0.53	7,8
ϕb_1	.016	.019	0.41	0.48	8,9
ϕD	.335	.370	8.51	9.40	
ϕD_1	.305	.335	7.75	8.51	
h	.009	.041	0.23	1.04	
j	.028	.034	0.71	0.86	3
k	.029	.045	0.74	1.14	4
L	.500	.750	12.70	19.05	8,9
L_1		.050		1.27	8,9
L_2	.250		6.35		8,9
P	.100		2.54		6
Q		.050		1.27	5
r		.010		0.25	11
α	45° TP		45° TP		7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Beyond radius (r) maximum, j shall be held for a minimum length of .011 inch (0.28 mm).
4. Dimension k measured from maximum ϕD.
5. Outline in this zone is not controlled.
6. Dimension ϕD_1 shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
7. Leads at gauge plane .054 +.001, -.000 inch (1.37 +0.03, -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to table at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown on figure 3.
8. ϕb_1 applies between L_1 and L_2. ϕb applies between L_2 and L minimum. Diameter is uncontrolled in L_1 and beyond L minimum.
9. All three leads.
10. The collector shall be electrically and mechanically connected to the case.
11. Radius (r) applies to both inside corners of tab.

FIGURE 1. Physical dimensions (TO-39).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

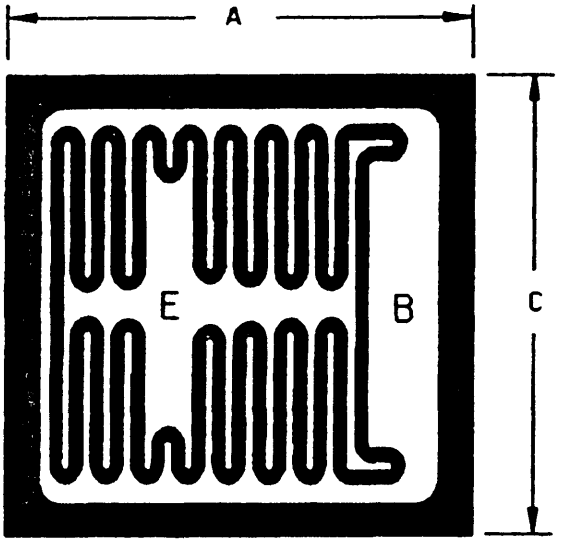


A version

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.120	.124	3.05	3.15
C	.120	.124	3.05	3.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The physical characteristics of the die are:
   Thickness: .008 inch (0.20 mm) to .012 inch (0.30 mm).
   Top metal: Aluminum 40,000 Å minimum, 50,000 Å nominal.
   Back metal: Gold 2,500 Å minimum, 3,000 Å nominal.
   Back side: Collector.
   Bonding pad: B = .015 inch (0.38 mm) x .072 inch (1.83 mm).
   E = .015 inch (0.38 mm) x .060 inch (1.52 mm).
4. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Physical dimensions JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

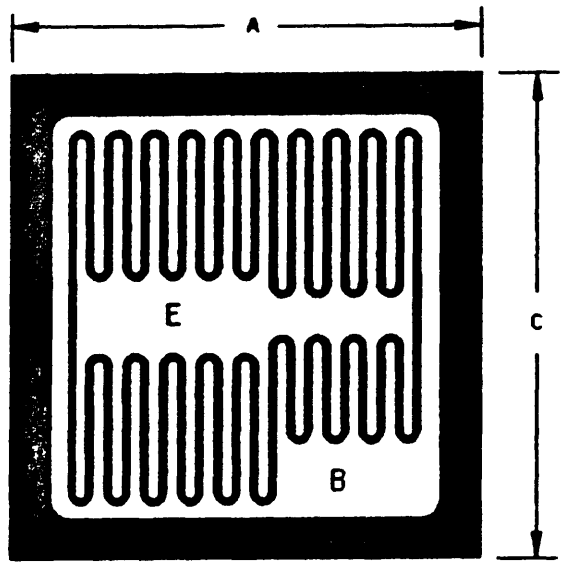


B version

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.098	.102	2.49	2.59
C	.098	.102	2.49	2.59

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The physical characteristics of the die are:
   Thickness: .006 inch (0.15 mm) to .010 inch (0.25 mm).
   Top metal: Aluminum 25,000 Å minimum, 33,000 Å nominal.
   Back metal: Gold 1,500 Å minimum, 2,500 Å nominal.
   Back side: Collector.
   Bonding pad: B = .014 inch (0.36 mm) x .030 inch (0.76 mm).
4. Unless otherwise specified, tolerance is ±.005 inch (±0.13 mm).

FIGURE 3. Physical dimensions JANHCB and JANKCB die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

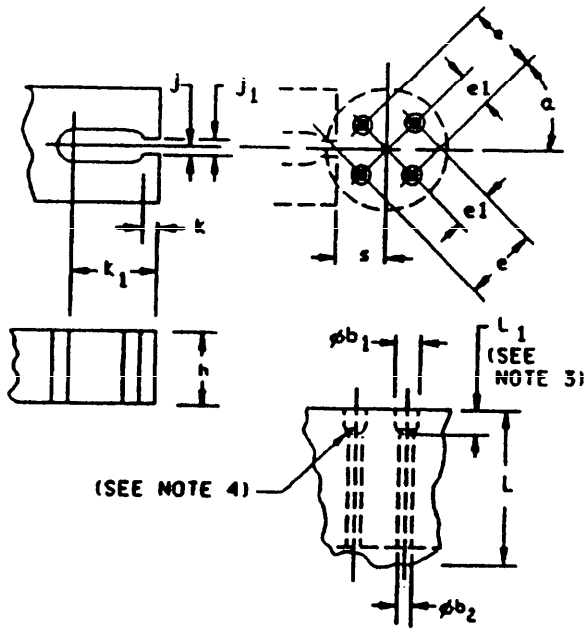

Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
ϕb_1	.0595	.0605	1.511	1.537	
ϕb_2	.0325	.0335	0.826	0.851	
e	.1995	.2005	5.067	5.093	
e_1	.0995	.1005	2.527	2.553	
h	.150 Nominal		3.81 Nominal		
j	.0175	.0180	0.444	0.457	
j_1	.0350	.0355	0.889	0.902	
k	.009	.011	0.23	0.28	
k_1	.125 Nominal		3.18 Nominal		
L	.372	.378	9.45	9.60	
L_1	.054	.055	1.37	1.40	
S	.182	.199	4.62	5.05	3
α	44.90°	45.10°	44.90°	45.10°	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The location of the tab locator within the limits indicated will be determined by the tab and flange dimensions of the device being checked.
4. Gauging procedure. The device being measured shall be inserted until its seating plane is .125 ±.010 inch (3.18 ±0.25 mm) from the seating surface of the gauge. A force of 8 ±.5 ounces shall then be applied parallel and symmetrical to the device's cylindrical axis. When examined visually after the force application (the force need not be removed) the seating plane of the device shall be seated against the gauge. The use of a pin straightener prior to insertion in the gauge is permissible.
5. Gauging plane.
6. Drill angle.

FIGURE 4. Gauge for lead and tab locations.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T03:24Z
Check the source to verify that this is the currentversion before use.

3.4 Marking. Marking shall be in accordance with MIL-S-19500. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the transistor, but shall be retained on the initial container.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500 and as specified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-S-19500.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with table II of MIL-S-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

4.3.1 Screening (JANHC and JANKC). Screening of die shall be in accordance with MIL-S-19500, appendix H.

4.3.2 JANHC and JANKC die. Qualification shall be in accordance with MIL-S-19500.

Screen (see table II of MIL-S-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
9	I_{CBO} and h_{FE2}	Not applicable
11	I_{CBO1}; h_{FE2}; ΔI_{CBO} = ±100 percent of initial value or 1.0 μA dc, whichever is greater; Δh_{FE2} = ±15 percent	I_{CBO} and h_{FE2}
12	See 4.3.2	See 4.3.2
13	Subgroups 2 and 3 of table I herein; ΔI_{CBO} = ±100 percent of initial value or 1.0 μA dc, whichever is greater; Δh_{FE2} = ±15 percent	Subgroup 2 of table I herein; ΔI_{CBO} = ±100 percent of initial value or 1.0 μA dc, whichever is greater; Δh_{FE} = ±15 percent

4.3.2 Power burn-in conditions. Power burn-in conditions are as follows:

20 V dc ≥ V_{CB} ≥ 10 V dc, P_T = 1.0 W at T_A = room ambient as defined in 4.5 of MIL-STD-750.

NOTE: No heat sink or forced air cooling on the devices shall be permitted.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-S-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-S-19500 and table I herein. Electrical measurements (end-points) shall be in accordance with the inspections of table I, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVa (JANS) and table IVb (JANTX and JANTXV) of MIL-S-19500 and herein. Electrical measurements (end-points) shall be in accordance with the inspections of table I, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table IVa (JANS) of MIL-S-19500.

Subgroup	Method	Condition
4	1037	V_{CB} = 10 V dc, P_T = 1.0 W at T_A = +25°C ±3°C; t_{on} = t_{off} ≥ 1 minute minimum for 2,000 cycles. No heat sink or forced air on the device shall be permitted.
5	1027	V_{CB} ≥ 10 V dc, T_A = +125°C, ±25°C for 96 hours, P_T = 1.0 W at T_A = +100°C or adjusted as required by the chosen T_A to give an average lot T_J = +275°C. Marking legibility requirements shall not apply.
5	2037	Test condition A.

4.4.2.2 Group B inspection (table IVb of MIL-S-19500).

Subgroup	Method	Condition
3	1037	V_{CB} ≥ 10 V dc, ΔT_J per cycles ≥ +100°C, t_{on} = t_{off} ≥ 1 minute for 2,000 cycles. No heat sink or forced air cooling on devices shall be permitted.
6	1032	T_A = +200°C.
7		High-temperature operation; T_A = +150°C. Collector to emitter voltage (saturated); method 3071; I_C = 2.0 A dc, I_B = 0.2 A dc, (pulsed, see 4.5.1); $\Delta V_{CE(sat)3}$, maximum limit 0.75 V dc. Low-temperature operation; T_A = -55°C. Base to emitter voltage saturated); method 3066; test condition A, I_C = 2.0 A dc, I_B = 0.2 A dc; pulsed (see 4.5.1); $\Delta V_{BE(sat)3}$ maximum limit 1.3 V dc. Sampling plan: 22 devices, c = 0.

4.4.3. Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table V of MIL-S-19500, and as follows. Electrical measurements (end-points) shall be in accordance with the inspections of table I, group A, subgroup 2 herein.

4.4.3.1 Group C inspection (table V of MIL-S-19500).

Subgroup	Method	Condition
2	2036	Test condition E.
6	1037	V_{CB} ≥ 10 V dc, ΔT_J per cycles ≥ +100°C, t_{on} = t_{off} ≥ 1 minute for 6,000 cycles. No heat sink or forced air cooling on devices shall be permitted.

4.5 Methods of inspection. Methods of inspection shall be as specified in appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Input capacitance. This test shall be conducted in accordance with method 3240 of MIL-STD-750, except the output capacitor shall be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Breakdown voltage, collector to emitter	3011	Bias condition D; I_C = 50 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$	100		V dc
Collector to emitter cutoff current	3041	Bias condition D; V_{CE} = 100 V	I_{CEO}		100	µA dc
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 90 V dc; V_{BE} = 1.5 V dc	I_{CEX1}		10	µA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 100 V dc	I_{CBO}		10	µA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 6.0 V dc	I_{EBO}		100	µA dc
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 0.5 A dc; pulsed (see 4.5.1)	h_{FE1}	60		
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 2.0 A dc; pulsed (see 4.5.1)	h_{FE2}	60	240	
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 5.0 A dc; pulsed (see 4.5.1)	h_{FE3}	40		
Collector to emitter voltage (saturated)	3071	I_C = 2.0 A dc; I_B = 0.2 A dc; pulsed (see 4.5.1)	$V_{CE(sat)1}$		0.7	V dc
Collector to emitter voltage (saturated)	3071	I_C = 5.0 A dc; I_B = 0.5 A dc; pulsed (see 4.5.1)	$V_{CE(sat)2}$		1.2	V dc
Base emitter voltage (saturated)	3066	Test condition A; I_C = 2.0 A dc; I_B = 0.2 A dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$		1.2	V dc
Base emitter voltage (saturated)	3066	Test condition A; I_C = 5.0 A dc; I_B = 0.5 A dc; pulsed (see 4.5.1)	$V_{BE(sat)2}$		1.8	V dc

See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 90 V dc; V_{BE} = +1.5 V dc	I_{CEX2}		1.0	mA dc
Low-temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 2.0 A dc; pulsed (see 4.5.1)	h_{FE4}	12		
Subgroup 4						
Small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 0.5 A dc; f = 10 MHz	$\|h_{fe}\|$	3	15	
Open circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		300	pF
Input capacitance (output open-circuited)	3240	V_{BE} = 2.0 V dc; I_C = 0; 100 kHz ≤ f ≤ 1 MHz; (see 4.5.2)	C_{ibo}		1,250	pF
Pulse response						
Pulse delay time		See figure 5	t_d		100	ns
Pulse rise time		See figure 5	t_r		100	ns
Pulse storage time		See figure 6	t_s		2	µs
Pulse fall time		See figure 6	t_f		200	ns
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = +25°C; t ≥ 0.5 s; 1 cycle				
Test 1		I_C = 5.0 A dc; V_{CE} = 2.0 V dc				
Test 2		I_C = 55 mA dc; V_{CE} = 90 V dc				
End-point electrical measurements		See table I, group A; subgroup 2				
Subgroups 6 and 7						
Not applicable						


1/ For sampling plan, see MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

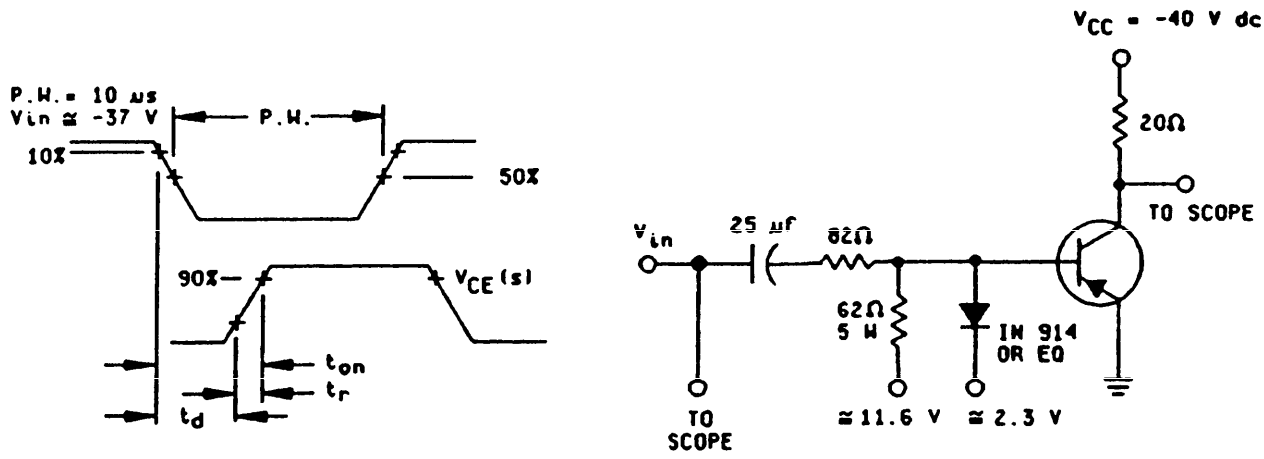

NOTES:
1. The rise time (t_r) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50Ω.
2. Scope: Z_{IN} ≥ 1 MΩ, C_{IN} ≤ 20 pF, rise time ≤ .20 ns.
3. Conditions: I_C = 2 A, I_{B1} = 200 mA.

FIGURE 5. Saturated turn-on switching waveform and time test circuit.

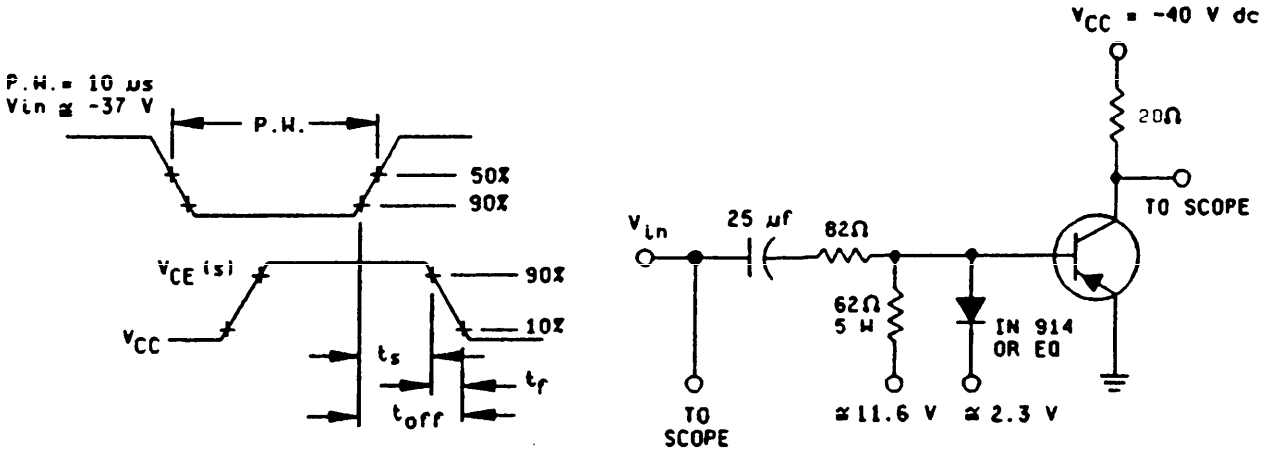

NOTES:
1. The rise time (t_r) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50 Ω.
2. Scope input: Z_{IN} ≥ 1 MΩ, C_{IN} ≤ 20 pF, rise time ≤ .20 ns.
3. Conditions: C_I = 2 A, I_{B1} = I_{B2} = 200 mA.

FIGURE 6. Saturated turn-off switching waveform and time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4.5.3 Thermal resistance (to be performed for qualification inspection only). Thermal resistance measurements shall be conducted in accordance with method 3131 of MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power applications shall be .15 A dc.

b. Collector to emitter voltage magnitude shall be 20 V dc.

c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be +25°C ≤ T_R ≤ +35°C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to case.

f. Maximum limit shall be $R_{\theta JC}$ = 17.5°C/W.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-S-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.1).

c. For die acquisition, specify the JANHC or JANKC letter version (see figures 3, 4, and 5).

d. Product assurance level and type designation.

6.3 Application guidance. The following NPN type transistor is complimentary to the PNP device listed herein.

NPN	PNP
2N5339	2N6193

6.4 Replacement data. JANTX devices are direct one way replacements for JAN devices (example, JANTX2N6193 and JAN2N6193). Manufacturers can no longer manufacture device types from this specification with a JAN assurance level.

6.5 Suppliers of JANHC and JANKC die. The qualified die suppliers with the applicable letter version (example, JANHCA2N6193) will be identified on the QPL.

JANC ordering information		
PIN	Manufacturers	
	33178	34156
2N6193	JANHCA2N6193 JANKCA2N6193	JANHCB2N6193 JANKCB2N6193

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T03:24Z
Check the source to verify that this is the currentversion before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodian:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Air Force - 99

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5961-1685)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-19500/561B	2. DOCUMENT DATE (YYMMDD) 940908

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, SILICON, SWITCHING, TYPE 2N6193, JANTX, JANTXV, JANS, JANHC, AND JANKC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DIRECTOR, US ARMY RESEARCH LAB/EPSD	b. TELEPHONE (Include Area Code) (1) Commercial: 908-544-3441/3148 (2) AUTOVON: 995-3441/3148
c. ADDRESS (Include Zip Code) ATTN: AMSRL-EP-RD FORT MONMOUTH, NJ 07703-5601	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 98/290

Source: https://assist.dla.mil -- Downloaded: 20261O-19T03:24Z
Check the source to verify that this is the current version before use.