The documentation and process conversion measures necessary to comply with this document shall be completed by 4 September 2025.

INCH-POUND

MIL-PRF-19500/722D
w/AMENDMENT 1
4 April 2025
SUPERSEDING
MIL-PRF-19500/722D
12 December 2019

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, SCHOTTKY POWER RECTIFIER,
TYPES 1N6902, 1N6903, 1N6904, AND 1N6905,
QUALITY LEVELS JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, Schottky power rectifier diodes in a low profile surface mount package. Three levels of product assurance (JANTX, JANTXV, and JANS) are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outlines. The device package for this specification sheet is a surface mount UTK3 package in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, T_C = +25°C.

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7
Types	V_{RWM}	I_O T_C = +100°C	I_{FSM} t_P = 8.3 ms T_C = +25°C	$R_{\theta JC}$ (junction to cathode side)	$R_{\theta JC}$ (junction to anode side)	T_{STG} and T_J
	V dc	A dc	A (pk)	°C/W	°C/W	°C
1N6902UTK3, CS, AS	45	150	2000	.25	.35	-65 to +175
1N6903UTK3, CS, AS	60	150	2000	.25	.35	
1N6904UTK3, CS, AS	80	150	2000	.25	.35	
1N6905UTK3, CS, AS	100	150	2000	.25	.35	

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, T_C = +25°C.

Column 1	Column 2		Column 3	Column 4		Column 5
Types	V_F Maximum forward voltage at T_C = +25°C V dc at I_F		V_F Maximum forward voltage at T_C = +125°C V dc at I_F	I_R Maximum reverse current (see column 2) mA at V_{RWM}		C_J Maximum junction capacitance f = 1MHz V_R = 5 VDC
	75A	150A	150A	T_J = +25°C	T_J = +125°C	pF
1N6902UTK3, CS, AS	.65	.78	.73	5.0	15	6,300
1N6903UTK3, CS, AS	.71	.82	.74	5.0	35	5,500
1N6904UTK3, CS, AS	.79	.88	.76	5.0	35	5,000
1N6905UTK3, CS, AS	.87	.94	.78	5.0	35	4,500

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANTX", "JANTXV" and "JANS".

1.5.2 Device type. The designation system for the device types of semiconductors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The semiconductors of this specification sheet use the first number and letter symbols "1N".


1.5.2.2 Second number symbols. The second number symbols for the semiconductors covered by this specification sheet are as follows: "6902", "6903", "6904", and "6905".

1.5.3 Suffix symbols. The following suffix symbols are incorporated in the PIN as applicable.

UTK3	Indicates a device package with no strap (see figure 1).
UTK3AS	Indicates a device package with a strap that connects to the anode (see figure 1)).
UTK3CS	Indicates a device package with a strap that connects to the cathode (see figure 1)).

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

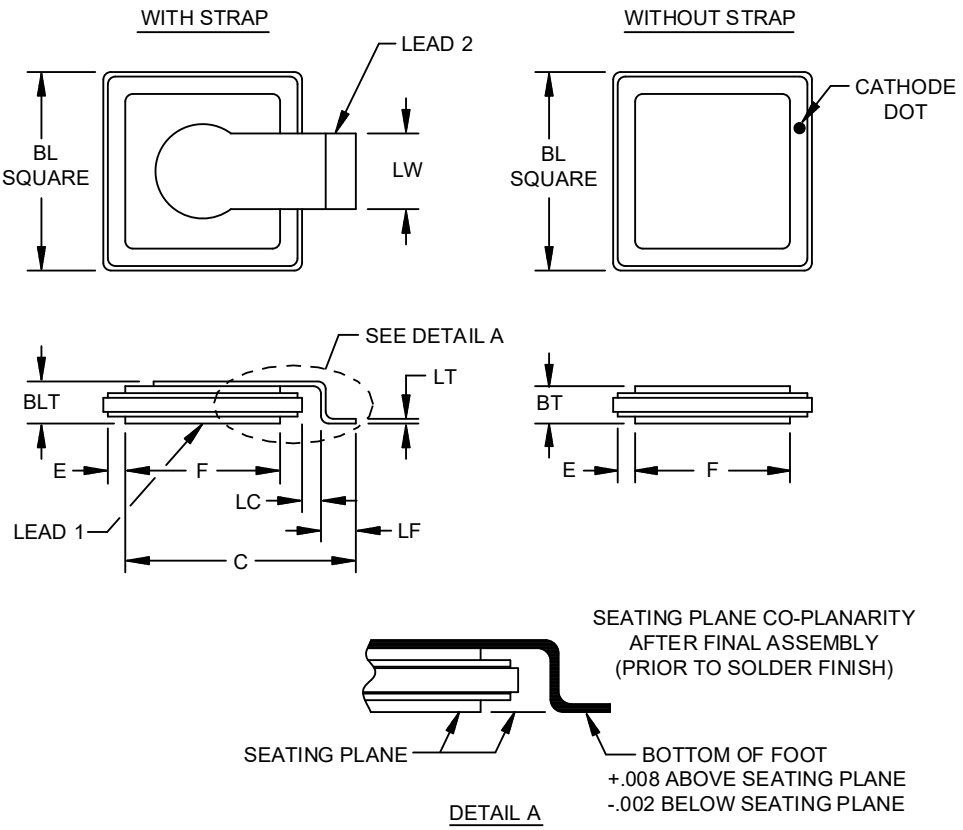

	Dimensions			
Symbol	inch	inch	mm	mm
	Min	Max	Min	Max
BL	.420	.440	10.67	11.18
BLT		.125		3.18
BT		.115		2.92
C	.469	.509	11.91	12.93
E	.038	NOM	.97	NOM
F	.331	.341	8.41	8.66
LC	.040	NOM	1.02	NOM
LF	.055	.075	1.40	1.91
LT	.005	.015	.127	.381
LW	.185	.215	4.70	5.46

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. For anode, cathode, and strap connections, see 3.4.1 and 3.4.3.

FIGURE 1. Physical dimensions and configurations of a UTK3 surface mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML-19500) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1 herein.

3.4.1 Diode construction. These devices shall be constructed utilizing double plug construction with eutectic bonding between both sides of the silicon die and terminal pins (see MIL-PRF-19500). Metallurgical bond shall be in accordance with the requirements of category II in MIL-PRF-19500. The diode body is ceramic. All seals are eutectic solder. Strap material is a copper alloy or copper sandwich. The 1N6902UTK3, 1N6903UTK3, 1N6904UTK3, and 1N6905UTK3 have no strap. The strap connects to the cathode on 1N6902UTK3CS, 1N6903UTK3CS, 1N6904UTK3CS, and 1N6905UTK3CS and to the anode on 1N6902UTK3AS, 1N6903UTK3AS, 1N6904UTK3AS, and 1N6905UTK3AS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

3.4.2 Lead formation and finish. Unless otherwise specified, lead finish (pads, bottom pad and strap foot) shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750 and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition document (see 6.2).

3.4.3 Polarity. Polarity shall be marked with the appropriate diode symbol on the strap or with a dot on the cathode side of the seal ring on "no strap" devices (see figure 1).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500 and herein. All marking may be omitted from the device except for the polarity marking. When present, the PIN prefixes JANTX, JANTXV or JANS may be abbreviated as JX, JV or JS, respectively. (Example: The PIN for JANS1N6902TK3 may be reduced to JS6902). All marking that is omitted from the body of the device shall appear on the label of the initial container.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4 and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I, II, and III).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Construction verification. Cross sectional photos from three devices shall be submitted in the qualification report.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

4.3 Screening. Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement for JANS level	Measurement for JANTX and JANTXV levels
(1) 3b	Condition A, one pulse, I_O = 0, V_{RWM} = 0, I_{FSM} = see 1.3, column 4 herein.	Condition A, one pulse, I_O = 0, V_{RWM} = 0, I_{FSM} = see 1.3, column 4 herein.
3c	Thermal impedance (see 4.3.1)	Thermal impedance (see 4.3.1)
4	Not applicable	Not applicable
5	Not applicable	Not applicable
7b	Optional	Optional
8	Serialization required.	Not applicable
9	Not applicable	Not applicable
10	Not applicable	Not applicable
11	V_{F1} and I_{R1}	V_{F1} and I_{R1}
12	Method 1038 of MIL-STD-750, test condition A; T_C =150°C, t = 240 hours, V_{RM} = 80 percent of rated V_{RWM} = see 1.3, column 2 herein V (pk), I_O = 0, f = 60 Hz; alternate test: V_{RM} = 80 percent of rated V_{RWM} (see 1.3, column 2 herein for V_{RWM}), T_C =150°C	Method 1038 of MIL-STD-750, test condition A; T_C =150°C, t = 48 hours, V_{RM} = 80 percent of rated V_{RWM} = see 1.3, column 2 herein V (pk), I_O = 0, f = 60 Hz; alternate test: V_{RM} = 80 percent of rated V_{RWM} (see 1.3, column 2 herein for V_{RWM}), T_C =150°C
13	Subgroup 2, of table I herein, and subgroup 3 of table I herein, V_{F1} and I_{R1}; ΔV_{F1} = ±50 mV (pk); ΔI_{R1} = ±1 mA dc or 100 percent from the initial value, whichever is greater. Scope display evaluation (see table I, subgroup 7)	Subgroup 2, of table I herein excluding thermal impedance; V_{F1} and I_{R1}; ΔV_{F1} = ±50 mV (pk); ΔI_{R1} = ±1 mA dc or 100 percent from the initial value, whichever is greater. Scope display evaluation (see table I, subgroup 7)
14b	Required	Required
15	Not applicable	Not applicable

(1) Surge shall precede thermal impedance. These tests shall be performed anytime after screen 3a and before screen 10.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 of MIL-STD-750. See table E-IX, group E, subgroup 4 of MIL-PRF-19500.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in tables E-VIA (JANS) and E-VIB (JANTX and JANTXV) of MIL-PRF-19500 and 4.4.2.1 and 4.4.2.2 herein. Delta measurements shall be in accordance with table III herein.

4.4.2.1 Group B inspection, table VIA (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B4	1037	ΔT_J = +85°C minimum, I_F = 2 A minimum.
B5	1038	Condition B, I_F = 1 A dc minimum, adjust T_A and I_F to achieve T_J = +175°C, +0°C, -35°C, t = 240 hours min; (heat sinking allowed).

4.4.2.2 Group B inspection, table VIB (JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	1037	ΔT_J = +85°C minimum, I_F = 2 A.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. Delta measurements shall be in accordance with table III herein.

Subgroup	Method	Condition
C5	3101	I_H = 20 A to 50 A, I_M = 10 mA to 250 mA, t_H = thermal equilibrium; t_{MD} = 200 µs maximum.
C6	1037	ΔT_J = +85°C minimum, I_F = 2 A.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and table II herein. Delta measurements shall be in accordance with table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Scope display evaluation. The reverse characteristics shall be inspected and evaluated in accordance with method 4023 of MIL-STD-750. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 2 mA/division and 10 to 20 V/division. Reverse current over the knee shall be at least 10 mA. Each device may exhibit a slightly rounded characteristic and any discontinuity or dynamic instability of the trace shall be cause for rejection.

4.5.3 Avalanche energy test. The Schottky rectifier shall be capable of absorbing the reverse energy of 350 rectangular pulse, t_P =1 µsec, I_R = 2 A at 1 kHz. This will be performed during wafer or die level prior to device assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3101	I_M = 10 mA to 250 mA, I_H = 50 A, t_H = 2 ms, t_{md} = 200 µs maximum	$Z_{\theta JX}$			
1N6902UTK3, CS, AS					.12	°C/W
1N6903UTK3, CS, AS					.12	°C/W
1N6904UTK3, CS, AS					.12	°C/W
1N6905UTK3, CS, AS					.12	°C/W
Forward voltage	4011	Condition A, Pulsed test (see 4.5.1) t_P = 300 µs	V_{F1}			
1N6902UTK3, CS, AS		I_F = 75 A (pk)			.65	V
1N6903UTK3, CS, AS		I_F = 75 A (pk)			.71	V
1N6904UTK3, CS, AS		I_F = 75 A (pk)			.79	V
1N6905UTK3, CS, AS		I_F = 75 A (pk)			.87	V
Forward voltage	4011	Condition A, Pulsed test (see 4.5.1) t_P = 300 µs	V_{F2}			
1N6902UTK3, CS, AS		I_F = 150 A (pk)			.78	V
1N6903UTK3, CS, AS		I_F = 150 A (pk)			.82	V
1N6904UTK3, CS, AS		I_F = 150 A (pk)			.88	V
1N6905UTK3, CS, AS		I_F = 150 A (pk)			.94	V
Reverse current leakage	4016	Condition A or B	I_{R1}			
1N6902UTK3, CS, AS		V_R = 45 V			5.0	mA
1N6903UTK3, CS, AS		V_R = 60 V			5.0	mA
1N6904UTK3, CS, AS		V_R = 80 V			5.0	mA
1N6905UTK3, CS, AS		V_R = 100 V			5.0	mA
Breakdown voltage	4021	Pulsed test (see 4.5.1) tp = 35 ms	V_{BR1}			
1N6902UTK3, CS, AS		I_R = 5.0 mA (pk)		50		V
1N6903UTK3, CS, AS		I_R = 5.0 mA (pk)		66		V
1N6904UTK3, CS, AS		I_R= 10 mA (pk))		88		V
1N6905UTK3, CS, AS		I_R = 10 mA (pk)		110		V

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation:		T_C = +125°C				
Forward voltage	4011	Condition A, pulsed test (see 4.5.1) tp = 300 µs	V_{F3}			
1N6902UTK3, CS, AS		I_F = 150 A (pk)			.73	V
1N6903UTK3, CS, AS		I_F = 150 A (pk)			.74	V
1N6904UTK3, CS, AS		I_F = 150 A (pk)			.76	V
1N6905UTK3, CS, AS		I_F = 150 A (pk)			.78	V
Reverse current leakage	4016	Condition A or B				
1N6902UTK3, CS, AS		V_R = 45 V			15	mA
1N6903UTK3, CS, AS		V_R = 60 V			35	mA
1N6904UTK3, CS, AS		V_R = 80 V			35	mA
1N6905UTK3, CS, AS		V_R = 100 V	I_{R2}		35	mA
Low temperature operation:		T_C = -55°C				
Breakdown voltage	4021	Pulsed test (see 4.5.1) t_P = 35 ms	V_{BR2}			
1N6902UTK3, CS, AS		I_R = 5.0 mA (pk)		45		V
1N6903UTK3, CS, AS		I_R = 5.0 mA (pk)		60		V
1N6904UTK3, CS, AS		I_R = 10 mA (pk)		80		V
1N6905UTK3, CS, AS		I_R = 10 mA (pk)		100		V
Subgroup 4						
Junction capacitance	4001	V_R = 5 V dc, f = 1 MHz, V_{SIG} = 50 mV (p-p)	C_J			
1N6902UTK3, CS, AS					6,300	
1N6903UTK3, CS, AS					5,500	
1N6904UTK3, CS, AS					5,000	
1N6905UTK3, CS, AS					4,500	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current	4066	Condition A, I_{FSM} = see 1.3, column 4, ten surges of 8.3 ms each at 1 minute intervals. T_C = 25°C				
Electrical measurements		See table I, subgroup 2 herein				
Subgroup 7						
Scope display evaluation	4023	See 4.5.2				
Electrical measurements		See table I, subgroup 2 herein				

1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point measurements, this test is required for the following subgroups:
Group B, subgroups 3, 4, and 5 (JANS).
Group B, subgroups 2 and 3 (JANTX and JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) – for qualification and requalification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			n = 45, c = 0
Thermal shock (liquid to liquid)	1056	Test condition A, 0°C to +100°C	
Temperature cycling (air to air)	1051	Test condition G, 500 cycles	
Hermetic seal	1071		
Electrical measurements		See table I, subgroup 2 and table III herein	
Subgroup 2			n = 45, c = 0
Life test	1038	Condition A, t = 1,000 hours, V_R = 80 percent V_{rated} (see 1.3, column 2 herein)	
Electrical measurements		See table I, subgroup 2 and table III herein	
Subgroup 4			
Thermal impedance curves		See MIL-PRF-19500	
Subgroup 5			
Not applicable			
Subgroup 6	1020		n = 11, c = 0
ESD			
Subgroup 7			n = 22, c = 0
Forward surge	4066	Condition A, I_{FSM} = see 1.3, 110 percent of column 4; ten surges of 8.3 ms each at 1 minute intervals, T_C = 25°C	
Electrical measurements		See table I, subgroup 2 except for thermal impedance	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

TABLE III. Groups B, C, and E delta electrical measurements. 1/ 2/ 3/ 4/ 5/

Step	Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
		Method	Conditions		Min	Max	
1.	Forward voltage	4011	Condition A	ΔV_{F1}	±50 mV		
2.	Reverse current leakage	4016	Condition A or B	ΔI_{R1}	±.1 mA or 100 percent of initial value whichever is greater.		

1/ The delta electrical measurements for group B inspection for quality level JANS (table E-VIA of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 4 and 5, the measurements of steps 1 and 2 of this table shall also be taken.
2/ The delta electrical measurements for group B inspection for quality levels JANTX and JANTXV (table E-VIB of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 3, the measurements of steps 1 and 2 of this table shall also be taken.
3/ The delta electrical measurements for group C inspection for all quality levels (table E-VII of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 6, the measurements of steps 1 and 2 of this table shall also be taken.
4/ The delta electrical measurements for group E inspection for all quality levels (table E-IX of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 1 and 2, the measurements of steps 1 and 2 of this table shall also be taken.
5/ Devices which exceed the table I limits for this test shall not be accepted.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead formation and finish (see 3.4.2).

d. The complete PIN, see sections 1.5, 6.4, and 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

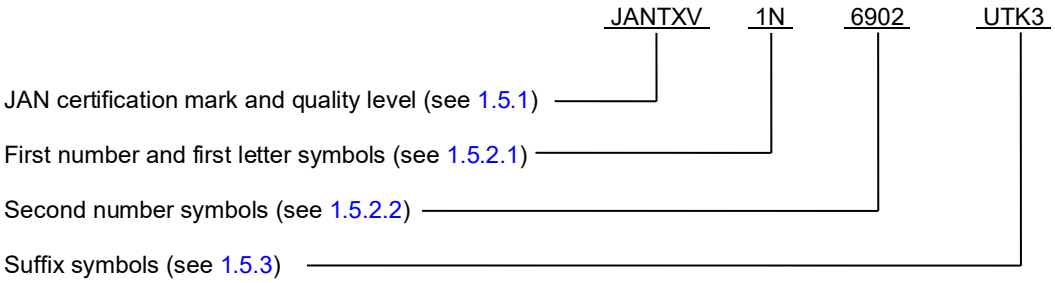

6.5 List of PINs. The following is a list of possible PINs available on this specification sheet.

Quality level "TX"	Quality level "TXV"	Quality level "S"
JANTX1N6902UTK3	JANTXV1N6902UTK3	JANS1N6902UTK3
JANTX1N6903UTK3	JANTXV1N6903UTK3	JANS1N6903UTK3
JANTX1N6904UTK3	JANTXV1N6904UTK3	JANS1N6904UTK3
JANTX1N6905UTK3	JANTXV1N6905UTK3	JANS1N6905UTK3
JANTX1N6902UTK3CS	JANTXV1N6902UTK3CS	JANS1N6902UTK3CS
JANTX1N6903UTK3CS	JANTXV1N6903UTK3CS	JANS1N6903UTK3CS
JANTX1N6904UTK3CS	JANTXV1N6904UTK3CS	JANS1N6904UTK3CS
JANTX1N6905UTK3CS	JANTXV1N6905UTK3CS	JANS1N6905UTK3CS
JANTX1N6902UTK3AS	JANTXV1N6902UTK3AS	JANS1N6902UTK3AS
JANTX1N6903UTK3AS	JANTXV1N6903UTK3AS	JANS1N6903UTK3AS
JANTX1N6904UTK3AS	JANTXV1N6904UTK3AS	JANS1N6904UTK3AS
JANTX1N6905UTK3AS	JANTXV1N6905UTK3AS	JANS1N6905UTK3AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.

6.6 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activity:
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961-2025-021)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:11Z
Check the source to verify that this is the current version before use.