The documentation and process conversion measures necessary to comply with this revision shall be completed by 1 Feburary 1994

INCH-POUND

MIL-S-19500/571A
1 November 1993
SUPERSEDING
MIL-S-19500/571
13 May 1987

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, FIELD EFFECT TRANSISTORS, MOS, N-CHANNEL, SILICON
TYPES 2N7104, 2N7105, 2N7108, 2N7109, JANTX, JANTXV AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for N-channel, field effect transistors. Three levels of product assurance are provided for each device type as specified in MIL-S-19500.

1.2 Physical dimensions. See figure 1 (TO-72).

1.3 Maximum ratings.

Type	P_T 1/ T_A = 2/	I_D	V_{DS}	V_{SB}	V_{DB}	V_{SD}	V_{GS}		V_{GB}		V_{GD}		T_J and T_{STG}
							Min	Max	Min	Max	Min	Max	
	W	mA	V dc	V dc	V dc	V dc	V dc		V dc		V dc		°C
2N7104	0.30	50	30	15	30	10	-20	+20	-20	+20	-30	+30	-55 to +150
2N7105	0.30	50	30	15	30	10	-0.3	+20	-0.3	+20	-30	+25	-55 to +150
2N7108	0.30	50	20	25	25	20	-20	+20	-20	+20	-30	+30	-55 to +150
2N7109	0.30	50	20	25	25	20	-0.3	+20	-0.3	+20	-25	+30	-55 to +150

1/ Derate linearly 2.4 mW/°C for $T_A \geq +25°C$.
2/ T_A = Room ambient as defined in the general requirements of paragraph 4.5 of MIL-STD-750.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: NASA/Parts Project Office (NPPO) NASA Goddard Space Flight Center, Code 310.A Greenbelt, MD 20771, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. T_C = +25°C.

Type	$V_{(BR)DS}$ $V_{BS} = V_{GS}$ = -5 V dc I_S = 10 nA dc	$V_{GS(th)}$ $V_{DS} = V_{GS} = V_T$ I_D = 50 nA dc		$r_{DS(on)}$ I_D = 1 mA dc V_{SB} = 0 V dc
	V dc Min	V dc Min	 Max	ohms Max
2N7104	10	0.5	2.0	70
2N7105	10	0.5	2.0	45
2N7108	20	0.3	2.0	70
2N7109	20	0.3	2.0	45

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.


3. REQUIREMENTS

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-S-19500 and as specified herein, except 4.2.2 shall not apply to this specification. ESD rejects shall not be counted as valid failures for PDA calculations during 100 percent screening test.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-S-19500.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-S-19500 and on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

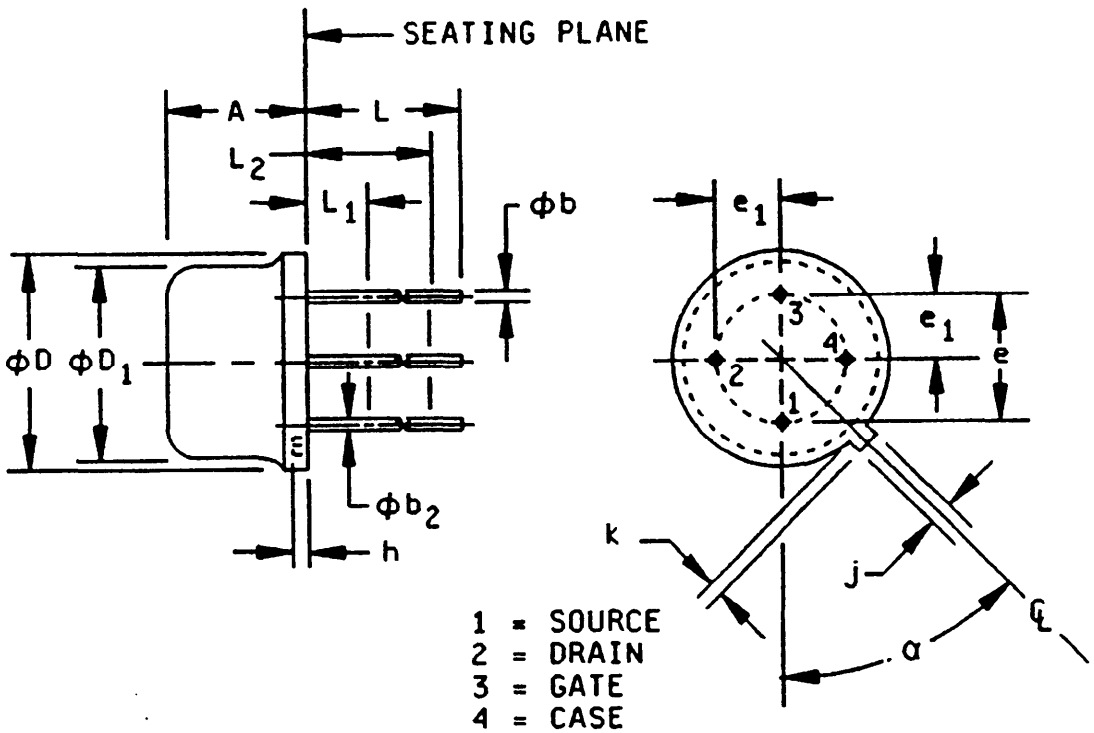

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. (All leads) ϕb_2 applies between L_1 and L_2. ϕb applies between L_2 and L minimum. Diameter is uncontrolled in L_1 and beyond L minimum.
4. Measured from maximum diameter of the product.
5. Leads having maximum diameter .019 inch (0.48 mm) measured in gauging plane .054 inch (1.37 mm) +.001 inch (0.025 mm) -.000 inch (0.00 mm) below the seating plane of the product shall be within .007 inch (0.17 mm) of their true position relative to a maximum width tab.
6. The product may be measured by direct methods or by gauge.
7. Tab centerline.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions				
	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.170	.210	4.32	5.33	
ϕb	.016	.021	0.41	0.53	3
ϕb_2	.016	.019	0.41	0.48	3
ϕD	.209	.230	5.31	5.84	
ϕD_1	.178	.195	4.52	4.95	
e	.100 T.P.		2.54 T.P.		5
e_1	.050 T.P.		1.27 T.P.		6
h		.030		0.76	
j	.036	.046	0.91	1.17	
k	.028	.048	0.71	1.22	4
L	.500		12.70		3
L_1	---	.050	---	1.27	3
L_2	.250	---	6.35	---	3
α	45° TP		45° TP		5, 7

FIGURE 1. Physical dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T03:31Z
Check the source to verify that this is the currentversion before use.

3.3.1 Lead material and finish. Lead material shall be Kovar or Alloy 52; a copper core is permitted. Lead finish shall be gold, tin plated, or solder dipped. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-S-19500.

3.5 Electrostatic discharge (ESD) protection. The devices covered by this specification require ESD protection. ESD device failures in groups A, B, and C are not to be counted as failures against the lot when verified by the following procedure. ESD failures electrical characteristics:

a. Gate to source, body or drain short (primary failure mode).

b. $r_{ds(on)}$ in excess of 100 ohms at V_{GS} = 5 V, I_D = 1 mA (secondary failure mode).

c. g_{fs} below 1 ms (secondary failure mode).

d. $V_{GS(th)}$ shift down (secondary failure mode).

ESD visual characteristics confirming:

a. Small dark short on edge of gate.

b. Crater and gate oxide when viewed under SEM.

3.6 Handling. MOS devices must be handled with certain precautions to avoid damage due to the accumulation of static charge. The following handling practices are recommended (see 3.5).

a. Devices should be handled on benches with conductive and grounded surface.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent if practical.

g. Care should be exercised during test and troubleshooting to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source and substrate, R ≤ 100 K, whenever bias voltage is to be applied drain to source.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500 and as specified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-S-19500 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS, JANTXV and JANTX levels). Screening shall be in accordance with table II of MIL-S-19500, and as specified herein. The following measurements shall be made in accordance with table III herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table II of MIL-S-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
3	Test condition F, except T_{low} = -55°C, and 20 cycles	Test condition F, except T_{low} = -55°C, and 20 cycles
9	V_{T1}, $r_{ds(on)1}$, $I_{DS(off)}$, $r_{ds(on)2}$	V_{T1}, $r_{ds(on)1}$, $I_{DS(off)}$, $r_{ds(on)2}$
10	Method 1042, test condition B	Method 1042, test condition B
11	V_{T1}, $r_{ds(on)1}$, $I_{DS(off)}$, $r_{ds(on)2}$; ΔV_T = 0.2 V or ±10 percent of initial value, whichever is greater; $\Delta r_{ds(on)1}$ = ±20 percent of initial value. $\Delta r_{ds(on)2}$ = ±20 percent of initial value. $\Delta I_{D(off)}$ = ±2 nA or ± 100 percent of initial value. whichever is greater	V_{T1}, $r_{ds(on)1}$, $I_{DS(off)}$, $r_{ds(on)2}$
12	Method 1042, test condition A	Method 1042, test condition A
13	Subgroups 2 and 3 of table I herein: ΔV_T = .2 V or ±10 percent of initial value whichever is greater. $\Delta r_{ds(on)1}$ = ±10 percent of initial value. $\Delta I_{DS(off)1}$ = ±2 nA or ± 100 percent of initial value; whichever is greater. ΔI_{GBS} = ±1 µA or ± 100 percent of initial value, whichever is greater	Subgroup 2 of table I herein; ΔV_T = .2 V or ±10 percent of initial value whichever is greater. $\Delta r_{ds(on)1}$ = ±10 percent of initial value. $\Delta I_{DS(off)1}$ = ±2 nA or ± 100 percent of initial value, whichever is greater. ΔI_{GBS} = ±1 µA or ± 100 percent of initial value, whichever is greater

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-S-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-S-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVa (JANS) and table IVb (JANTX and JANTXV) of MIL-S-19500, and as follows. Electrical measurements (endpoints) and delta requirements shall be in accordance with the applicable steps of table III herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection (table IVa (JANS) of MIL-S-19500).

Subgroup	Method	Conditions
B4	1042	Test condition A, $V_{GS} = V_{BS} = 0$, V_{DS} = 80 percent of breakdown, T_A = 125°C, t = 340 hours (option: T_A = 150°C, t = 170 hours).
B5	1042	Test condition C, 120 hours; V_{DS} = 10 V dc; P_T = 1.2 W at T_A = 75°C, or adjusted as required by the chosen T_A to give an average lot T_J = 275°C.

4.4.2.1 Group B inspection (table IVb (JANTX and JANTXV) of MIL-S-19500).

Subgroup	Method	Conditions
B3	1042	Test condition A, $V_{GS} = V_{BS} = 0$, V_{DS} = 80 percent of breakdown, T_A = 125°C, t = 340 hours (option: T_A = 150°C, t = 170 hours).

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table V of MIL-S-19500, and as follows. Electrical measurements (endpoints) and delta requirements shall be in accordance with the applicable steps of table III herein.

4.4.3.1 Group C inspection (table V of MIL-S-19500).

Subgroup	Method	Conditions
C6	1042	Test condition A, $V_{GS} = V_{BS} = 0$, V_{DS} = 80 percent of breakdown, T_A = 125°C, t = 1000 hours (option: T_A = 150°C, t = 500 hours).

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Leakage current drain to source	3413	$V_{GS} = V_{BS} = -5$ V dc $V_{DS} = 10$ V dc	$I_{DS(off)1}$		10	nA dc
Leakage current source to drain	3413	$V_{GS} = V_{BS} = -5$ V dc $V_{DS} = 10$ V dc	$I_{SD(off)1}$		10	nA dc
Leakage current gate	3411	$V_{BD} = V_{SB} = 0$ V				
2N7104, 2N7108		$V_{GB} = 30$ V dc	I_{GBS1}		0.1	nA dc
2N7105, 2N7109		$V_{GB} = 20$ V dc	I_{GBS2}		1.0	µA dc
Threshold voltage,	3403	$V_{DS} = V_{GS} = V_T$ $I_D = 50$ µA dc $V_{SB} = 0$ V	V_T			
2N7104, 2N7105				0.5	2.0	V dc
2N7108, 2N7109				0.3	2.0	V dc
Static drain to source on-state resistance	3423	$V_{SB} = 0$; $I_D = 1.0$				
		$V_{GS} = 5$ V	$r_{ds(on)1}$		70	ohms
		$V_{GS} = 10$ V	$r_{ds(on)2}$		45	ohms
Breakdown voltage, drain to source	3401	$V_{GS} = V_{BS} = 0$ $I_D = 10$ µA dc	$V_{(BR)DSS}$			
2N7104, 2N7105				30		V dc
2N7108, 2N7109				20		V dc
Breakdown voltage, drain to substrate	3401	$V_{GB} = 0$, source open	$V_{(BR)DB}$			
2N7104, 2N7105		$V_{DB} = 15$ V dc		10		V dc
2N7108, 2N7109		$V_{DB} = 25$ V dc		10		V dc
Breakdown voltage, source to substrate	3401	$V_{GB} = 0$, drain open, $I_S = 10$ µA dc	$V_{(BR)SB}$			
2N7104, 2N7105				15		V dc
2N7108, 2N7109				25		V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation	3421	T_A = +125°C				
Leakage current, drain to source	3413	$V_{GS} = V_{BS}$ = -5 V dc				
2N7104, 2N7105		V_{DS} = 10 V dc	$I_{DS(off)3}$		1.0	µA dc
2N7108, 2N7109		V_{DS} = 20 V dc	$I_{DS(off)4}$		1.0	µA dc
Leakage current, source to drain	3413	$V_{GD} = V_{BD}$ = -5 V dc				
2N7104, 2N7105		V_{SD} = 10 V dc	$I_{SD(off)3}$		1.0	µA dc
2N7108, 2N7109		V_{SD} = 10 V dc	$I_{SD(off)4}$		1.0	µA dc
Leakage current, gate	3411	$V_{DB} = V_{SB}$ = 0 V dc				
2N7104, 2N7108		V_{GB} = 24 V dc	I_{GBS4}		1.0	µA dc
2N7105		V_{GB} = 16 V dc	I_{GBS5}		100	µA dc
2N7109		V_{GB} = 24 V dc	I_{GBS6}		100	µA dc
Threshold voltage,	3403	$V_{DS} = V_{GS} = V_T$ I_D = 50 µA dc V_{SB} = 0 V	V_{T2}	0.1	2.25	V dc
Static drain to source on-state resistance	3423	V_{SB} = 0; I_D = 1.0 V_{GS} = 5 V	$r_{ds(on)3}$		140	ohms
Threshold voltage,	3403	$V_{DS} = V_{GS} = V_T$ I_D = 50 µA dc V_{SB} = 0 V	V_T			
2N7104, 2N7105				0.25	2.25	V dc
2N7108, 2N7109				0.1	2.25	V dc
Subgroup 4						
Forward transconductance		V_{SB} = 0; I_D = 20 mA V_{DS} = 10 V; f = 1kHz	g_{fs}	10		ms
Small-signal capacitance gate node		V_{DS} = 10 V; f = 1 MHz $V_{BS} = V_{GS}$ = -15 V	C(GS+GD+GB)		6.0	pf

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 continued						
Small-signal capacitance drain node		V_{DS} = 10 V; f = 1 MHz V_{BS} = V_{GS} = -15 V	C(GD +DB)		2.6	pf
Small-signal capacitance source node		V_{DS} = 10 V; f = 1 MHz V_{BS} = V_{GS} = -15 V	C(GS +SB)		7.0	pf
Small-signal common-source reverse transfer capacitance	3433	V_{DS} = 10 V dc; V_{BS} = V_{GS} = -15 V; C_1 = .1µF, f = 1 MHz L_1 = L_2 ≥ 500 µH	C_{rss}		2	pF
Turn-on delay time		V_{DD} = 5 V, R_L = 680 ohms See figure 3	$t_{d(on)}$		1.0	ns
Rise time		V_{DD} = 5 V, R_L = 680 ohms See figure 3	t_r		1.0	ns
Turn-off delay time		V_{DD} = 5 V, R_L = 680 ohms See figure 3	$t_{d(off)}$		12.0	ns
Subgroups 5, 6, 7						
Not applicable						

1/ For sampling plan, see MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B, and C electrical end-point measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Leakage current drain to source	3413	$V_{GS} = V_{BS} = -5$ V $V_{DS} = 10$ V	$I_{DS(off)1}$		10	nA dc
2.	Leakage current source to drain	3413	$V_{GS} = V_{BS} = -5$ V $V_{SD} = 10$ V	$I_{SD(off)1}$		10	nA dc
3.	Leakage current gate	3411	$V_{BD} = V_{SB} = 0$ V				
	2N7104, 2N7108		$V_{GB} = 30$ V dc	I_{GBS1}		0.1	nA dc
	2N7105, 2N7109		$V_{GB} = 20$ V dc	I_{GBS2}		1.0	µA dc
4.	Threshold voltage,	3403	$V_{DS} = V_{GS} = V_T$ $I_D = 50$ µA dc $V_{SB} = 0$ V	V_T			
	2N7104, 2N7105				0.5	2.0	V dc
	2N7108, 2N7109				0.3	2.0	V dc
5.	Static drain to source on-state resistance	3423	$V_{SB} = 0$; $I_D = 1.0$				
			$V_{GS} = 5$ V	$r_{ds(on)1}$		70	ohms
			$V_{GS} = 10$ V	$r_{ds(on)2}$		45	ohms
6.	Breakdown voltage, drain to source	3401	$V_{GS} = V_{BS} = 0$ $I_D = 10$ µA dc	$V_{(BR)DSS}$			
	2N7104, 2N7105				30		V dc
	2N7108, 2N7109				20		V dc
7.	Breakdown voltage, drain to substrate	3401	$V_{GB} = 0$, source open	$V_{(BR)DB}$			
	2N7104, 2N7105		$V_{DB} = 15$ V dc		10		V dc
	2N7108, 2N7109		$V_{DB} = 25$ V dc		10		V dc
8.	Breakdown voltage, source to substrate	3401	$V_{GB} = 0$, drain open, $I_S = 10$ µAdc	$V_{(BR)SB}$			
	2N7104, 2N7105				15		V dc
	2N7108, 2N7109				25		V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T03:31Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B, and C endpoint measurements - Continued.

1/ The electrical measurements for table IVa (JANS) of MIL-S-19500 are as follows:

a. Subgroup 3, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

b. Subgroup 4, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

c. Subgroup 5, see table II herein, steps 1, 2, 3, 4, 5, 6, 7, and 8.

2/ The electrical measurements for table IVb (JANTX and JANTXV) of MIL-S-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

b. Subgroup 3, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

c. Subgroup 6, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.


3/ The electrical measurements for table V of MIL-S-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

b. Subgroup 3, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.

c. Subgroup 6, see table II herein, steps 1, 2, 3, 4, 5, 6, and 7.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

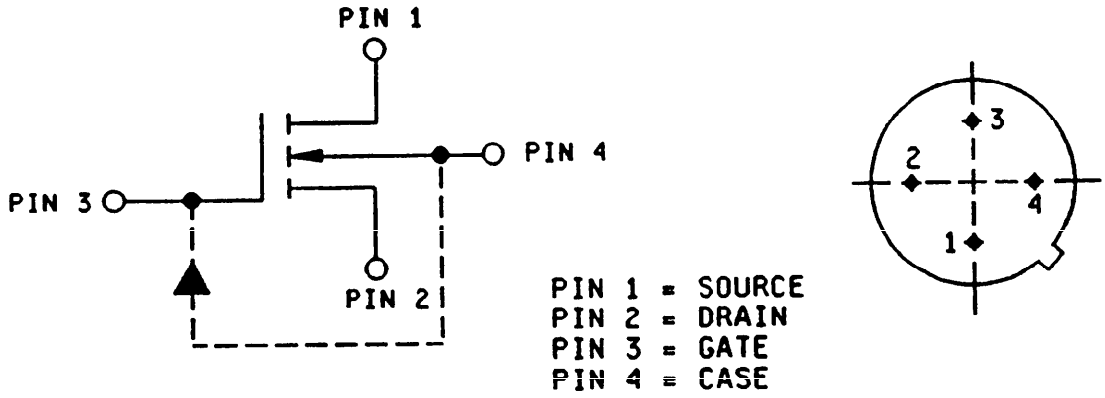

2N7104
2N7108 - Nonzenered
2N7105
2N7109 - Zenered

FIGURE 2. Schematic diagram and pin orientation (bottom view).


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

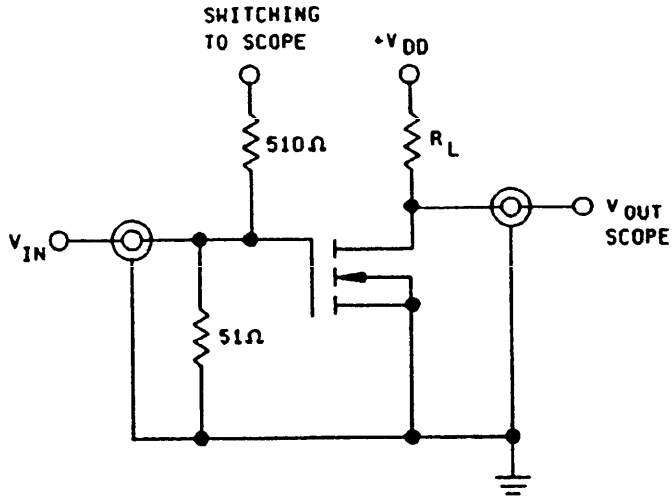

NOTES:
Input pulse: t_d, t_r < 1 ns.
Pulse width = 100 ns.
Rep rate = 1 MHz.

SAMPLING SCOPE
t_r < 360 ps; $R_{IN} \geq 1$ M ohm; $C_{IN} \leq 2.0$ pf.

TYPICAL SWITCHING WAVEFORM

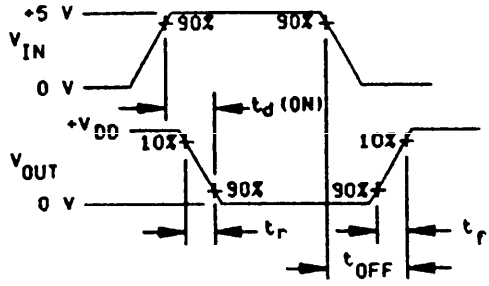

NOTE:
t_{off} is dependent on R_L and C_L and does not depend on the device chatacteristics.

FIGURE 3. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 202610-19T03:31Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-S-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.1).

c. Type designation and product assurance level.

6.3 Cross reference and compliment list. Parts from this specification are one way substitutable replacements for the following commericial Part or Identifying Numbers (PINs).

Prefered types	Commercial types and SCD numbers	CAGE
2N7104	SD210DE	17856
2N7108	SD214DE	17856
2N7105	SD211DE	17856
2N7109	SD215DE	17856

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodian:
Army - ER
NAVY - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC, OS
Air Force - 13, 15, 19, 85, 99
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5961-1483)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-19500/571A	2. DOCUMENT DATE (YYMMDD) 931101

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, FIELD EFFECT TRANSISTOR, MOS, N-CHANNEL, SILICON, TYPES 2N7104, 2N7105, 2N7108, 2N7109, JANTX, JANTXV AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-19T03:31Z
Check the source to verify that this is the current version before use.