DDD-B-151d
November 7, 1962
SUPERSEDING
Fed. Spec. DDD-B-151c
September 9, 1957

FEDERAL SPECIFICATION

# BEDSPREAD (COTTON)

*This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers cotton bedspreads.

1.2 **Classification.**

1.2.1 *Types.* Bedspreads shall be of the following types, as specified (see 6.2) :

Type I.—Crinkle.
Type II.—Dimity.
Type III.—Herringbone stripe.

## 2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 **Specifications and standards.** The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

*Federal Specifications:*

L-P-378—Plastic Film (Polyethylene, Thin Gage).
V-T-276—Thread, Cotton.
UU-P-268—Paper, Kraft, Untreated, Wrapping.
UU-T-111—Tape, Paper Gummed (Sealing and Securing).
CCC-T-191—Textile Test Methods.
PPP-B-576—Box, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-591—Boxes, Fiberboard, Wood-Cleated.
PPP-B-601—Boxes, Wood, Cleated-Plywood.
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636—Box, Fiberboard.
PPP-T-60—Tape; Pressure Sensitive Adhesive, Waterproof for Packaging and Sealing.

*Federal Standards:*

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of documents, U. S. Government Printing Offce, Washington, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

*Military Specifications:*

MIL-L-10547—Liners, Case, Waterproof.

MIL-B-17757—Boxes, Fiber, Corrugated (Modular Sizes).

*Military Standards:*

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for shipment and Storage.

MIL-16686—Medical Service Symbol.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publications.** The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Rules and Regulations Under The Textile Products Identification Act.

(Copies may be obtained without charge from the Federal Trade Commission, Washington 25, D.C.)

## 3. REQUIREMENTS

3.1 **Material.**

3.1.1 *Yarn.* The yarn shall be made from cotton which has been carded, drawn, and spun.

3.1.2 *Thread.* The thread shall be bleached conforming to type IA1, 3 cord, ticket No. 40 of V-T-276.

3.2 **Construction.** Each bedspread shall be one piece of fabric with straight, even selvages on both sides. The ends shall be cut parallel to the filling yarns. The hems at each end shall be not less than ¾ inch wide, straight, and of uniform width. The turn unders on each hem shall be not less than ¼ inch wide. All stitching shall be done with not less than eight stitches to the linear inch, using stitching type EFb-1 and stitch type 301 specified in Fed. Std. No. 751.

3.3 **Design.** Unless otherwise specified in the contract or order, cotton bedspreads shall be furnished as selected from commercial designs (see 6.2).

3.4 **Physical requirements.** The bedspreads shall conform to the requirements shown in table I for the size specified (see 3.4.1 and 6.2) when tested as specified in 4.2.3 and 4.3.

3.4.1 *Size.* Bedspreads shall be furnished in such dimensions as to conform to the sizes shown in table I. Sizes indicated are after laundering.

3.5 **Finishing and non-fibrous materials.** The total of sizing, finishing, and other non-fibrous materials shall not exceed 5.0 percent, when tested as specified in 4.3.

3.6 **Weave and finish (see 4.3).**

3.6.1 *Type I, crinkle.*

3.6.1.1 *Weave.* Type I bedspreads shall be of any weave or combination of weaves that will produce an alternate crinkle stripe and smooth stripe in the finished bedspread. The ground shall be reinforced as follows: Eight ground ends on each side and adjacent to all crinkle stripes measuring ⅜ inch or more shall be drawn in so that two ends are woven as one (eight ends weaving as four). The stripes shall run lengthwise in the bedspreads.

3.6.1.2 *Finish.* The cloth shall be of alternating bleached and yarn-dyed colored stripes. The colored stripes shall be the crinkled-warp yarns and shall be of the



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

TABLE I.—*Physical requirements*

| Type | Size before hemming, minimum (after laundering) | Weight of finished bedspreads, minimum | Yarns per inch, minimum | | Breaking strength (grab method) minimum | |
|---|---|---|---|---|---|---|
| | | | Warp | Filling | Warp | Filling |
| | *Inches* | *Ounces* | | | *Pounds* | *Pounds* |
| I—Crinkle ..... | 63 x 99<br>63 x 108<br>72 x 108 | 24<br>25-1/2<br>29 | 72 in plain ground 62 in crinkle stripe | 62 | 50 | 50 |
| II—Dimity ..... | 81 x 105 | 32-3/8 | 70 | 60 | 75 | 45 |
| III—Stripe ..... | 56 x 90 | 23 | 68 | 38 | 80 | 50 |

color specified (see 6.2). The colored stripes shall have good color-fastness to laundering, light, and bleaching when tested in accordance with 4.3.

3.6.2 *Type II, dimity.*

3.6.2.1 *Weave.* Type II bedspreads shall be of any weave or combination of weaves that will produce a series of narrow, medium, and wide corded stripes which run lengthwise in the bedspread.

3.6.2.2 *Finish.* The cloth shall be bleached.

3.6.2.3 *Insignia of bedspreads for Defense Medical Supply Center procurement.* Type II bedspreads shall be stamped in black indelible ink with the stock number in block letters ¼ inch in height and a caduceus of appropriate size centered between the letters "U" and "S" in accordance with type I of MS 16686. Marking shall be placed midway between the two sides on the underside of the ¾-inch hem. The marking applied shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.3.

3.6.3 *Type III, herringbone stripe.*

3.6.3.1 *Weave.* Type III bedspreads shall be a combination weave consisting of alternating solid-color bands of narrow ribbed and chevron stripes (see figure 2). The stripes shall run lengthwise of the bedspread. When specified (see 6.2), an insignia similar to figure 1 shall be woven in the center of the bedspread. It shall consist of two concentric knotted rope designs with the letters "U.S." between the two circles. The height of the letters shall be one-third of the distance between the outer and inner circles. Within the inner circle shall be a fouled anchor set at an angle of approximately 30 degrees from the vertical. The finished insignia shall measure between 11½ and 15 inches in outside diameter, with a 5⅜- to 8-inch diameter of the inner circle.





FIGURE 1. NAVY AND COAST GUARD INSIGNIA



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

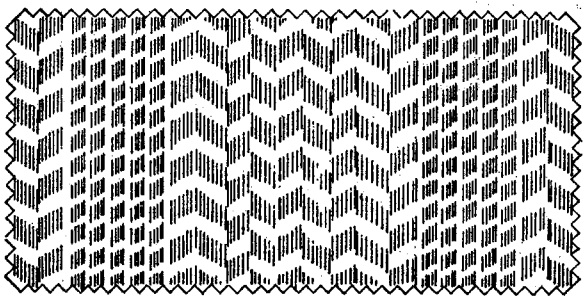


FIGURE 2 DIAGRAM OF GROUND WEAVE

**3.6.3.2** ***Finish.*** **The cloth shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.3.**

**3.7 Fiber identification.** **Each bedspread shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations Under The Textile Fiber Products Identification Act.**

**3.8 Workmanship.** **The bedspreads shall conform to the quality of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.**

## 4. SAMPLING, INSPECTION, AND TEST PROCEDURES

**4.1 Contractor's inspection responsibility.** **The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may ultilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.**

**4.2 Examination for acceptance.** **Examination shall be in accordance with the provisions of MIL-STD-105.**

**4.2.1** ***Examination of the end item.*** **Defects found during examination of the end item shall be classified in accordance with the following lists. The sample unit shall be one individual bedspread. The acceptable quality level (AQL) shall be 2.5 major defects and 10.0 total defects (major and minor combined) per 100 units (individual bedspreads). The inspection level shall be level I of MIL-STD-105. The lot size shall be expressed in units of one individual bedspread each.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

| Defects | Classification | |
|---|---|---|
| | Major | Minor |
| Cut, hole, or tear (including selvage)—Any | X | |
| Smash—Any | X | |
| Floats or skips (other than those which are characteristic of the approved weave or weaves): | | |
| — Multiple, 1/2 square inch or more in area | X | |
| — Multiple, less than 1/2 square inch in area | | X |
| — Single, over 9 inches in length | | X |
| Broken or missing yarns: | | |
| — Three or more, less than 9 inches apart regardless of length | X | |
| — Two, less than 9 inches apart, over 3 inches in length | | X |
| — Single, three or more per bedspread | | X |
| — Single, 9 inches or more in length | | X |
| Hitch-back or open places | X | |
| Slub, slug, slough-off or jerked in filling: | | |
| More than 3 times the thickness of normal yarn | | X |
| Spot, stain, or streak: | | |
| — More than 1 inch in combined dimensions* | X | |
| — One inch or less but not less than 1/4 inch in combined dimensions* | | X |
| Heavy filling bar—Any* | | X |
| Fine or light filling bar—Any* | | X |
| Color, pattern, or design—Not as specified | X | |
| Knot—Untrimmed end or oversized knot protruding from face of bedspread | | X |
| Temple cuts or abrasion marks | | X |
| Workmanship: | | |
| Open seam—Seam open more than 1/2 inch on hem | X | |
| —Seam open 1/4 inch but not more than 1/2 inch on hem | | X |
| Raw edge—More than 1/2 inch, but securely caught in stitching | | X |
| NOTE: A raw edge not securely caught in the stitching shall be classified as an open seam | | |
| Seam and stitch type—Wrong seam type | | X |
| —Wrong stitch type | | X |
| Stitch tension—Loose tension, resulting in a loosely secured seam | | X |
| —Tight tension (stitches break when normal strain is applied to the seam or stitching) | | X |
| NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector will test seam by exerting pull on the seam | | |
| Stitches per inch—less than 8 stitches per inch | | X |
| Hem—Varies in width by more than 1/4 inch | | X |
| —Badly twisted, pleated, or puckered | | X |
| —Needle chews | X | |
| Identification marking and insignia (when required): | | |
| —Missing, incomplete, incorrect, wrong color, illegible, or misplaced | | X |
| —Characters or design not as specified | | X |
| —Dimensions not as specified | | X |
| —Method of application not as specified | | X |

* Clearly visible at normal inspection distance (3 feet).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

4.2.2 *Weight examination.* The sample unit shall be one individual bedspread. The acceptable quality level (AQL) shall be 4.0 defects per hundred units. The sample size shall be in accordance with inspection level L-4, MIL-STD-105. The lot size shall be expressed in units of one bedspread each.

| *Examine* | *Defect* |
|---|---|
| Weight per bed spread (minimum) | Less than minimum weight specified in table I of specification for applicable type and size. |

4.2.3 *Dimensional examination.* The sample unit shall be one individual bedspread. The lot size shall be expressed in units of one bedspread. The acceptable quality level (AQL) shall be 4.0 defects per hundred units. The sample size shall be in accordance with inspection level L-6, MIL-STD-105.

| *Examine* | *Defect* |
|---|---|
| Finished length (after laundering)[1] | Less than specified |
| Finished width (after laundering)[1] | Less than specified |
| Hem | Less than 3/4 inch |
| Turn under | Less than 1/4 inch |

[1] The method of laundering shall be in accordance with the provisions of method 5550 of CCC-T-191.

4.2.4 *Examination of preparation for delivery requirements.* An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per 100 units.

| *Examine* | *Defect* |
|---|---|
| Marking (exterior and interior) | Omitted, incorrect, illegible, of improper size, location, sequence or method of application. |
| Materials | Any component missing or damaged. |
| Workmanship | Inadequate application of components, such as: Incomplete closure of case liners, container flaps, improper taping, loose strapping, inadequate stapling. Bulging or distortion of containers. |
| Content | Number of unit packages per container is more or less than required.[1] |

[1] For this defect, one intermediate package shall be examined from each container in the sample.

4.3 **Tests.** The methods of testing specified in CCC-T-191, wherever applicable, as listed in table III shall be followed. The physical and chemical values specified in section 3 apply to the average of the determination made on a sample unit for test purposes as specified in the applicable test method. The sample unit shall be two yards full width. The lot size shall be expressed in units of one bedspread each. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample size (number of sample units) shall be in accordance with table II.

TABLE II.

| Lot size | Sample size |
|---|---|
| 800 or less | 2 |
| 801 to 22,000 | 3 |
| 22,001 and over | 5 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

TABLE III.—*Test methods*

| Characteristic | Requirement reference | Test method |
|---|---|---|
| Weight | Table I | 5041 |
| Yarns per inch | Table I | 5050 |
| Breaking strength | Table I | 5100 |
| Non-fibrous materials | 3.5 | 2611 |
| Weave[1] | 3.6 | Visual |
| Colorfastness to: | | |
| Light | 3.6 | 5660 |
| Laundering | 3.6 | 5612 |
| Bleach | 3.6 | 5600 |

[1] One determination per sample unit reported as "pass or fail."

## 5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and application of various levels of packaging and packing for civil agency procurements.)

5.1 **Packaging.** Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Unit packaging.* Each bedspread shall be neatly folded to approximate dimensions of 14 by 23 inches and placed in a snug-fitting polyethylene bag. The polyethylene flexible film shall be 0.0015 inch thick conforming to type I, grade A, B, or C, finish 1 or 2 of L-P-378. All seams shall be effected by heat sealing and shall conform to the heat-seal strength requirement in L-P-378. Prior to or during the final heat sealing closure operation, excess air within the bag shall be expelled.

5.1.1.2 *Standard packaging (civil agencies).* Six folded identical bedspreads, unit packaged as specified in 5.1.1.1, shall be stacked flat and completely wrapped in 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with 2-inch minimum width gummed paper tape conforming to class 2 of UU-T-111; or with cotton tape or twine.

5.1.2 *Level C.* Bedspreads shall be packaged in accordance with the Industry's practice.

5.2 **Packing.** Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.* Bedspreads of one identity (except type III) packaged as specified in 5.1 shall be packed in the quantity as specified in table IV within a snug-fitting shipping container conforming to class 2, V3c or V3s, style RSC-L of PPP-B-636; style A or B, class 2, of PPP-B-576; overseas type of PPP-B-591 or PPP-B-601; or class 2, style 2 or 4 of PPP-B-621. The inside of each fiberboard shipping container shall be fitted with a one-piece doublefaced corrugated fiberboard liner having a minimum bursting strength of 275 p. s. i. conforming to class 1 of PPP-B-636. Each shipping container shall be provided with a type I or II, grade B or C, class 2 sealed case liner conforming to MIL-L-10547. The waterproof case liner shall be placed between the corrugated liner and the inner surfaces of the fiberboard shipping container. In lieu of the waterproof case liner, fiberboard containers shall have all seams, corners, and manufacturer's joints sealed by the application of a 3-inch-minimum-width olive-drab-color cloth tape conforming to type III, class 1 of PPP-T-60. Each shipping container shall be closed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the applicable container specification. Type III bedspreads of one identity shall be packed in the quantity as specified in table IV within a fiberboard shipping container, assembled, closed, and reinforced conforming to class weather-resistant, size 3A of MIL-B-17757.

5.2.2 *Level B.* Bedspreads of one identity (except type III) packaged as specified in 5.1 shall be packed in the quantity as specified in table IV within a snug-fitting shipping container conforming to types I or



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

II, class 1, style RSC-L of PPP-B-636; style A or B, class 1, of PPP-B-576; domestic type, style A or B of PPP-B-591 or PPP-B-601; or class 1, style 2 or 4 of PPP-B-621. The inside of each fiberboard shipping container shall be fitted with a one-piece double-faced corruguated-fiberboard liner having a minimum bursting strength of 275 p. s. i. conforming to class 1 of PPP-B-636. All flaps of the fiberboard shipping containers shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. Type III bedspreads of one identity shall be packed in the quantity as specified in table IV within a fiberboard shipping container closed and reinforced conforming to class domestic, size 3A of MIL-B-17757.

5.2.2.1 *Standard pack* (civil agencies). Bedspreads of one identity packaged as specified in 5.1.1.1 and 5.1.1.2 shall be packed in the quantity as specified in table IV within a snug-fitting fiberboard shipping container conforming to type I or II, class 1, style FTC, CSSC or FOL (optional) of PPP-B-636. The minimum bursting strength of the fiberboard shall be 275 p. s. i. for weights up to and including 90 pounds, and not less than 350 p. s. i. for weights in excess of 90 pounds. Each fiberboard shipping container shall be closed and reinforced with tape banding in accordance with the appendix of the container specification.

5.2.3 *Level C.* Bedspreads, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

TABLE IV.—*Number of packages in shipping containers*

| Type | Size | Total number of items to be contained in each shipping container |
|---|---|---|
| I—Crinkle | 63 x 99 | 60 |
| | 63 x 108 | 48 |
| | 72 x 108 | 48 |
| II—Dimity | 81 x 105 | 48 |
| III—Nesting Stripe | 56 x 90 | 30 |

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 *Polyethylene bagged packages.* Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag, so as to permit ready identification. The bag or label shall indicate the following information:

Stock number
Nomenclature
Type, size, and color
Quantity

## 6. NOTES

6.1 **Military use.** The following bedspreads are for use by military agencies:

(*a*) Type I (Air Force).
(*b*) Type II (Medical).
(*c*) Type III (Navy).

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).
(c) Design (see 3.3).
(d) Size required (see table I).
(e) Color required for type I (see 3.6.1.2) and type III (see 3.6.3.2).
(f) Detailed information relative to insignia for types II and III when insignia is required (see 3.6.2.3 and 3.6.3.1).
(g) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2.1 *Standard pack (civil agencies).* The standard pack for this commodity shall be as specified in 5.1.1.1, 5.1.1.2, and 5.2.2.1. The standard-pack requirements are intended for use in procurements of stores stock replenishments. Procuring officers should use the standard pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot, or intermediate storage point for temporary storage, subsequent issue, and for shipment to eventual use.

6.3 **Transportation description.** The transportation descriptions and minimum weights applicable to this commodity are:

*Rail:*

Spreads, bed, cotton.
Carload minimum weight—Any quantity.

*Motor:*

Dry goods, not otherwise indexed.
Truckload minimum weight — Any quantity.

6.4 Certain types and all classes have been deleted from this specification when compared to the superseded document DDD-B-151c and Interim Amendment 1. For comparison purposes, listed below are the types deleted from and retained in this specification over those contained in previous revisions.

Type VI Pique—Deleted.
Type VII Crinkle—Type I.
Type VII Class A Bleached—Deleted.
Type VII Class B Unbleached—Deleted.
Type VII Class C Color—Retained as Type I without reference to class.
Type VIII Crochet—Deleted.
Type VIII Class A Bleached—Deleted.
Type VIII Class A Pattern 1 Fancy—Deleted.
Type VIII Class A Pattern 2 Border—Deleted.
Type IX Dimity—Type II.
Type IX Class A Bleached—Retained as Type II without reference to Class.
Type IX Class B Unbleached—Deleted.
Type IX Class C Color—Deleted.
Type X Striped—Deleted.
Type X Class A White—Deleted.
Type X Class B Colored—Deleted.
Type XI Herringbone—Type III.

**Notice.** When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility not any oblibation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

**MILITARY INTEREST:**

**Army—Q M**
**Navy—S Cg Sh**
**Air Force—MAA**

Copies of this specification may be purchased for [illegible] cents each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.