DDD-B-151e
January 6, 1966

SUPERSEDING
Fed. Spec. DDD-B-151d
November 7, 1962 and
Int. Fed. Spec. DDD-B-00155 (GSA-FSS)
July 17, 1964

FEDERAL SPECIFICATION

BEDSPREAD, COTTON OR COTTON/RAYON BLEND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a cotton or a cotton/rayon blend bedspread.

1.2 Classification. Bedspreads shall be of the following types and sizes as specified in table I (see 6.2).

1.2.1 *Types.*
I—Crinkle.
II—Dimity.
III—Herringbone stripe.
IV—Corded.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:
V-T-276—Thread, Cotton.
UU-P-268—Paper, Kraft, Untreated, Wrapping.
UU-T-111—Tape; Paper, Gummed (Sealing and Securing).
CCC-T-191—Textile Test Methods.
PPP-B-636—Box, Fiberboard.

Federal Standards:
Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specfications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:
MIL-B-17757—Boxes, Fiber, Corrugated (Modular Sizes).

Military Standards:
MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MS-16686—Medical Services Symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D.C., 20580).

Technical Manual and Year Book of American Association of Textile Chemists and Colorists.

(Application for copies should be addressed to the Secretary, American Association of Textile Chemists and Colorists, Post Office Box 886, Durham, N. C.)

3. REQUIREMENTS

3.1 Sample. When available, samples are furnished as a guide only. Variations from this specification may appear in the sample, in which case this specification shall govern. Except for such variations, the design, construction, and workmanship, in all respects not covered by this specification shall be equal to the sample (see 6.3).

3.2 Preproduction sample approval. When required (see 6.2) before production is commenced, a sample of the finished bedspread of each type and size being procured, shall be submitted or made ready for the contracting officer or his authorized representative for inspection as specified herein. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

TABLE I. *Physical requirements*

Type	Size of finished bedspread (after laundering)	Weight of finished bedspreads	Yarns per inch		Breaking strength (grab method)	
	Minimum	Minimum	Minimum		Minimum	
			Warp	Filling	Warp	Filling
	Inches	*Ounces*			*Pounds*	*Pounds*
I Crinkle						
Size 1	63 by 97	24.0	72 in plain ground 62 in crinkle stripe	62	50	50
Size 2	63 by 106	25.5				
Size 3	72 by 97	27.0				
Size 4	72 by 106	29.0				
II Dimity	81 by 103	32.5	70	60	75	45
III Herringbone stripe[1]	56 by 88	23.0	68	38	80	50
IV Corded						
Size 1	63 by 103	38.0	65 including the cotton cords	32	85	70
Size 2	76 by 103	46.0				
Size 3	76 by 113	47.0				
Size 4	90 by 113	57.0				

[1]The herringbone stripes shall consist of solid color bands of narrow ribbed and chevron stripes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 *Bedspreads.* The bedspreads shall be either all cotton or a blend of cotton/rayon as specified in 3.3.1.1 or 3.3.1.2 (see 6.2.1).

Note: Bedspreads for Defense Medical procurements shall be all cotton (see 6.2).

3.3.1.1 *Bedspreads, cotton.* The yarn for the bedspreads shall be made from cotton which has been carded, drawn and spun into singles yarn for both warp and filling. The bedspreads shall meet the requirements specified in table I when tested as specified in 4.4.

3.3.1.2 *Bedspreads, cotton/rayon blend.* The yarn for the bedspreads, except for the cords for type IV bedspreads which shall be all cotton, shall consist of a blend of 50 percent cotton, as specified in 3.3.1.1, and 50 percent high wet-strength modulus type rayon, with a tolerance of plus or minus 5.0 percent for fiber content on a conditioned basis when tested as specified in 4.4.1. The yarns shall be evenly spun into singles yarn for both warp and filling. The bedspreads shall meet all requirements specified in table I when tested as specified in 4.4.

3.3.2 *Thread.* The thread used for hemming shall be 3 ply, ticket number 40, conforming to type 1A2 and 1A3 of V-T-276. The color of the thread shall match the color of the basic material. The dyed thread shall show good colorfastness to laundering, light, and bleaching when tested as specified in V-T-276.

3.4 Construction. The bedspread shall be fabricated from one piece of fabric that has straight woven selvages with the ends of the bedspread cut parallel to the filling yarns. The ends of the bedspread shall be hemmed and the four corners shall be square cut.

3.4.1 *Stitches, seams and stitching.* The stitches, seams and stitching types shall conform to Fed. Std. No. 751. Thread breaks shall be secured by stitching back of break not less than 1/2 inch.

3.4.2 *Hems.* The finished hems for the bedspreads shall be not less than 3/4 inch wide, with the raw edges turned under not less than 1/4 inch, using stitching type EFb-1. Each hem shall be stitched with not less than 5 nor more than 8 stitches per inch using stitch type 301. The stitching shall be 1/16 to 1/8 inch from the turned edge.

3.5 Design. Unless otherwise specified in the contract or order (see 6.2), selected commercial designs shall be furnished for the bedspreads.

3.6 Sizes. Bedspreads shall be furnished in the sizes specified in table I (see 6.2).

3.7 Weave and finish.

3.7.1 *Type I—crinkle.*

3.7.1.1 *Weave.* Type I bedspreads shall be of any weave or combination of weaves that will produce an alternate crinkle stripe and smooth stripe in the finished bedspreads. The ground ends, adjacent to all crinkle stripes which measure 3/8 inch or more, shall be reinforced as follows: Eight ground ends on each side of the crinkle stripes shall be drawn in so that two ends are weaving as one (eight ends weaving as four). The stripes shall run lenthwise in the bedspreads.

3.7.1.2 *Color and colorfastness.* The cloth for type I bedspreads shall be either bleached white or of alternating bleached and yarn-dyed colored stripes. The colored stripes shall be the crinkled warp yarns and shall be of the color as specified (see 6.2). The colored stripes shall have good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.7.1.3 *Identification marking.* When specified (see 6.2), type I bedspreads shall be marked with the letters "U.S." in block style, one inch high, in a black marking medium, centered 18 inches from end on underside. The marking shall show good colorfastness to laundering and bleaching when tested in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

3.7.2 *Type II—dimity.*

3.7.2.1 *Weave.* Type II bedspreads shall be of any weave or combination of weaves that will produce a series of narrow, medium, and wide corded stripes which run lengthwise in the bedspread.

3.7.2.2 *Color.* The cloth for type II bedspreads shall be bleached white.

3.7.2.3 *Marking for medical procurement.* When specified (see 6.2), type II bedspreads shall be marked with black indelible ink as follows: The stock number shall be in black letters 1/4 inch in height with a caduceus of appropriate size centered between the letters "U" and "S" in accordance with type I of MS16686. The marking shall be placed midway between the two sides on the underside of the 3/4 inch hem. The marking shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.7.3 *Type III—herringbone stripe.*

3.7.3.1 *Weave.* Type III bedspreads shall be a combination weave consisting of alternating solid-color bands of narrow ribbed and chevron stripes (see fig. 1). The stripes shall run lengthwise in the bedspread.

3.7.3.2 *Color and colorfastness.* The cloth for type III bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.7.4 *Type IV—corded.*

3.7.4.1 *Weave.* Type IV bedspreads shall be of a plain weave construction with a pronounced warp-wise cord. The cord shall be a single corded cotton yarn not less than 1/16 inch in width. The cloth shall contain not less than 4 warp cords per inch.

3.7.4.2 *Color and colorfastness.* The cloth for type IV bedspreads shall be of the color specified (see 6.2). The bedspreads shall show good colorfastness to laundering, light, and bleaching when tested in accordance with 4.4.

3.8 Nonfibrous material content. The starch and protein content, including chloroform-soluble and water-soluble materials shall not exceed 5.0 percent when tested as specified in 4.4.

3.9 Fiber identification. Bedspreads shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations under the Textile Fiber Products Identification Act.

3.10 Workmanship. The finished bedspreads shall be clean and free from any defects that might affect appearance or functionability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preacceptance inspection.

4.2.1 *Preproduction inspection.* When required (see 3.2), inspection and testing of the preproduction sample shall be made from a completely fabricated bedspread for all provisions of this specification applicable to the end product.

4.3 Inspection for acceptance. Inspection shall be in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 *Testing of components.* The quality assurance provisions for components, except as otherwise required by the specification, shall be in accordance with the appli-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

cable specifications and standards referenced herewith.

4.3.2 *Inspection of the end item.*

4.3.2.1 *Visual examination.* The defects found during this examination shall be classified in accordance with 4.3.2.1.1 through 4.3.2.1.3.

4.3.2.1.1 *Examination for material, construction, and workmanship.* The required number of bedspreads shall be inspected and defects classified listed as follows. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the bedspread, in which case only the more serious defect shall be counted. The sample unit shall be one bedspread. The lot size shall be expressed in units of one bedspread each.

Defects	Classification	
	Major	Minor
Cut, hole, or tear (including selvage)—Any	X	
Smash—Any	X	
Floats or skips (other than those which are characteristic of the approved weave or weaves):		
Multiple, 1/2 square inch or more in area	X	
Multiple, less than 1/2 square inch in area		X
Single, over 9 inches in length		X
Broken or missing yarns:		
Three or more, less than 9 inches apart regardless of length	X	
Two, less than 9 inches apart, over 3 inches in length		X
Single, three or more per bedspread		X
Single, 9 inches or more in length		X
Hitch-back:		
Distorted area 1 square inch or more in area	X	
Distorted area less than 1 square inch		X
Slub, slug, slough-off or jerked in filling:		
Over 1/8 inch in thickness	X	
1/16—1/8 inch in thickness		X
Open places—any	X	
Spot, stain, or streak:		
1 inch or more in combined dimensions*	X	
Less than one inch but not less than 1/4 inch in combined dimensions*		X
Accumulation of small spots or stains (5 or more per bedspread)		X
Heavy filling bar—Any*		X
Fine or light filling bar—Any*	X	
Color, pattern, or design—Not as specified	X	
Knot:		
Untrimmed end or oversized knot protruding from face of bedspread		X
Temple cuts or abrasion marks		X
Workmanship:		
Open seam		
Seam open more than 1/2 inch on hem	X	
Seam open 1/4 inch but not more than 1/2 inch on hem		X
Raw edge		
More than 1/2 inch, but securely caught in stitching		X
Note: A raw edge not securely caught in the stitching shall be classified as an open seam.		
Seam and stitch type:		
Wrong seam type	X	
Wrong stitch type	X	
Stitch tension:		
Loose tension, resulting in a loosely secured seam		X
Tight tension (stitches break when normal strain is applied to the seam or stitching)		X
Note: Puckering is evidence of tight tension. When puckering is evident, the inspector will test seam by exerting pull on the seam.		
Stitches per inch:		
Less than 5 stitches or more than 8 stitches per inch		X
Hem:		
Varies in width by more than 1/4 inch		X
Badly twisted, pleated, or puckered		X
Needle chews	X	
Omitted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Defects	Classification	
	Major	Minor
Identification marking (when required):		
Missing, incomplete, incorrect, wrong color, illegible, or misplaced	X	
Characters or design not as specified	X	
Dimensions not as specified	X	
Method of application not as specified	X	

*Clearly visible at normal inspection distance (3 feet).

4.3.2.1.2 *Bedspread inspection quality.* Each bedspread in the sample size shall be designated as first, second, or third quality, for inspection purposes only, in accordance with 4.3.2.1.2.1, 4.3.2.1.2.2, and 4.3.2.1.2.3.

4.3.2.1.2.1 A first quality bedspread shall be defined as follows:

Contains no major defect listed.
Contains not more than three minors listed.

4.3.2.1.2.2 A second quality bedspread shall be defined as follows:

Contains no holes, cuts, tears, or smashes.
Contains no spots, stains, or streaks exceeding two square inches.
Contains no defect of color, pattern, or design.
Contains not more than two major defects listed.
Contains not more than six total defects (major and minor combined).

4.3.2.1.2.3 A spread shall be defined as third quality when it contains defects in excess of those permitted in second quality.

4.3.2.1.3 *Inspection level and acceptable quality level (AQL).* Inspection level shall be level I of MIL-STD-105 and the AQL shall be 4.0 percent defective; i.e., the number of second and third quality bedspreads (combined) shall not exceed the acceptance number listed under the AQL for each sample size. The number of third quality bedspreads acceptable in a first quality lot shall not exceed the acceptance number listed in table II for each sample size.

TABLE II. *Acceptance number of third quality bedspreads*

Sample size	Acceptance number
0-80 (inclusive)	0
125	1
200	2
315	3
500	5

4.3.2.2 *Weight examination.* The sample unit shall be one individual bedspread. The AQL shall be 4.0 defects per hundred units. The sample size shall be in accordance with inspection level S-2, MIL-STD-105. The lot size shall be expressed in units of one bedspread each.

Examine	Defect
Weight per bedspread (minimum)	Less than minimum weight specified in table I of specification for applicable type and size.

4.3.2.3 *Dimensional examination.* The sample unit shall be one individual bedspread. The lot size shall be expressed in units of one bedspread. The AQL shall be 2.5 percent defective. The sample size shall be in accordance with inspection level S-3, MIL-STD-105. Each of the following defects listed shall be counted not more than once in each bedspread.

Examine	Defect
Finished length (after laundering[1])	Less than specified
Finished width (after laundering[1])	Less than specified
Hem	Less than 3/4 inch
Turnunder	Less than 1/4 inch

[1]The method of laundering shall be in accordance with the provisions of method 5550 of CCC-T-191.

4.3.2.4 *Examination of preparation for delivery.* An examination shall be made to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

determine that packaging, packing, and marking requirements of section 5 are complied with. Defects shall be scored in accordance with the following list. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 of MIL-STD-105 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as: Incomplete closure of container flaps, loose strapping, or inadequate stapling.
	Bulging or distortion of containers.
	Inadequate securing or sealing of wrapping materials and containers.
Content	Number of items per container is more or less than required.
	Name, type, and size on the package not as specified on container.[1]

[1]For this defect, one package shall be examined from each container in the sample.

4.4 Tests. The methods of testing specified in CCC-T-191, wherever applicable, as listed in table IV, shall be followed. The physical and chemical values specified in section 3 apply to the average of the determination made on a sample unit for test purposes as specified in the applicable test method. The sample unit shall be one full bedspread and two yards full width, of the cloth. The lot size shall be expressed in units of one bedspread each. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample size (number of sample units) shall be in accordance with table III.

TABLE III.

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and up	5

TABLE IV. *Test methods*

Characteristic	Requirement reference	Test method
Material identification	3.3.1.1 and 3.3.1.2	1200 and 1500[1,2]
Fiber content	3.3.1.2	Par. 4.4.1[1]
Size after laundering	Table I	5550[3]
Weight per bedspread	Table I	Std. Comm'l[2]
Yarns per inch	Table I	5050
Breaking strength	Table I	5100[4]
Nonfibrous materials	3.8	2611
Weave	3.7	Visual[2]
Colorfastness to:		
Light	3.7	5660
Laundering	3.7	5612
Bleaching	3.7	5600

[1]A certificate of compliance will be acceptable in lieu of the specified test.

[2]One determination per sample unit reported as "pass or fail".

[3]The results of the test shall be used in the calculation for dimensional examination (see 4.3.2.3). One determination per sample unit using one full bedspread.

[4]The breaking strength test shall be made on ground threads only.

4.4.1 *Fiber content for the blended fabric.* The blended fabric shall contain the specified fiber percentages when tested in accordance with test method No. 4 of 20A-1959T listed in the Technical Manual and Year Book of the American Association of Textile Chemists and Colorists (see 2.2). The 59.5 percent sulfuric acid test shall be utilized. Two specimens shall be tested from each sample unit.

4.4.1.1 *Calculations.* When the weights of both the bone-dry sample and residue have been found, the fiber content percentages on a conditioned basis shall be calculated by the following formula and shall be reported to the nearest 0.1 percent:

Percentage of cotton fiber (based on dry weight)

$$c = \frac{R\ (100)}{DW}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

Percentage of rayon fiber (based on dry weight)

$$v = 100\text{-}c$$

Percentage of corrected (regain) cotton fiber

$$CW = \frac{c(100)}{100 - 0.075}$$

Percentage of corrected (regain) rayon fiber

$$VW = \frac{v\ (100)}{100 - 0.110}$$

Percentage of cotton on conditioned basis

$$C = \frac{CW\ (100)}{CW + VW}$$

Percentage of rayon on conditioned basis

$$V = 100 - CW$$

where:

c = percentage of cotton (ovendry)
v = percentage of rayon (ovendry)
CW = corrected cotton
VW = corrected rayon
C = percentage of cotton on conditioned basis
V = percentage of rayon on conditioned basis

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and application of various levels of packaging and packing for civil agency procurements.)

5.1 Packaging. Packaging shall be level A or C (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Unit packaging for types I, II, and III bedspreads.* Each bedspread neatly folded to approximate dimensions of 14 by 23 inches shall be placed in a properly fitted polyethylene bag. The polyethylene film for the bag shall be not less than 0.0015 inch thick. All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape.

5.1.1.2 *Unit packaging for type IV bedspreads.* Each size 1, 2, and 3 bedspread shall be neatly folded to an approximate dimension of 11 by 18 inches; each size 4 bedspread shall be folded to an approximate dimension of 9 by 22 inches. Each folded bedspread shall be placed in a properly fitted polyethylene bag of not less than 0.0015 inch thick. All seams and closures shall be heat sealed. A hole of not more than 1/4 inch in diameter shall be made at one corner of each bag to allow the excess air within the bag to escape.

5.1.1.3 *Standard packaging (civil agencies).* Four identical bedspreads, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be stacked flat, with each bedspread reversed end to end, and completely wrapped in 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with a 2-inch minimum width gummed paper tape conforming to class 2 of UU-T-111, or with cotton tape or twine.

5.1.2 *Level C.* Bedspreads shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 *Level A.*

5.2.1.1 *Types I, II, and IV bedspreads.* Bedspreads of one type and size only, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be packed in the quantity as specified in table V, within a snug-fitting shipping container conforming to style SFF-L, grade V3c or V3s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-B-636. Each shipping container shall be closed, waterproofed and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.1.2 *Type III bedspreads.* Bedspreads, packaged as specified in 5.1.1.1, shall be packed in the quantity as specified in table V, within a shipping container, assembled, closed and reinforced conforming to class weather-resistant, size 3A of MIL-B-17757.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

5.2.2 *Level B.*

5.2.2.1 *Types I, II, and IV bedspreads.* Bedspreads of one type and size only, packaged as specified in 5.1.1.1 and 5.1.1.2, shall be packed in the quantity as specified in table V, within a snug-fitting shipping container conforming to style SFF-L, type CF, class domestic, variety SW, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of the container specification.

5.2.2.2 *Type III bedspreads.* Bedspreads shall be packed in the quantity as specified in table V within a shipping container conforming to class domestic, size 3A of MIL-B-17757, except that the brusting strength for the shipping container shall be 275 p.s.i. and the bursting strength for the fiberboard liner shall be 200 p.s.i. Each shipping container shall be closed in accordance with the appendix of the container specification.

5.2.3 *Level C.* Bedspreads shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules and regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 *Polyethylene bagged packages.* Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face; or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Stock number
Nomenclature
Type, size, and color
Quantity

TABLE V. *Number of packages in shipping containers*

Type	Size	Total number of items in each shipping container
I — Crinkle	63 by 97	30
	63 by 106	24
	72 by 97	24
	72 by 106	24
II — Dimity	81 by 103	24
III — Herringbone stripe	56 by 88	30
IV — Corded	63 by 103	24
	76 by 103	20
	76 by 113	20
	90 by 113	16

6. NOTES

6.1 **Intended use.** Bedspreads covered by this specification are intended for use by the Department of Defense, Medical Departments of the Armed Services, and General Services Administration. The following types are used by the agencies:

(*a*) Type I (Air Force) and (General Services Administration).
(*b*) Type II (Medical).
(*c*) Type III (Navy).
(*d*) Type IV (General Services Administration).

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type required (see 1.2).
(*c*) Whether preproduction sample is required (see 3.2).
(*d*) Whether all cotton bedspreads shall be specified (see 3.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

(*e*) Design required (see 3.5).
(*f*) Size required (see 3.6 and table I).
(*g*) Colors required (see 3.7.1.2, 3.7.3.2, and 3.7.4.2).
(*h*) Whether type I bedspreads shall be bleached white or bleached with colored stripes (see 3.7.1.2).
(*i*) When required, the marking for type I or II bedspreads (see 3.7.1.3 or 3.7.2.3).
(*j*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2.1 In the preparation of the contract or order, it must be noted that the supplier has the option of submitting either an all cotton or a cotton/rayon blend bedspread as specified in 3.3.1, except that the bedspreads for Defense Medical shall be all cotton.

6.3 Samples. For access to samples of the end item, address the procuring office issuing the invitation for bids (see 3.1).

6.4 Transportation descriptions. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Bedspreads, cotton; bedspreads, cotton/rayon blend.
Carload minimum weight—Any quantity.

Motor:

Dry goods, not otherwise indexed.
Truckload minimum weight—Any quantity.

CUSTODIANS:
Navy—SA
Air Force—67

Review activities:
Air Force—67
Defense Supply Agency—DM

User activities:
Navy—MS, CG

Preparing activity:
Navy—SA

CIVIL AGENCIES INTEREST:
HEW
COM
VA
GSA
FAA

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.

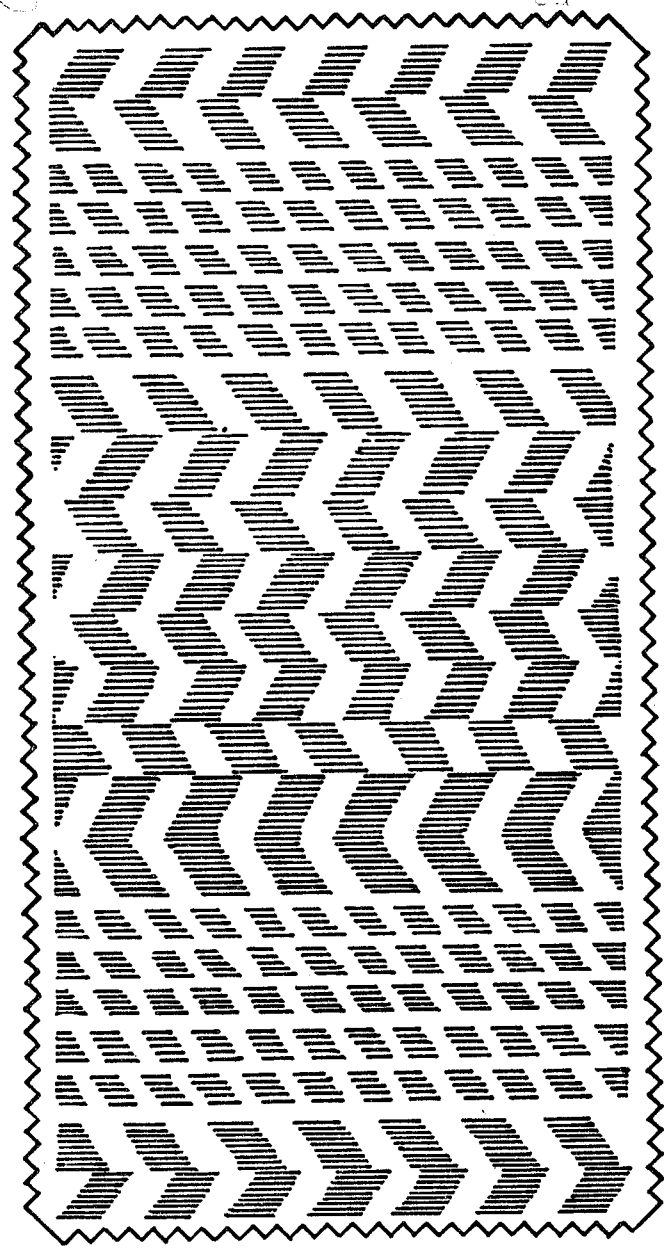


FIGURE 1. Diagram of ground weave for type III bedspread.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:33Z
Check the source to verify that this is the current version before use.