DDD-B-421f
March 27, 1967

SUPERSEDING
Fed. Spec. DDD-B-421e
September 14, 1962

FEDERAL SPECIFICATION

BLANKET, BED (OTHER THAN ALL WOOL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers blankets other than all wool (see 6.1).

1.2 Classification.

1.2.1 Types, classes, and sizes. Blankets shall be of the following types, classes, and sizes, as specified (see 6.3 and 6.4):

Type I.—All cotton.

Class 1.—Twill (double woven).
Size 1.—30 by 40 inches.
Size 4.—66 by 90 inches.

Class 2.—Plain weave.
Size 2.—72 by 90 inches.

Type III.—Blended wool-nylon-rayon cotton and other fibers.

Class 1.—Twill (double woven).
Size 4.—66 by 84 inches.

2. APPLICABLE DOCUMENTS

2.1 Specification and standards. The following specifications and standards of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276 —Thread, Cotton.
UU-P-268 —Paper, Kraft, Untreated, Wrapping.
CCC-T-191—Textile Test Methods.
DDD-L-20 —Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, and at the prices indicteda in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-B-43291—Boxes: Fiberboard; Corrugated, Double-Wall, Weather Resistant.
MIL-P-116 —Preservation, Methods of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MS 16686 —Medical Services Symbol.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Rules and Regulations Under the Wool Products Labeling Act of 1939.

(Applications for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

U. S. Department of Agriculture Methods of Test for Grade of Wool.

(Application for copies should be addressed to the U. S. Department of Agriculture, Agricultural Marketing Service, Washington, D. C. 20402).

3. REQUIREMENTS

3.1 Standard sample. When a standard sample is available, the dyed and finished blanket shall match the standard sample for shade. All finished blankets shall be equal to, or better than, the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.2).

3.2 Materials.

3.2.1 Cotton yarns. The cotton yarns for type I shall be spun from cotton of a grade and length of staple to meet the requirements for the finished blankets.

3.2.2 Yarns of wool-nylon-rayon-cotton and other fibers. The blended fiber yarns for type III blankets shall be made from wool, reprocessed wool (as defined by the Wool Products Labeling Act), new nylon, new rayon, new cotton, and other fibers as follows: not less than 80 percent wool not lower in grade that 44's U.S. Standard; not less than 10 percent nylon fibers; and not more than 10 percent rayon, cotton and other fibers based on the dry weight of the desized specimen. Tests shall be made as specified in 4.2.1.2.

3.2.3 Thread.

3.2.3.1 Thread for overedge stitching and attaching labels. The cotton thread for overedge stitching blankets and stitching on labels shall conform to type IC1 or IC2, ticket number B, 3-ply of V-T-276.

3.2.3.2 Thread for binding stitching type I, class 2, size 2. When binding is required (see 3.10.1.1.1), the cotton thread for stitching binding shall conform to type IA1, ticket number 50, 3-ply of V-T-276.

3.2.3.3 Thread for binding or hemming type III. When binding or hemming is required (see 3.10.1.2), the cotton thread for stitching shall conform to type IC1 or IC2, ticket number 0, 3-ply of V-T-276.

3.2.3.4 Color and colorfastness of thread. The color of the thread shall match the color of the blanket and colorfastness of the dyed thread shall be in accordance with 3.4.4.2 when tested as specified in V-T-276.

3.2.4 Binding.

3.2.4.1 Type I, class 2, size 2. When cloth binding is required (see 3.10.1.1.1), the binding shall be unbleached cotton bias tape not less than 1½ inches wide and not less than 3.7 ounces per square yard, when tested as specified in 4.2.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.2.4.2 Type III. When cloth binding is required (see 3.10.1.2), the binding shall be rayon or acetate satin weighing not less than 4 ounces per square yard when tested as specified in 4.2.1.2. The binding shall be not less than 4 inches wide when finished with uniformly costructed edges on both sides, or shall have edges cut parallel to the warp and shall be of sufficient width to meet the requirements of 3.10.1.2.2. The color of the binding shall match the shade of the blanket. The colorfastness shall be as specified in 3.4.4.2.

3.3 Markings and labels.

3.3.1 Markings. All markings specified herein shall show colorfastness as specified in 3.4.4.2. The letters shall extend parallel to the length of the blanket. The markings shall be black and shall be either stamped, printed or applied by dry heat transfer process.

3.3.1.1 Letters "US". When specified (see 6.3), each blanket shall have the letters "US", in outline block letters, marked in the center of the blanket. Each letter shall be 4 inches ± ⅛ inch high by 3¼ inches ± ⅛ inch wide. The overall width of the lettering shall be 7¼ inches ± ¼ inch.

3.3.1.2 Caduceus and letters. When specified (see 6.3), each blanket shall have a black caduceus, 6 inches ± ⅛ inch high by 6¼ inches ± ⅛ inch wide, centered between the black block letters "U" and "S", 2 inches ± ⅛ inch high by 1½ ± ⅛ inch wide, in the center of the blanket, conforming to type I of MS 16686.

3.3.1.3 Caduceus and letter for type I, class 1, size 1. Unless otherwise specified (see 6.3), each type I, class 1, size 1 blanket shall have a medical services symbol, as shown for type I of MS 16686, in the lower left-hand corner on the face of the blanket at approximately 2 inches ± ¼ inch from each edge. The caduceus shall be 2 inches ± ⅛ inch high, centered between the block letters "U" and "S", ½ ± ⅛ inch high.

3.3.2 Identification label. Each blanket shall have a 2 inches ± ¼ inch by 3 inches ± ¼ inch label located 2 inches ± ½ inch from each edge, on the back righthand lower corner of the blanket as the blanket is viewed face up. The label may be attached to the blanket by stitching or by heat sealing process. Heat sealed labels shall be comparable with the stitched labels insofar as adhesion to the blanket is concerned. When the label is stitched, it shall be stitched using a 301 stitch type with not less than 10 stitches per inch. The label shall show fastness to laundering and shall conform to type I, class 1 of DDD–L–20. The label shall include the information required by the applicable products labeling act and the supplier's registration number. The heat sealed labels shall conform to all requirements of type I, class 1 labels prior to application of the heat sealing adhesive.

3.4 Color.

3.4.1 Type I blankets. Blankets shall be unbleached, bleached white, or dyed as specified (see 6.3).

3.4.2 Type III blankets. The color of type III blanket shall be heather.

3.4.3 Color matching. The color of all dyed textile components shall match the respective standard sample under natural (north sky) daylight or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.4.4 Colorfastness.

3.4.4.1 Type I blankets. When colors are specified, the finished blanket shall show fastness to laundering and bleaching, and crocking equal to or better than the standard sample. When no standard sample has been established or designated as applicable to colorfastness, the finished blanket shall show "good" fastness to laundering and bleaching, and shall show a Munsell Value for crocking not lower than 8.5. Tests shall be made as specified in 4.3.

3.4.4.2 Component materials. The colorfastness properties of the component materials used for binding, thread, and marking (except identification label) as applicable shall be equal to those required for the blanket with which they are used when tested as specified in 4.2.1.2. When unbleached or bleached white blankets are specified, the markings shall show colorfastness equal to the requirements specified for markings on colored blankets and in addition, the markings shall show good fastness to salt water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.5 Physical requirements. The finished blanket shall conform to the requirements specified in table I when tested as specified in 4.3 and 4.2.3.4.

TABLE I. Physical requirements

Type	Class	Size	Fiber	Blanket size (min.) inches		Weight per blanket		Yarns per inch (min.)		Breaking strength (min.) pounds	
				Width	Length	Max	Min	Warp	Filling	Warp	Filling
I	1	1	Cotton	30	40	9.0 ozs.	7.8 ozs.	30	35	23	15
	1	4	Cotton	66	90	3.7 lbs.	3.45 lbs.	37	36	30	25
	2	2	Cotton	72	90	1.7 lbs.	1.5 lbs.	27	28	27	17
III	1	4	Blended wool-nylon-rayon-cotton and other fibers	66	84	4.0 lbs.	3.8 lbs.	22	20	35	30

3.6 Weave.

3.6.1 Class 1. Class 1 blankets shall be double woven, having a twill face of one up-three down and a twill back of three up-one down, using two sets of filling yarns and one set of warp yarns (see figure 1). All class 1 blankets shall have woven selvages ¼ (+⅛, −0) inch except that type I, class 1, size 1 blankets may have one selvage. (See 4.3).

3.6.2 Class 2. Class 2 blankets shall be plain weave with one wrap and one filling, woven with selvages on the sides ¼ (+⅛, −0) inch. (See 4.3.).

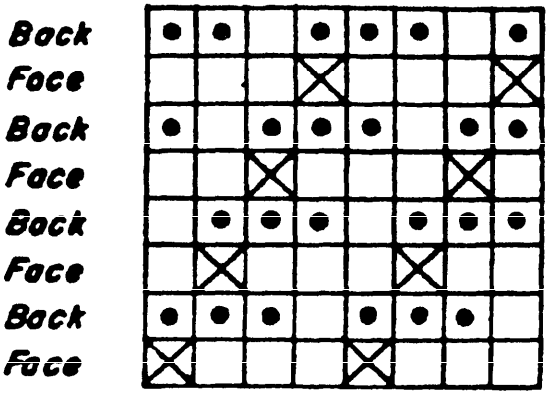


Figure 1. - Weave diagram

3.7 Shrinkage.

3.7.1 Type I blankets. The shrinkage for type I, class 1 finished blankets shall not exceed 11.0 percent in the wrap and 6.0 percent in the filling, and for type I, class 2 finished blankets shall not exceed 12.0 percent in the warp and 6.0 percent in the filling when tested for laundering shrinkage as specified in 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.7.2 Type III blankets. The shrinkage for type III blankets shall not exceed 10.0 percent in either the warp or filling direction when tested for laundering shrinkage as specified in 4.3.

3.8 Nonfibrous materials. The starch and protein content, including chloroform-soluble and water-soluble material, of the finished blankets shall not exceed 5.0 percent for type I, class 1 and type III, class 1; and shall not exceed 7.0 percent for type I, class 2 when tested as specified in 4.3.

3.9 Finish. The blankets of all types and classes shall have a finish equal to the standard sample with respect to nap and hand. The character of nap shall be such as will cause the napped fibers to offer considerable resistance to lifting with a needle.

3.10 Construction.

3.10.1 Stitches, seams, and stitchings. Stitches, seams, and stitchings shall conform to Fed. Std. No. 751.

3.10.1.1 Type I blankets. Unless otherwise specified, the type I, class 1, size 4 and type I, class 2, size 2 shall be cut to size with square corners. The corners of type I, class 1, size 1 shall be slightly rounded. All edges of type I, class 1, size 1 blankets; and the cut edges for type I, class 1, size 4 and, unless otherwise specified, type I, class 2, size 2 shall be overstitched $\frac{1}{4} \pm \frac{1}{16}$ inch wide with 16 to 20 stitches per inch of cotton thread specified in 3.2.3.1, using stitch type 505 and stitching type EFd–1. The ends of the overedge stitching shall be locked.

3.10.1.1.1 Binding for type I, class 2. When specified (see 6.3), the cut edges of the type I, class 2, size 2 blankets shall be bound with a bias-binding (see 3.2.4.1) attached using seam type BSc–1 with one row of stitch type 301, $\frac{1}{16}$ to $\frac{1}{8}$ inch from turned edge of binding, and with 6 to 8 stitches per inch. The binding shall be finished not less than $\frac{3}{8}$ inch on each side and each raw edge shall be turned in not less than $\frac{1}{4}$ inch. Each end of the binding shall be turned under at least $\frac{7}{8}$ inch. Each end of stitching shall be backstitched $\frac{1}{2}$ to 1 inch.

3.10.1.2 Type III blankets. The cut ends of the blanket shall be finished by overedge stitching, by binding, or by hemming, as specified (see 6.3).

3.10.1.2.1 Overedge stitching for type III. The cut edges of the finished blanket shall be overedge stitched $\frac{1}{4} \pm \frac{1}{16}$ inch wide with 16 to 20 stitches per inch of cotton thread specified in 3.2.3.1, using stitch type 505 and stitching type EFd–1. The ends of the overedge stitching shall be locked.

3.10.1.2.2 Binding for type III. Satin binding as specified in 3.2.4.2 shall be attached with two rows of stitching $\frac{1}{4}$ inch apart, $\frac{1}{16}$ to $\frac{1}{8}$ inch from edge, with 6 to 8 stitches per inch of cotton thread specified in 3.2.3.3, using stitch type 301. Seam type shall be BSa–2 when a binding with woven edges is used, and type BSc–2 on cut binding with stitches $\frac{1}{8}$ to $\frac{3}{16}$ inch from edge. The turnunder shall be $\frac{1}{4}$ inch wide and shall be caught in the outer row of stitching, and the finished binding shall finish 4 inches of total exposed width. The ends of the binding shall be turned under at least $\frac{7}{8}$ inch. The stitching shall be backstitched $\frac{1}{2}$ to 1 inch at the ends.

3.10.1.2.3. Hemming for type III. The ends shall be turned under $\frac{1}{2} \pm \frac{1}{8}$ inch, hemmed $\frac{1}{2} \pm \frac{1}{8}$ inch, and sewn with 2 rows of stitching $\frac{1}{4}$ inch apart with 6 to 8 stitches per inch of cotton thread specified in 3.2.3.3 using stitch type 301. The stitching shall be backstitched $\frac{1}{2}$ to 1 inch at the ends.

3.11 Workmanship. The finished blanket shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Inspection shall be in accordance with MIL–STD–105 except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.1.1 Examination of components.

4.2.1.1.1 Wool. The wool shall be visually examined for grade (see 3.2.2) in scoured form prior to picking or carding, by comparison with the applicable U. S. Standard (see 2.2). In the event of a dispute resulting from the above comparison, the grade shall be determined by a width (wedge) method. The examination for grade shall be performed on a composite sample of 1 pound of wool from each 10,000 pounds or fraction thereof in the lot. The composite sample shall be selected from not less than 10 percent of the bales in the lot. The lot shall be unacceptable if the sample does not conform to the requirements of 3.2.2.

4.2.1.1.2 Reprocessed wool. Reprocessed wools shall be examined for grade when reduced to the fibrous state prior to blending with other fibers. Method of sampling, sample size and acceptance criteria shall be as specified in 4.2.1.1.1.

4.2.1.2 Testing of components. Unless otherwise specified, testing shall be performed on the following components for the characteristics indicated, in accordance with CCC–T–191 wherever applicable and as listed in table III. The physical and chemical values specified in section 3 apply to the results of the determinations made on a sample unit for test purposes as specified in the applicable test method. The sample size shall be in accordance with table II. All test reports shall contain the individual value utilized in expressing the final result. The lot shall be unacceptable if one or more units fail to meet any requirements specified.

TABLE II. Lot and sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.2.1.2.1 Yarn, type III blanket. The sample unit for each characteristic shall be 2 ounces of the yarn. The lot size shall be expressed in units of 1 pound.

4.2.1.2.2 Satin and cotton binding cloth. The sample unit for test purposes shall be 2 linear yards of binding. The lot size shall be expressed in units of 1 linear yard each.

4.2.1.2.3 Marking. The sample unit for test purposes shall be a caduceus or "US" marking applied to a piece of finished blanket cloth under the same conditions as in production. Three sample units shall be tested from each lot.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:34Z
Check the source to verify that this is the currentversion before use.

TABLE III. Testing of components

Characteristic	Requirement paragraph	Test method
Yarn (type III blanket): wool, nylon and other fibers	3.2.2	2100 [1]
Binding material:		
Cotton:		
Material identification	3.2.4.1	1200 [2]
Weight	3.2.4.1	5041 [2]
Satin:		
Material identification	3.2.4.2	15,00, 1510 [2]
Weave	3.2.4.2	Visual [2]
Weight	3.2.4.2	5041 [2]
Colorfastness of dyed binding to:		
Laundering and bleaching	3.2.4.2	5605
Crocking	3.2.4.2	5651
Heat sealed labels	3.3.4	[2]
Colorfastness of markings to:		
Laundering and bleaching	3.4.4.2	5605
Crocking	3.4.4.2	5651
Salt water—for white blankets only	3.4.4.2	5632

[1] The supplier shall submit a certification with each lot that new cotton, new rayon or new nylon fibers were used and that percent and type of fiber content is in accordance with the requirements of this specification. The certificate of compliance shall be accompanied by actual test, inspection or other verifiable data.
[2] A supplier's certificate of compliance will be accepted for this characteristic.

4.2.2 In-process inspection. Inspection shall be made at any point or any phase of the manufacturing process to determine that:

(a) Only approved components are used.

(b) Fiber materials are blended in the proportions specified.

The Government reserves the right to exclude from consideration for acceptance any blankets for which in-process inspection has indicated nonconformance.

4.2.3 Examination of the end item. The defects found during the examination shall be classified in accordance with 4.2.3.1 through 4.2.3.4. The sample unit shall be one blanket. The lot size shall be expressed in units of one blanket.

4.2.3.1 Visual examination. Each blanket shall be examined on one side only. However, the sample shall be alternated so that every other blanket is examined on the stamped or labeled side. Each blanket shall be given a through-lighting examination toward a light source for holes and thin areas. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the cloth, in which case only the more serious defect shall be counted.

Defect	Classification	
	Major	Minor
Fabric:		
Hole, cut, or tear	X	
Smash	X	
Broken or missing yarns:		
Two or more contiguous, 2 inches or more in length	X	
Two contiguous, less than 2 inches in length; or single more than 4 inches in length		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:34Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
Fabric: (cont'd)		
Abrasion mark or thin place	X	
Coarse filling bar, heavy place*		X
Slub, slough-off, jerked-in-filling, knot*		X
Burrs, shives, sisal or specks*		X
Selvage edge missing on either side (except type I, class 1, size 1)	X	
Shade bar or mixed filling*		X
Spot, stain, or streak*		X
Waviness or rolling at edges will not flatten by manual pressure		X
Off-shade—blanket not within acceptable range	X	
Mottled or cloudy		X
Color of binding or thread not approved color		X
Not equal to standard sample for nap and hand	X	
Nap not offering considerable resistance to lifting with a needle		X
Unevenly napped*	X	
Rancid or other objectionable odor	X	
Hand of blanket not equal to standard sample		X
Unclean overall appearance		X
The woven selvage for class 2 shall not be less than $\frac{1}{4}$ or more than $\frac{3}{8}$ inch		X
Workmanship, general:		
Unfinished—either one or both ends	X	
Needle chew	X	
Seam or splice—blanket composed of two or more parts	X	
Scorch or burn	X	
Wrong seam or stitch type		X
Run-offs:		
More than 1 inch	X	
One half inch but not more than 1 inch		X
Raw edges (including binding):		
One inch or more	X	
Less than 1 inch		X
Threads not trimmed		X
Excess napping waste, not properly cleaned from surface of blanket		X
Finished ends:		
When overedge stitching is specified:		
Overedge stitching more than $\frac{5}{16}$ inch or less than $\frac{3}{16}$ inch wide		X
Less than 16 or more than 20 overedge stitches per inch		X
Corners not rounded (type I, class 1, size 1 blankets only)		X
When binding is specified:		
Less than number of rows of stitching specified	X	
Stitching gage less or more than specified		X
Binding with cut edges not turned under $\frac{1}{4}$ inch or turnunder not caught in stitches		X
Less than 6 or more than 8 stitches per inch		X
Width of binding less than specified		X
End of binding on either corner of blanket not turned under at least $\frac{7}{8}$ inch		X
Not backstitched $\frac{1}{2}$ to 1 inch at the ends		X
Overedge stitching not locked		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defect	Classification	
	Major	Minor
Stitching:		
Loose stitching		X
Tight stitching		X
Skip stitches ¼ to 1 inch		X
Skip stitches more than 1 inch	X	
Open seams up to 1 inch		X
Open seams more than 1 inch	X	
Markings and labels (as specified):		
Missing, incorrect, illegible, or wrong color	X	
Misplaced by more than 2 inches except type I, class 1, size 1		X
Label insecurely attached or misplaced by more than 1 inch		X
Not located as specified (type I, class 1, size 1)		X
Height or width of lettering other than specified		X
Caduceus not specified size	X	
Label attached with less than 10 stitches per inch		X

* Clearly visible at approximately 3 feet.

4.2.3.2 Blanket inspection quality. Each blanket in the sample size shall be designated as first, second, or third quality for inspection purposes only, in accordance with 4.2.3.2.1 through 4.2.3.2.3.

4.2.3.2.1 First quality. A first quality blanket shall be defined as follows:

Contains no major defect listed.
Contains not more than 4 minor defects listed.

4.2.3.2.2 Second quality. A second quality blanket shall be defined as a blanket that does not meet the provisions of a first quality blanket (see 4.2.3.2.1) but does adhere to the following:

Contains no hole, cut, tear or smash.
Contains not more than 3 major defects listed.
Contains not more than 8 total defects (major and minor combined) listed.

4.2.3.2.3 Third quality. A third quality blanket shall be defined as follows:
Contains any hole, cut, tear or smash.
Contains more than 3 major defects listed.
Contains more than 8 total defects (major and minor combined) listed.

4.2.3.3 Inspection level and acceptable quality level (AQL). The inspection level shall be level I of MIL–STD–105 and AQL for first quality shall be 1.5 percent defective; i.e., the number of second and third quality blankets (combined) shall not exceed the acceptance number listed under the AQL for each sample size. The number of third quality blankets acceptable in a first quality lot shall not exceed the acceptance number listed in table IV for each sample size.

TABLE IV. Acceptance number of third quality blankets

Sample size	Acceptance number
Up to 125	0
200	1
315	2
500	3

4.2.3.4 Examination for dimensions. Defects found during this examination shall be classified in accordance with the following list. The sample unit shall be 1 blanket. The acceptable quality level (AQL) shall be 1.5 major and 4.0 total defects per 100 units. The inspection level (sample size) shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

be S-3 of MIL-STD-105. The lot size shall be expressed in units of 1 blanket. An approximate equal number of blankets shall be drawn from each shipping container selected for visual examination (see 4.2.3.1).

Dimensional examination	Classification	
	Major	Minor
Size 30 by 40 inches:		
Length		
More than 1 inch short	X	
1 inch or less short		X
Width		
More than 1 inch narrow	X	
1 inch or less narrow		X
Length or width uneven by more than 2 inches		X
All other sizes:		
Length		
More than 2 inches short	X	
2 inches or less short		X
Width		
More than 2 inches narrow	X	
2 inches or less narrow		X
Length or width uneven by more than 2 inches		X

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, improper taping.
	Open and non-continuous heat sealed seams and closure of polyethylene bag. Bulged or distorted container.
Content	Number per package or container is more or less than required.
Preservation (when applicable)	Preservation improper, improperly applied, or missing.

4.3 Testing of the end item. The methods of testing specified in CCC-T-191 wherever applicable and as listed in table V shall be followed. The physical and chemical values specified in section 3 apply to the results of the determinations made on a sample unit for test purposes as specified in the applicable test method. The sample unit shall be one finished blanket, except that for type I, class 1, size 1 blankets, the sample unit shall be two finished blankets. The lot size shall be expressed in units of one blanket. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. All test reports shall contain the individual values utilized in expressing the final result. The sample size (number of sample units) shall be in accordance with table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE V. End item tests

Characteristic	Requirement paragraph	Test method
Colorfastness to:		
Laundering and bleaching	3.4.4	5605
Crocking	3.4.4	5651
Yarns per inch:		
Warp	3.5	5050
Filling	3.5	5050
Breaking strength:		
Warp	3.5	5100
Filling	3.5	5100
Weight of blanket	3.5	[1]
Weave:		
Class 1	3.6.1	Visual [2]
Class 2	3.6.2	Visual [2]
Shrinkage:		
Type I		
Laundering		
Warp	3.7.1	5550
Filling	3.7.1	5550
Type III		
Laundering		
Warp	3.7.2	5552
Filling	3.7.2	5552
Nonfibrous material	3.8	2611

[1] Each blanket shall be weighed and results reported to the nearest 1.0 ounce. The test for weight of the finished blanket shall be conducted prior to any other tests and shall be conducted on the blanket in equilibrium with Standard Conditions as defined in CCC-T-191.

[2] One determination per sample unit and results reported as "pass" or "fail".

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.3).

5.1.1 Level A. Each individually folded blanket, or when specified (see 6.3) three type I, class 1, size 1 blankets, shall be inserted in a snug-fitting flat or square style clear polyethylene film bag of 0.003-inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag closure shall be effected by heat sealing with the heat seal as close as possible to the open end. One ounce of naphthalene flakes shall be evenly distributed throughout each blanket containing wool (see 6.3.1).

5.1.2 Level C. Blankets shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.3).

5.2.1 Level A. Blankets of like description only, packaged as specified in 5.1, shall be packed flat in the quantity as specified in table VI in a snug-fitting fiberboard shipping container conforming to style RSC-L. V3c or V3s of PPP-B-636. The inside of each PPP-B-636 container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Alternatively, shipping containers shall conform to style RSC, V13c of MIL-B-43291. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

kraft paper conforming to grade B of UU–P–268. Each shipping container shall be waterproofed in accordance with the appendix of PPP–B–636. Each shipping container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container specification.

TABLE VI. Blanket quantities per shipping container

Type	Class	Size	Quantity (each)
I	1	1	72
I	2	2	35
I	1	4	15
III	1	4	15

5.2.2 Level B. Blankets of like description only, packaged as specified in 5.1, shall be packed flat in the quantity as specified in table VI, in a snug-fitting fiberboard shipping container conforming to style RSC–L, type CF or SF, variety SW, class domestic, grade 275 of PPP–B–636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP–B–636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU–P–268. Each container shall be closed in accordance with method II of the appendix of the container specification.

5.2.2.1 When specified, shipping containers shall be fabricated from V3c or V3s fiberboard (see 6.3).

5.2.3 Level C. Blankets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL–STD–129.

5.3.3 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
TYPE_____, CLASS_____, COLOR_____
SIZE
QUANTITY

6. NOTES

6.1 Intended use. Type I, class 1, size 1 blanket is intended for infants' use in hospitals and nurseries. Other types and classes are primarily used as bed covering. Type I, class 2 blankets are also used as sheet and bath blankets.

6.2 Standard sample. For access to a standard sample address the procuring office issuing the invitation for bids.

6.3 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class, size of blanket required (see 1.2.1).
(c) Marking required (see 3.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

(d) Whether type I blankets should be unbleached, bleached white, or dyed (see 3.4.1).

(e) When binding is required for cut ends of type I, class 2, size 2 blankets (see 3.10.1.1.1).

(f) Whether overedge stitching, binding, or hemming is required for cut ends of type III blankets (see 3.10.1.2).

(g) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(h) Whether V-board containers are required for level B shipments (see 5.2.2.1).

6.3.1 The method of packaging referred to in 5.1.1 is similar to method III of MIL-P-116.

6.4 Type I, class 1, sizes 2 and 3; type I, class 2, size 1; type II in its entirety; and type III, class I, sizes 1, 2 and 3 blankets have been deleted as they are no longer required.

MILITARY INTEREST

Custodians:

Army—GL
Navy—SA
Air Force—82

Review activities:

Army—MD
Navy—SA, MS
Air Force—82, 85

User activity:

Air Force—03

Preparing activity:

Army—GL

Civil agencies interest:

AGR—OPO
COM—NBS
DC—GA
GSA—FSS
HEW—GS
INT
JUS—FPI
VA—DMS

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Blanket, Bed (Other Than All Wool) - DDD-B-421f

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.