DDD-F-410C
August 15, 1988
SUPERSEDING
DDD-F-410B
August 18, 1972

FEDERAL SPECIFICATION

FLAG, NATIONAL, UNITED STATES OF AMERICA

INDOOR SET

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for United States of America National Flag sets for indoor use, consisting of U. S. Flag with fringe, cord and tassels, two-section flagpole, stand and ornaments.

1.2 Classification.

1.2.1 Type. The flag sets covered by this specification shall be of two types, as specified (see 6.2).

Type I. Flag set with metal accessories.
Type II. Flag set with plastic accessories.

1.2.2 Sizes. The flag sets shall be of three sizes, as specified (see 6.2).

Size 1. 9 foot pole (4'4" hoist by 5' 6" fly flag)
Size 2. 8 foot pole (3' hoist by 5' 8-3/8" fly flag)
Size 3. 7 foot pole (3' hoist by 5' 8-3/8" fly flag)

2. APPLICABLE DOCUMENTS

2.1 Government publications. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Federal Specifications

V-T-285 - Thread, Polyester
CCC-C-458 - Cloth, Flannel, Cotton
DDD-F-416 - Flag, National, United States of America, and Flag, Union Jack

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 8345

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Federal Standards

FED-STD-191 - Textile Test Methods

(Activities outside the Federal Government may obtain copies of Federal specifications, standards and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification and other Federal specifications, standards and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of Military specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

16A - Colorfastness to Light: Carbon-Arc Lamp, Continuous Light
132 - Colorfastness to Drycleaning

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Association for Textile Chemists and Colorists, P. O. Box 12215, Research Triangle Park, NC 27709.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 276 - Identification of Fibers in Textiles, Methods for
D 861 - Use of the Tex System to Designate Linear Density of Fibers, Yarn Intermediates, and Yarns, Practice for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

The Standard Color Reference of America, Tenth Edition

(Applications for copies should be addressed to The Color Association of the United States, Inc., 24 East 38th Street, New York, NY 10016.)

NATIONAL MOTOR FREIGHT CLASSIFICATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Traffic Department, 1616 F Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references specified herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Preproduction sample. When specified, before production is commenced, a preproduction sample of the flag set shall be submitted to the Government representative for approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.2 Figures. Figures 1 and 2, incorporated in this specification, are furnished for guidance to the contractor. In the event of conflict between the specification and the figure, the specification shall take precedence.

3.3 Materials.

3.3.1 Flag. Except as otherwise specified herein, the U. S. Flag shall be in accordance with DDD-F-416, type II heading; heavyweight (3.6 oz./sq. yd.) nylon bunting with machine power embroidered stars, Schiffli or equal. The flag heading shall be stamped "U. S. PROPERTY" or "U. S. PROP.", and shall have a fringe in accordance with 3.3.2, attached as specified in 3.3.1.3.1.

3.3.1.1 Dimensions. The dimensions of the size 1 flag shall be 4 feet 4 inches (hoist) by 5 feet 6 inches (fly) in accordance with the "Special Sizes" of Figure 1, DDD-F-416, except that under "K +", the stars may measure 2-3/8 inches. The dimensions of the size 2 and size 3 flags shall be 3 feet (hoist) by 5 feet 8-3/8 inches (fly) in accordance with the "Standard Sizes" of Figure 1, DDD-F-416.

3.3.1.2 Heading. The heading shall conform to type II of DDD-F-416, except that cotton canton flannel in accordance with CCC-C-458 type IV, Class 5, cut 5-1/2 inches wide, may be used as an alternate to cotton sheeting.

3.3.1.3 Stitches, seams and stitchings. Stitches, seams, and stitchings shall be in accordance with DDD-F-416, except that:

(a) Hems and seams shall be sewn with not less than 1Ø stitches per inch.
(b) Stitching gauge shall be not less than 1/8 inch for joining stripes and horizontal seam between stripes and union.

The ends of all stitching when not caught in other seams or stitching shall be backstitched for a distance of 1 inch (minimum) or bartacked with a 9/16 inch, 28 stitch bartack.

3.3.1.3.1 Stitching of fringe. Stitching of fringe shall be in accordance with DDD-F-416, except that hems may be on the back side of the flag, in which case stitching type EFb-1 shall be used for the top and bottom edge (3/16 inch wide hem with a 1/8 inch turnunder, and stitching type EFb-2 shall be used for the fly edge (3/8 inch wide hem with a 1/4 inch turnunder).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.3.1.4 Thread.

3.3.1.4.1 Embroidery thread. The embroidery thread for the stars shall be a semidull, continuous filament, regenerated cellulose type rayon, two ply Schiffli type. The single yarn shall be 150 denier rayon.

3.3.1.4.2 Sewing thread. The thread used for sewing stripes, seams and hems shall be polyester conforming to V-T-285, type I or II, class 1, size B, 2 or 3 ply. The color of the thread shall match the color of the material except that the red thread may be used for the hem on the fly end, and to close the heading.

3.3.2 Fringe. The design of the fringe shall be a woven heading with bullion formed by twisting two picks in the same shed sufficiently so that they twist upon themselves flush up to the heading. The color of the fringe shall match Cable No. 80068 of the Standard Color Reference of America, Tenth Edition. The dyed material shall show good colorfastness to light and wet-dry cleaning when tested as specified in Table I. The overall length of the fringe shall measure 2 to 2-5/8 inches.

3.3.2.1 Rayon/acetate yarn. The rayon/acetate yarn used for the fringe shall be either a 600 to 625 denier acetate, continuous multifilament bright viscose rayon or cuprammonium rayon.

3.3.2.2 Cotton yarn. The cotton yarn used for the fringe shall be 12/2 cotton yarns.

3.3.2.3 Construction. The filling yarn, which is used to form the bullion, shall be made by twisting together two ends of cotton yarn and shall be wound with a sufficient number of ends of rayon yarn to completely cover the cotton yarn. The bullion shall be formed with not less than five turns per inch of Z twist. There shall be no less than 11 bullions per inch. The heading shall be constructed from single ends of rayon yarn and shall be woven with a float stripe centered in the heading. The heading shall be woven with a sufficient number of ends to finish a minimum of 5/16 inch in width and completely cover the picks on both sides of the heading throughout the width specified. The float stripe shall finish a minimum of 3/32 inch in width on both sides of the heading.

3.3.3 Cords and tassels. The design of the cord and tassels shall be a twisted cord with a tassel attached at each end. The color of the cord and tassels shall match Cable No. 80068. The dyed material shall show good color fastness to light and wet-dry cleaning when tested as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.3.3.1 Rayon/acetate yarn. The rayon/acetate yarn used for the cord and tassels shall be the same as specified in 3.3.2.1.

3.3.3.2 Cotton yarn. The cotton yarn used for the cord and tassels shall be the same as specified in 3.3.2.2.

3.3.3.3 Wood mold. The wood for the mold shall be clear, well seasoned, free from checks or other defects. Any of the woods listed in 3.3.4.1 may be used.

3.3.3.5 Construction.

3.3.3.5.1. Cord. The cord for the size 1 flag set shall be 1Ø8 ± 2 inches in overall length (including tassel), and 1/4 ± 1/16 inch in diameter. The cord for the size 2 and size 3 flag sets shall be 96 to 1Ø8 inches in overall length (including tassel) and 1/4 ± 1/16 inch in diameter. The cord shall be constructed of three strands twisted together and shall have one turn of twist per inch. Each strand shall have a minimum of 28 ends of cotton yarn as a core, which is wound with a sufficient number of ends of rayon yarn to completely cover the core.

3.3.3.5.2 Tassels. The tassels shall consist of a braided covered wood mold, 3.3.3.3, and at the bottom of the mold shall be attached a fringe or skirt. The tassel ornament for the size 1 flag set shall be not less than 6 inches nor more than 8 inches in overall length, and for the size 2 and size 3 flag sets, shall be not less than 4 inches nor more 6 inches in overall length. Approximately one half of the tassel ornament length shall compose the fringe or skirt. The tassel shall be of the normal commercial shape and design with centerhole throughout and shall be completely covered with rayon braiding. The fringe shall contain 52 ± 2 shots of bullion. The bullion shall be composed of cord of five ends of cotton yarn as a core which is wound with a sufficient number of ends of rayon yarn to completely cover the core. The formed bullion shall be of two-ply construction and no less than 3/32 inch in diameter and shall have a minimum of three turns per inch. The heading of the skirt shall be lashed together by a sufficient number of wraps of 2Ø/2 polyester yarn to securely fasten the bullion. The crouse cord shall have a corkscrew twist effect, evenly spaced and consisting of eight strands divided into four sections equidistant around the circumference of the braided covered wood mold. There shall be two strands to each section. Each strand shall be composed of three ends of cotton yarn as a core which is wound with a sufficient number of ends of rayon yarn to completely cover the core and in turn twisted in corkscrew fashion around one end of rayon yarn. Each crouse cord shall be approximately 1/8 inch wide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.3.3.6 Assembly. The excessive braid at both ends of the wood mold shall be neatly tucked into the centerhole of the mold and glued with suitable adhesive so as not to impede passage of the cords. The crouse cord with two strands per section shall be securely tucked in on the inside of the mold and securely bound or anchored as necessary at both necks to prevent loosening. The bullion skirt shall be securely tucked in at the head end of the mold and glued to the braid with suitable adhesive to prevent loosening. The finished cord shall be threaded through the centerhole of each tassel component and each end knotted tightly and glued with suitable adhesive to the base of the braided mold.

3.3.4 Pole, Flag.

3.3.4.1 Wood. The pole shall be made from hardwood of either ash, beech, birch, elm, locust, maple, oak or pecan. The wood for the pole shall be clear, straight grained, well seasoned and free from checks or other defects. The wood shall be dried to a maximum moisture content of 9 percent, prior to application of finishing materials. The pole shall be machine turned and sanded smooth. The slope of the grain shall not exceed 1 inch in 12. Open grain wood shall be filled with natural color filler before staining. The pole shall have a smooth spun gloss finish over a dark oak stain. Lacquer or varnish shall be applied and controlled to produce a clean, smooth even film without blisters, pits, wrinkles, or other defects which will affect serviceability or appearance. The finish shall not cloud the natural grain of the wood. Tissue paper shall not stick when tested as specified in 4.4.1.

3.3.4.2 Metal band with screw joint. The sections of the type I pole, 3.3.4.4, shall be joined by means of a two-piece brass tube with screw joint. The overall length of the brass screw joint when assembled will be not less than 6 nor more than 6-7/16 inches. The edge of the band shall be chamfered so that there will be no rough or ragged edges. The screw joint shall be manufactured from seamless tubing.

3.3.4.3 Plastic band with screw joint. The sections of the type II pole shall be joined by means of a two-piece plastic tube with screw joint. The plastic band with screw joint shall be made of acrylonitrile butadiene styrene (ABS) plastic which has been vacuum plated in gold color. The overall length of the plastic tube with screw joint when assembled shall be not less than 6 inches nor more than 6-7/16 inches. The edges of the band shall have a radius and shall have no rough or ragged edges. The plastic tube with screw joint shall be attached to the pole sections by means of mounting screws. The color of the mounting screws shall approximately match the gold color of the plastic band with screw joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.3.4.4 Pole construction and pole assembly. The pole for the size 1 flag set when assembled shall measure 108 inches ± 1-3/8 inches in length and shall have a straight even diameter of 1-1/4 inches throughout the length. The pole for the size 1 flag set shall be in two sections with the top section measuring 60 inches ± 3/16 inch and the bottom section measuring 48 inches ± 3/16 inch and joined by means of a metal band with screw joint as specified in 3.3.4.2.

The pole for the size 2 flag set when assembled shall measure 96 inches ± 3/8 inch in length and shall have a straight even diameter of 1-1/4 inches throughout the length. The pole for the size 2 flag set shall be in two sections with the top section measuring 60 inches ± 3/16 inch and the bottom section measuring 36 inches ± 3/16 inch and joined by means of a metal band with screw joint as specified in 3.3.4.2.

The pole for the size 3 flag set when assembled shall measure 84 inches ± 3/8 inch in length and shall have a straight even diameter of 1-1/4 inches throughout the length. The pole for the size 3 flag set shall be in two sections with the top section measuring 48 inches ± 3/16 inch and the bottom section measuring 36 inches ± 3/16 inch and joined by means of a metal band with screw joint as specified in 3.3.4.2. All poles shall have a slight taper at the top where the ferrule is placed and at the two ends of the one or two joining sections where the metal band is placed. The bands shall be attached to the pole sections by means of brass mounting screws or rivets.

Holes shall be drilled into the staff to receive the required screws and screw ring for attachment of the cord and tassels and shall be of such size to permit the screws and screw ring to be turned without splitting the wood. The screws and ring shall match the brass metal accessories in color. Knobs or buttons shall be attached to the pole for fastening leather tabs fitted into the heading of the flag. The top of the pole shall have a firmly mounted ferrule of cast brass or aluminum alloy casting. The ferrule shall be approximately 2-3/16 inches in length (including threads), 1.00 to 1.05 inches in diameter (outside) and shall have 3/4 inch standard pipe threads (14 tpi) with an effective thread length of 5/16 inch on top. The brass shall consist of any alloy containing 65 to 85 percent copper. Type II sets may use aluminum tab rings with provisions for mounting the cord and tassels. The tab rings shall be gold in color to approximately match the color of the cord and tassels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

The ferrule shall have a screw ring mounted through it for the attachment of the cord and tassels. The ferrule, screw ring and any other attaching hardware shall be finished with a gold tinted brass coating, approximately matching the gold of the fringe, cord and tassels. The screws, knobs or buttons (for fastening of the leather or artificial leather tabs) shall be mounted 4 ft 2-3/4 inches +/- 1/2 inch apart for the size 1 pole and 2 ft. 10-3/4 inches +/- 1/2 inch for the size 2 and 3 poles, with the top one 7/16 +/- 1/16 inch from the lower edge of the ferrule. The screws, knobs or buttons shall be mounted in line with each other.

3.3.5 Pole ornaments. The finish of the ornaments shall show no effects of humidity, cold temperature, and a fadeometer test when tested in accordance with 4.2.1.

3.3.5.1 Type I. The ornaments for the type I flag set shall be made from solid cast brass or aluminum alloy casting. The brass shall contain 65 to 85 percent copper. The ornaments shall be burnished and polished to remove casting imperfections. A plating of 0.0003 to 0.0005 inch nickel shall be applied to the casting followed by a 40 mil coating of gold tinted brass. A lacquer coat will then be applied and the ornament baked for 30 minutes at 250 degrees Fahrenheit. The base of each ornament shall be tapped to accept the ferrule's 3/4 inch standard pipe thread of 5/16 inch length.

3.3.5.2 Type II. The ornaments for the type II flag set shall be made from acrylonitrile butadiene styrene (ABS) which has been vacuum plated in gold color.

3.3.5.3 Eagle ornament. Unless otherwise specified, the ornament shall be an eagle and shall meet the following requirements. The design shall be a spread eagle in accordance with Figure 1 measuring 7 $\pm$ 1/4 inches in wing spread and 6-1/4 inches, +1/4 inch, -3/8 inch, in height (not including the ferrule).

3.3.5.4 Spear ornament. The spear ornament shall be round in shape and made in accordance with Figure 2. It shall measure 6-1/4 inches $\pm$ 1/4 inch in height (not including the ferrule).

3.3.6 Stand. The stands for the type I and II flag sets shall be round in shape and measure 10-3/4 inches to 12 inches in diameter at the base. The stands shall have a bore of proper diameter to receive and make the pole secure and fast when inserted. The pole shall fit snugly in the bore when tested as specified in table II and 4.4.2. The finish of the stands shall meet the same humidity, temperature and fading requirements as the ornaments specified in 3.3.5. The stands for the type I and II flag sets shall meet the additional requirements in 3.3.6.1 and 3.3.6.2, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.3.6.1 Type I. The stand for the type I flag set shall be of cast iron, measuring not less than 4-3/8 inches and not more than 5-3/8 inches high at the point where the pole is inserted. The stand shall weigh between 17 and 21 pounds and shall have a gold anodized spun aluminum alloy (11ØØ) shell, unlacquered, and of plain design, approximately matching the gold color of the fringe, cord and tassels. The aluminum shell shall be a minimum thickness of Ø.Ø4Ø inch. The shell shall be superimposed on the configuration of the stand by a permanent crimping operation.

3.3.6.2 Type II. The stand for the type II flag set shall be made from acrylonitrile butadiene styrene (ABS) which has been vacuum plated in gold color, approximately matching the gold color of the fringe, cord and tassels. The stand shall measure 6 inches ± 1/2 inch in height where the flag pole is inserted. The stand shall be hollow and capable of being filled with sand or water for weight.

3.3.7 Hardware finish.

3.3.7.1 Polishing. All exposed sections of hardware, as assembled, shall be ground, cut down, greased or oiled and polished or buffed to a mirrorlike finish.

3.3.7.2 Lacquering. The exterior of the hardware components, including the edges, shall be lacquered. The dry lacquer film shall be continuous, level and adherent, and free from lint, dust, or other foreign inclusions. There shall be no change in the appearance of the lacquered finish when examined in accordance with 4.2.2.1.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificates of compliance. When certificates of compliance for component materials are submitted, the Government reserves the right to inspect such items to determine the validity of the certification. Certificates of compliance shall be accompanied by actual test results dated not more than two years prior to the date of the start of the contract or date of purchase order.

4.1.3 Preproduction sample approval. When required, a preproduction sample shall be submitted to the Government for approval. The flag sets, or individual components, shall be inspected by the Government for compliance in design, construction and workmanship required by this specification. The markings shall be inspected by the Government for compliance with the marking requirements specified herein.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection and testing. Inspection shall be performed on components and materials listed in Table I for the characteristics shown and the inspection level shall be S-1 with an AQL of 4.0 percent defective. The methods of testing, as applicable, shall be as specified in Table I. The number of specimens to be tested from each sample unit is specified in the individual test methods. Components and materials listed in Table II shall be accepted on the basis of a contractor's certification of compliance for requirements specified in applicable paragraphs of this specification in accordance with 4.1.2.

4.2.2 Inspection of the end item.

4.2.2.1 Visual examination. Defects found during this examination shall be classified in accordance with defects listed in Table III. The sample unit for this examination shall be one flag set or individual component, as supplied. The acceptable quality level (AQL) shall be 2.5 major and 6.5 total defects per 100 units. The sample size shall be in accordance with inspection level II of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Table I - Inspection of Components and Materials

Components and Materials	Characteristic	Requirement	Test Method
Embroidery Thread for Stars	Identification	3.3.1.4.1	D 276
	No. of plies	3.3.1.4.1	Visual
	Denier	3.3.1.4.1	D 861 (A4)
Polyester Thread for Sewing	Identification	3.3.1.4.2	D 276
	No. of plies	3.3.1.4.2	Visual
Liner for Heading: Cotton Flannel or Cotton Sheeting	Identification	3.3.1.2	D 276
Nylon Bunting for Flag	Identification	3.3.1	D 276
	Weight	3.3.1	5040/5041 (FED-STD-191)
Rayon yarn for Fringe, Cord and Tassels	Identification	3.3.2.1	D 276
	Denier	3.3.2.1	D 861 (A4)
Cotton Yarn for Fringe, Cord and Tassels	Identification	3.3.2.2	D 276
	Yarn number	3.3.2.2	D 861 (A3)
Fringe	Colorfastness:	3.3.2	
	Light		AATCC 16A
	Dry Cleaning		AATCC 132
	Construction of Bullion	3.3.2.3	Visual
Cord and Tassels	Colorfastness:	3.3.3	
	Light		AATCC 16A
	Dry Cleaning		AATCC 132
	Construction of Cord	3.3.3.5.1	Visual
	Construction of Tassel	3.3.3.5.2, 3.3.3.6	Visual
Pole and stand	Assembly	3.3.6	4.4.2
Eagle, Spear and Stand	Finish Resistance:		
	Humidity	3.3.5 and 3.3.6	4.4.1.1
	Cold Temperature		4.4.1.2
	Fading		4.4.1.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Table II - Certificate of Compliance

Components and Materials	Characteristic	Requirement Paragraph
Wood mold	Material Identification	3.3.3.3
Metal band with screw joint	Material Identification	3.3.4.2
Plastic band with screw joint	Material Identification	3.3.4.3
Pole, Flag	Material Identification	3.3.4.1
Eagle ornament	Material Identification	3.3.5.1, 3.3.5.2
Spear ornament	Material Identification	3.3.5.1, 3.3.5.2
Stand	Material Identification	3.3.6.1, 3.3.6.2

Table III - Classification of Defects

Examine	Defect	Classification Major	Classification Minor
Complete Assembly	Any component missing	X	
	Any component not fabricated of the specified material	X	
	Any characteristic not in accordance with the specified requirements	X	
Overall dimensions of each major component (flag, cord and tassels, pole, stand and ornaments)	Less than or more than specified dimension (Tolerances included)	X	
All other specified dimensions (components and dimensions relating to construction)	Not within specified tolerance		X
Flag	Any weakening defect that may develop into a hole	X	
	Any cut, tear or burn	X	
	One or more spots or stains, clearly noticeable, affecting appearance	X	
	Thread ends not trimmed or not neatly trimmed, affecting appearance		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Table III - Cont.

Examine	Defect	Classification Major	Minor
Stars	More than a total of 4 individual embroidering yarns on the back of one or more Schiffli type stars that are not secured by a yarn loop at the center of each segment of the star (known as a "stump")	X	
	One severed yarn on the face or back of the stars		X
	Two or more severed yarns on the face or back of the stars	X	
	Two or more malformed yarns on the face side of the stars	X	
	Two or more severed yarns on the face or back of the stars that have not been trimmed to 1/8 inch maximum length	X	
	Malformed stars - uneven or ragged edges on face or back for distance of 1/4 inch or more as result of loose tensioned yarns causing loops, and improper embroidering and mending	X	
	Incorrect span used	X	
Fringe	Color not as specified	X	
	Spot, stains or soiled places	X	
	Cut, hole or tear	X	
	Frayed or kinked bullion		X
	Crushed or wrinkled fringe		X
	Top edge of heading uneven		X
	Length of bullion uneven		X
Cord and tassels	Color not as specified	X	
	Wood mold not completely covered with braiding or loosely or unevenly covered	X	
	Braiding damaged or frayed		X
	Braid ends not secured to mold	X	
	Fringe or skirt damaged or frayed	X	
	Any section of crouse cord missing	X	
	Any section of crouse cord not secured on inside of mold		X
	Excessive braid; braid not glued or neatly tucked in at either end of mold	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Table III - Cont.

Examine	Defect	Classification Major	Minor
Cords and tassels (cont.)	Passage of cord impeded by braid in centerhole		X
	Fringe or skirt not securely tucked in and glued to head end of mold	X	
	Finished cord not knotted and glued to base of braided mold	X	
Pole, Flag	Any check, split, crack, torn or raised grain, or other defect affecting appearance or serviceability	X	
	Staff not straight, i.e., any warp, bow or crook exceeding 1/32 inch per foot of length		X
	Broken, fractured, scratched or otherwise defective, affecting appearance or serviceability	X	
	Slope of grain exceeds 1 inch in 12		X
	Not finished	X	
	Color not as specified	X	
	Not smooth, i.e., not sanded before coating		X
	Finish not adhered, i.e., blistered, peeled or chipped, or unevenly applied		X
	Does not fit securely in stand	X	
Stand	Does not fit pole	X	
	Does not sit flat on floor or carpet	X	
Band, Flag Pole	Out of round	X	
	Any soldering or joining mark	X	
	Broken, fractured, scratched, scored, nicked, dented or otherwise defective affecting appearance or serviceability (including edges)	X	
	Any rough or ragged edge; surface of edge not clean, smooth finish		X
Ornaments, Eagle and Spear	Does not match design	X	
	Color not as specified	X	
	Broken, fractured, or otherwise defective affecting appearance or serviceability	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Table III - Cont.

Examine	Defect	Classification Major	Minor
Finish: Ornaments and Stand	Does not match specified designs surface lacking gloss, luster, polish (including edges)	X	
	Lacquer application not smooth, continuous coating, i.e., break in film, run, lump, or orange peel effect		X
	Lacquer application not clear and transparent		X
	Any area of surface tarnished, spotted, stained or discolored	X	
	Any area or surface scratched scored, nicked, dented, gouged or defaced	X	
Hardware	Any component missing or not specified type or size	X	
	Fractured, split, malformed, miscast or otherwise impaired seriously affecting serviceability	X	
	Defective or otherwise damaged, not affecting serviceability, but affecting appearance		X
	Any part which does not readily assemble with its mating part, i.e., male and female ferrules and couplings	X	
	Threads damaged or stripped	X	
	Threads not as specified	X	
	Evidence that screw was hammered in place	X	
	Screw or screw ring missing		X
	Sharp edges, burr or sliver which may cause injury	X	

4.3 Examination of preparation for delivery. An examination shall be made to determine compliance with the requirements of Section 5. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

4.4 Test Methods.

4.4.1 Finish tests on ornaments and stand. After each test, 4.4.1.1, 4.4.1.2, and 4.4.1.3, the finish shall show no effects from the exposure. Results shall be reported as pass or fail.

4.4.1.1 Humidity test. The finish of the ornaments and stand shall be subjected to 168 hours of exposure in a tropical chamber at 1ØØ degrees Fahrenheit and 95 percent relative humidity.

4.4.1.2 Cold temperature. The finish of the ornaments and stand shall be subjected to 1Ø cycles of alternate exposure of between minus 2Ø degrees and 77 degrees Fahrenheit. Each cycle shall be one hour.

4.4.1.3 Fading. The finish of the ornaments and stand shall be subjected to 1ØØ hours in a standard fadeometer, using the procedure in AATCC Method 16A.

4.4.2 Pole and stand assembly test. The stand shall be placed on a level surface and the bottom section of the pole (butt end) properly inserted into the bore of the stand. The pole shall fit snugly into the bore. Moderate pressure shall be applied by hand to exert a force downward and sidewise on the pole section. There shall be no loosening of the snug fit of the pole in the bore of the stand.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be commercial.

5.1.1 Commercial. Each flag set or individual component as specified shall be packaged in accordance with normal commercial practice. The flag pole shall be disassembled to produce the practical minimum cube. The complete package shall be designed to protect the flag set or component(s) against damage during shipment, handling and storage.

5.2 Packing. Packing shall be commercial.

5.2.1 Commercial. All components comprising one complete flag set shall be packed in a single, close fitting corrugated fiberboard box conforming to Section 6(a), Rule 41 of the Uniform Freight Classification and Rule 222 of the National Motor Freight Classification. Closure of the boxes shall be in accordance with Section 7 of the Uniform Freight Classification. The parts shall be separated within the box to prevent damage during shipment, handling and storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

5.3 Marking. Packages and shipping containers shall be marked as specified in the contract or purchase order.

6. NOTES

6.1 Intended use. The flag sets described in this specification are intended primarily for use in executive offices of the Government.

6.2 Ordering Data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number and date of the specification
(b) Type and size required (see 1.2.1 and 1.2.2)
(c) Whether entire set is desired or certain individual components
(d) Marking required (see 5.3)

MILITARY INTERESTS:
NONE: DoD has determined that no military activity has an official interest in this Federal Specifiation

CIVIL AGENCY COORDINATING ACTIVITY:

VA - OSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

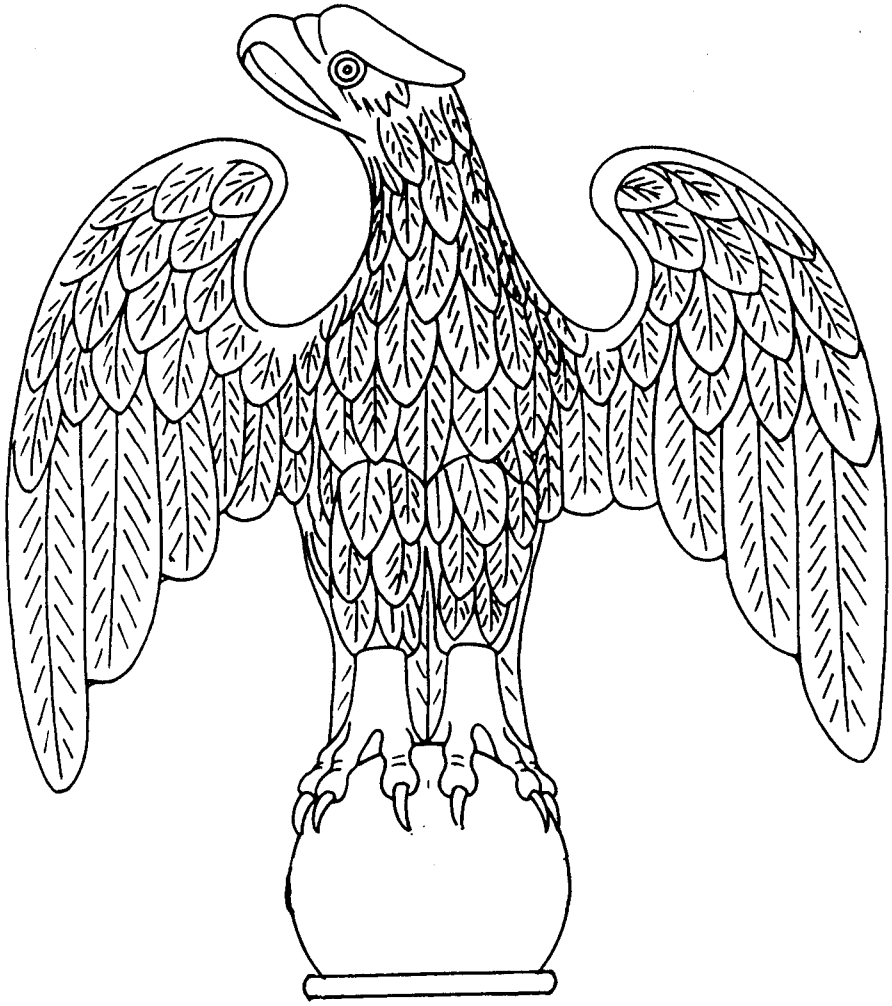


FIGURE 1. EAGLE ORNAMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

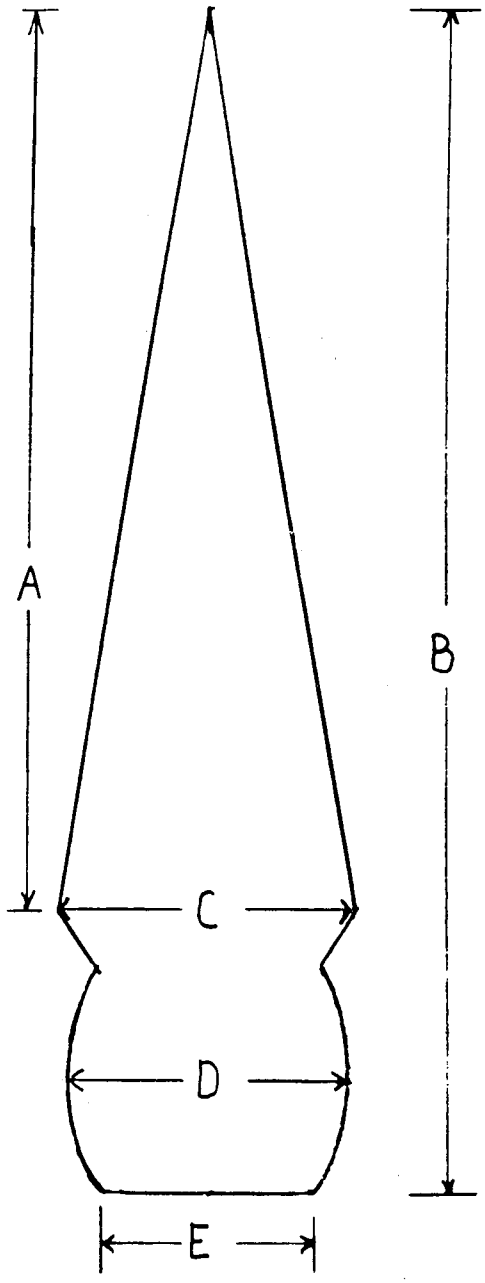


FIGURE 2. SPEAR ORNAMENT
Note: Tip may be slightly rounded

Dimensions:
A - 4-3/4 inches ± 1/4 inch
B - 6-1/4 inches ± 1/4 inch
C - 1-21/32 inches ± 5/32 inch
D - 1-5/8 inches ± 3/16 inch
E - 1-1/8 inches ± 3/16 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.