DDD-S-301b
OCTOBER 14, 1960
SUPERSEDING
Int. Fed. Spec. DDD–S–00301a (GSA–FSS)
December 31, 1957 and
Fed. Spec. DDD–S–301
April 23, 1937

FEDERAL SPECIFICATION

SHIRT, MAN'S, COTTON, BROADCLOTH, MERCERIZED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers the requirements for a man's shirt made of cotton broadcloth.

1.2 Classification.

1.2.1 *Types, classes, colors and sizes.*—The shirts shall be of the following types, classes, colors and sizes, as specified (see 6.2):

Type I.—One patch pocket solid color or color pattern

Type II.—Two patch pockets with flaps, khaki

Class 1.—Regular collar.

Class 2.—Fused collar.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards.—The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Specifications:

L–P–406 — Plastic, Organic; General Specifications, Test Methods.
V–B–871 — Buttons, Sewing Hole, and Button, Staple (Plastic and Pearl).
V–T–276—Thread, Cotton.
CCC–C–430—Cloth, Cotton, Sheeting.
CCC–C–437—Cloth, Cotton, Broadcloth, Mercerized.
CCC–C–438—Cloth, Cotton, Buckram.
CCC–T–191—Textile Test Methods.
DDD–L–0020 — Labels, Printed and Markings General Use (For Clothing, Equipage and Tentage).
PPP–B–636—Box, Fiberboard.
PPP–B–676 — Boxes, Set-Up, Paper-

Schedule of sizes

Neck size	Sleeve length	Neck size	Sleeve length
13	29–30–31–32–34	15½	29–30–31–32–33–34–35–36
13½	29–30–31–32–33–34	16	30–31–32–33–34–35
14	29–30–31–32–33–34–35	16½	31–33–34–35–36
14½	29–30–31–32–33–34–35	17	32–33–34–35
15	29–30–31–32–33–34–35–36	17½	32–33–34–35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

board.
PPP–T–60 — Tape; Pressure Sensitive Adhesive, Waterproof — For Packaging and Sealing.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL–P–3803 — Plastic, Polyethylene, Molded and Extruded Shapes, Sheets and Tubing.
MIL–L–10547 — Liners, Case, Waterproof.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. — The following documents form a part of this specification. Unless otherwise indicated, the issues in effect on date of invitation for bids shall apply.

Federal Trade Commission Publication:

Textile Fiber Products Identification Act.

(Copies of the Textile Fiber Products Identification Act may be obtained free of charge, from the Federal Trade Commission, Washington 25, D C.

Color Association of the United States, Inc.

United States Army Color Card for Official Colors for Arms and Services.

(Information regarding availability of copies of color cards or cable numbers may be obtained from the Textile Color Card Association of the United States, Inc., 200 Madison Ave., New York 16, N. Y.)

3. REQUIREMENTS

3.1 Sample.—Samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 Materials.

3.2.1 *Basic cloth.* — The basic cloth for shirts shall be mercerized cotton broadcloth, conforming to type II or V as specified in Federal Specification CCC–C–437, and unless otherwise specified shall have a seam efficiency of not less than 80 percent when tested as specified in 4.3.

3.2.1.1 *Color.*—The basic cloth for type I shirts of color (solid) or color patterns (checks or stripes) shall be as specified (see 6.2). For type II, shirts shall be khaki shade M–1. Shade M–1 shall be in accordance with standard shade samples (see 6.3).

3.2.2 *Buckram.*—The interlining for regular collar (class 1) collar leaf, collar stand, and cuffs; and collar stand for fused collar (class 2), shall be cloth, cotton, buckram, conforming to type II, class 2 of Federal Specification CCC–C–438. The buckram shall be bleached for type I white shirts and unbleached for type I khaki and type II shirts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.2.3 *Cloth, laminating.* — The cloth for laminating fused collar leaf (class 2) shall be cotton and acetate containing not less than 120 ends and 72 picks per inch and weigh not less than 4 ounces per square yard. The warp shall be arranged 2 ends of cotton and 1 end of acetate. The filling shall be all cotton. The residual shrinkage shall not exceed 1 percent in the warp or filling when tested as specified in 4.3. The laminating cloth shall be fused with the cotton broadcloth upon the application of heat, moisture and pressure and remain laminated after five successive launderings when tested as specified in 4.3

3.2.4 *Cloth sheeting.*—The interlining for type I and type II left front and right front buttonhole facing shall be cloth, cotton, sheeting conforming to type II, class 2, style A of Federal Specification CCC–C–430.

3.2.4.1 *Color.* — The sheeting for type I shirts except khaki colored shirts shall be bleached white; the sheeting for type I khaki, and type II shirts shall be unbleached.

3.2.5 *Thread.*—The thread for seaming and stitching the shirts shall be thread, cotton, mercerized, type IC1 and IC2, ticket No. 00, 3 ply; and thread, cotton, soft finish, type IA2 and IA3, ticket No. 80, 2 ply, conforming to Federal Specification V–T–276.

3.2.5.1 *Color.*—The thread for type I white and colored pattern, shirts shall be bleached white; for solid color shirts the thread may be either bleached white or an approximate shade of the basic material; for type I khaki and type II, shirts shall be dyed shade khaki cable No. 66019 (see 2.2).

3.2.5.2 *Color fastness.* — The dyed thread shall show fastness to light, chlorine bleaching and perspiration equal to or better than the standard sample. When no standard sample is available the dyed thread shall show good fastness to light, chlorine bleaching, laundering and perspiration. Tests shall be as specified in Federal Specification V–T–276.

3.2.6 *Buttons.*—The buttons shall be type II, class G or H, style 14, 20-line or type II, class K, style 25, 19- or 21-line conforming to Federal Specification V–B–871.

3.2.6.1 *Color.* — The buttons for type I white shirts shall be white, buttons for type I khaki and type II shirts shall be khaki shade to match the basic cloth.

3.3 Marking.—Each shirt shall have an identification marking and a size marking, conforming to type IV of Interim Federal Specification DDD–L–0020, except as follows. The end item is intended to be laundered.

3.3.1 *Identification marking.*—The identification marking shall conform to class 1 and contain the following information:

Nomenclature
Contract number

3.3.2 *Size marking.* — The size marking shall conform to class 2 and include the neck size and sleeve length, together with the stock number. For example:

14½ – 32
(Stock number)

3.4 Design.—The shirt is a coat style, with one outside patch pocket for type I shirt and two outside patch pockets with flaps for type II, and the collar with leaf and stand, and sleeves with button cuff as shown on figure 1.

3.5 Patterns.—Patterns shall be processed by the contractor and consist of parts as listed in 3.5.1 and shall provide a minimum allowance of ¼ inch for plain seams including shoulder, making of collar and cuffs, attaching collar and seams, and for attaching yoke; ⅜ inch for setting pockets, making and attaching pocket flaps (type II), attaching cuffs and hem; and ½ inch for armhole and double lapped side seams.

3.5.1 *List of pattern parts.* — The shirts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

shall be cut from materials as specified and in accordance with the following pattern parts.

Material	Nomenclature of parts	Cut parts
Material and color as specified	*Right front	1
	*Left front	1
	*Back	1
	Yoke	2
	*Sleeve	2
	*Sleeve facing	2
	Top cuff	2
	Under cuff	2
	Collar (leaf)	2
	Collar stand	2
	*Patch pocket (Type I)	1
	*Patch pocket (Type II)	2
	*Pocket flap—Top (Type II)	2
	*Pocket flap—Under (Type II)	2
Cloth, cotton, buckram	Collar stand interlining	1
	Cuff interlining	2
Cloth, cotton, sheeting	*Left front interlining (when used)	1
	*Right front facing	1
Or cloth laminated	Collar leaf interlining	1

* Directional lines shall show these parts are to be laid in the warp direction.

3.6 Construction.

3.6.1 *Stitches; seams and stitching.* — Stitch, seam, and stitching types, as specified in table I shall conform to Federal Standard No. 751. Whenever two or more methods of seams or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the shirt.

3.6.2 *Thread breaks and ends of seams.* — Thread breaks and ends of all seams and stitching, when not caught in other seams or stitching shall be securely tacked or backstitched not less than ¼ inch. Thread breaks or skipped stitches on 401 stitch type seams shall be back stitched not less than 1 inch with stitching superimposed and anchoring the ends of the break. Skipped stitches or thread breaks on 401 seaming may be repaired using 301 stitch type, not less than ½ inch in length on each side of the skip or break, superimposed and catching other seaming.

3.6.3 *Stitches per inch.*—The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6.4 *Buttonholes.* — Buttonholes shall be straight cut with the purling on the outside and ends tacked, fitting the size of button used.

3.7 Manufacturing operations requirements.—The shirts shall be manufactured in accordance with all operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations.

3.7.1 *Figures.*—The figures referred to in the specification are furnished for information purposes only. To the extent of any inconsistencies between this specification and the figures, this specification shall control.

3.7.2 *Shade marking.* — The component parts of the shirt shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(1) Corrosive metal fastening devices shall not be used.

(2) Sew-on shade tickets are prohibited.

(3) Adhesive type tickets shall not show discoloration and the adhesive mass shall not adhere to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
1.	*Cutting:*					
	a. Cut shirts in strict accordance with patterns which shall show size, shape, placement of pocket, pocket flaps (type II) and directional lines for cutting.					
	b. Cut all component parts from one piece of cloth, except binding for sleeve openings, under cuff, collar stand and undercollar leaf, pocket flap linings (type II), and gussets (when used) which may be cut from ends of the basic cloth.					
2.	*Replacement of damaged parts:*					
	a. Replace at time of cutting any part containing holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into a hole.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns, and large exposed drill holes.					
3.	*Shade marking:*					
	a. Mark, ticket or bundle all parts to insure a uniform shade and proper assembly throughout the garment, except those cut from ends.					
4.	*Marking shirts:*					
	a. Position the identification marking on the outside of the left front at the bottom of shirt adjacent to the buttonhole facing.					
	b. Center the size marking on the lining side of the collar stand at back.					
5.	*Make cuffs:*					
	Finished appearance.—The cuffs, made of two plies of the basic material interlined with buckram, with rounded corners, shall finish $2\frac{1}{2} \pm \frac{1}{8}$ inches wide. The cuffs shall finish smooth and flat without distortion and be uniform in shape and size.					
	a. Seam the two plies of cuff and interlining around ends and bottom edges and turn out (A, figure 3).	301	SSa–1	14–18	00	00
	— or —	or				
		401	SSa–1	14–18	00	80–2
	The top edge of outer ply of cuff may be folded over top edge of the interlining and stitched $\frac{1}{4}$ to $\frac{3}{8}$ inch from folded edge, catching the interlining in the stitching prior to operation 5.a.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
6.	*Make collar:*					
	Finished appearance.—The collar consisting of a leaf and stand shall finish $1\frac{3}{4}\pm\frac{1}{4}$ inches wide at center back and $2\frac{3}{4}\pm\frac{1}{4}$ inches wide at points. Regular collars interlined with cotton buckram and fused collar leafs interlined with laminating cloth, with the points and edges completely forced out and uniform in length shall finish flat and smooth without distortion. The edge stitching shall be uniform in width. When used, the laminating fabric shall be permanently fused to collar.	301	SSa–1	14–18	00	00
	a. Join the three plies of leaf (outerply, underply and interlining) around the bottom and side edges (A, figure 4).	301 or 401	SSe–2 (a)	14–18	00	00
			SSe–2 (a)	14–18	00	80–2
	b. Trim corners, turn and press collar points on a collar pointing machine.					
	c. Single stitch the leaf $\frac{3}{32}$ to $\frac{1}{8}$ inch from edge (B, figure 4).	301	SSe–2 (b)	14–18	00	00
	d. Fold under the neck edge of the outer ply of collar stand $\frac{3}{16}$ to $\frac{1}{4}$ inch and stitch $\frac{1}{16}$ to $\frac{1}{8}$ inch from folded edge forming a hem (C, figure 4).	301	EFa–1	14–18	00	00
	e. Insert leaf between the plies of stand and interlining and seam, catching all plies (D, figure 4).	301	SSq–2 (a)	14–18	00	00
	— or —					
	Interlining may be stitched to the inside ply of collar stand with a row of stitching at center of stand, prior to joining stand to collar.	301	SSa–1	14–18	00	00
	f. Turn stand and single stitch $\frac{1}{16}$ inch from seam, continue the stitching around the ends of stand (E, figure 4).	301	SSq–2 (b)	14–18	00	00
	g. Fuse collars (class 2) (see 3.2.2).					
7.	*Hem breast pocket:*					
	Finished appearance.—The hem shall finish smooth and flat without distortion.					
	Type I					
	a. Fold top of pocket, turn in raw edges, forming a hem $1\frac{1}{4}\pm\frac{1}{8}$ inches wide at sides and $1\frac{3}{4}\pm\frac{1}{8}$ inches wide at center and stitch hem $\frac{1}{16}$ to $\frac{1}{8}$ inch from edge.	301	EFb–1	14–18	00	00
	Type II					
	b. Fold top of pockets, turn in raw edges forming a hem $1\frac{1}{4}\pm\frac{1}{8}$ inches wide at sides and $1\frac{3}{4}\pm\frac{1}{8}$ inches at center and stitch hem $\frac{1}{16}$ to $\frac{1}{8}$ inch from edge.	301	EFb–1	14–18	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
8.	*Make pocket flaps (Type II):*					
	Finished appearance.—The pocket flaps shall finish smooth and flat. The gage of stitching shall be uniform. The buttonholes shall be correctly positioned with the purling on the top side of flap.					
	a. Seam the two plies of flap, turn, work out point and corners and edge stitch 1/16 to 3/32 inch from edge.	301	SSe–2	14–18	00	00
		or	(a)			
		401	SSe–2	14–18	00	80–2
		and	(b)	14–18	00	00
		301				
	b. Mark or gage and make a straight cut buttonhole in the center of flap vertically positioned in accordance with mark on pattern and with one end of button hole 1/2 to 5/8 inch from point of flap.	Buttonhole		42–46 per buttonhole including tack	00	00
9.	*Make fronts:*					
	a. *Left front.*—Double stitch, 1 3/16 to 1 1/4 inch gage, a strip of sheeting with both edges turned under 1/8 to 3/16 inch, to the underside of the left front edge with the edge of the left front turned under 3/16 to 1/4 inch. The folded front edge of sheeting shall be 1/16 to 3/32 inch in from the folded left front edge (A, figure 5).	301	LSk–2	14–18	00	00
		or				
		401	LSk–2	14–18	00	80–2
	— or —					
	b. Fold back the left front from notch to notch. Buttonhole facing shall finish 1 1/2±1/8 inches wide (B, figure 5).					
	c. *Right front.*—Turn under the raw edge of right front 1/4 to 5/16 inch and double stitch a strip of sheeting, with both edges turned under 3/16 to 1/4 inch, to the underside of the right front edge. The gage of stitching shall be not less than 11/16 to 3/4 inch with the folded front edge of the basic cloth 1/32 to 1/16 inch in from the folded right front edge. The button stay shall finish 7/8±1/16 inch in width (C and D, figure 5).	301	LSk–2	14–18	00	00
		or				
		401	LSk–2	14–18	00	80–2
10.	*Set on breast pockets:*					
	Finished appearance.—The pockets shall be properly positioned without twists, pleats or puckers and uniformly stitched. The shape as shown by patterns shall finish: For type I shirts 4 5/8±1/8 inches wide, 5 1/2±1/8 inches deep at center and 4 3/4±1/8 deep at sides. For type II shirts 6 1/4±1/4 inches deep and 5 3/4±1/4 inches wide. Pockets may be creased on a pocket creasing machine. The stitching of the ends of pocket shall be uniform.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
10.	*Set on breast pockets:*—(Cont.)					
	Type I shirt					
	a. Turn in the raw edges of the pocket and single stitch 1/16 inch from edge of pocket to left front as indicated by marks on pattern and parallel with front of shirt and continuing the stitching across top of pocket for a distance of 3/16 to 1/4 inch from each end and down to hem stitching (see operation 10c).	301 301	LSd–1 SSa–1	14–18 14–18	00 00	00 00
	Type II shirt					
	b. Pockets shall be positioned on right and left shirt fronts parallel with front edges and in accordance with marks on pattern. Turn pockets edges under and stitch 1/16 inch from edges to shirt, and continue the stitching across top of pocket for a distance of 3/16 to 1/4 inch from each end and down to hem stitching.	301 301	LSd–1 SSa–1	14–18 14–18	00 00	00 00
	— or —					
	c. The stitching at top of pocket may be slanted to unite with edge stitching of pocket at bottom of hem.					
11.	*Position and set flaps (Type II):*					
	a. Seam flaps to shirt 1/2±1/8 inch from top of pocket turn down and raise stitch 3/16 to 1/4 inch from seam. Ends of stitching shall be securely tacked and no raw edge visible under flaps.	301	LSq–2	14–18	00	00
12.	*Attach yoke:*					
	Finished appearance.—The yoke, made of two plies of the basic material, shall finish smooth without twists or puckers and measure 1 7/8±1/8 inches at the ends and 1 5/8±1/8 inch at center.					
	a. Position the plies of yoke, inserting the back of shirt, and seam together, forming gathers in the back of shirt as indicated by marks on patterns.	301 or 401	SSa–1 SSa–1	14–18 14–18	00 00	00 80–2
	b. Turn up outer ply of yoke and single stitch 3/32 to 1/8 inch from turned edge, catching the gathers and seam allowance of inner yoke in the stitching and turn up the inner ply of yoke.	301 or 401	LSf–1 LSf–1	14–18 14–18	00 00	00 80–2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
13.	*Make sleeve opening:*					
	Finished appearance.—The facing of the sleeve opening shall finish smooth and flat without distortion and be uniform in width and length. Sleeve openings shall measure 5½±½ inches long exclusive of cuff.					
	a. Bind the sleeve openings with a strip of the basic material to form a continuous facing. Turn the raw edges of the facing to the inside, insert the edges of the sleeve opening 3/16 to ¼ inch and single stitch. The facing shall finish ½ to ¾ inch in width (A and B, figure 6).	301	BSc–1	14–18	00	00
	b. Turn bound sleeve opening to the inside of sleeve and stitch through binding and sleeve ⅛ to ¼ inch below top of openings, the full width of binding (C and D, figure 6).	301	SSa–1	14–18	00	00
	— or —					
	c. A ½ inch bartack may be used.	Bartack		28 per bartack	00	00
14.	*Join shoulder seams:*					
	Finished appearance.—The shoulder seam shall be carefully joined to avoid twisting and puckering.					
	a. Join shoulder seams of under yoke and fronts; turn seam up toward the back.	301	SSa–1	14–18	00	00
		or				
		401	SSa–1	14–18	00	80–2
	b. Turn in the raw edge of upper yoke, place over the seam and stitch through the shoulder 1/16 inch from edge.	301	LSd–1	14–18	00	00
		or				
		401	LSd–1	14–18	00	80–2
	— or —					
	c. Operations a and b may be combined by using folder.	301	LSe–1	14–18	00	00
		or				
		401	LSe–1	14–18	00	80–2
15.	*Set sleeves:*					
	Finished appearance.—The sleeves shall be carefully set to avoid twisting and puckering. The gage of the stitching shall be uniform in width.					
	Set in sleeves with a double lapped and double stitched seam, 3/16 to 5/16 inch gage. Front and back parts shall be over the sleeves.	301	LSc–2	14–18	00	00
		or				
		401	LSc–2	14–18	00	80–2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
16.	*Join side and underarm seams:*					
	Finished appearance.—The side and underarm seams shall be carefully joined without puckering or twisting. The seams shall start and finish evenly. The gage of stitching shall be uniform.					
	Join side and underarm seam of the sleeve with a double lapped and double stitched seam ⅛ to ¼ inch gage. The armhole seam shall not be staggered more than ⅜ inch.	301	LSc–2	14–18	00	00
		or 401	LSc–2	14–18	00	80–2
17.	*Hem shirts:*					
	a. Turn up bottom of shirt with the raw edge turned in and stitch through the shirt catching gussets at sides. One side of gusset shall be folded in half with the folded edge of gusset on the bias. Hem shall finish not less than ⅛ to 3/16 inch in width.	301	EFb–1	14–18	00	00
	— or —					
	b. When gussets are omitted a ¼ inch bartack shall be used to secure ends of side seams.	Bartack		28 per bartack	00	00
18.	*Join cuffs to sleeves:*					
	Finished appearance.—The finished cuffs shall be uniform with the fullness in sleeve properly distributed and without raw edges. The edge stitching shall be uniform in width.					
	a. Seam the underside of cuff to the bottom of sleeve on the underside, with the bound edge of the sleeve opening turned to the inside (at the buttonhole end of cuff) and caught in the stitching, with fullness in sleeve properly distributed (B, figure 3).	301	SSa–1	14–18	00	00
		or 401	SSa–1	14–18	00	80–2
	b. Stitch the top edge of the outer side of cuff and interlining, with the raw edges turned in 3/32 to ⅛ inch from turned edge, to the bottom edge of sleeve catching the underply of cuff and continue the stitching around sides and bottom edges of cuff (C and D, figure 3).	301	LSb–1	14–18	00	00
19.	*Join collar to shirt:*					
	Finished appearance.—The collar shall be carefully joined to the shirt with notches matching without distortion of the stand or the collar. The finished seam on stand shall not be on or off the opposite stand by more than ⅛ inch, and shall measure 1⅜±⅛ inches wide at center back.					
	a. Seam inner ply of collar stand to neck of shirt catching the interlining in the stitching and turn stand up (F, figure 4).	301	SSa–1	14–18	00	00
	b. Seam bottom edge of the outer ply of collar stand (previously hemmed) and stitch 1/16 inch from edge through stand and shirt (F, figure 4).	301	LSb–1	14–18	00	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
20.	*Make buttonholes in collar stand, front and cuffs:*					
	Finished appearance.—The buttonholes shall be clean cut, well made and correctly positioned. All shirts shall have five front buttonholes and one collar stand buttonhole. The five front buttonholes shall be vertical and $3\frac{3}{4} \pm \frac{1}{4}$ inches apart center to center. The second front buttonhole shall be in horizontal alignment with the top edge of breast pocket $\pm \frac{1}{2}$ inch.					
	a. Mark or gage and make buttonholes vertically in the center of plait, off-center tolerance $\frac{1}{8}$ inch.	Buttonhole		42–46 per buttonhole including tacks	00	00
	b. Make one buttonhole (horizontal) in the center of the left end of collar stand, so positioned as to extend $\frac{1}{8}$ inch ahead of line of center plait buttonholes.	Buttonhole		42–46 per buttonhole including tacks	00	00
	c. Make a horizontal buttonhole in the center of each cuff ($\frac{1}{4}$ inch off center tolerance) with the end of the buttonhole $\frac{3}{8} \pm \frac{1}{4} - \frac{1}{8}$ inch from front edge (D, figure 3).	Buttonhole		42–46 per buttonhole including tacks	00	00
21.	*Sew on buttons:*					
	Finished appearance.—The buttons shall be securely sewn and properly aligned with buttonholes in collar stand, cuffs, center plait, and flaps (type II).					
	a. Sew five buttons securely by machine on right shirt front, $\frac{5}{8}$ to $\frac{3}{4}$ inch from front edge through button facing.	301		14–16 per button	00	00
		or 101		20–22 per button	00	
	b. Sew one button on right end of collar stand so positioned that, when collar is buttoned, center of the button shall be in line with vertical buttonholes on front without distortion to front plait or front button stay. Collar leaf ends, when collar is buttoned, shall be centered equidistant from center of plait and shall open not less than $\frac{1}{4}$ inch nor more than $\frac{3}{4}$ inch.	301		14–16 per button	00	00
		or 101		20–22 per button	00	
	c. Sew one button on each cuff with edge of button $\frac{1}{2}$ to $\frac{5}{8}$ inch from end of cuff to correspond with the buttonhole on the oposite end.	301		14–16 per button	00	00
		or 101		20–22 per button	00	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE I.—(Cont.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
21.	*Sew on buttons:*—(Cont.) d. Sew one button on each pocket to correspond with buttonhold in flap (type II).	301 or 101		14–16 per button 20–22 per button	00 00	00
22.	*Clean shirts:* a. Trim all ends of threads and remove loose threads from shirt. Remove all spots and stains. b. Remove all adhesive shade tickets, when used.					
23.	*Press shirts:* Finished appearance.—The entire shirt shall be well pressed. Pressing shall be accomplished with a heated pressing iron or machine. The use of a steam inflated bag type machine is prohibited. a. Press collar and cuffs prior to the folding process. b. Press entire body and sleeves of shirt; button and neatly fold each shirt. c. Pin or clip shirts at top of each side fold (see 5.1.1.1). When pins are used the point shall not be exposed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. — The shirts shall conform to finished measurements shown in table II.

3.9 Workmanship. — The finished shirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Contractor's inspection responsibility. —Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 Inspection for acceptance. — Except when otherwise specified by Civil Government Agencies, inspection shall be in accordance with Military Standard MIL–STD–105 except where otherwise indicated hereinafter.

4.2.1 *Testing of components.* — Testing of components shall be made in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable, except that this specification shall govern in the event of conflict. In addition to the testing provisions contained in subsidiary specifications and drawings, testing shall be performed on components listed in table III for characteristics noted.

TABLE II.—*Finished measurements*

Size	½ breast[1]	Back length[2]	Collar[3]	Sleeve length[4]
13	18¾	30½	13½	½ inch over marked size
13½	19¾	30½	14	½ inch over marked size
14	20¾	31	14½	½ inch over marked size
14½	21¾	31	15	½ inch over marked size
15	22¾	32	15½	½ inch over marked size
15½	23¾	32	16	½ inch over marked size
16	24¾	32	16½	½ inch over marked size
16½	25¾	32	17	½ inch over marked size
17	26¾	33	17½	½ inch over marked size
17½	27¾	33	18	½ inch over marked size
18	28¾	33	18½	½ inch over marked size
Tolerance (inch)	±½	±½	±¼	±¼

[1] ½ breast.—Measurement taken from folded edge at base of armhole to opposite side with shirt buttoned.
[2] Back length.—Measurement taken at center back from collar seam to bottom edge of shirt.
[3] Collar.—Measurement taken from center of collar button to front end of buttonhole with collar in flat position.
[4] Sleeve length.—Measurement taken from center back at collar seam diagonally across back to lower edge of back yoke and down sleeve to bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

4.2.1.1 *Sampling for testing.*—Government furnished materials shall not be sampled or tested unless specifically requested by the Government. The inspection level for each component shall be L–1 of Military Standard MIL–STD–105. The acceptable quality (AQL) for each characteristic tested shall be 6.5 defects per 100 units.

Lot sizes shall be expressed as follows:

Cloth (all types)	Yards
Thread	Cone, spool, or bobbin
Buttons	Gross
Polyethylene film	Yards

4.2.1.2 *Testing criteria.*—Unless otherwise indicated in applicable specification, the sample unit for testing shall be as follows:

Cloth, cotton, sheeting	1 continuous yard full width
Cloth, laminating	1 continuous yard full width
Buttons	40 each
Stamped swatches	15 (4 by 4 inch specimens) each marking
Threads[1]	1 cone or spool, or sufficient number of bobbins to total not less than 360 yards
Polyethylene film	1 continuous yard and 5 sealed seams

[1] When threads are purchased on cones, spools or bobbins, each type shall be sampled.

4.2.2 *In-process inspection.* — Inspection will be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are performed as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.2.3 *Examination of the end item.*

4.2.3.1 *Classification of defects.* — All defects shall be classified as indicated in 4.2.3.2, 4.2.3.3 and 4.2.3.4, except those with an asterisk (*) in classification column, which shall be classified as follows:

Major defect—When seriously affecting appearance or serviceability.

Minor A defect — When affecting appearance or serviceability, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

4.2.3.2 *General defects.*

Defects	Classification			
	Major	(*)	Minor A	Minor B
Material defects and damages:				
a. Any hole or weakening defects that may develop into a hole, such as a smash, multiple float, loose slub, etc.		(*)		
b. Shade bar, unsightly slub, etc.:				
—Above waistline (i.e., 1 inch above bottom button)		(*)		
—Below waistline				X
c. Needle chew which may develop into a hole		(*)		
d. Scissors or knife cut, tear, mend or burn		(*)		
NOTE.—Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric of the shirt, or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions, which are inconspicuous and have negligible effect on serviceability, are to be classified as follows: Material defects —No defect; Workmanship damages—Minor B defect				
Shaded parts:				
Any outside part badly shaded		(*)		
Cleanness:				
a. Spots, or stains of a permanent nature		(*)		
b. Removable spots or stains clearly noticeable			X	
c. Thread ends not trimmed or thread ends not removed throughout shirt				X
Component and assembly:				
a. Any component part or required operation omitted		(*)		
Pressing:				
a. Burned or scorched	X			
b. Omitted (entire shirt)			X	
c. Poorly pressed				X
Cutting:				
a. Component part not cut in conformance with directional lines indicated on patterns:				
—principal parts of shirts	X			
—small hidden parts			X	
Seams and stitching:				
a. Accuracy of seaming:				
1. Any part of shirt caught in any unrelated operation or stitching		(*)		
2. Seams badly twisted, puckered or pleated, affecting appearance (unless otherwise classified)			X	
3. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not backstitched as specified				X
4. Thread breaks or skip stitches on 401 stitch type backstitched less than 1 inch on both sides of break; less than ½ inch when 301 stitch type is used			X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification			
	Major	(*)	Minor	
			A	B
Seams and stitching:—(Cont.)				
b. Gauge of stitching, edge, raised or double stitching:				
1. Irregular, i.e., unevenly gauged or various stitchings not uniform affecting appearance			X	
2. Edge or raised stitching sewn too close to edge, resulting in damage to cloth		(*)		
3. Beyond range or width specified or varies more than 1/16 inch when no range is specified				X
c. Open seams:				
1. On all seams except bottom hem:				
—3/16 inch up to 3/8 inch				X
—more than 3/8 inch up to 3/4 inch			X	
—more than 3/4 inch	X			
2. Bottom hem:				
—1/2 inch or more			X	
NOTE:—One or more broken or two or more continuous skipped or run-off stitches constitute an open seam. A double stitched seam is considered open when either side of the seam is open.				
d. Raw edges:				
1. On outside:				
—1/8 inch to 1/4 inch inclusive				X
—more than 1/4 inch but not more than 1 inch			X	
—more than 1 inch	X			
2. On inside:				
—more than 1 inch but not more than 2 inches				X
—more than 2 inches			X	
NOTE:—Raw edges not securely caught in stitching shall be classified as an open seam.				
e. Run-offs: (see open seam).				
f. Seam and stitch type:				
1. Wrong seam type			X	
2. Wrong stitch type			X	
3. Looper thread exposed on outside shirt when 401 stitch type is used	X			
g. Stitch tension:				
1. Loose tension, resulting in a loose seam	X			
2. Loose tension on edge or raised stitching resulting in a loosely exposed bobbin or top thread			X	
3. Tight tension (stitches break when normal strain is applied to the seam or stitching	X			
NOTE:—Puckering is evidence of tight tension. When puckering is evident seam shall be tested by exerting normal pull in lengthwise direction of seam or stitching.				
h. Stitches per inch:				
Stitches less than minimum or more than maximum specified:				
—two stitches				X
—three stitches			X	
—more than three stitches	X			
NOTE:—To be scored only when the condition exists on major portion of seam.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification			
	Major	(*)	Minor	
			A	B
Seams and stitching:—(Cont.)				
i. Stitches skipped or broken on edge of raised stitching, when seam is seamed, turned and stitched:				
—more than ½ inch			X	
—¼ inch to ½ inch				X
Buttonholes: (all buttonholes)				
a. One or more omitted, or added	X			
b. Buttonhole not securely caught on fabric, causing stitching to pull away from fabric	X			
c. Buttonholes not corresponding to size of buttons, so that they do not button properly	X			
d. One or more broken stitches:				
—in one buttonhole				X
—in two or more buttonholes			X	
e. More than two skipped stitches on one or more buttonholes			X	
f. Tacking at ends omitted or insecure:				
—on two or more buttonholes	X			
—on one buttonhole			X	
g. Wrong type, or uncut buttonhole			X	
h. Very ragged edges				X
Buttons: (applying to all buttons)				
a. Missing, loose or broken:				
—one button				X
—two buttons			X	
—three or more buttons	X			
b. Not specified type, size or color			X	

4.2.3.3 *Detailed defects.*

Collar closure:				
a. Ends overlapping when buttoned			X	
b. Collar ends open less than ¼ inch or more than ¾ inch when buttoned				X
Collar button and buttonhole:				
a. Buttonhole more than ⅛ inch off-center of stand			X	
b. Button and buttonhole not aligned, causing fronts to be uneven at neck by ¼ inch or more when buttoned			X	
Front buttonholes: (position)				
a. Off-center of left front facing:				
—more than ⅛ inch but not more than ¼ inch				X
—more than ¼ inch			X	
b. Spaced less than 3½ inches or more than 4 inches apart from center to center of hole			X	
c. Second front buttonhole out of alignment with top edge of breast pocket by more than ½ inch			X	
d. Unequally spaced (center to center) by more than ¼ inch			X	
e. Constructed horizontally			X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification			
	Major	(*)	Minor	
			A	B
Front buttons: (*closure*)				
a. Buttons and buttonholes out of alignment causing a noticeable bulge on fronts when buttoned, affecting appearance			X	
b. Center of buttons less than 5/8 or more than 3/4 inch from front edge				X
Length of fronts:				
Uneven in length at bottom when buttoned:				
—by 1/2 inch to 3/4 inch				X
—more than 3/4 inch			X	
Buttonhole facing:				
a. Excessive fullness or twisting on sheeting strip causing excessive puckers and pleating on front		(*)		
b. Finished width of facing:				
—less than 1 3/8 inches but not less than 1 1/4 inches				X
—more than 1 5/8 inches but not more than 1 3/4 inches				X
—less than 1 1/4 inches or more than 1 3/4 inches			X	
Right front: (*button stand*)				
—less than 13/16 inch but not less than 3/4 inch or more than 15/16 inch but not more than 1 inch				X
—less than 3/4 inch or more than 1 inch			X	
Collar: (*construction and setting*)				
a. Collar edge irregular, affecting appearance			X	
b. Collar edge not properly forced out, having a fold of more than 1/16 inch				X
c. Points:				
—less than 2 1/2 inches but not less than 2 3/8 inches or more than 3 inches but not more than 3 1/8 inches				X
—less than 2 3/8 inches or more than 3 1/8 inches			X	
d. Length of points uneven:				
—more than 1/8 inch but not more than 1/4 inch				X
—more than 1/4 inch			X	
e. Collar other than fused type as specified (when applicable)	X			
f. Any blistering of collar (fused type)	X			
g. Interlining omitted in collars	X			
h. Width of leaf at center back:				
—less than 1 1/2 inches but not less than 1 3/8 inches or more than 2 inches but not more than 2 1/8 inches				X
—less than 1 3/8 inches or more than 2 1/8 inches			X	
i. Outer ply of collar leaf tight across width or length, causing collar to curl (not applicable to fused type collar)			X	
j. Width of leaf insufficient to cover collar stand at center back	X			
k. Stand tight at joining to fronts or yoke, causing puckering or pleats around neckline, affecting appearance			X	
l. Ends of stand finishing more than 1/8 inch beyond front edges			X	
m. Collar off-center by:				
—more than 3/8 inch but not more than 1/2 inch			X	
—more than 1/2 inch	X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification			
	Major	(*)	Minor	
			A	B
Pockets and flaps:				
Type I				
a. Pockets poorly shaped, or not of uniform shape, affecting appearance		(*)		
b. Pockets set on crookedly, affecting appearance		(*)		
c. One or more corners of pocket openings not securely tacked, box or diagonal stitching incompleted or omitted			X	
Width of pocket hem:				
1. Less than 1⅛ inch or more than 1⅜ inch at sides				X
2. Less than 1⅝ inch or more than 1⅞ inch at center				X
Width of pocket:				
—less than 4½ inches or more than 4¾ inches wide			X	
Depth of pocket:				
—less than 5⅜ inches or more than 5⅝ inches deep at center			X	
—less than 4⅝ inches or more than 4⅞ inches deep at sides			X	
Type II				
a. Width of pocket less than 5½ inches or more than 6 inches wide			X	
b. Depth of pocket less than 6 inches or more than 6½ inches deep			X	
c. Pockets or flaps out of alignment (with front edges by more than ½ inch)	X			
d. Pockets or flaps out of horizontal alignment (with neck of buttons centered on buttonholes):				
—more than ¼ inch but not more than ½ inch			X	
—more than ½ inch	X			
e. Flaps (raised stitching) less than ⅜ inch or more than ⅝ inch from pocket opening			X	
f. Button not aligned with flap buttonhole causing a noticeable bulge, twist or pull on flap or pocket			X	
g. Buttonhole less than ½ inch or more than ⅝ inch from point of flap			X	
Sleeves:				
a. Reversed, i.e., left sleeve in right armhole, right sleeve in left armhole	X			
b. Tight at armhole, causing puckers or pleats on front and back affecting appearance			X	
c. Finishing on top of body at armholes	X			
d. Excessive puckers on sleeve at joining of binding to sleeve opening, affecting appearance			X	
e. Length of sleeve opening less than 5 inches or more than 6 inches (measured from edge of the seam joining cuff to sleeve)				X
f. Openings uneven in length by more than ¼ inch				X
g. Facing less than ½ inch or more than ¾ inch wide				X
h. Bartack or stitching across top of sleeve opening omitted				X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification			
	Major	(*)	Minor	
			A	B
Cuffs:				
a. Cuffs reversed, i.e., buttonhole on underside and button on top of side of opening	X			
b. Interlining omitted	X			
c. Cuff buttonhole less than ¼ inch or more than ⅝ inch from front edge of cuff				X
d. Button placed less than ½ inch or more than ⅝ inch from end of cuff				X
e. Ends of cuffs extending beyond edge of sleeve opening by more than ⅛ inch			X	
f. Width of cuffs less than 2⅜ inches but not less than 2¼ inches or more than 2⅝ inches but not more than 2¾ inches				X
g. Irregular in width by ¼ inch or more			X	
h. Excessive fullness or twist on cuff, lining affecting appearance				X
i. Buttons misplaced or misaligned with buttonholes, causing a noticeable bulge on sleeve opening; misalignment of bottom of cuff edges by ¼ inch or more			X	
Side and sleeve closing seam:				
Armhole seams staggered from center of seam to center of seam at side seam ½ inch or more				X
Side gussets:				
Any side gusset omitted or insecurely caught in bottom hem when bartacks are not used			X	
Yoke:				
a. Excessive fullness, twist on yoke, affecting appearance			X	
b. Gathers in back of shirt omitted				X
c. Width of yoke:				
—less than 1¾ inches or more than 2 inches at ends				X
—less than 1½ inches or more than 1¾ inches at center back				X
Bottom hem:				
Ends of hem not securely stitched, or badly twisted				X
Marking:				
a. Size marking:				
1. Missing, incorrect or illegible	X			
2. Located other than inside of collar stand				X
b. Identification marking:				
1. Missing, incorrect, or illegible			X	
2. Not positioned on outside of left front at bottom of shirt adjacent to the buttonhole facing				X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

4.2.3.4 *Finished dimensions.*

		Defect
a. ½ breast b. Back length c. Collar d. Sleeve length	from the nominal dimensions and tolerance specified in table of measurement shall be scored as a size measurement defect.	X
e. Equal sleeve length	Sleeve lengths uneven in length by more than ½ inch shall be scored as a measurement defect.	X

4.2.3.5 *Acceptable quality levels and inspection levels.*

Paragraphs 4.2.3.2 and 4.2.3.3

	AQL's	*Inspection level*
Major	2.5	II
Major and minor A (combined)	15.0	
Totals—Major, minors A and B (combined)	40.0	
Paragraph 4.2.3.4 One class	4.0	L–6

4.2.4 *Examination of preparation for delivery requirements.* — An examination will be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects will be scored in accordance with the list below. The sample unit shall be one shipping container, fully packed, selected just prior to the closing operation. Defects of closure listed below will be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be L–4 and the AQL shall be 4.0 defects per hundred units.

4.3 **Tests.**—The methods of testing specified in Federal Specification CCC–T–191 and L–P–406 whenever applicable and as listed by number in table III, shall be followed.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

TABLE III.—*Test for components*

Component	Characteristic	Requirement paragraph	Test method	Number determinations per sample unit	Results reported as
Basic cloth	Sewability	3.2.1	CCC–T–191 5110	7	Average of 7 determinations to nearest 1.0 percent
Cloth, laminating	Weight	3.2.3	5041	5	Average of 5 determinations to nearest 0.1 ounce
	Texture-warp and filling	3.2.3	5050	5	Average of 5 determinations to nearest whole number
	Material identification-warp	3.2.3	1200 and 1510	1	Pass or fail
	-filling		1200	1	Pass or fail
	Shrinkage-warp and filling	3.2.3	5550	3	Average of 3 determinations to nearest 0.1 percent
	Lamination	3.2.3	5550	1	Pass or fail
Polyethylene film	Tensile strength	5.1.1.1	L–P–406 1013B[1]	5	Average determinations
	Elongation	5.1.1.1	1013B[1]	5	Average determinations
	Sealability	5.1.1.1	1013B[2]	5	Pass or fail

[1] The sample width shall be one inch.
[2] The sample width shall be one inch and the seam shall be equidistant between the two jaws.

5. PREPARATION FOR DELIVERY

(Federal Standard No. 102 shall be referred to for definitions and applications of the various levels of packaging and packing for civil agency procurement).

5.1 Packaging.—Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Unit packaging.*—Each fully buttoned shirt shall be folded over a diecut shirt form to approximate dimensions of 14 by 10½ inches. The die-cut shirt form shall be fabricated from a smooth finish chipboard that calipers not less than 0.022 inch in thickness. Each form shall be provided with a sufficient number of holes or windows to substantially reduce the weight of the form without reducing rigidity. The die-cut shirt form shall have an attached collar stand of approximately 1¼ inches in height. The width of the stand shall be undercut from approximately 3½ inches at the top to 2¾ inches at the base. Each shirt shall also have a collar insert of approximately 1¼ inches in height that shall extend around the collar to approximately one-half of an inch from each side of the front edge of the collar. A chipboard ring or butterfly may be inserted in the neck of the shirt in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

lieu of the collar insert. Inserts or rings shall be fabricated from chipboard that calipers not less than 0.022 inch in thickness. It is important that the chipboard shall not contain any ingredients that will discolor the shirt fabric. The folded shirt shall be secured with noncorrosive pins or clips, or with a paper shirt band, and placed in a snug-fitting polyethylene bag. The polyethylene flexible film shall be 0.0015 inch thick conforming to grade 1 and the requirements of tables I and IV and the specific gravity in table III of Military Specification MIL–P–3803, except that in table IV the ultimate elongation shall be minimum 225 percent machine direction and 350 percent cross direction when tested as specified in section 4. All seams and closures shall be effected by heat sealing. Prior to or during the heat sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged units will fit into the intermediate box as hereinafter specified.

5.1.1.2 *Intermediate packaging.* — Five shirts of one type, class, color, and size (neck and sleeve length) only, unit packaged as specified in 5.1.1.1, shall be placed in a set-up paperboard box conforming to type II, class A, style 4 of Federal Specification PPP–B–676. Outside dimensions of the set-up box, cover included, shall be 14¾ inches in length, 11½ inches in width, and 3¾ inches in depth. The depth of the cover shall be one inch.

5.1.2 *Level C.* — Shirts shall be packaged in accordance with the industry's practice.

5.2 Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.*

5.2.1.1 *Shipping container.*—Forty shirts of one type, class, color and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class 2, V3c or V3s, style OSC of Federal Specification PPP–B–636, except that the inner flaps shall meet at the center and the outer flaps overlap (no flap cutting required). Level A packages shall be arranged, two in length, one in width, and four in depth, within a shipping container. Inside dimensions of the shipping container shall be 23½ inches in length, 15 inches in width, and 15 inches in depth. Each container shall be provided with a type I or II, grade B or C, class 2 sealed case liner conforming to Military Specification MIL–L–10547. Each container shall be closed and strapped in accordance with the appendix of the container specification.

5.2.1.2 *Unitizer pack.* — When specified, three level B fiberboard containers shall be overpacked on end, three in length, within a fiberboard shipping container conforming to class 2, V3c or V3s, style FOL of Federal Specification PPP–B–636. Inside dimensions of the unitizer shipping container shall be 46¾ inches in length, 16¼ inches in width, and 24 inches in depth. The requirements for closure and strapping shall be in accordance with the appendix of the container specification, except that the container flaps shall be glued (not stitched) and only flat steel straps used. In addition, all seams, corners, and manufacturer's joint of the containers shall be sealed by the application of a 3-inch minimum width cloth tape conforming to type II, class 1, olive drab color of Federal Specification PPP–T–60.

5.2.2 *Level B.* — Forty shirts of one type, class, color, and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type I (B-flute), class 1, style OSC of Federal Specification PPP–B–636, except that the inner flaps shall meet at the center and the outer flaps overlap (no flap cutting required) and the manufacturer's joint shall be stitched. The minimum bursting strength of the fiberboard shall be 350 p.s.i. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

with adhesive. Level A packages shall be arranged, two in length, one in width, and four in depth, within a shipping container. Inside dimensions of the shipping container shall be 23½ inches in length, 15 inches in width, and 15 inches in depth.

5.2.3 *Level C.*—Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Shipping containers shall be in accordance with rules and regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* — In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Federal Standard No. 123.

5.3.2 *Military agencies.*—In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with the requirements of Military Standard MIL–STD–129. When level B shipping containers are overpacked, thereby becoming inner containers, the marking shall be in accordance with the requirements for interior packages.

6. NOTES

6.1 Intended use. — The shirts covered by this specification are intended for wear as dress shirts.

6.2 Ordering data. — Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number and date of this specification.

(*b*) Type, class, color and sizes required (see 1.2).

(*c*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2); and whether unitizer pack is required (see 5.2.1.2).

(*d*) Marking required (see 5.3).

6.3 Samples and shade samples.—For access to sample of the end item, and shade samples, address the procuring officer issuing the invitation for bids.

6.4 Level A or B packaging and level B packing should be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to ultimate consumers.

6.5 Transportation description.—The transportation description applicable to this item is:

Clothing, not otherwise indexed by name.
Carload minimum weight 15,000 pounds, subject to Rule 34, Uniform Freight Classification.

Clothing, not otherwise indexed, other than in wheeled containers or on hampers or racks.
Motor Volume minimum weight 12,000 pounds, subject to Rule 34, National Motor Freight Classification.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:
Army—M Q.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

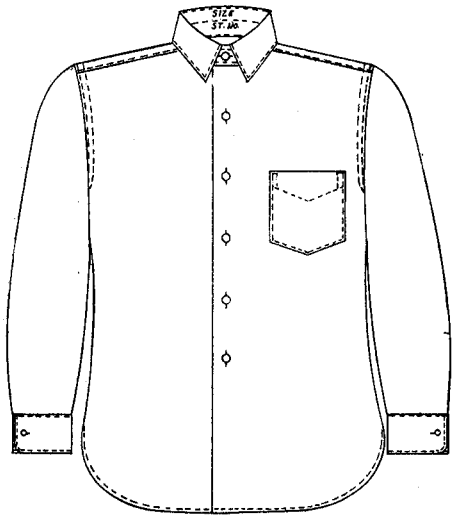


FIG 1-SHIRT, MAN'S, COTTON, BROADCLOTH, MERCERIZED TYPE I



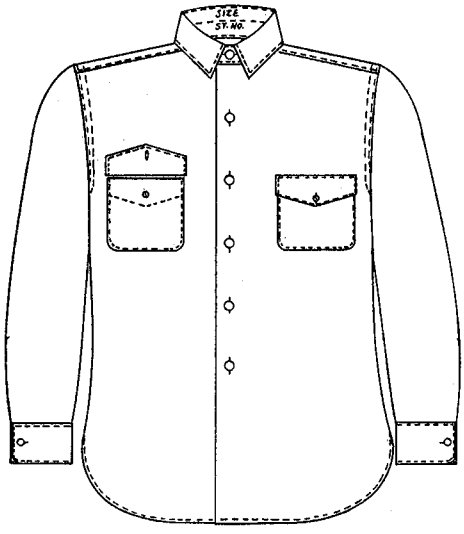


FIG 2-SHIRT, MAN'S, COTTON, BROADCLOTH, MERCERIZED TYPE II

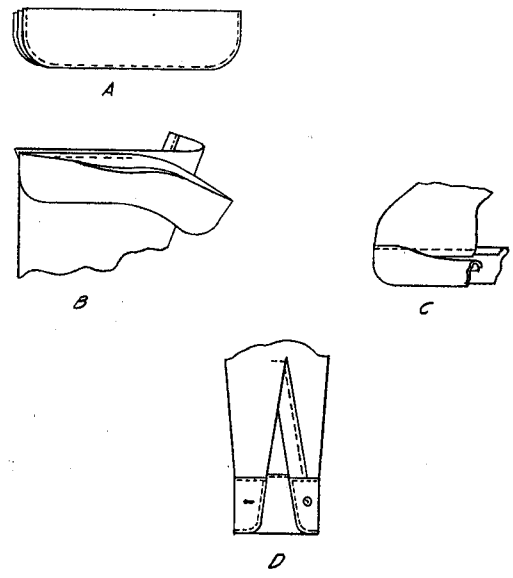

A- 3 PLIES OF CUFF JOINED
B- UNDER PLY OF CUFF JOINED TO SLEEVE
C- TOP PLY OF CUFF AND INTERLINING STITCHED TO SLEEVE
D- FINISHED CUFF


FIG. 3 - CUFF

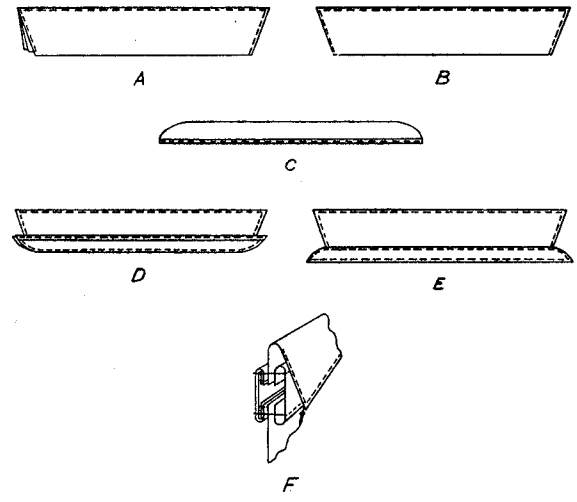

A- THREE PLIES OF COLLAR JOINED
B- COLLAR TURNED AND EDGESTITCHED
C- NECK EDGE OF OUTER COLLAR STAND TURNED IN AND HEMMED
D- COLLAR INSERTED BETWEEN PLIES OF STAND AND SEAMED
E- TURN STAND DOWN AND EDGESTITCH
F- FINISHED COLLAR ON SHIRT

FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

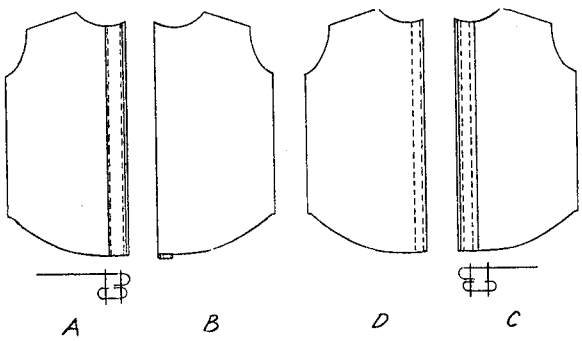

A- BUTTONHOLE FACING ON UNDERSIDE OF LEFT FRONT
B- LEFT FRONT WITH BUTTONHOLE FACING TURNED TO INSIDE
C- BUTTON FACING ON UNDERSIDE OF RIGHT FRONT
D- FINISHED RIGHT FRONT

FIG. 5-FRONT BUTTONHOLE AND BUTTON FACING

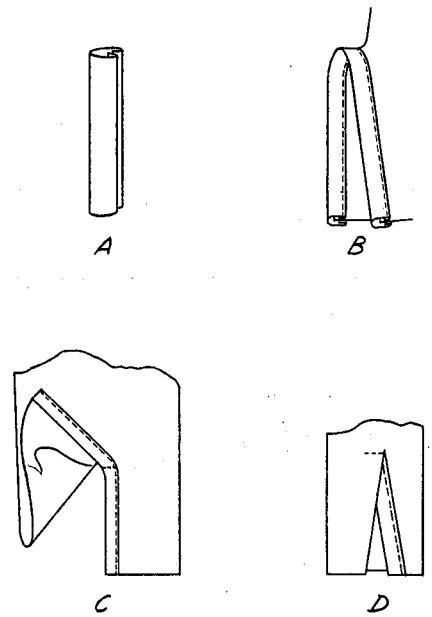


FIG.-6 SLEEVE OPENING

A - FACING - SLEEVE OPENING
B - OPENING INSERTED BETWEEN FACING & STITCHED
C - FACING STITCHED TO SLEEVE BELOW TOP OF OPENING
D - FINISHED SLEEVE OPENING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.