FEDERAL SPECIFICATION

SLIPCOVERS, FURNITURE, UPHOLSTERED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers washable slipcovers to be used on upholstered furniture.

1.2 Classification.

1.2.1 *Types and styles.* The slipcover shall be of the following types and styles as specified (see 6.2):

Type I—Davenport
Type II—Easy chair

Style 1—Turquoise
Style 2—Green
Style 3—Petal pink
Style 4—Rust

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-F-106—Fasteners, Slide, Interlocking.
V-T-276—Thread, Cotton.
CCC-T-191—Textile Test Methods.
DDD-L-20—Label; For Clothing, Equipage and Tentage (General Use).
PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following publication forms a part of this specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Application for copies should be addressed to the Federal Trade Commission, Washington, D. C. 20580.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the sample in which case the specification shall govern.

3.2 Material.

3.2.1 *Basic cloth.* Cloth type and color style shall be as specified (see 6.2).

3.2.2 *Cord.* Cord for welting shall be 4-ply unbleached cord, 1/8 to 3/16 inch in diameter, each ply consisting of 12 to 14 strands of cotton. The plies shall be twisted together with 2 to 4 turns per inch.

3.2.3 *Fasteners, slide; interlocking.* Slide fasteners shall be type I, fastener, slide, interlocking, nonseparating, size L, brass or aluminum, with single short tab conforming to V-F-106. The fastener may be an individual slide fastener or assembled from a continuous length chain. When the fastener is a continuous length, the completely assembled fasteners shall comply with the requirements specified.

3.2.3.1 *Cover fasteners.* The fasteners for the back closing of the slipcover shall be style 3, with automatic locks, with open top stops, closed bottom stops, single slider, and shall measure 18 inches ± 1/8 inch in length.

3.2.3.2 *Cushion fasteners.* The fastener for the cushion cover shall be style 7 or 8, and shall measure 36 inches ± 1/8 inch in length.

3.2.3.3 *Tape.* The tapes and bead shall be dyed to match the basic cloth. The dyed tape shall show fastness to chlorine bleaching and laundering equal to or better than the standard sample when tested as specified in V-F-106. When no standard sample is available, the dyed tape shall show good colorfastness to chlorine bleaching and laundering.

3.2.4 *Thread.* The thread shall be cotton, machine, ticket No. 30, 4 ply, conforming to type IA3 of V-T-276 and dyed to match the basic cloth.

3.2.5 *Labels.* Each slipcover shall have an identification label, and an instruction label conforming to DDD-L-20 for laundered items.

3.2.5.1 *Identification label.* The identification label shall conform to type I, class 1, and measure not less than 3 inches square, and shall include the stock number.

3.2.5.2 *Instruction label.* The instruction label shall conform to type I, class 3, measure not less than 3 inches square, and include the following:

INSTRUCTIONS

Laundering

DO NOT USE BLEACH
DO NOT WRING
DO NOT DRY IN THE SUN

Starch lightly to improve appearance and retard soiling.

Fit and shape covers to furniture before completely dry.

Use

The washable slipcovers supplied with this piece of furniture are necessary parts of the furniture and must be used at all times. The covers provide easy and sanitary maintenance and permit interchange for summer and winter.

3.2.5.3 *Positioning and stitching.* The labels shall be sewn on the outside of the slip cover platform (seat) at the center. Top of identification label shall be caught in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

tuck-in seam and the instruction label shall be stitched on all four sides so they can be read easily when cushion is removed.

3.3 **Design.** The slipcover for the davenport and chair are similar in design and construction; and are fitted to matching pieces of furniture with T-shaped cushions. The covers are tailored type with self-material welted seams, slide fasteners to close the back of the covers and each cushion cover, and inverted pleats in the tailored skirt.

3.3.1 *Davenport.* The slipcover for the davenport as shown on figure 1, consists of the davenport cover and three cushion covers. The skirt has a pleat at each corner and two pleats across the front directly below the cushion intersections.

3.3.2 *Easy chair.* The slipcover for the easy chair as shown on figure 2, consists of a chair cover and one reversible cushion cover. The skirt has a pleat at each corner.

3.4 **Patterns.** Standard patterns will not be furnished by the Government. The supplier shall develop master patterns which will insure a well-fitting slipcover for the Government specified furniture and which will be used for cutting his working patterns. A copy of the pattern made on hard paper shall be supplied to the Government with the first shipment of slipcovers. The pattern shall show warp direction of each part and shall provide for seam allowances to finish 1/2 inch wide, with 1-inch allowance for fastener seams to fully cover fastener chain, and shall have all marks or guides (such as notches) required for correct assembly.

3.5 **Cutting.** All parts of each cover shall be cut from the same piece of cloth except platforms (seats) and back-cushion borders, which may be cut from ends, but which shall be a good match to the rest of the cover. All parts, except those parts cut from ends, as indicated herein, shall be marked or ticketed to insure a uniform shade and proper assembly of the slipcover. When pin tickets are used for shade marking, the wire shall be noncorrosive. Tickets shall be removed prior to Government inspection. All parts, except bias covering for welting, shall be cut (whether straight or cross grain of fabric) to maintain the vertical warp direction of the fabric, i.e. up and down from floor so that when the slipcover is used from front or back, the twill lines run in the same direction, and front to back on platform except that platform may be cut either crosswise or lengthwise. The bias cover for welting shall be cut 1-1/4 to 1-1/2 inches wide and shall be pieced on the straight (diagonal to edges) with seams pressed open. Top and bottom of cushion shall be cut to be reversible.

3.6 **Required piecing.** Skirt piecing shall be inside pleats. Cushion borders shall be pieced once at sides at a point behind the visible T-part of the cushion. The single center cushion shall be pieced once at sides. The top borders shall be seamed at the two corners. The davenport cover shall be pieced at the center back, and shall have top and front borders which extend across the entire width of the davenport pieced at the lines of cushion intersections, as shown on figure 1. The piecing specified in 3.7 shall be required when the cloth is Government furnished as the savings amounts to 1/6 linear yard or more per cover as compared to the yardage required without the piecing.

3.7 **Optional piecing.** The covers shall be cut and pieced as specified in 3.5 and 3.6 except that the following change is optional when cloth is furnished by the supplier. Platforms on all slipcovers including the tuck-in extension may be pieced once, side to side, at any point behind the T-shaped part, provided the small part is at least 4 inches wide when finished.

3.8 **Seams and stitches.** All seaming and stitching shall conform to Fed. Std. No. 751, and shall be 8 to 12 stitches per inch (except that welt covering may be basted over cord) using stitch type 301 or 401. When 401 stitch is used, the looper thread shall not appear on the outside of slipcover. Plain

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

seams, i.e., tuck-ins for seat and arm joining, skirt piecing, etc., shall be SSa-1, single needle. Stitching types for bottom hems shall be stitch type EFa-1 for selvage edges and stitch type EFb-1 for raw edges requiring turn-in. Welting shall be stitched at least once to the edge of a part before seaming opposite part(s). Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. Thread breaks on 301 stitch type shall be secured by stitching back of the ends of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.9 Closures. The cushion closure shall be centered on boxing (seam type LSb-2) with folded edges of cloth meeting on the center of the fastener chain and stitched to form 1/4 to 3/8 inch welts as shown on figure 3. A second outside row of stitching shall be placed evenly 3/16 to 1/4 inch from first to catch back edge of fastener tape. The ends of fastener shall be covered by a 1/4 to 3/8 inch welt (seam type LSq-2). Fastener for back of slipcover shall be inserted in the left-corner seam by method similar to that used for cushion closure except the welting cord shall be on the side toward the front in place of the 1/4 to 3/8 inch welt (seam type SSa-1), the tape ends at the hem shall be turned under, and the only stitching visible on the outside will be the 1/4 to 3/8 inch welt stitching on the back edge with the other stitching on the seam allowance only (seam type LSq-2). The edge of the cord shall meet the folded edge of the back part over the center of the fastener chain. The welt on the back side of the opening shall be under the pleat at the bottom (figure 3). Before insertion of each fastener, both sides of opening shall be checked for equal length. Inequalities in length shall be corrected before fastener is inserted.

3.10 Finished measurements. The skirt shall finish 7-3/4 ± 1/4 inches wide with 1-1/4 ± 1/8 inch hem and shall clear the floor by 1/2 to 1 inch. The inverted box pleat at corners shall be 4 ± 1/2 inches deep each side (total 12 ± 2 inches). Tuck-ins for platform and arm joining shall be 3 to 3-1/2 inches deep and shall be tapered into seam at front corners. Back closure shall extend to within 1/2 inch of bottom edge. Cushion closure shall extend around corner boxing from back to an even distance on each side ± 1 inch.

3.11 Fit and appearance. The finished slipcover shall fit all parts of the davenport or chair smoothly and with an even amount of ease throughout to increase durability and to allow for shrinkage. The cover shall hang easily and neatly and in no case shall fit so tightly as to show strain on the fabric. The skirt shall drop freely and straight so that the corner pleats stay closed as shown on figures 1 and 2. The cushion covers shall fit so that the cushion can spread freely to full size with ease to allow for shrinkage. Seams shall coincide with seams and edges of the furniture, except for the front border and skirt, so that the cover repeats the lines of the chair, has a molded upholstery appearance, and stays neatly in place. Seams shall be even, corners squared, borders uniform in width, parts aligned, and welting evenly applied. Notches used on seam allowances for correct assembly shall stop safely short of the stitching so that there will be no weakening of the seams in use.

3.12 Fiber identification. Each slipcover shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations Under the Textile Fiber Products Identification Act.

3.13 Workmanship. The finished slipcovers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or pur-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

chase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Inspection.** Inspection shall be in accordance with provisions of MIL-STD-105, except where otherwise indicated.

4.2.1 *Testing of components.* In addition to the quality assurance provisions of the applicable subsidiary specifications and drawings, testing shall be performed on the components listed in table I for the characteristics specified, and in accordance with the referenced test methods of CCC-T-191. The inspection level shall be S-1 and the acceptable quality level shall be 6.5 test failures per hundred units. The sample units shall be 2 yards. The lot size shall be expressed in units of yards.

TABLE I—*Test method*

Component	Characteristic	Requirement reference	Test method
Cord	Material identification	3.2.2	1200
	Ply	3.2.2	Visual
	Diameter	3.2.2	4.3.1
	Turns per inch[1]	3.2.2	4054
	Strands (single yarn)	3.2.2	Visual

[1] Three determinations shall be made from each sample unit and the results shall be reported as the average of the 3 determinations to the nearest whole number.

4.2.2 *Examination of the end item.* The defects found during examination shall be in accordance with list shown in 4.2.2.1 and 4.2.2.2. The inspection levels and acceptable quality level shall be as specified in 4.2.2.3. The sample unit shall be one davenport or one chair cover as applicable.

4.2.2.1 *Classification of defects.* All defects shall be classified as indicated below in classification column, and shall be classified as follows:

Defects	Classification	
	Major	Minor
Material defects and damages:		
a. Hole, smash, float, or loose slubs.	X	
b. Heavy shade bars, unsightly slubs.	X	
c. Cut, tear, mend, burn, or needle chew.	X	
d. Material not approved color or type specified.	X	
e. Material has objectionable odor.		X
Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the structure of the slip cover, or when it is conspicuously located. Non-weakening conditions which are inconspicuous are to be classified as follows:		
Material defect—no defect.		
Workmanship damages — minor defect.		
Shaded parts:		
a. Outside parts required to be cut from one piece of material badly shaded.	X	
b. Parts cut from ends badly shaded.		X
Cleanliness:		
a. Any spot or stain.		X
b. Thread ends not trimmed, shade tickets, loose threads and removable spots or stains not removed throughout slip cover.		X
Component and assembly:		
a. Any component part or required operation omitted (unless otherwise classified herein).	X	
Cutting:		
Component parts not cut in conformance with requirements, visibly affecting harmony of lines:		
—principal parts.	X	
—hidden parts, including pieced parts.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification	
	Major	Minor
Seams and stitching:		
a. General.		
1. Seams puckered, twisted, or pleated.	X	
2. Part of slipcover caught in unrelated operation or stitching.	X	
3. Ends of stitching (when not caught in other seams or stitching) backstitched less than 1/4 inch.		X
4. Thread breaks stitched less than 1/2 inch beyond end of each break.		X
5. Various shades of thread on outside.		X
6. Welting (see figures 1, 2, and 3):		
—missing or not in locations specified.		X
—loose or uneven along edges affecting appearance.		X
—material not same as slip cover.		X
7. Seams uneven, corners not squared, parts not aligned, or borders not uniform in width.		X
8. Notches on seam allowances extending to stitch line so as to weaken construction.	X	
b. Any open seams:		
1. Up to 1/2 inch.		X
2. More than 1/2 inch.	X	
Note: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam.		
c. Raw edges on outside:		
On all visible seams:		
—more than 3/4 inch.		X
d. Run-offs (see classification of open seams).		
e. Seams and stitch type:		
1. Wrong seam or stitch type.		X
2. Looper thread on outside when stitch type 401 is used.		X
f. Stitch tension:		
1. Loose tension, resulting in a loose seam.	X	
2. Loose tension of edge or raised stitching resulting in loosely exposed bobbin thread or top thread.		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching).	X	
Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in the lengthwise direction of the seam.		
Stitches per inch:		
g. Stitches per inch on any welted seam:		
1. Less than minimum specified:		
—one or two stitches.		X
—three or more stitches.	X	
2. More than maximum specified.		X
3. On all other seams:		
—less than minimum specified.		X
—more than maximum specified.		X
h. Stitches, skipped or broken (on edge or raised stitching when seam is seamed, turned and seamed):		
More than 1/2 inch (not resulting in an open seam).		X
Slide fastener:		
a. Any part of assembly omitted, non-locking, bent or broken.	X	
b. Not specified type, size or length.		X
c. Tapes stitched too close to metal chain, not permitting slider to pass freely.	X	
d. Tapes stitched too loose or too tight causing a noticeable bulge on tapes or cover when closed.		X
Cushions:		
a. Slide fastener off center of boxing by more than 3/8 inch.		X
b. Chain exposed or welts overlapping excessively when fastener is closed.		X
c. Closure extended around corners on each side uneven in length by more than 1 inch.		X
d. Fastener attached incorrectly, causing a gap between ends of chain and edge of welt by more than 3/4 inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

Defects	Classification	
	Major	Minor
e. Second row of stitching on each side of fastener omitted *or not caught through tape.*		X
Davenport or chair:		
a. Back (slide fastener closure).		
1. Positioned on right side.		X
2. Fastener more than 1/2 inch from bottom edge of skirt.		X
3. Fastener exposed or edges overlapping excessively when fastener is closed.		X
4. Fastener attached incorrectly, resulting in a gap beyond top (staple end) of chain by more than 1/4 inch.		X
5. Slide fastener attached with less than two rows of stitching or both rows not caught through tape.		X
6. Welting on side toward back.		X
7. Welted skirt seams at closure out of horizontal alignment by more than 3/8 inch when fastener is closed.		X
b. Skirt portion.		
1. Width less than 7-1/2 inches or more than 8 inches.		X
2. Hem less than 1-1/8 inches or more than 1-3/8 inches wide.		X
3. Box pleats: (at each corner)		
—one or more omitted.	X	
—not inverted type.		X
—inverted pleat on each side less than 3-1/2 inches or more than 4-1/2 inches deep.		X
4. Outerfolds of pleat apart more than 1/8 inch at joining seams.		X
c. Labels.		
1. Missing, incorrect or illegible.		X
2. Positioned on inside of cover.		X
3. Any label less than 3 inches square.		X
4. Top edge of identification label not caught in tuck-in seams.		X
5. Instruction label not stitched flat on all four sides.		X
Fit of slipcover (when positioned in normal use)		
Defects		
a. Cover does not fit cushion, chair, or davenport with sufficient ease, i.e., fastener cannot be closed or is closed with difficulty causing strain on cloth when in normal use.		X
b. Cover does not fit all parts of the davenport or chair smoothly and with an even amount of ease, i.e., with the cover hanging freely and neatly and in no case fitting so tightly as to show strain on cloth.		X
c. Seams do not coincide with corresponding seams, edges and lines of the davenport or chair (except for front border and skirt).		X
d. Tuck-in for seat and arm joining less than 3 inches or more than 3-1/2 inches.		X
e. Skirt less than 1/2 inch or more than 1 inch above floor.		X
f. Skirt pleats not located at corners.		X
g. Skirt pleats open or sagging.		X

4.2.2.2 *Defects applicable to fit and appearance of slipcovers on applicable end item.*

4.2.2.3 *Acceptable quality levels and inspection levels.* The acceptable quality levels (AQL) expressed in defects per hundred units (DHU) and inspection level shall be as follows:

	Inspection level	Major	AQL Total (major and minor combined)
4.2.2.1	II	2.5	10.0
4.2.2.2 (one class)	S-3		4.0

4.2.3 *Examination for preparation of delivery requirements.* An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defects
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling.
	Open and non-continuous heat sealed seams and closure of polyethylene bags.
	Bulging or distortion of containers.
	Omission of vent hole in polyethylene bag.
Content	Number of slipcovers per shipping container is more or less than required.

4.3 Tests.

4.3.1 *Diameter of cord.* The diameter of the cord shall be determined by calipers at five points, at least one foot apart, and the results shall be reported as the average of the five determinations to the nearest 1/64 of an inch. The diameter shall be measured with cord under just sufficient tension to keep it taut.

5. PREPARATION FOR DELIVERY

Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing protection for civil agency procurements.

5.1 Packaging. Packaging shall be level A or C (see 6.2).

5.1.1 *Level A.* Each davenport and each easy-chair slipcover set shall be neatly and compactly folded to approximately 23 by 19 inches and 23 by 10 inches, respectively. Each folded slipcover shall be inserted into a snug-fitting square style clear polyethylene film bag of 0.00125-inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight and continuous and parallel to each other and the formed edges of the bag. The bag closure shall be effected by heat sealing with the heat seal as close as possible to the open end. A 1/4-inch diameter hole shall be made at one corner of each bag to allow the excess air to escape.

5.1.2 *Level C.* Slipcover sets shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 *Level A.* Five davenport or fifteen easy-chair slipcover sets of one type and style only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V3c or V3s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, five in depth for the davenport slipcovers and one in length, two in width, seven in depth, and one centered lengthwise on top for easy-chair slipcovers, within a shipping container. Inside dimensions of each shipping container shall approximate 23 inches in length, 21 inches in width, and 17-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed, and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Five davenport or fifteen easy-chair slipcover sets of one type and style only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat five in depth

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

for the davenport slipcovers, and one in length, two in width, seven in depth, and one centered lengthwise on top for the easy-chair slipcovers within a shipping container. Inside dimensions of each shipping container shall approximate 23 inches in length, 21 inches in width, and 17-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with the appendix of the container specification.

5.2.3 *Level C.* Slipcover sets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules and regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 *Polyethylene bagged packages.* Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
TYPE
STYLE
QUANTITY

6. NOTES

6.1 **Intended use.** The slipcovers covered by this specification are intended for use on davenports and easy chairs.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Basic cloth required (see 3.2.1).
(*c*) Type and style of slipcover required (see 1.2 and 3.2.1).
(*d*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 For access to sample davenport and/or chair, address the procuring office issuing the invitation for bids.

6.4 **Level B packaging (civil agencies).** When level B packaging is specified for civil agency procurement, the requirements in 5.1.1 shall apply.

CUSTODIANS:

Army—GL
Navy—SA
Air Force—67

Review activities:

Navy—SA
Air Force—67

User activities:

Navy—MC

Preparing activity:

Army—GL

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Standardization Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

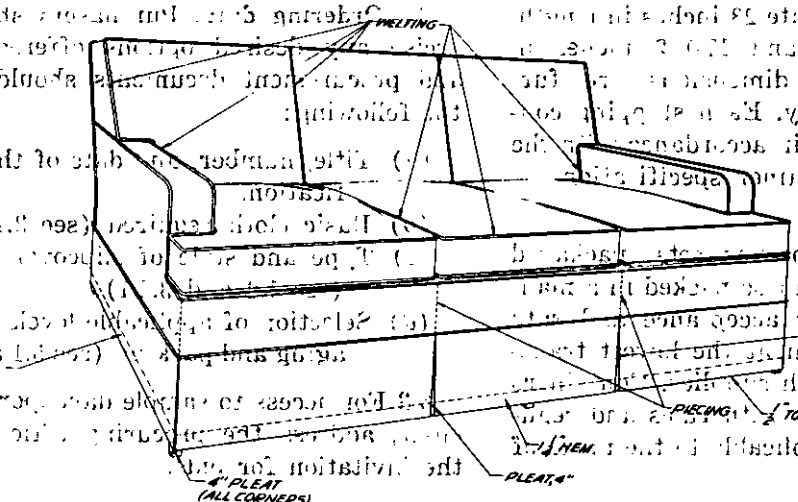


FIGURE 1. Slipcover, upholstered furniture, davenport.

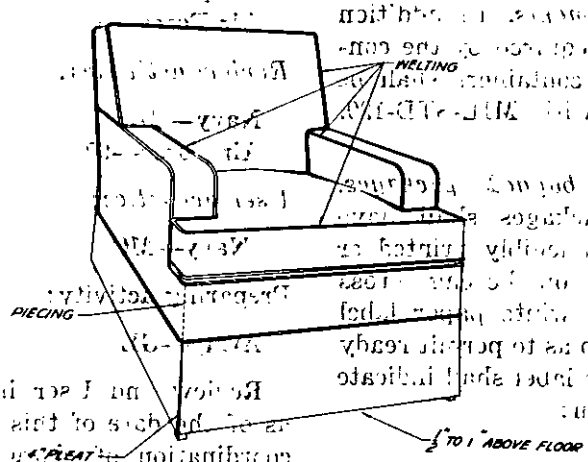


FIGURE 2. Slipcover, upholstered furniture, easy chair

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.

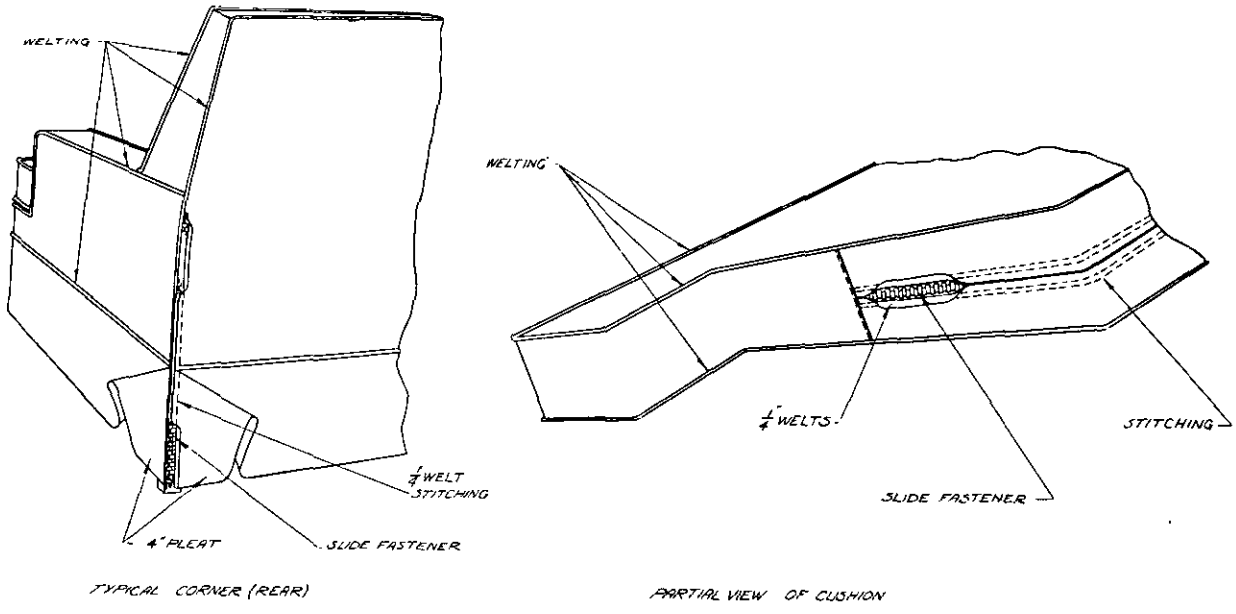


FIGURE 3. Slipcover, upholstered furniture, cushion and corner closure

☆ U.S. GOVERNMENT PRINTING OFFICE: 1965—753355/436

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:34Z
Check the source to verify that this is the current version before use.