W-F-1814/35
May 23, 1974

FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASS K1 (CURRENT-LIMITING) 250 VOLTS, 0-30 AMPERES

(DETAIL SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

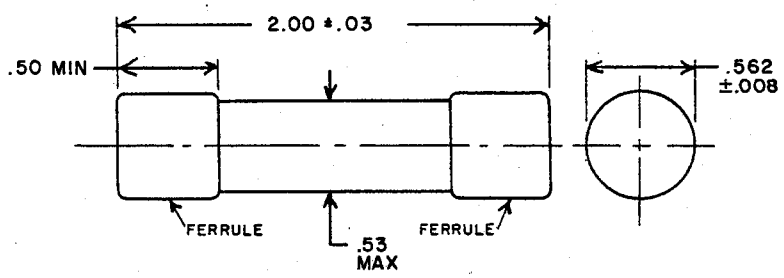

INCHES	MM
.008	.20
.03	.76
.50	12.70
.53	13.46
.562	14.27
2.00	50.80

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Minimum acceptable thickness of tube wall .062 (1.57 mm).
4. Minimum acceptable thickness of ferrule side wall .025 (.64 mm).

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:36Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - EL
Navy - YD
Air Force - 85

Review activities:

Army - EL, AT, ME, WC
Navy -
Air Force - 80
DSA - ES
NS

User activities:

Army - MU
Navy - OS
Air Force -

Preparing activity:

DSA - ES

Civil Agency Coordinating Activities:

AEC - AEC
Commerce - NBS
DOT - ACO, FIS
GPO - GPO
GSA - FSS
Justice - FPI
NASA - JFK, LRC
Postal - POS
VA - DMS

(Project 5920-0342-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:36Z
Check the source to verify that this is the current version before use.