
FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASS J
(CURRENT-LIMITING) 600 VOLTS, 0-30 AMPERES

(DETAIL SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

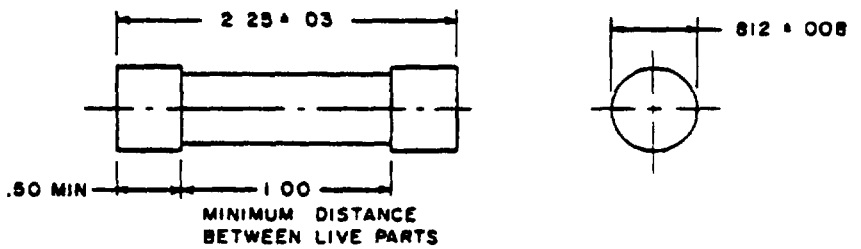

INCHES	MM
.008	.20
.03	.76
50	12.70
.812	20.62
1.00	25.40
2.25	31.75

NOTES
1 Dimensions are in inches.
2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction - See figure.

Physical Nonrenewable

Terminals - Ferrule type.
Material - Brass, copper or copper alloy.
Strength - 5 pound-inches torque between body and ferrules.

Body

Insulating material - Ceramic, melamine-impregnated glass fiber, or the equivalent

Electrical

Voltage - 600 volts or less
Frequency - 48 to 60 hertz.
Current - See table.

Current carrying capacity - 110 percent indefinitely with temperature rise not to exceed 85°C above ambient on the body and 50°C on the ferrules.

Overload interrupt - Shall interrupt within 1 hour at 135 percent of rated current and within 2 minutes at 200 percent of rated current.

Interrupting capacity rating - 200,000 amperes rms symmetrical at 600 volts, 60 Hz and a power factor of 20 percent or less. Closing angle shall be essentially at the zero of the voltage wave (maximum offset) or later, to produce start of arcing within 30 electrical degrees prior to system peak voltage.

Threshold ratio - 30 maximum.

Maximum peak let-thru current - See table

Maximum clearing I^2T - See table.

Applicable fuseholders· Type II in accordance with W-F-870

Part number See table

Government part number	Current rating (amps)	Maximum peak let-thru current amperes	Maximum clearing I^2T x10^3
WF1814/05-001	1	2,300	2 0
-002	3	2,300	2.0
-003	6	3,300	3.0
-004	10	3,300	3.0
-005	15	4,000	4 0
-006	20	5,000	5 0
-007	25	6,000	5 5
-008	30	7,500	7.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - EL
Navy - YD
Air Force - 85

Review activities:

Army - EL, AT, ME, WC
Navy -
Air Force - 80
DSA - ES
NS

User activities:

Army - MU
Navy - OS
Air Force -

Preparing activity.

DSA - ES

Civil Agency Coordinating Activities:

AEC - AEC
Commerce - NBS
DOT - ACO, FIS
GPO - GPO
GSA - FSS
Justice - FPI
NASA - JFK, LRC
Postal - POS
VA - DMS

(Project 5920-0342-5)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.