
FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASS J (CURRENT-LIMITING) 600 VOLTS, 61-100 AMPERES

(DETAIL SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

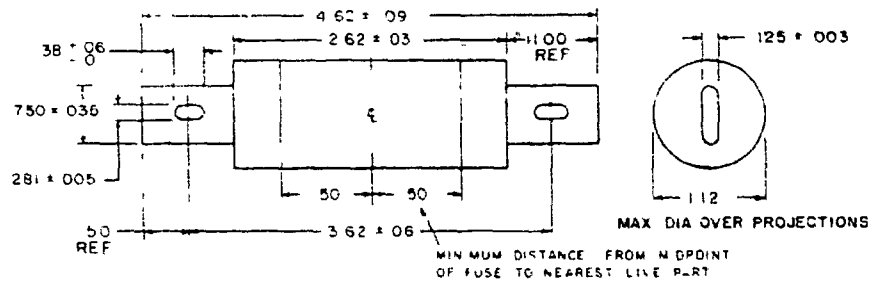

INCHES	MM	INCHES	MM
003	08	50	12 70
005	13	750	19 05
035	89	1 00	25 40
.06	1 52	1 12	28.45
09	2 29	2 62	66 55
.125	3 18	3 62	91 75
281	7.14	4 62	117 35
38	9 64		

NOTES

1 Dimensions are in inches

2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction - See figure

Physical - Nonrenewable

Fastness - Knife blade type
Material - Brass, copper or copper alloy
Strength - 20 pound-inches torque between body and knife blades

Body

Insulating material - Ceramic, melamine impregnated glass fiber, or the equivalent

Electrical

Voltage - 600 volts or less
Frequency - 45 to 66 Hertz
Current - See table

Current carrying capacity - 110 percent indefinitely with temperature rise not to exceed 65°C above ambient on the body and 50°C on the terminals

Overload interrupt - Shall interrupt within 4 hours at 135 percent of rated current and within 6 minutes at 200 percent of rated current

Interrupting capacity rating - 200,000 amperes rms symmetrical at 600 volts, 60 Hz and a power factor of 20 percent or less. Closing angle shall be essentially at the zero of the voltage wave (maximum offset) or later, to produce start of arcing within 30 electrical degrees prior to system peak voltage

Threshold ratio - 30 maximum

Maximum peak let-thru current - See table

Maximum clearing I^2t - See table

Applicable fuseholders - Type II in accordance with W-F-870

Part number - See table

Government part number	Current rating (amps)	Maximum peak let thru current amperes	Maximum clearing I^2Tx10^3
WF1814/07-001	70	11,500	50
-002	80	12,500	60
-003	90	13,500	75
-004	100	14,000	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:36Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS

Army - EL
Navy - YD
Air Force - 85

Review activities

Army - IL, AT, MT, MC
Navy -
Air Force - 80
DSA - LS
NS

User activities

Army - MI
Navy - OS
Air Force -

Preparing activity

DSA - ES

Civil Agency Coordinating Activities

GSA - AF
Commerce - NPS
DOT - MSO, FIS
GPO - GPO
GSA - FSS
Justice - FPI
NASA - JSK, LPC
Postal - POS
VA - DMS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein. Price 25 cents each

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:36Z
Check the source to verify that this is the current version before use.