A-A-54495
25 September 1991

COMMERCIAL ITEM DESCRIPTION

SUPPORTS, LEG CALF

(Elastic, Seamless)

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for MIL-S-36830 which is cancelled.

This Commercial Item Description covers a pressure control elastic stocking used to reduce the risk of pulmonary embolism.

Salient Characteristics:

The leg calf support shall be a seamless, circular knit, proportioned pressure controlled support with a top welt, toe welt, and reciprocated heel. The support shall be furnished in the following sizes:

Size 1 - Large (calf measuring up to 17 inches in circumference).

Size 2 - Medium (calf measuring up to 15 inches in circumference)

Size 3 - Small (calf measuring up to 12 inches in circumference).

The top welt shall be knit with two yarns, a 490 denier spandex double covered with 20/7 nylon yarn, and a 2/40/13 texturized nylon The leg and foot shall consist of three yarns. They shall be knit with a 70 denier spandex double covered with 30/10 nylon yarn, laid in with a 490 denier spandex double covered with a 20/7 nylon, and a 2/40/13 stretch nylon yarn. The heel shall be knit with a 2/70/34 texturized nylon yarn. The toe welt shall be knit with a 70 denier spandex double covered with 30/10 nylon yarn The fiber content of the finished leg support shall be a minimum of 67 percent nylon and the remainder spandex The color of the finished stocking shall be natural.

AMSC N/A FSC 6515

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

Each stocking shall have a size marking applied and centered on the foot The size marking shall be clearly legible and show good fastness to laundering transference (wool method). The minimum height of the characters for each size shall be 1/8 inch

The stockings shall be knit seamless in one integral unit, on a 341 needle circular machine having a cylinder diameter of 3-3/4 inches.

The open toe cuff shall be a true 1 x 1 rib knit, using 70 denier spandex with an outer and inner cover of 30/10 nylon. The cuff edge shall be non-raveling, flat and free from loose ends.

The foot and the leg or body shall be of the same material. The material shall be a jersey (plain) knit of one end 2/40/13 stretch nylon, one end 70 denier spandex with outer and inner covers of 30/10 nylon, and one end of 490 denier spandex with outer and inner covers of 20/7 nylon.

The heel shall be knit with a jersey (plain) stitch from one end of 2/70/34 texturized nylon. There shall be a minimum of 40 gore needles.

The top welt shall be knit with a jersey (plain) stitch made of two ends 2/40/13 texturized nylon and one end of 490 denier spandex with inner and outer covers of 20/7 nylon

An instruction label shall be legibly printed on a separate sheet of white paper and inserted with each stocking into the immediate polyethylene envelope or container. The instructions shall indicate how the stocking is to be worn and washed

All ends of yarn on the inside of the finished stocking shall be trimmed to not less than 1/4 inch nor more than 1 inch. The stockings shall not be finished. Scouring or boarding is not required. The stockings shall be matched and paired, so that there will be no greater difference in foot length than 1/4 inch, and in leg length, 1/2 inch. The use of thread, twine, or staple to secure a pair of stockings shall not be permitted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

The dimensions and weight of the stocking shall be as follows (see figure 1, dimensions A, B, C, and D for reference):

	Size			
	Small	Medium	Large	Tolerance
Top welt length "C" (inches)	5/8	5/8	5/8	plus or minus 1/8
Body or leg Length "A" (inches)	9-3/4	10-1/4	11-1/2	plus or minus 1/4
Foot length "B" (Inches)	3	3-1/2	4-1/2	plus or minus 1/4
Toe welt Length "D" (inches)	1/2	1/2	1/2	plus or minus 1/8
Weight per dozen (ounces)	15.0	17 0	19.0	minimum

All measurements shall be made with the stocking laid out flat under no tension

The compression shall be graduated exhibiting decreasing levels from ankle to calf The ankle shall be 24 plus or minus 4 mm Hg and the calf shall be 18 plus or minus 4 mm Hg The compression test shall be as specified in the Instrom Fabric Tension, Kendall "T" - Pin Test for Surgical and Support Hosiery, or the National Association of Hosiery Manufacturers Tester

Workmanship The leg calf support shall be free from defects which detract from its appearance or impair its serviceability.

Unit Pair (PR). Each stocking shall be neatly folded and packaged in a suitable polyethylene bag of appropriate size. Each bag shall have a laundry instruction sheet enclosed. Each bag shall then be placed in an outer package. Two outer packages

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

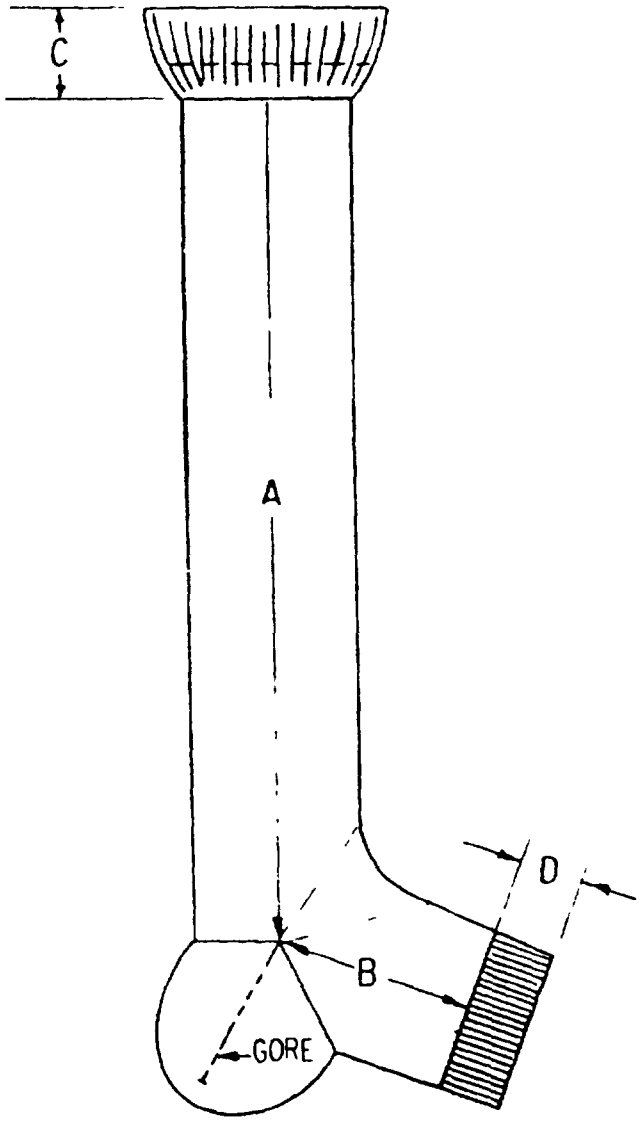


FIGURE 1. Support, leg calf

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

shall then be attached together with an adhesive label indicating a matched pair

Quality Assurance Provisions.

Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for examination Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 4.0 (percent defective) and an inspection level of I. The unit of product for examination purposes shall be one leg calf support.

Sampling for tests. Sampling for tests, including dimensional test, shall be conducted in accordance with MIL-STD-105, with an AQL of 4.0 (percent defective) and an inspection level of S-3. The unit of product for test purposes shall be one leg calf support

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

Metric products Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23 4 to the maximum extent practical

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

handling, etc , involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data Intermediate/exterior package quantities, labeling, and marking must be specified in the contract and/or order.

NOTE: The following National Stock Numbers are covered by this document.

6515-01-134-0437 (Size 1)
6515-01-139-5003 (Size 2)
6515-01-139-5004 (Size 3)

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD-MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project Number: 6515-5054

Location: LEGCID13 A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I. RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-54495	2. DOCUMENT DATE (YYMMDD) 25 September 1991

3. DOCUMENT TITLE
SUPPORTS, LEG CALF, (Elastic, Seamless)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER ATTN: DPSC-MSE	b. TELEPHONE (Include Area Code) (1) Commercial: AC 215-737-2870 (2) AUTOVON: AV 444-2870
c. ADDRESS (Include Zip Code) 2800 SO. 20TH STREET PHILADELPHIA, PA 19145	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:34Z
Check the source to verify that this is the current version before use.