A-A-1353
February 26, 1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, OPEN END, SINGLE THIN HEAD, 30° HEAD

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-W-636.

This commercial item description covers wrenches suitable for thin hexagon and square-headed bolts and nuts, assigned National Stock Numbers (NSN's) as listed below.


Salient characteristics:

Material:	Steel, Rockwell C hardness of 44 minimum, 51 maximum.
Finish:	Chromium plated. Both faces of the head shall be bright and shall have a maximum roughness height value of 30 microinches (A.A.).
Marking:	Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to the head as practicable and with manufacturer's name or trademark.
Wrench opening:	Sized to pass the gaging requirements of Federal Standard 346.
Chamfer:	Tips chamfered or rounded to eliminate burrs.

National Stock Number	Wrench opening (distance across flats)	Width of head (maximum)	Thickness of head (maximum)	Overall length (minimum)	Test load (minimum)
	Inches	Inches	Inches	Inches	Inches
5120-00-203-4815	3/4	1-11/16	1/4	6-1/4	1,000
5120-00-203-4796	13/16	1-11/16	1/4	6-1/4	1,000
5120-00-203-4814	7/8	1-11/16	1/4	6-1/4	1,000
5120-00-203-4813	15/16	1-7/8	1/4	6-7/8	1,000
5120-00-203-4812	1	1-7/8	1/4	6-7/8	1,000
5120-00-203-4811	1-1/16	1-7/8	1/4	6-7/8	1,000
5120-00-203-4810	1-1/8	2-1/16	1/4	6-7/8	1,000
5120-00-203-4809	1-3/16	2-1/16	1/4	6-7/8	1,000
5120-00-203-4808	1-1/4	2-1/16	1/4	6-7/8	1,000
5120-00-203-4807	1-5/16	2-1/2	9/32	7-5/8	1,500
5120-00-203-4806	1-3/8	2-1/2	9/32	7-5/8	1,600
5120-00-203-4805	1-7/16	2-1/2	9/32	7-5/8	1,500
5120-00-203-4804	1-1/2	2-1/2	9/32	7-5/8	1,500
5120-00-203-4806	1-9/16	2-5/8	9/32	7-5/8	1,500
5120-00-203-4802	1-5/8	2-5/8	9/32	7-5/8	1,500
5120-00-203-4801	1-3/4	3-1/8	5/16	8-1/2	2,400
5120-00-203-4800	1-13/16	3-1/8	5/16	8-1/2	2,400
5120-00-203-4799	1-7/8	3-1/8	5/16	8-1/2	2,400
5120-00-203-4798	1-15/16	3-1/8	5/16	8-1/2	2,400
5120-00-203-4797	2	3-1/2	5/16	8-1/2	2,400
5120-00-203-4791	2-1/16	3-1/2	5/16	8-1/2	2,400
5120-00-203-4795	2-1/8	3-1/2	5/16	8-1/2	2,400
5120-00-203-4794	2-1/4	3-1/2	5/16	8-1/2	2,400
5120-00-203-4793	2-3/8	3-1/2	5/16	8-1/2	2,400
5120-00-203-4792	2-1/2	3-1/2	5/16	8-1/2	2,400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

GSA DC-81005544

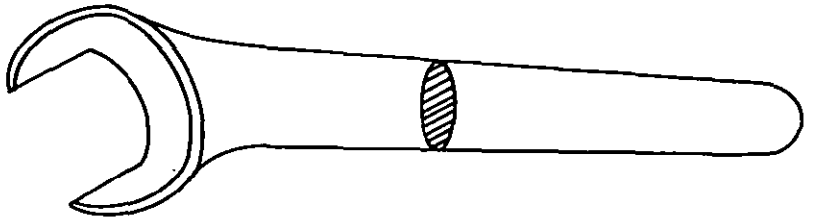

WRENCH, OPEN END

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability, or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished.

The issue of Federal Standard 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Federal Standards are available from General Services Administration, Specification Sales, Building 197 (Washington Navy Yard), Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:13Z
Check the source to verify that this is the current version before use.