MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, GERMANIUM, HIGH-FREQUENCY
TYPE 2N334

This amendment forms a part of Military Specification MIL-S-19500/27E, dated 12 February 1970, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2: Delete (TO-44) and substitute (TO-72).

PAGE 3

FIGURE 1: Delete and substitute the new figure 1 shown on page 2 of this amendment. Add figure 2 shown on page 3 of this amendment.

PAGE 4

* TABLE I, Group A inspection, Subgroup 2, Breakdown voltage, emitter to base, limits column, delete "0.5" and substitute "0.4".

TABLE I, Group A inspection, Subgroup 3, Magnitude of small-signal short-circuit forward-current transfer ratio, Method 3306, Limits column, under Max: Delete "8" and substitute "15".

The margin of this amendment is marked with an asterisk to indicate where a change from the previous amendment was made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - MI, AR
Air Force - 11, 19, 99
DLA - ES

User activities:
Army - SM
Navy - AS, MC, OS, SH
Air Force - 13, 15, 85


Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5961-0812)

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:59Z
Check the source to verify that this is the current version before use.

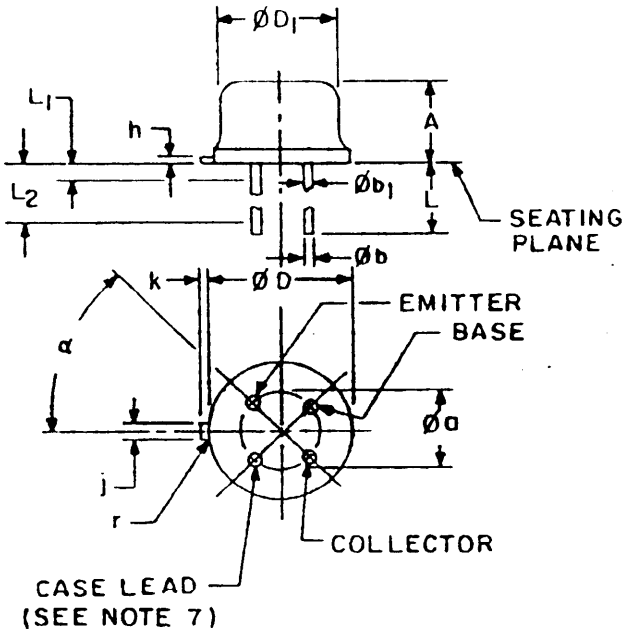


Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.170	.346	4.32	8.79	
øa	.100 TP		2.54 TP		5
øb	.016	.021	0.41	0.53	5, 6
$øb_1$	.016	.019	0.41	0.48	5, 6
øD	.209	.230	5.31	5.84	
$øD_1$	.178	.195	4.52	4.95	
h	---	.020	---	0.51	
j	.036	.046	0.91	1.17	3
k	.028	.048	0.71	1.22	4
L	.500	.750	12.70	19.05	7
L_1	---	.050	---	1.27	6, 7
L_2	.250	---	6.35	---	6, 7
r		.010	---	0.25	9
α	45° TP		45° TP		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Beyond dimension r (radius) maximum, j shall be held for a minimum length of .011 (0.28 mm).
4. Dimension k measured from maximum øD.
5. Leads at gauge plane .054 +.001 -.000 (1.37 +.03 -.00 mm) below seating plane shall be within .007 (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown in figure 2.
6. $øb_1$ applies between L_1 and L_2. øb applies between L_2 and L minimum. Diameter is uncontrolled in L_1 and beyond L minimum.
7. All four leads.
8. Case lead is electrically connected to the case.
9. Dimension r (radius) applies to both inside corners of tab.

FIGURE 1. Physical dimensions of transistor type 2N384 (TO-72).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:59Z
Check the source to verify that this is the current version before use.

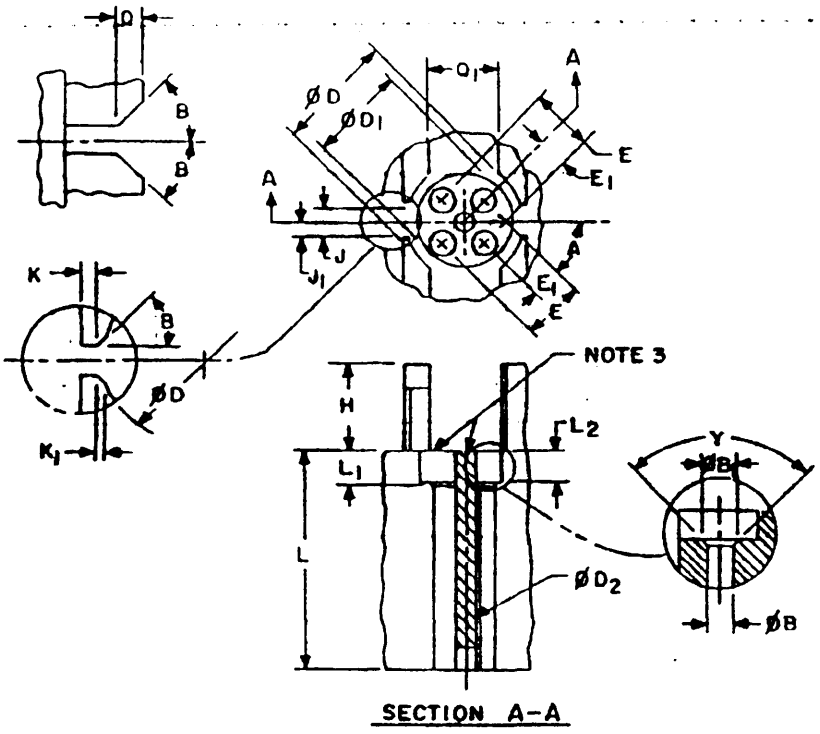

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
ød	.0325	.0335	0.826	0.851	5
$ød_1$	.043 Nom		1.09 Nom		5
øD	.2310	.2315	5.867	5.880	
$øD_1$	.159	.161	4.04	4.09	
$øD_2$	.040 Nom		1.02 Nom		6
e	.0995	.1005	2.527	2.553	
e_1	.0495	.0505	1.257	1.283	
h	.145	.155	3.68	3.94	
j	.0470	.0475	1.194	1.207	
j_1	.0235	.0245	0.597	0.622	
k	.009	.011	0.23	0.28	
k_1	.005 Nom		0.13 Nom		
L	.372	.378	9.45	9.60	
L_1	.054	.055	1.37	1.40	
L_2	.043 Nom		1.09 Nom		
Q	.040 Nom		1.02 Nom		
Q_1	.123	.127	3.12	3.23	
α	44.90°	45.10°			
B	45° Nom				
Y	90° Nom				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The following gauging procedure shall be used: The device being measured shall be inserted until its seating plane is .125 (3.18 mm) +.010 (0.25 mm) from the seating surface of the gauge. A force of 8 ounces ±0.5 ounce shall then be applied parallel and symmetrical to the device's cylindrical axis. When examined visually after the force application (the force need not be removed), the seating plane of the device shall be seated against the gauge. The use of a pin straightener prior to insertion in the gauge is permissible. A spacer may be used to obtain .125 (3.18 mm) distance from the gauge seat prior to force application.
4. These surfaces to be parallel and in same plane within ±.001 (.03 mm).
5. Four holes.
6. Pressed in.

FIGURE 2. Gauge for lead and tab location for transistor type 2N384.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:59Z
Check the source to verify that this is the current version before use.