MIL-A-3339C
17 August 1981
SUPERSEDING
MIL-A-3339B
15 March 1968

MILITARY SPECIFICATION

ANCHORS, SEA, LIFE RAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for two types and three sizes of life raft sea anchors.

1.2 Classification. The sea anchors shall be furnished in the following types and sizes, as specified (see 6.2):

Size	Type	
	I	II
1	12 1/	30-5/16 1/
2	20 1/	-
3	24 1/	-

1/ Diameter in inches

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-295 - Thread, Nylon.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-T-42 - Tape, Packaging/Masking, Paper.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-16117:322
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-5038	- Tape, Textile and Webbing, Textile, Reinforcing, Nylon.
MIL-C-5040	- Cord, Nylon.
MIL-I-6903	- Ink, Marking (for Parachutes and Other Textile Items).
MIL-G-16491	- Grommet, Metallic.
MIL-C-21108	- Cloth, Nylon, Raft Bottom.
MIL-C-43307	- Cord, Nylon, Solid Braid, General Purpose.
MIL-W-83420	- Wire Rope, Flexible, for Aircraft Control.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-595	- Colors.
FED-STD-751	- Stitches, Seams, and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific acquisition functions should be obtained from the acquiring activity, or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3.1 and 6.2).

3.2 Materials. The materials shall conform to the applicable specifications as listed or required herein.

3.2.1 Body. The body of the type I and II sea anchors shall be fabricated from nylon cloth conforming to MIL-C-21108, type I.

3.2.2 Lines.

3.2.2.1 Mooring.

3.2.2.1.1 Type I sea anchor. The mooring line for the type I sea anchor shall be nylon cord conforming to MIL-C-5040, type III.

3.2.2.1.2 Type II sea anchor. The mooring line for the type II sea anchor shall be nylon cord conforming to MIL-C-43307, 1/4 inch diameter.

3.2.2.2 Bridle. The bridle for the type I and II sea anchors shall be fabricated from nylon cord conforming to MIL-C-5040, type III.

3.2.3 Thread. All the sewing operations shall be performed with the nylon thread conforming to V-T-295, type I or II, class 1 or 2, size E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

3.2.4 Ring. The ring for the type I sea anchor shall be fabricated from flexible corrosion-resistant steel cable conforming to MIL-W-83420, 3/32 inch diameter.

3.2.5 Sleeve. The sleeve for securing the ends of the metal ring for the type I sea anchor shall be fabricated from corrosion-resistant steel and shall conform to figure 3.

3.2.6 Grommets. The grommets for the type I sea anchor shall be brass with a black chemical finish conforming to MIL-G-16491, type I, class 3, size number 0.

3.2.7 Reinforcing tape. The reinforcing tape for the type II sea anchor shall be nylon conforming to MIL-T-5038, type III, 3/4 inch wide.

3.2.8 Throat facing. The throat facing for the type II sea anchor shall be fabricated from the body cloth 3.2.1.

3.3 Design.

3.3.1 Type I sea anchor. The type I sea anchor shall be a truncated cone with an enclosed flexible steel cable at the top, a bridle and a mooring line. The type I sea anchor shall conform in appearance to figure 1.

3.3.2 Type II sea anchor. The type II sea anchor shall be semi-hemispherical in shape with a bridle and a mooring line. The type II sea anchor shall conform in appearance to figure 4.

3.4 Construction. The details of the construction for the type I and II sea anchors shall conform to figures 1 through 7, as applicable. All the knots shall be tightly drawn. The cut edges of the lines and reinforcing tape shall be seared to prevent fraying. No sharp edges shall be formed and except for the lines and bridle, no cut edges shall be visible.

3.4.1 Seams and stitching. All the seams used in the fabrication of the sea anchor shall conform to figures 1 through 6, as applicable. All the regular sewing shall be accomplished with stitch type 301 and the zigzag stitching, for attaching the end of the mooring line to itself and the ends of the bridle to the body of the type II sea anchor, shall be accomplished with stitch type 304. All the stitch types shall conform to FED-STD-751 and shall contain 8 to 10 stitches per inch. All the seam edges shall be properly forced out and shall not contain any folds. No seam shall be twisted, puckered or pleated and no part of the sea anchor shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a length of 1/4 to 3/8 inch.

3.4.1.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching in any row shall be maintained within a tolerance of plus or minus 1/32 inch. The ends of all the stitch type 301 stitching that are not caught in other seams or stitching, shall be securely backstitched, by overlapping on itself, for at least 1/2 inch. Thread breaks, skips and run-offs shall be overstitched not less than one inch. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

3.4.1.2 Bartacking. The size and location of the bartacks, on the type II sea anchor, shall be as specified in figures 4 and 6. Each bartack shall contain a minimum of 21 stitches.

3.5 Color. Unless otherwise specified (see 6.2), the color of the cloth, lines, sewing thread, reinforcing tape and throat facing shall be natural (white) color. When blue color is specified, the color of the body cloth, lines, bridle, sewing thread, reinforcing tape, and throat facing shall approximately match FED-STD-595 blue lusterless color number 35042, when inspected as specified in 4.3.1. The dyed components shall have at least "good" colorfastness to light and laundering, when inspected as specified in 4.5.2.

3.6 Performance characteristics.

3.6.1 Strength of the ring attachment. When inspected as specified in 4.5.3, the strength of the ring attachment shall be not less than 100 pounds.

3.7 Dimensions. The dimensions of the assembled sea anchors, width of the seams and hems, and the dimensions and location of the components shall conform to figures 1 through 6, as applicable, when determined as specified in 4.5.5.

3.8 Marking. Unless otherwise specified, the natural color sea anchor shall be marked with blue ink conforming to MIL-I-6903. When the color of the sea anchor is blue, the color of the markings shall be white or yellow, accomplished with ink conforming to MIL-I-6903. The height of the markings shall be 1/4 inch for the type I, size 1, sea anchor and one inch for the type I, sizes 2 and 3, and the type II, size 1, sea anchors. The markings shall be legible and durable letters and numerals, which shall be thoroughly dry prior to packaging. The markings shall be located on the innerside of the sea anchor and shall be as follows:

SEA ANCHOR
MIL-A-3339C
Type I or II, as applicable
Size 1, 2 or 3, as applicable
Name of manufacture
Contract no.
Date of manufacture (month and year)

3.9 Workmanship. The sea anchors shall not contain any non-specified hole, tear, cut, mend, burn, needle chew, spot, or stain. The grommets shall be securely clinched without distortion, damage, splitting or cutting of the cloth. The sleeve shall be securely crimped without distortion, splitting, or damage to the steel cable. The metal components shall not contain any sharp edge, sliver, nick, crack, or burr. All loose thread, lint, and foreign matter shall be removed. The assembled sea anchors shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after the award of a contract to determine that the production item meets the requirements of this specification (see 4.3).

b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4).

4.3 First article inspection.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of the contract or order, the manufacturer shall submit three sea anchors of the type specified in the contract or order. The samples shall be representative of the workmanship, construction, components and materials to be used during production. When a manufacturer is in continuous production of these sea anchors from contract to contract, submission of further first article inspection samples on the new contract, may be waived at the discretion of the acquiring activity (see 6.2e). Approval of the first article inspection samples or the waiving of the first article inspection does not exclude the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2f). The samples shall be plainly identified by securely attached durable tags marked with the following information:

Samples submitted by (name) (date) for first article inspection
in accordance with the requirements of MIL-A-3339C under Contract No.

4.3.2 First article examinations and tests. The first article inspection of the sea anchors shall consist of all the tests and examinations of this specification.

4.3.3 First article approval. Upon completion of the first article inspection program, recommendations and comments pertinent for use in monitoring production will be forwarded by the Government activity responsible for the inspection program (see 6.2f). One approved sea anchor will be returned to the manufacturer for use in monitoring production. The other sea anchors will be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under contract.

4.4 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

Color matching of the cloth, lines, sewing thread and reinforcing tape, as applicable
Colorfastness of the cloth, lines, sewing thread, and reinforcing tape, as applicable, to light and laundering
Strength of the ring attachment
Visual examination of the sea anchors
Dimensional check of the sea anchors
Packaging

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Components (cloth, lines, sewing thread and reinforcing tape). An inspection lot size shall be expressed in units of one for the individual components (cloth, lines, sewing thread and reinforcing tape) designated in the terms used commercially and shall consist of all of an individual item received by the life raft sea anchor manufacturer at one time. The sample unit shall be one unit of each of the individual components (cloth, lines, sewing thread and reinforcing tape) designated in the terms used commercially.

4.4.1.1.2 Rings. An inspection lot size shall be expressed in units of one assembled ring for one size sea anchor made essentially under the same conditions and from the same components and shall consist of all the rings received by the sea anchor manufacturer at one time. The sample unit shall be one ring for one size sea anchor.

4.4.1.1.3 Sea anchors. An inspection lot size shall be expressed in units of one sea anchor of one type and size made essentially under the same conditions and from the same materials and components. The sample unit shall be one sea anchor of one type and size.

4.4.1.1.4 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing sea anchors of one type and size, fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing sea anchors of one type and size, fully prepared for delivery with the exception that it need not be sealed.

4.4.1.2 Sampling for tests and examinations of the components and sea anchors. The sample size, acceptance criteria, tests and examinations required for the components and sea anchors shall be as specified in table I.

4.5 Inspection methods.

4.5.1 Color matching. The color of the cloth, lines, sewing thread and reinforcing tape, as applicable, shall approximately match the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin. This inspection is applicable only when the sea anchor is blue in color.

4.5.2 Colorfastness to light and laundering. The colorfastness of the cloth, lines, sewing thread and reinforcing tape, as applicable, shall be determined in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

accordance with the inspection methods of FED-STD-191 specified in table II, as applicable. These inspections are applicable only when the sea anchor is blue in color.

4.5.3 Strength of the ring attachment. The strength of the ring attachment shall be determined by attaching the wire on one side of the sleeve to the upper jaw and the wire on the other side of the sleeve to the bottom jaw of a suitable inspection apparatus. The sleeve shall be centered between the upper and lower jaws and the distance between the jaws, at the start of the inspection, shall be 6 inches. The rate of jaw separation, under no load, shall be 12 ± 1/2 inches per minute. The jaws shall be separated until failure occurs. The rings shall conform to the requirements of paragraph 3.6.1.

4.5.4 Visual examination.

4.5.4.1 Sea anchors. Each of the sea anchors of one type and size, selected as a sample unit from the lot, shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, tables III and IV, as applicable, shall be used to classify and enumerate the defects found.

4.5.4.2 Packaging. Each of the fully prepared shipping containers, containing assembled sea anchors of one type and size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing and marking conform to this specification. The list of defects, table V, shall be used to enumerate the defects found.

4.5.5 Procedure for measuring. The sea anchor to be measured shall be laid flat, without tension, on a smooth flat surface so that the creases and wrinkles shall not affect the measurement. The dimensions of the sea anchor and components, location of the components, width of the seams and hems shall be determined by a yardstick, metal tape, or any suitable measuring device.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each sea anchor shall be folded in accordance with figures 9 through 13, as applicable. Each sea anchor shall be packaged within a one-piece fiberboard folder conforming to PPP-B-636, type CF, domestic class, variety SW, grade 125, style OPF. The size of the folder for each type I sea anchor shall be snug fitting. The size of the folder for each type II, size 1 sea anchor shall be approximately 9 inches long, 9 inches wide, and 1-1/4 inches in depth. The containers shall be constructed and closed, with a minimum of 3 inch wide tape conforming to PPP-T-45, type III, grade A, B or C, in accordance with the appendix to PPP-B-636.

5.1.2 Level C. The sea anchors of one type and size shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2). Shipping containers, insofar as possible, shall be uniform in size and shape and of minimum

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:32Z
Check the source to verify that this is the current version before use.

cube and tare weight. Each shipping container shall only contain sea anchors of one type and size.

5.2.1 Level A. The sea anchors, packaged as specified in 5.1, shall be packed and the container sealed in the same manner as specified in 5.2.2, except that the fiberboard container shall be weather resistant class, variety SW, grade V3c or V3s. Each container shall be constructed, closed and reinforced with flat steel strapping or tape banding in accordance with the appendix to PPP-B-636.

5.2.2 Level B. The sea anchors, packaged as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to PPP-B-636, type CF or SF, domestic class, variety SW, grade 275. Each container shall be constructed and closed in accordance with the appendix to PPP-B-636. The weight of the contents within the shipping container shall not exceed 65 pounds.

5.2.3 Level C. The packaged sea anchors, which require packing for acceptance by the carrier, shall be packed within exterior type shipping containers in a manner that shall insure safe transportation at the lowest rate to the point of delivery. The shipment shall conform to the minimum requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking. In addition to any special marking required by the contract or order, the interior and exterior containers shall be marked in accordance with MIL-STD-129 and shall include the type, size and date of manufacture (month and year).

6. NOTES

6.1 Intended use. The type I sea anchors covered by this specification are intended for use with inflatable life rafts carried by aircrewmen or stowed in aircraft. The type II sea anchors are intended for use with assault and large abandon-ship type inflatable life rafts.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Type, size and quantity desired (see 1.2).
c. Whether first article is required (see 3.1).
d. Color of the sea anchor (see 3.5).
e. Whether first article inspection is waived (see 4.3.1).
f. Name and address of the first article inspection laboratory and the Government Activity responsible for conducting the inspection program (see 4.3.3).
g. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
h. Whether any additional markings are required (see 5.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Defense Acquisition Regulations. The first article should be a preproduction sample. The first article should consist of 3 (three) units. The contracting officer should include specific instructions in all acquisition instruments, regarding arrangements for examinations, test and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

6.4 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of Defense Acquisition Regulations (DAR), the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data requirement	Applicable DID
4.3.3	First Article inspection reports	DI-T-5329 - Inspection test reports

(Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the acquiring activity or as directed by the contracting officer).

Custodians:
Army - ME
Navy - AS

Preparing activity:
Navy - AS

(Project No. 2040-0144)

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:32Z
Check the source to verify that this is the current version before use.

TABLE I. Sample size, acceptance criteria, tests, and examinations of the components and sea anchors (see 4.4.1.2).

Inspection	Paragraph		Sample size	Acceptance criteria
	Requirement	Method		
Color matching of the cloth, lines, sewing thread and reinforcing tape, as applicable 1/ 2/	3.5	4.5.1	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units
Colorfastness of the cloth, lines, sewing thread and reinforcing tape, as applicable, to:				
light 1/ 2/	3.5	4.5.2	Inspection level S-1	An acceptable qualtiy level of 2.5 defects per 100 units
laundering 1 2/	3.5	4.5.2	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units
Strength of the ring attachment 2/ 3/	3.6.1	4.5.3	Inspection level S-1	An acceptable quality level of 1.5 defects per 100 units
Visual examination	3.3 through 3.4.1.2, 3.8, 3.9 and figures 1 through 6, as applicable	4.5.4.1	Inspection level II	An acceptable quality level of 2.5 defects per 100 units for major defects and 4.0 defects per 100 units for minor defects
Dimensional check	3.7 and figures 1 through 6, as applicable	4.5.4.1 and 4.5.5	Inspection level S-3	An acceptable quality level of 4.0 defects per 100 units
Packaging	Section 5	4.5.4.2	Inspection level S-2	An acceptable quality level of 2.5 defects per 100 units

1/ This inspection is applicable only when the sea anchors are blue in color.
2/ This inspection shall be performed either at the contractor's or subcontractor's plant.
3/ This inspection is applicable only to the type I, size 1, 2 and 3 sea anchors.

Source: https://assist.dla.mil - Downloaded: 20260-16T17:32Z
Check the source to verify that this is the currenversion before use.

TABLE II. Colorfastness inspection methods (see 4.5.2).

Item	Colorfastness methods	
	Light	Laundering
Cloth	5660	5614
Lines	4660	4614
Sewing thread	4660	4614
Reinforcing tape	5660	5614

TABLE III. Classification of defects for the visual examination of the sea anchors. (see 4.5.4.1).

Defect	Major	Minor
General		
a. Any non-specified hold, scissors or knife cut, tear, mend, burn or weakening defect such as smash, multiple float, loose slub, needle chew or abraded area	X	
b. Color of any component not as specified	X	
c. Color of any component not uniform or contains one or more shade bars 1/		X
d. Any thread end not trimmed to a length of 1/4 to 3/8 inch or loose thread ends		X
e. Any spot or stain		X
f. Any knot not tightly knotted, drawn or formed as specified	2/	
g. Any cut edges of the fibrous materials not seared or sharp edges formed due to searing		X
h. Any line not formed from one continuous length of the cord	2/	
i. Any reinforcing tape not one continuous length 3/	2/	
Metallic components		
a. Any grommet loose; any metallic component misaligned, distorted, surface rough or contains any nick, burr, sharp edge, crack or sliver	X	
b. Any surface unclean, contains embedded foreign matter, finish missing or improperly finished		X
c. Any grommet improperly clinched, resulting in cutting of the cloth	X	
d. Ring not formed from one continuous length of the flexible steel cable 4/	2/	
Components and assembly		
a. Any component not as specified or any defect of a component or defect of assembly not herein classified	2/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for the visual examinations of the sea anchors (see 4.5.4.1). - Continued

Defect	Major	Minor
Components and Assembly (Continued)		
b. Any component, component part or required operation omitted, or any operation improperly performed not herein classified	2/	
Seams and Stitching		
a. Accuracy of Seaming:		
1. Any seam, hem or attachment of any component twisted, puckered, pleated or caught in an unrelated operation or stitching		X
2. Ends of type 301 stitching that are not caught in other seams or stitching:		
(a) Not securely backstitched	X	
(b) Secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
3. Thread breaks:		
(a) Not securely overstitched	X	
(b) Secure but overstitched for a distance less than one inch		X
b. Gage of stitching 5/:		
1. Any stitching irregular, unevenly gaged or various stitchings not uniform		X
c. Open seams 6/:		
1. One-forth inch or less		X
2. More than one-fourth inch	X	
d. Raw edges 7/:		
1. One-half inch or less		X
2. More than one-half inch	X	
e. Seam and stitch type:		
1. Not specified seam or stitch type	X	
f. Stitch tension 8/:		
1. Loose tension, resulting in a loose seam or tight tension, resulting in the breaking of the stitches, when normal pull is applied	X	
g. Stitches per inch 9/:		
1. Stitches more or less than specified:		
(a) One or two		X
(b) More than two	X	

Source: https://assist.dla.mil -- Downloaded: 202640-16T17:32Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for the visual examinations of the sea anchors (see 4.5.4.1). - Continued

Defect	Major	Minor
Seams and stitching (Continued)		
h. Bartacks 3/:		
1. Any loose, misplaced or not serving the intended purpose		X
2. Length of any bartack not as specified		X
Markings		
a. Type or size missing, incomplete, incorrect or illegible	X	
b. Other than type or size information missing, incomplete, incorrect or illegible		X
c. Improperly located or color or size of the markings not as specified		X

1/ Applicable only when the sea anchor is blue in color.
2/ The defect shall be considered major, when it seriously affects the serviceability or appearance, otherwise it is to be classified as a minor defect.
3/ Applicable only to the type II sea anchor.
4/ Applicable only to the type I sea anchor.
5/ Gage of stitching defects are to be scored only when the condition exists on the major portion of the seam.
6/ A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam is considered open, when either one or both sides of the seam is open.
7/ Any edge that should be turned under and is not, but is securely caught in the stitching shall be classified as a raw edge. Any raw edge not securely caught in the stitching shall be classified as an open seam.
8/ Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam or stitching.
9/ Stitches per inch defects are to be scored only when condition exists on the major portion of the seam.

Source: https://assist.dla.mil -- Downloaded: 202640-16T17:32Z
Check the source to verify that this is the current version before use.


TABLE IV. List of defects for the dimensions of the assembled sea anchors (see 4.5.4.1).

Examine	Defect
Measure the top diameter, throat diameter, and length of the sea anchor; length of the bridle, bridle loop, mooring line and turnback of the mooring line; location of the grommets and knots; width of the seams and hems, length of the zigzag stitching and size of the throat facing, as applicable.	Any measurement deviating from the dimensions and tolerances as specified in figures 1 through 6, as applicable, shall be enumerated as a dimensional defect.

TABLE V. List of defects for preparation for delivery (see 4.5.4.2).

Item	Defect
Exterior and interior markings	Missing, incomplete, incorrect, illegible; of improper size, location, sequence or method of application; type and size shown on the sea anchor not the same on the exterior container.
Materials	Any non-conforming component; any component missing, damaged or otherwise defective.
Workmanship	Inadequate application of the components such an incomplete closure of the unit package, container flaps, loose strappings, etc.; bulging or distortion of the containers.
Exterior and interior weight or content	Not folded as specified; gross or net weight exceeds the requirement; more than one type and size sea anchor in the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

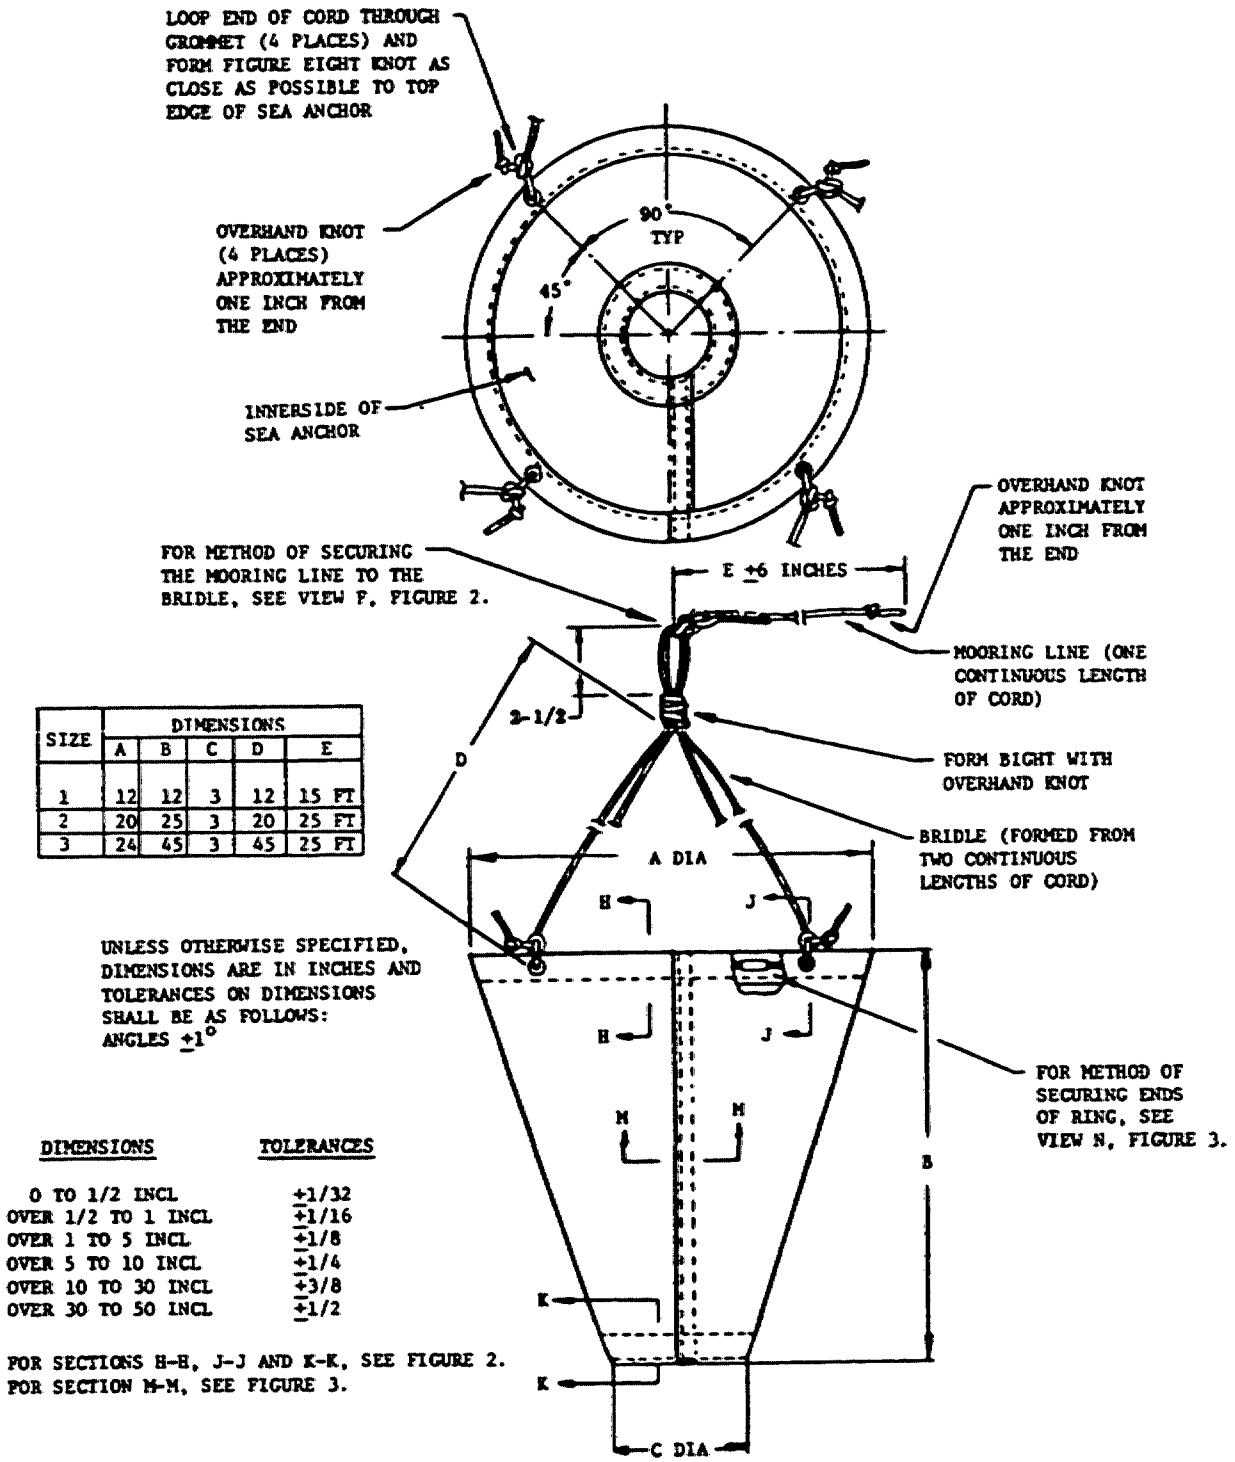

SIZE	DIMENSIONS				
	A	B	C	D	E
1	12	12	3	12	15 FT
2	20	25	3	20	25 FT
3	24	45	3	45	25 FT


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ON DIMENSIONS SHALL BE AS FOLLOWS:
ANGLES ±1°

DIMENSIONS	TOLERANCES
0 TO 1/2 INCL	±1/32
OVER 1/2 TO 1 INCL	±1/16
OVER 1 TO 5 INCL	±1/8
OVER 5 TO 10 INCL	±1/4
OVER 10 TO 30 INCL	±3/8
OVER 30 TO 50 INCL	±1/2


FOR SECTIONS H-H, J-J AND K-K, SEE FIGURE 2.
FOR SECTION M-M, SEE FIGURE 3.

FIGURE 1. Type I life raft sea anchor.


Source: https://assist.dla.mil -- Downloaded: 20261O-16T17:32Z
Check the source to verify that this is the current version before use.

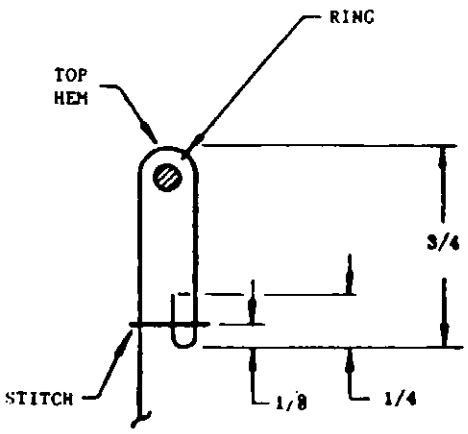


SECTION H-H

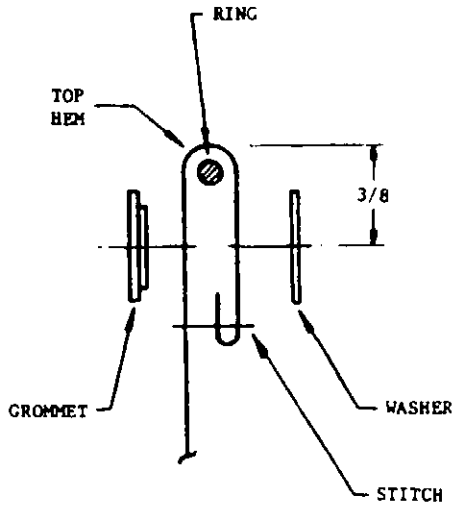

SECTION J-J

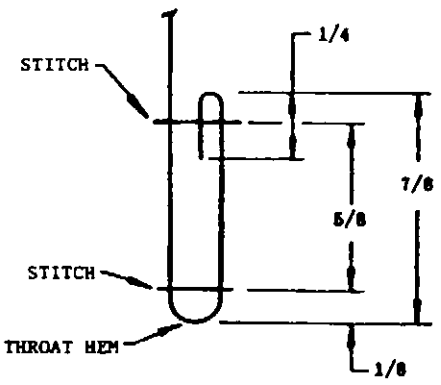


SECTION K-K

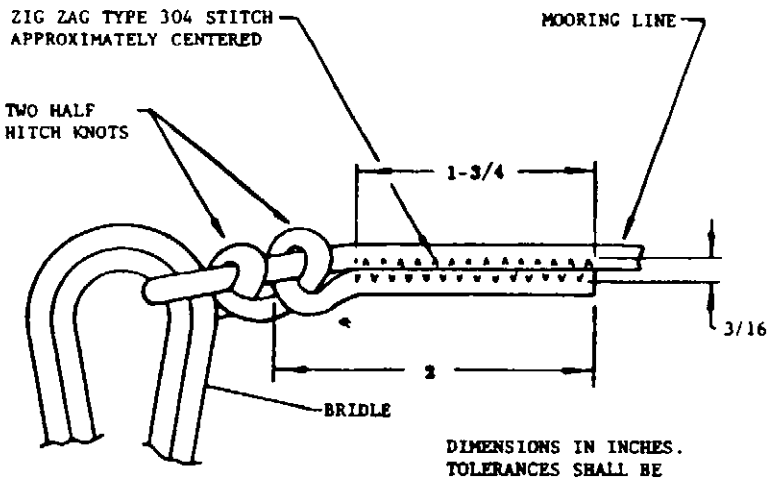


VIEW F

FIGURE 2. Type I life raft sea anchor sections.

Source: https://assist.dla.mil -- Downloaded: 202640-16T17:32Z
Check the source to verify that this is the current version before use.

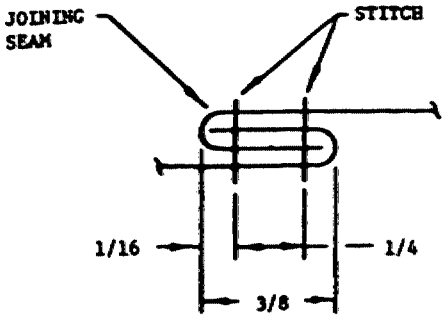


SECTION M-M

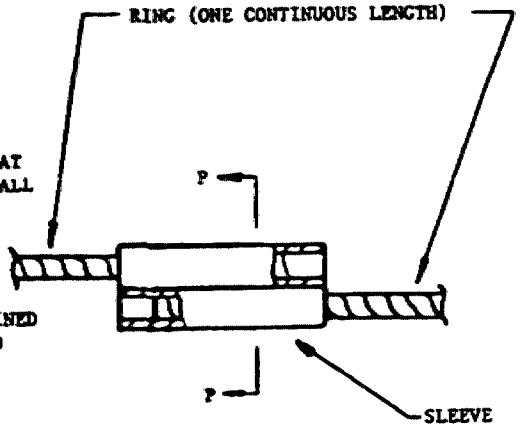

CABLE OVERLAP AND SLEEVE LENGTH SHALL BE AT THE DISCRETION OF THE MANUFACTURER AND SHALL BE BASED UPON MEETING THE REQUIREMENTS OF 3.6.1 AND 4.5.3.

THE CUT ENDS OF THE CABLE SHALL BE CONTAINED WITHIN THE SLEEVE SO AS TO PREVENT RAGGED OR SHARP EDGES.

VIEW B



DIMENSIONS IN INCHES.
TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

SECTION P-P

FIGURE 3. Type I life raft sea anchor sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.



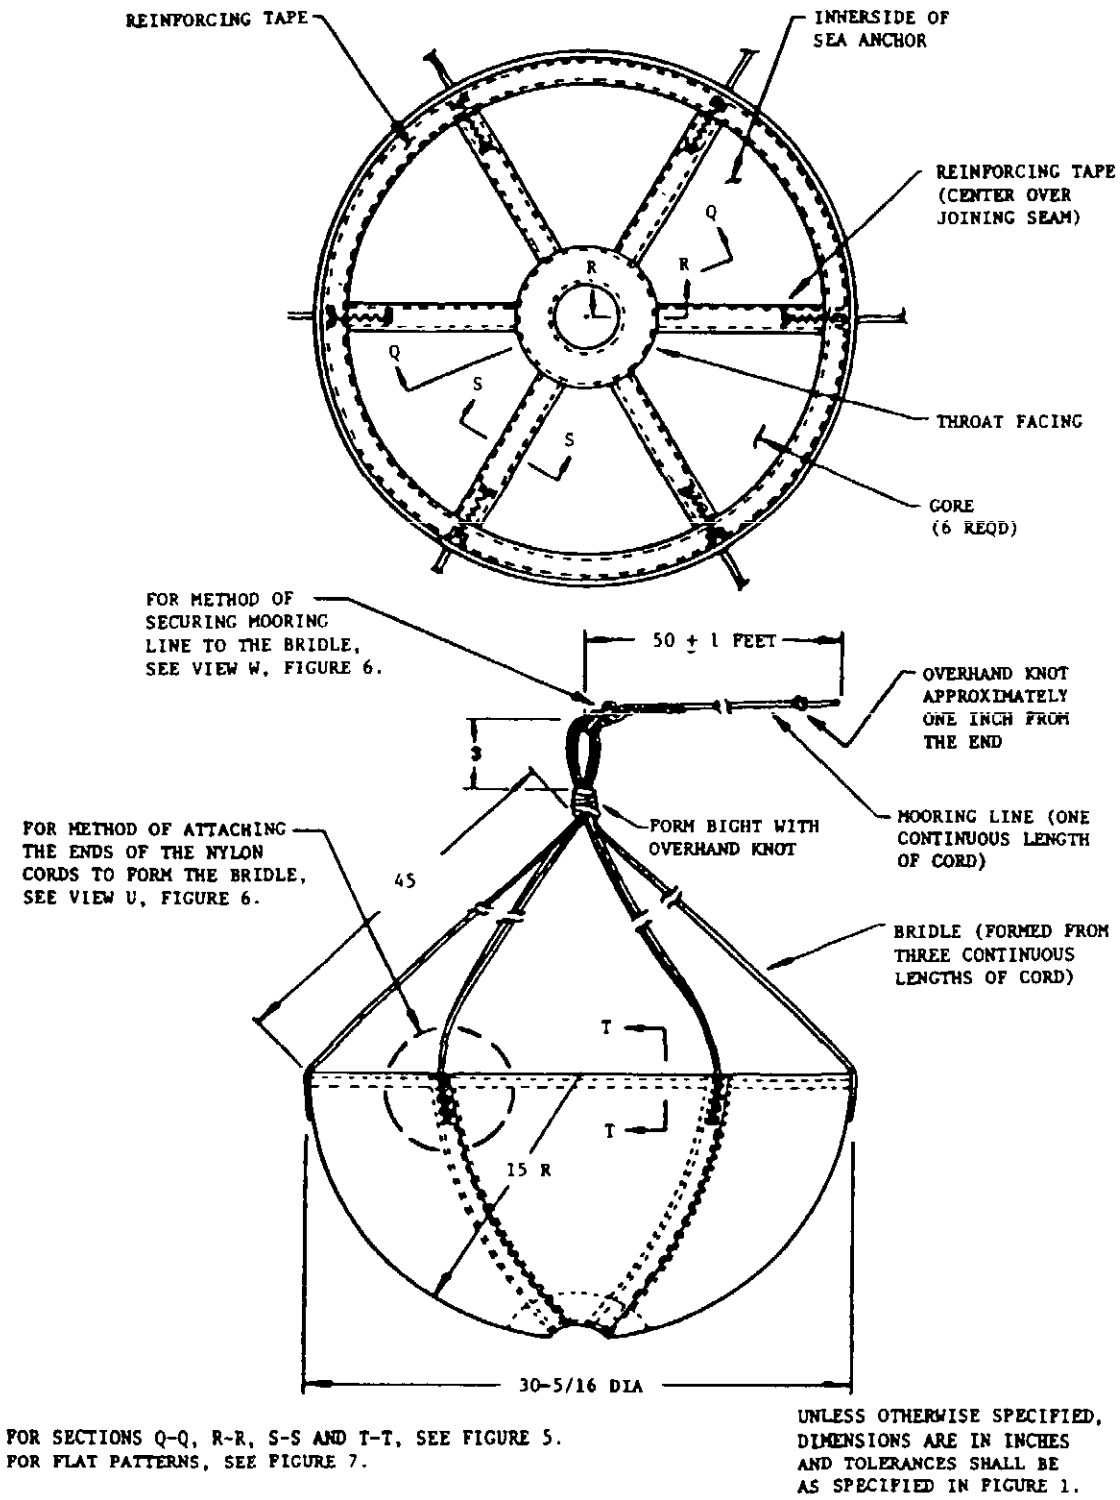


FIGURE 4. Type II, size 1, life raft sea anchor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

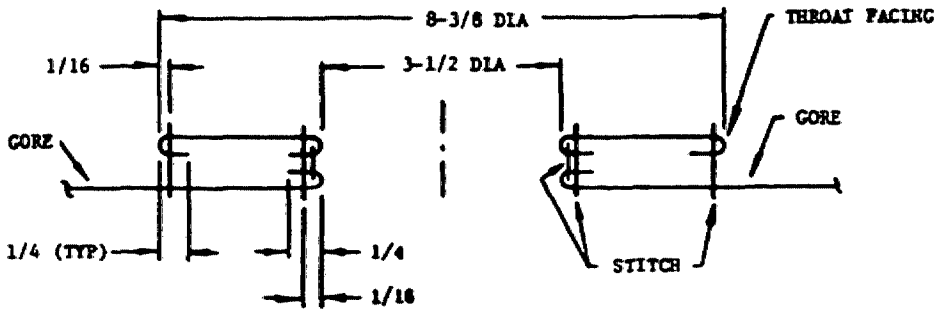


SECTION Q-Q

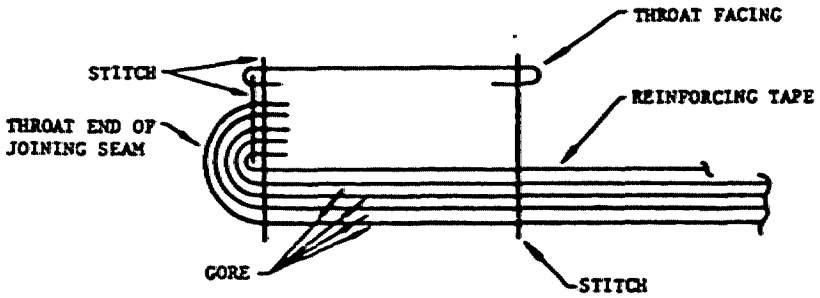

SECTION R-R

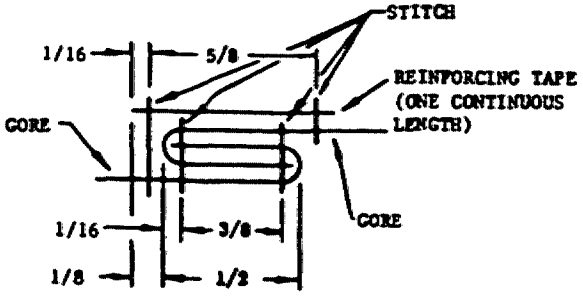

SECTION S-S
TYPICAL JOINING SEAM CONSTRUCTION

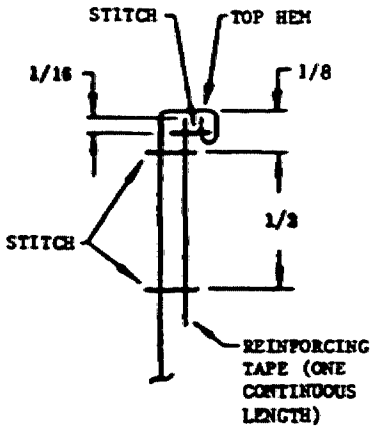


SECTION T-T

DIMENSIONS IN INCHES.
TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.


FIGURE 5. Type II, size 1, life raft sea anchor sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

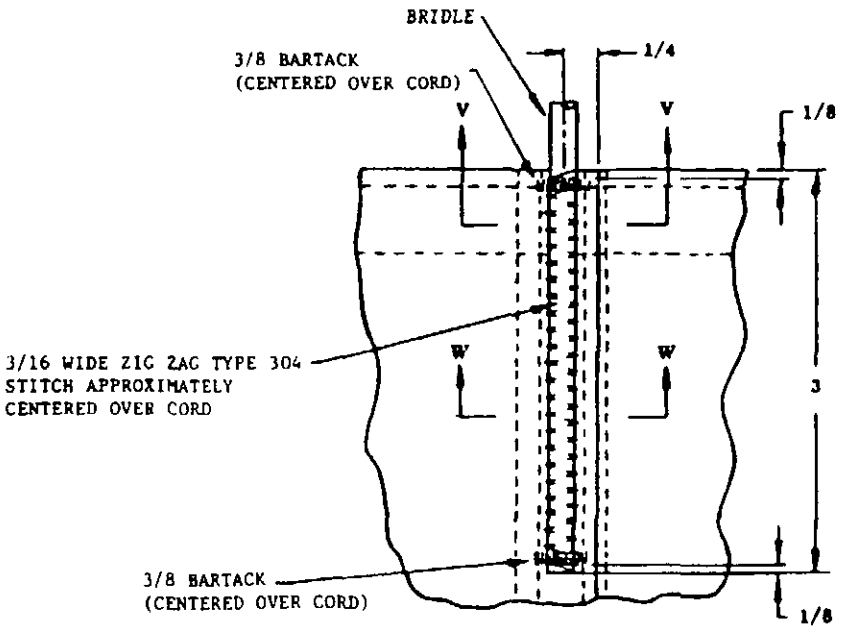


VIEW U

TYPICAL METHOD FOR ATTACHING THE NYLON CORD ENDS TO FORM THE BRIDLE.

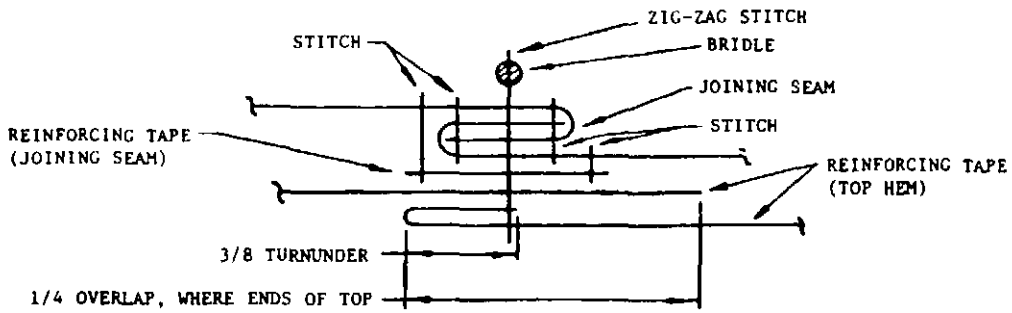

SECTION V-V

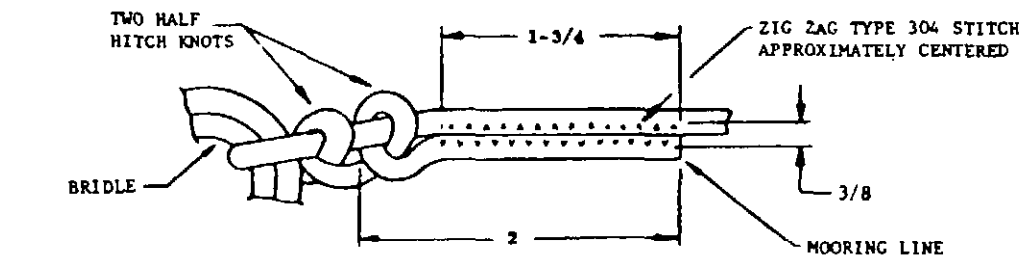

DIMENSIONS IN INCHES.
TOLERANCES SHALL BE
AS SPECIFIED IN FIGURE 1.

VIEW W

FIGURE 6. Type II, size 1, life raft sea anchor typical sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

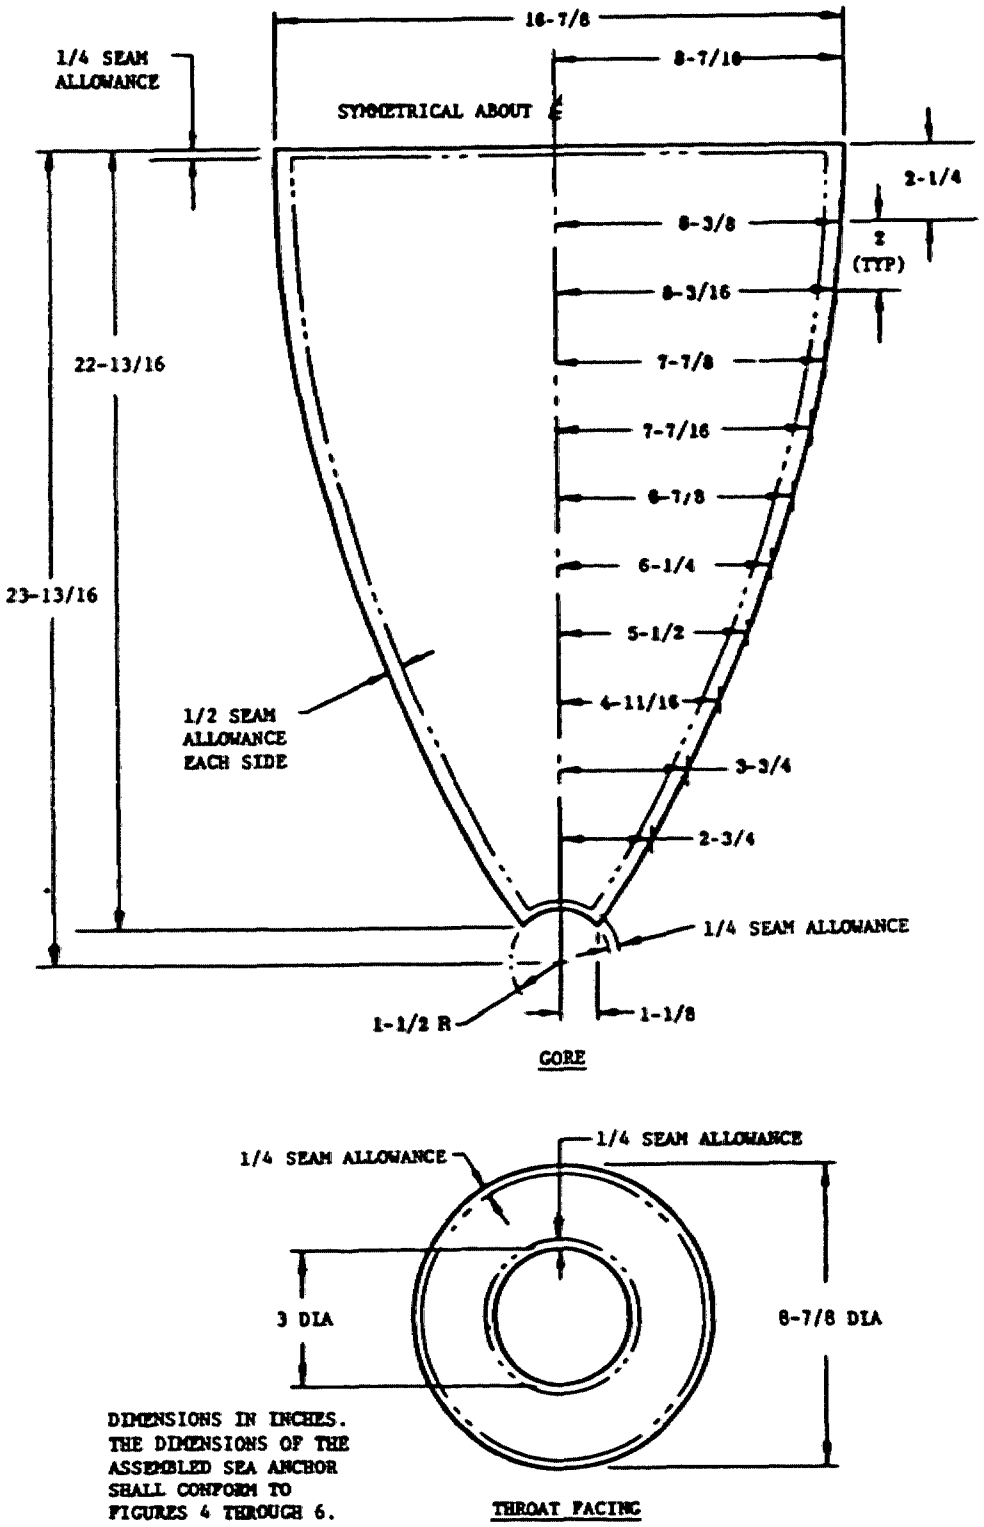


FIGURE 7. Flat patterns for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:32Z
Check the source to verify that this is the current version before use.

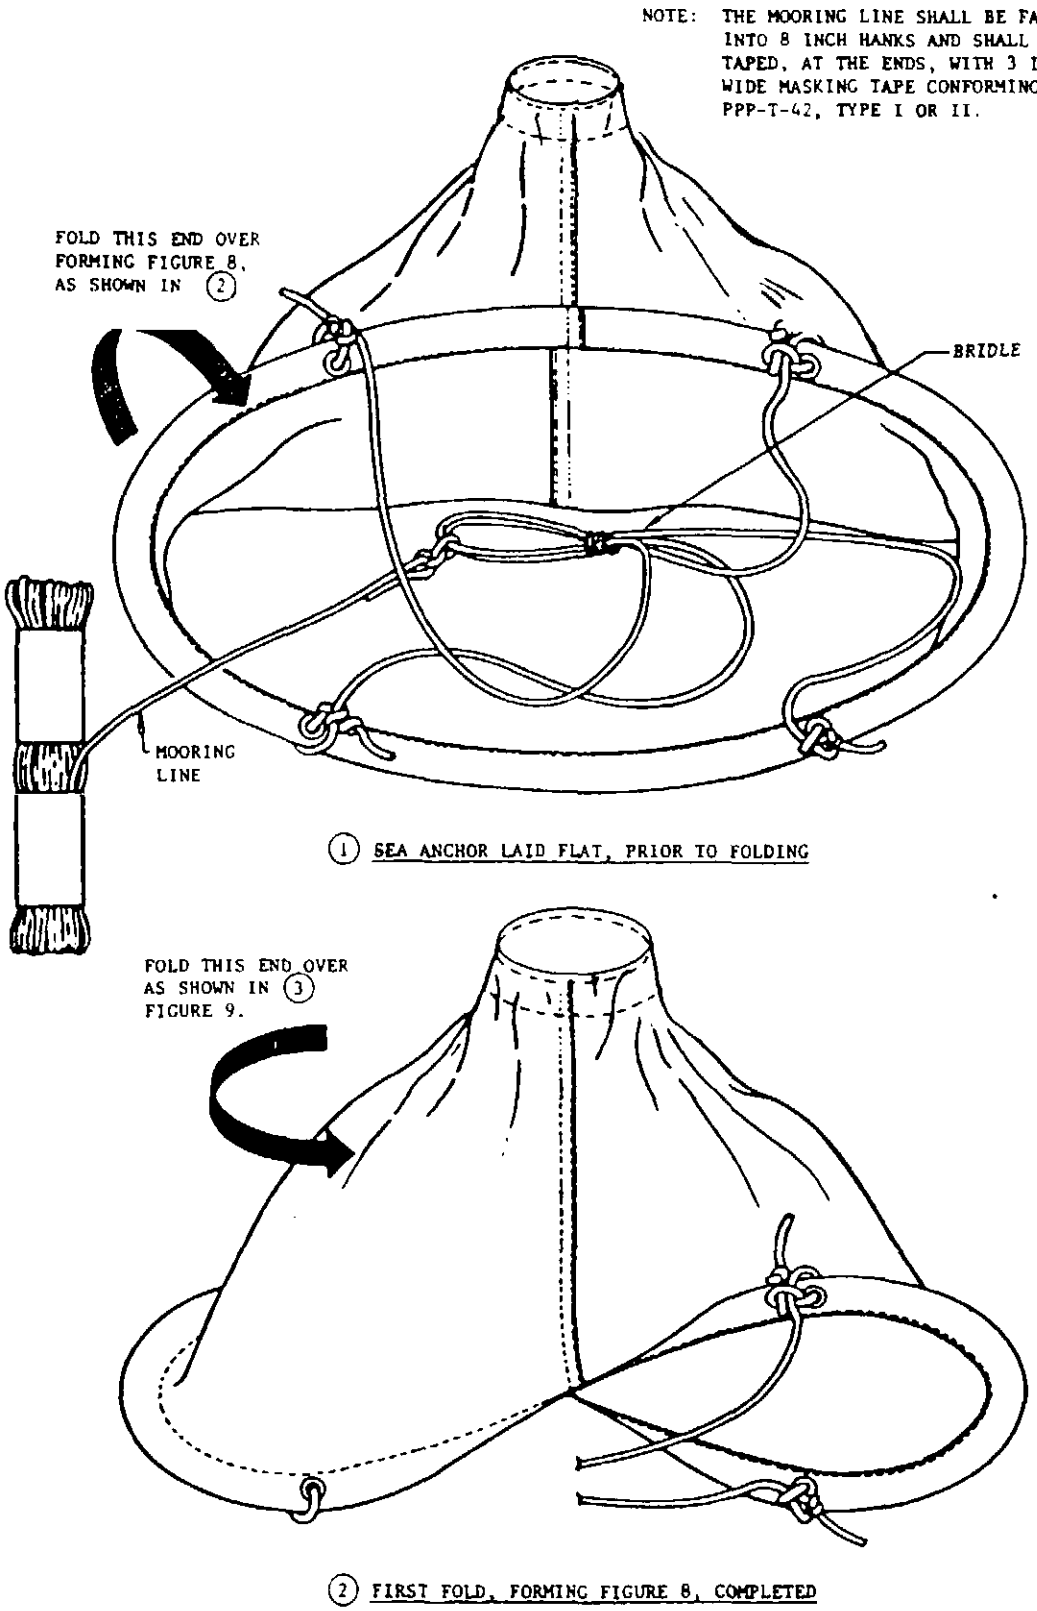


FIGURE 8. Folding procedure for type I life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 20260410-16T17:32Z
Check the source to verify that this is the current version before use.


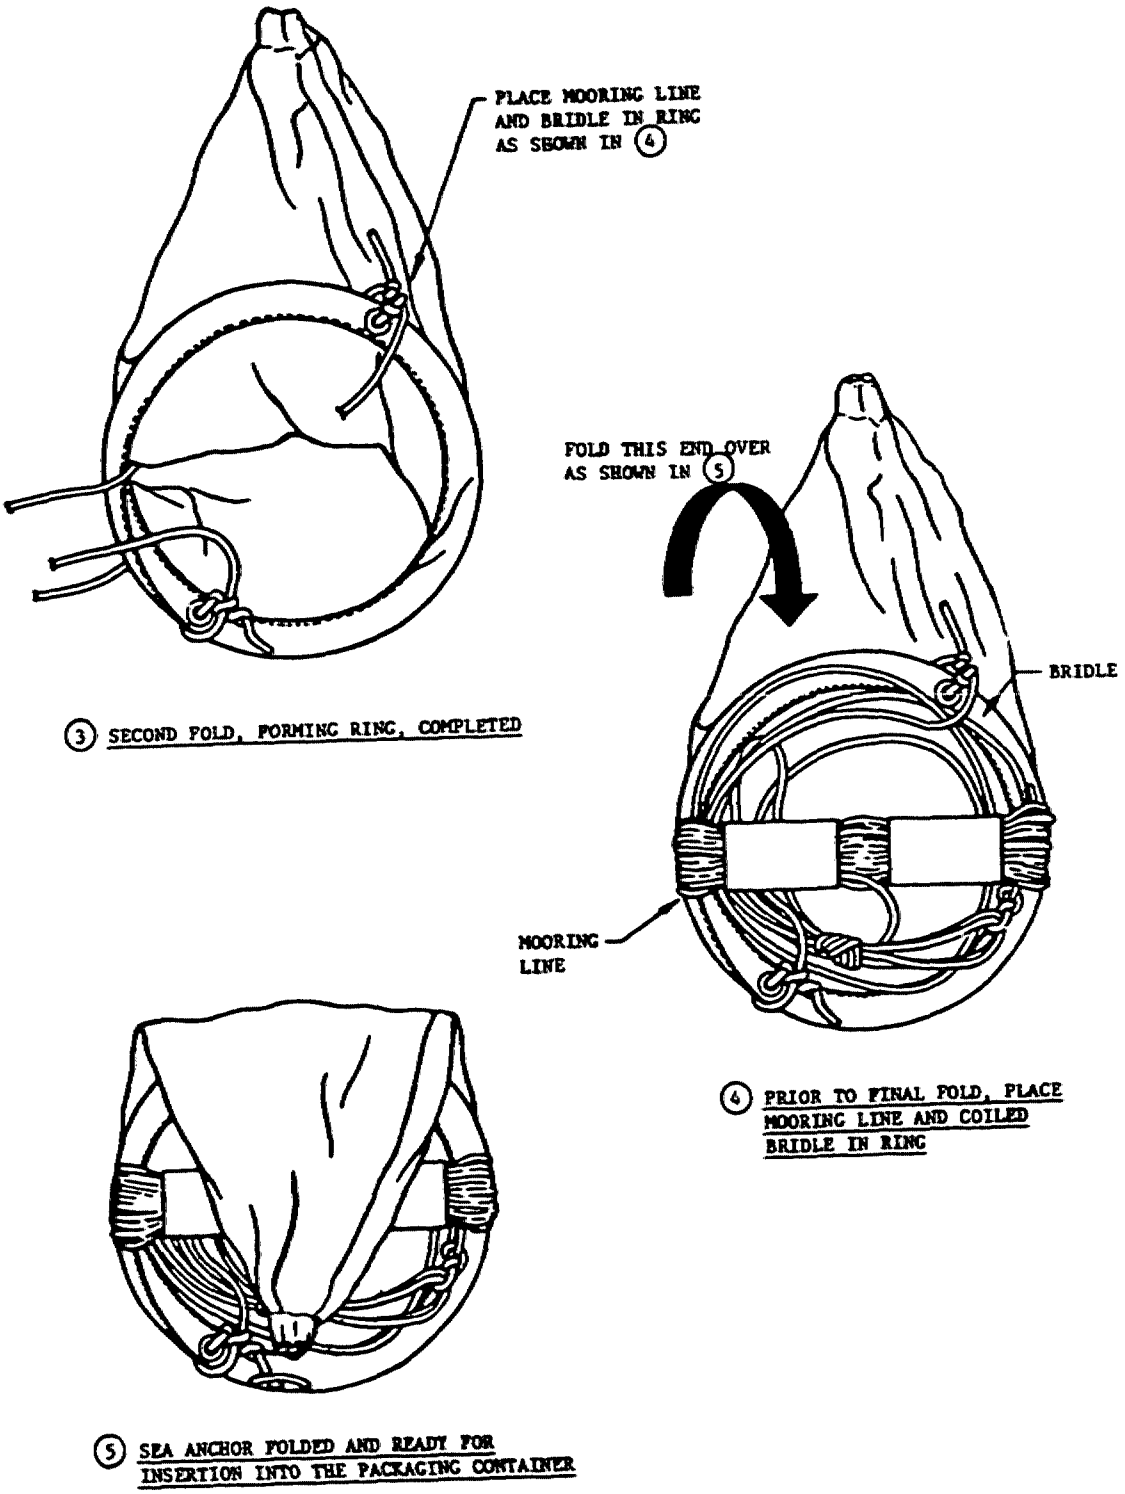



FIGURE 9. Folding procedure for type I life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

NOTE: BEFORE FOLDING THE SEA ANCHOR, THE MOORING LINE SHALL BE FAKED INTO 8 INCH HANKS AND SHALL BE TAPED, AT THE ENDS, WITH 3 INCH WIDE MASKING TAPE CONFORMING TO PPP-T-42 TYPE I OR II.

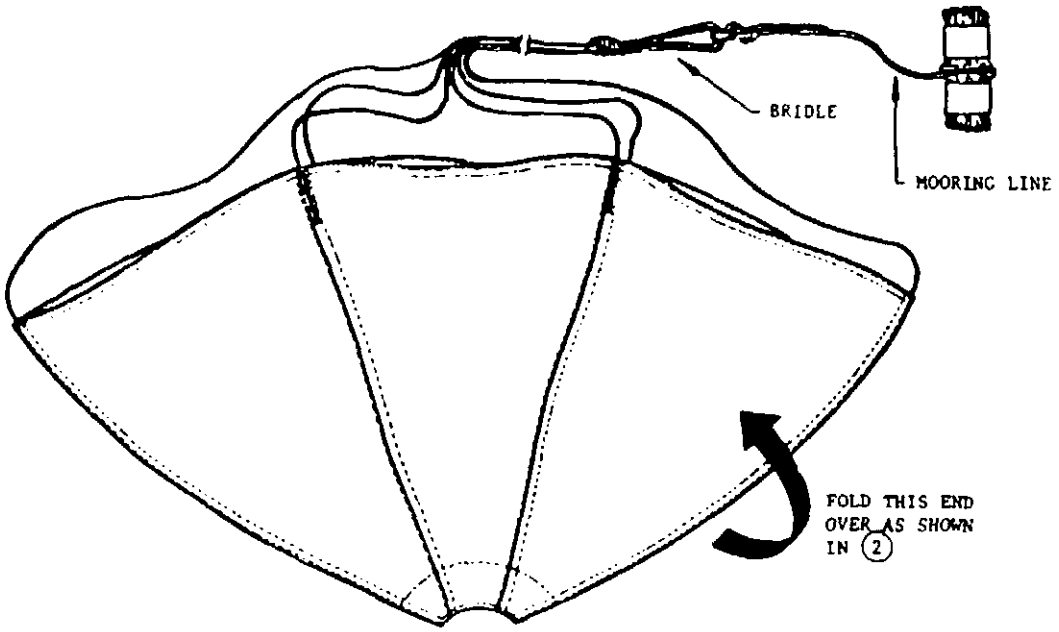


(1) SEA ANCHOR LAID FLAT, PRIOR TO FOLDING

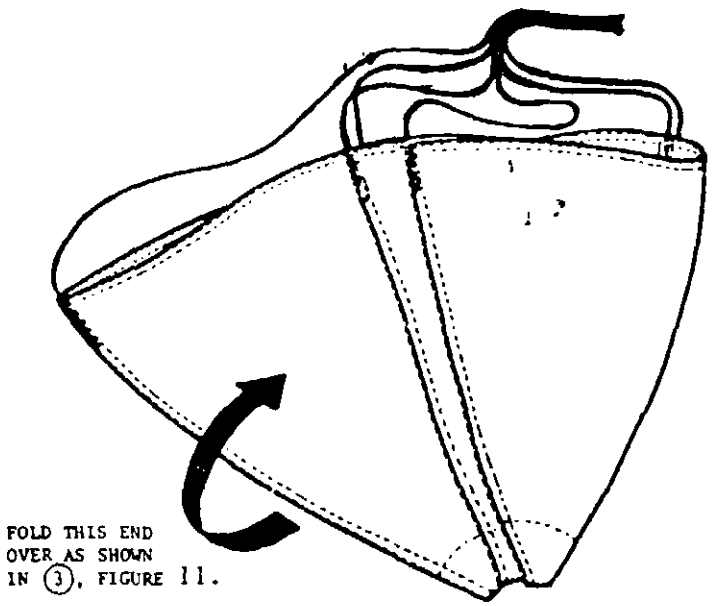


(2) FIRST FOLD COMPLETED

FIGURE 10. Folding procedure for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

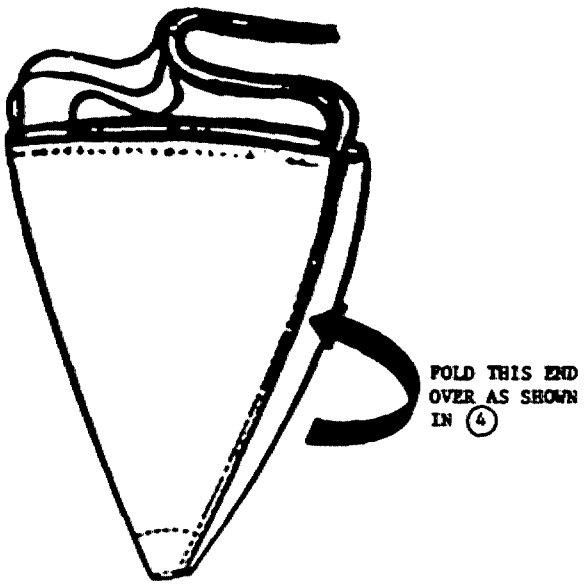


(3) SECOND FOLD COMPLETED

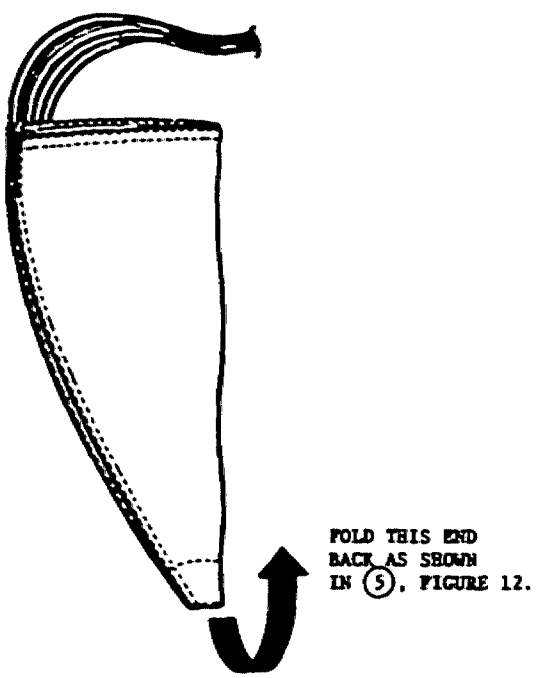


(4) THIRD FOLD COMPLETED

FIGURE 11. Folding procedure for type II, size 1, life raft sea anchor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

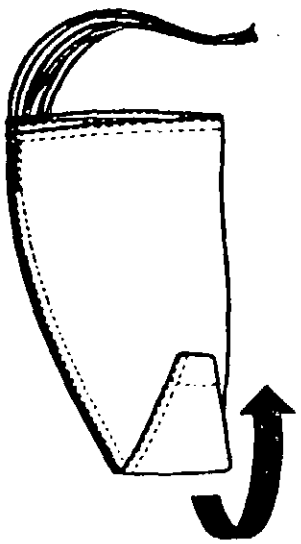

(5) FOURTH FOLD COMPLETED

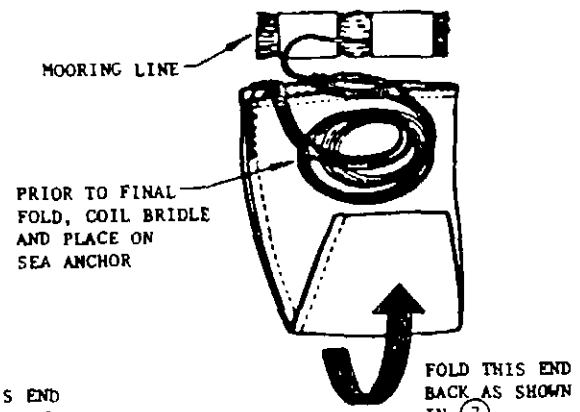

(6) FIFTH FOLD COMPLETED

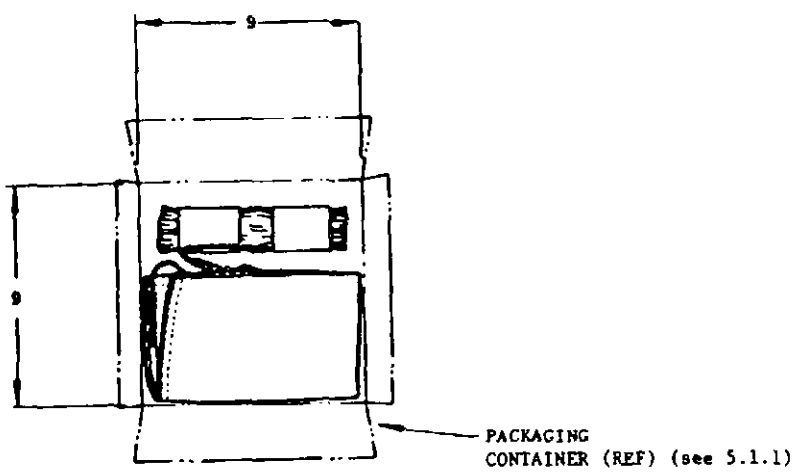

DIMENSIONS IN INCHES

(7) SEA ANCHOR FOLDED AND READY FOR INSERTION INTO THE PACKAGING CONTAINER

FIGURE 12. Folding procedure for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12803 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Naval Air Engineering Center
ESSD (Code 9312)
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-A-3339C Anchors, Sea, Life Raft

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:32Z
Check the source to verify that this is the current version before use.