INCH-POUND

MIL-DTL-3339D
11 August 2025
SUPERSEDING
MIL-A-3339C
17 August 1981

MILITARY SPECIFICATION

ANCHORS, SEA, LIFE RAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for two types and three sizes of life raft sea anchors.

1.2 Classification. The sea anchors will be furnished in the following types and sizes as specified: (see 6.2)

SIZE	TYPE	
	I	II
1	12 1/	30-5/16 1/
2	20 1/	-
3	24 1/	-

1/ Diameter in inches

Comments, suggestions, or questions on this document should be addressed to AFLCMC/EZSS, 2145 Monahan Way, Bldg. 28, and Wright-Patterson AFB, OH, 45433-7017 or emailed to Engineering.Standards@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 2040

DISTRIBUTION STATEMENT A. Approved for Public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL STANDARDS

FED-STD-191	-	Textile Test Methods

COMMERCIAL ITEM DESCRIPTIONS

A-A-1671	-	Tape, Gummed (Paper, Reinforced, Asphalt Laminated)
A-A-59291	-	Ink, Marking (for Parachutes and Other Textile Items)
A-A-59826	-	Thread, Nylon

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-C-21108	-	Cloth, Nylon, Raft Bottom
MIL-DTL-5038	-	Tape, Textile and Webbing, Textile, Reinforcing, Nylon
MIL-DTL-43307	-	Cord, Nylon, Solid Braid, General Purpose
MIL-DTL-83420	-	Wire Rope, Flexible, for Aircraft Control, General Specification for

DEPARTMENT OF DEFENSE STANDARD

MIL-STD-129	-	Military Marking for Shipment and Storage
MIL-STD-1916	-	DOD Preferred Methods for Acceptance of Product

(Copies of these documents are available online at https://assist.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DATA ITEM DESCRIPTION

DI-NDTI-80809	-	Test/Inspection Report

(Copies of these documents are available online at https://assist.dla.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D1974/D1974M	-	Fiberboard Boxes, Methods of Closing, Sealing, and Reinforcing, Standard Practice for
ASTM-D5118/D5118M	-	Boxes, Fiberboard Shipping, Fabrication of
ASTM-D6193	-	Stitches and Seams

(Copies of this document is available online at https://www.astm.org/.)

NATIONAL AEROSPACE STANDARDS COMMITTEE (NA/NAS)

NASM16491	-	Grommet, Metallic, General Specification For

(Copies of this document is available online at https://www.aia-aerospace.org/.)

PARACHUTE INDUSTRY ASSOCIATION (PIA)

PIA-C-5040	-	Cord, Fibrous, Nylon

(Copies of this document is available online at https://www.pia.com/.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-AMS-STD-595	-	Colors Used in Government Procurement

(Copies of this document is available online at https://www.sae.org/.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified, (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3.1 and 6.2).

3.2 Materials. The materials shall conform to the applicable specifications listed or required herein.

3.2.1 Body. The body of the type I and type II sea anchors shall be fabricated from nylon cloth conforming to MIL-C-21108, type I.

3.2.2 Lines.

3.2.2.1 Mooring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

3.2.2.1.1 Type I sea anchor. The mooring line for the type I sea anchor shall be nylon cord conforming to PIA-C-5040, type III.

3.2.2.1.2 Type II sea anchor. The mooring line for the type II sea anchor shall be nylon cord conforming to MIL-DTL-43307, ¼-inch diameter.

3.2.2.2 Bridle. The bridle for the type I and II sea anchors shall be fabricated from nylon cord conforming to PIA-C-5040, type III.

3.2.3 Thread. All the sewing operations shall be performed with the nylon thread conforming to A-A-59826, type I or II, class A or B, size E.

3.2.4 Ring. The ring for the type I sea anchor shall be fabricated from flexible corrosion-resistant steel cable conforming to MIL-DTL-83420, 3/32-inch diameter.

3.2.5 Sleeve. The sleeve for securing the ends of the metal ring for the type I sea anchor shall be fabricated from corrosion-resistant steel and shall conform to figure 3.

3.2.6 Grommets. The grommets for the type I sea anchor shall be brass with a black chemical finish conforming to NASM16491. type I, class 3, size number 0.

3.2.7 Reinforcing tape. The reinforcing tape for the type II sea anchor shall be nylon, conforming to MIL-DTL-5038, type III, ¾-inch wide.

3.2.8 Throat facing. The throat facing for the type II sea anchor shall be fabricated from the body cloth stated in 3.2.1.

3.3 Design.

3.3.1 Type I sea anchor. The type I sea anchor shall be a truncated cone with an enclosed flexible steel cable at the top, a bridle, and a mooring line. The type I sea anchor shall conform in appearance to figure 1.

3.3.1.1 Knot Substitution. Alternate knot configuration to use a bowline knot secured with an overhand stopper knot one inch from the end of the line in place of the figure eight knot shown in figure 1.

3.3.2 Type II sea anchor. The type II sea anchor shall be semi-hemispherical in shape with a bridle and a mooring line. The type II sea anchor shall conform in appearance to figure 4.

3.4 Construction. The details of the construction of the type I and type II sea anchors shall conform to figures 1 through 7 as applicable. All the knots shall be tightly drawn. The cut edge of the line and reinforcing tape shall be seared to prevent fraying. No sharp edges shall be formed and except for the lines and bridle, no cut edges shall be visible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

3.4.1 Seams and stitching. All the seams used in the fabrication of the sea anchor shall conform to figures 1 through 6, as applicable. All the regular sewing shall be accomplished with stitch type 301 and the zigzag stitching, for attaching the end of the mooring line to itself and the ends of the bridle to the body of the type II sea anchor, shall be accomplished with stitch type 304. All the stitch types shall conform to ASTM-D6193 and shall contain 8 to 10 stitches per inch. All the seam edges shall be properly forced out and shall not contain any folds. No seam shall be twisted, puckered or pleated and no part of the sea anchor shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a length of ¼ to ⅜ inch.

3.4.1.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching in any row shall be maintained within a tolerance of plus or minus 1/32 inch. The ends of all the stitch type 301 stitching that are not caught in other seams or stitching, shall be securely backstitched, by overlapping on itself, for at least ½-inch. Thread breaks, skips, and run-offs shall be overstitched not less than one inch. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.4.1.2 Bartacking. The size and location of the bartacks on the type II sea anchor shall be as specified on figures 4 and 6. Each bartack will contain a minimum of 21 stitches.

3.5 Color. Unless otherwise specified (see 6.2), the color of the cloth, lines, sewing thread, reinforcing tape and throat facing shall be natural (white) color. When blue color is specified, the color of the body cloth, lines, bridle, sewing thread, reinforcing tape, and throat facing shall approximately match SAE-AMS-STD-595 blue lusterless color number 35042, when inspected as specified in 4.3.1. The dyed components shall have at least "good" colorfastness to light and laundering, when inspected as specified in 4.5.2.

3.6 Performance characteristics.

3.6.1 Strength of the ring attachment. When inspected as specified in 4.5.3, the strength of the ring attachment shall be not less than 100 pounds.

3.7 Dimensions. The dimensions of the assembled sea anchors, width of the seams and hems, and the dimension and location of the components shall conform to figures 1 through 6, as applicable, when determined as specified in 4.5.5.

3.8 Marking. Unless otherwise specified, the natural color sea anchor shall be marked with blue ink conforming to A-A-59291. When the color of the sea anchor is blue, the color of the markings shall be white or yellow, accomplished with ink conforming to A-A-59291. The height of the markings shall be ¼ inch for the type I, size 1, sea anchor and one inch for the type I, sizes 2 and 3, and type II, size 1, sea anchors. The markings shall be legible and durable letters and numerals, which shall be thoroughly dry prior to packaging. The markings shall be located on the inner side of the sea anchor and shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

SEA ANCHOR
MIL-DTL-3339
Type I and II, as applicable
Size 1, 2, and 3, as applicable
Name of Manufacture
Contract No.
Date of Manufacture (month and year)

3.9 Workmanship. The sea anchors shall not contain any non-specified hole, tear, cut, mend, burn, needle chew, spot or stain. The grommets shall be securely clinched without distortion, damage, splitting or cutting of the cloth. The sleeve shall be securely crimped without distortion, splitting, or damage to the steel cable. The metal components shall not contain any sharp edge, sliver, nick, crack, or burr. All loose thread, lint, and foreign matter shall be removed. The assembled sea anchors shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. VERIFICATION

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use their own or any other facilities acceptable or the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after the award of a contract to determine that the production item meets the requirements of this specification (see 4.3).
b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4).

4.3 First article inspection.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of the contract or order, the manufacture shall submit three sea anchors of the type specified in the contract or order. The samples shall be representative of the workmanship, construction, components, and materials to be used during production. When a manufacturer is in continuous production of these sea anchors from contract to contract, submission of further first article

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

inspection samples on the new contract, may be waived at the discretion of the acquiring activity (see 6.2e). Approval of the first article inspection samples or the waiving of the first article inspection does not exclude the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2f). The samples shall be plainly identified by securely attached durable tags marked with the following information:

Samples submitted by (name) (date) for first article inspection in accordance with the requirements of MIL-A-3339 under Contract No.

4.3.2 First article examinations and tests. The first article inspection of the sea anchors shall consist of all the tests and examinations of this specification.

4.3.3 First article approval. Upon completion of the first article inspection program, recommendations and comments pertinent for use in monitoring production will be forwarded by the Government activity responsible for the inspection program (see 6.2f). Once approved, sea anchors will be returned to the manufacturer for use in monitoring production. The other sea anchors will be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under the contract.

4.4 Quality conformance inspection. The sampling and inspection levels shall conform to MIL-STD-1916. The quality conformance inspection shall consist of the following:

a. Color matching of the cloth, lines, sewing thread and reinforcing tape, as applicable.
b. Colorfastness of the cloth, lines, sewing thread, and reinforcing tape, as applicable, to light and laundering.
c. Strength of the ring attachment.
d. Visual examination of the sea anchors.
e. Dimensional examination of the sea anchors.
f. Packaging.

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Components (cloth, lines, sewing thread, and reinforcing tape). An inspection lot size shall be expressed in units of one for the individual components (cloth, lines, sewing thread, and reinforcing tape) designated in the terms used commercially and shall consist of all of an individual item received by the life raft sea anchor manufacturer at one time. The sample unit shall be one unit of each of the individual components (cloth, lines, sewing thread, and reinforcing tape) designated in the terms used commercially.

4.4.1.1.2 Rings. An inspection lot size shall be expressed in units of one assembled ring for one size sea anchor made essentially under the same conditions and from the same components and shall consist of all the rings received by the sea anchor manufacturer at one time. The sample

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

unit shall be one ring for one size sea anchor.

4.4.1.1.3 Sea anchors. An inspection lot size shall be expressed in units of one sea anchor of one type and size made essentially under the same conditions and from the same materials and components. The sample unit shall be one sea anchor of type and size.

4.4.1.1.4 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing sea anchors of one type and size, fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing sea anchors of one type and size, fully prepared for delivery with the exception that it need not be sealed.

4.4.1.2 Sampling for tests and examinations of the components and sea anchors. The sample size, acceptance criteria, tests and examinations required for the components and sea anchors shall be as specified in Table I.

4.5 Inspections methods.

4.5.1 Color matching. The color of the cloth, lines, sewing thread, and reinforcing tape, as applicable, shall approximately match the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin. This inspection is applicable only when the sea anchor is blue in color.

4.5.2 Colorfastness to light and laundering. The colorfastness of the cloth, lines, sewing thread, and reinforcing tape, as applicable, shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table II, as applicable. These inspections are applicable only when the sea anchor is blue in color.

4.5.3 Strength of the ring attachment. The strength of the ring attachment shall be determined by attaching the wire on one side of the sleeve to the upper jaw and the wire on the other side of the sleeve to the bottom jaw of an acceptable inspection apparatus. The sleeve shall be centered between the upper and lower jaws and the distance between the jaws, at the start of the inspection shall be 6 inches. The rate of jaw separation, under no load, shall be 12 ± ½ inches per minute. The jaws shall be separated until failure occurs. The rings shall conform to the requirements of paragraph 3.6.1.

4.5.4 Visual examination.

4.5.4.1 Sea anchors. Each of the sea anchors of one type and size, selected as a sample unit from the lot, shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables III and IV, as applicable, shall be used to classify and enumerate the defects found.

4.5.4.2 Packaging. Each of the fully prepared shipping containers, containing assembled sea anchors of one type and size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

defects, Table V, shall be used to enumerate the defects found.

4.5.5 Procedure for measuring. The sea anchor to be measured shall be laid flat, without tension, on a smooth flat surface so that the creases and wrinkles shall not affect the measurement. The dimensions of the sea anchor and components, location of the components, width of the seams and hems shall be determined by a yardstick, metal tape, or any acceptable measuring device.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each sea anchor shall be folded in accordance with figures 9 through 13 as applicable. Each sea anchor shall be packaged within a one-piece fiberboard folder conforming to ASTM-D1974/D1974M and ASTM-D5118/D5118M, type CF, domestic class, variety SW, grade 125, style OPF. The size of the folder for each type I sea anchor shall be snug fitting. The size of the folder for each type II, size 1 sea anchor, shall be approximately 9 inches long, 9 inches wide, and l-l/4 inches in depth. The containers shall be constructed and closed, with a minimum of 3-inch-wide tape conforming to A-A-1671, type III, grade A, B or C, in accordance with the appendix to ASTM-D1974/D1974M and ASTM-D5118/D5118M.

5.1.2 Level C. The sea anchors of one type and size shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2). Shipping containers, as much as is feasible, shall be uniform in size and shape and of minimum cube and tare weight. Each shipping container shall only contain sea anchors of one type and size.

5.2.1 Level A. The sea anchors, packaged as specified in 5.1, shall be packed and the container sealed in the same manner as specified in 5.2.2, except that the fiberboard container shall be weather resistant class, variety SW, grade V3c or V3s. Each container shall be constructed, closed and reinforced with flat steel strapping or tape banding in accordance with the appendix to ASTM-D1974/D1974M and ASTM-D5118/D5118M.

5.2.2 Level B. The sea anchors, packaged as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to ASTM-D1974/D1974M and ASTM-D5118/D5118M, type CF or SF, domestic class, variety SW, grade 275. Each container shall be constructed and closed in accordance with the appendix to ASTM-D1974/D1974M and ASTM-D5118/D5118M. The weight of the contents within the shipping container shall not exceed 65 pounds.

5.2.3 Level C. The packaged sea anchors, which require packing for acceptance by the carrier, shall be packed within exterior type shipping containers in a manner that shall ensure safe transportation at the lowest rate to the point of delivery. The shipment shall conform to the minimum requirements of the rules and regulations applicable to the mode of transportation

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

selected.

5.3 Marking. In addition to any special marking required by the contract or order, the interior and exterior containers shall be marked in accordance with MIL-STD-129, and shall include the type, size, and date of manufacture (month and year).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The type I sea anchors covered by this specification are intended for use with inflatable life rafts carried by aircrewmen or stowed in aircraft. The type II sea anchors are intended for use with assault and large abandon-type inflatable life rafts.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type, size, and quantity desired (see 1.2).
c. Whether first article is required (see 3.1).
d. Color of the sea anchor (see 3.5).
e. Whether first article inspection is waived (see 4.3.1).
f. Name and address of the first article inspection laboratory and the Government Activity responsible for conducting the inspection program (see 4.3.3).
g. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
h. Whether any additional markings are required (see 5.3).

6.3 First article. When a first article is required, it should be tested and approved under the appropriate provisions of 7-104.55 of the Defense Acquisition Regulations. The first article should be a preproduction sample. The first article should consist of 3 (three) units. The contracting officer should include specific instructions in all acquisition instruments, regarding arrangements for examinations, tests, and approval of the first article.

6.4 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the DAR, the data requirements identified below will be developed as specified by and approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirement List (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirements	Applicable DID
4.3.3	First Article Inspection Reports	DI-NDTI-80809 Test/Inspection Report

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

(Copies of Data Item Descriptions required by the contractors in connection with specific acquisition functions should be obtained from the acquiring activity or as directed by the contracting officer).

6.5 Key word listing.

Life Raft Sea Anchor
Construction
Dimension
Inspection
Mooring Line
Nylon
Reinforcing Tape
Seems
Sewing
Stitching

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

TABLE I. Sample size, acceptance criteria, tests, and examination of the components and sea anchors (see 4.4.1.2).

Inspection	Paragraph		Sample Size	Acceptance Criteria
	Requirement	Method		
Color matching of the cloth, sewing thread and reinforcing tape, as applicable 1/ 2/	3.5	4.5.1	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units
Colorfastness of the cloth, lines, sewing thread and reinforcing tape, as applicable to:				
Light 1/ 2/	3.5	4.5.2	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units
Laundering 1/ 2/	3.5	4.5.2	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

TABLE I. Sample size, acceptance criteria, tests, and examination of the components and sea anchors (see 4.4.1.2)-Continued.

Inspection	Paragraph		Sample Size	Acceptance Criteria
	Requirements	Method		
Strength of the ring attachment 2/ 3/	3.6.1	4.5.3	Inspection level S-1	An acceptable quality level of 2.5 defects per 100 units
Visual Examination	3.3 through 3.4.1.2, 3.8, 3.9 and figures 1 through 5, as applicable	4.5.4.1	Inspection level II	An acceptable quality level of 1.5 defects per 100 units
Dimensional check	3.7 and figures 1 through 6, as applicable	4.5.4.1 and 4.5.5	Inspection level S-3	An acceptable quality level of 4.0 defects per 100 units for major defects and 4.0 defects per 10 units for minor defects
Packaging	Section 5	4.5.4.2	Inspection level S-2	An acceptable quality level of 2.5 defects per 100 units

1/ This inspection is applicable only when the sea anchors are blue in color.
2/ This inspection may be performed either at the contractor's or subcontractor's plant.
3/ This inspection is applicable only to the type 1, size 1, 2 and 3 sea anchors.

TABLE II. Colorfastness inspection methods (see 4.5.2).

Item	Colorfastness methods	
	Light	Laundering
Cloth	5660.1	5614.1
Lines	4660	4614
Sewing thread	4660	4614
Reinforcing tape	5660.1	5614.1

TABLE III. Classification of defects for the visual examination of the sea anchors. (see 4.5.4.1).

Defect	Major	Minor
General		
a. Any non-specific hold, scissors or knife cut, tear, mend, burn or weakening defect such as smash, multiple float, loose slub, needle chew or abraded area	x	
b. Color of any component not as specified	x	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for the visual examination of the sea anchors. (see 4.5.4.1)-Continued.

Defect	Major	Minor
c. Color of any component not uniform or contains one or more shade bars 1/		x
d. Any thread end not trimmed to a length on 1/4 to 3/8 inch or loose thread ends		x
e. Any spot or stain		x
f. Any knot not tightly knotted, drawn or formed as specified	2/	
g. Any cut edges of the fibrous materials not seared or sharp edges formed due to searing		x
h. Any line not formed from one continuous length of the cord	2/	
i. Any reinforcing tape not one continuous length 3/	2/	
Metallic components		
a. Any grommet loose; any metallic component misaligned, distorted, surface rough or contains any nick, burr, sharp edge, crack or silver	x	
b. Any surface unclean, contains embedded foreign matter, finish missing or improperly finished		x
c. Any grommet improperly clinched, resulting in cutting of the cloth	x	
d. Ring not formed from one continuous length of the flexible steel cable 4/	2/	
Components and assembly		
a. Any component not as specified or any defect of a component of defect of a component of defect of assembly not herein classified	2/	
b. Any component, component part or required operation omitted, or any operation improperly performed not herein classified	2/	
Seams and Stitching		
a. Accuracy of Seaming:		
1. Any seam, hem or attachment of any component twisted, puckered, pleated or caught in an unrelated operation or stitching		x
2. Ends of type 301 stitching that are not caught in other seams or stitching:		
(a) Not securely backstitched	x	
(b) Secure but backstitched for a distance less than ½ inch or the backstitching is not overlapped on itself		x
3. Thread breaks:		
(a) Not securely overstitched	x	
(b) Secure but overstitched for a distance less than one inch		x
b. Gage of stitching 5/:		
1. Any stitching irregular, unevenly gaged or various stitching not uniform		x
c. Open seams 6/:		
1. One-forth inch or less		x
2. More than one-forth inch	x	
d. Raw edges 7/:		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for the visual examination of the sea anchors. (see 4.5.4.1)- Continued.

Defect	Major	Minor
1. One-half inch or less		x
2. More than one-half inch	x	
e. Seam and stitch type:		
1. Not specified seam or stitch type	x	
f. Stitch tension 8/:		
1. Loose tension, resulting in a loose seam or tight tension, resulting in the breaking of the stitches, when normal pull is applied	x	
g. Stitches per inch 9/:		
1. Stitches more or less than specified:		
(a) One or two		x
(b) More than two	x	
h. Bartacks 3/:		
1. Any loose, misplaced or not serving the intended purpose		x
2. Length of any bartack not as specified		x
Markings		
a. Type or size missing, incomplete, incorrect or illegible	x	
b. Other than type or size information missing, incomplete, incorrect or illegible		x
c. Improperly located or color or size of the markings not as specified		x

1/ Applicable only when the sea anchor is blue in color.

2/ The defect may be considered major, when it seriously affects the serviceability or appearance, otherwise it is to be classified as a minor defect.

3/ Applicable only to the type II sea anchor.

4/ Applicable only to the type I sea anchor.

5/ Gage of stitching defects are to be scored only when the condition exists on the major portion of the seam.

6/ A seam may be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam is considered open, when either one or both sides of the seam is open.

7/ Any edge that should be turned under and is not, but is securely caught in the stitching will be classified as a raw edge. Any raw edge not securely caught in the stitching will be classified as an open seam.

8/ Puckering is evidence of tight tension. When puckering is evident, the seam will be tested by exerting normal pull in the lengthwise direction of the seam or stitching.

9/ Stitches per inch defects are to be scored only when condition exists to the major portion of the seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.


TABLE IV. List of defects for the dimensions of the assembled sea anchors (see 4.5.4.1).

Examine	Defect
Measure the top diameter, throat diameter, and length of the sea anchor; length of the bridle, bridle loop. Mooring line and turnback of the mooring line; location of the grommets and knots; width of the seams and hems, length of the zigzag stitching and size of the throat facing, as applicable.	Any measurement deviating from the dimensions and tolerances as specified in figures 1 through 6, as applicable, will be enumerated as a dimensional defect.

TABLE V. List of defects for preparation for delivery (see 4.5.4.2).

Item	Defect
Exterior and interior markings	Missing, incomplete, incorrect, illegible; of improper size, location, sequence or method of application; type and size shown on the sea anchor not the same on the exterior container.
Materials	Any non-conforming component; any component missing, damaged or otherwise defective.
Workmanship	Inadequate application of the components such an incomplete closure of the unit package, container flaps, loose strappings, etc.; bulging or distortion of the containers.
Exterior and interior weight or content	Not folded as specified; gross or net weight exceeds the requirement; more than one type and size sea anchor in the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

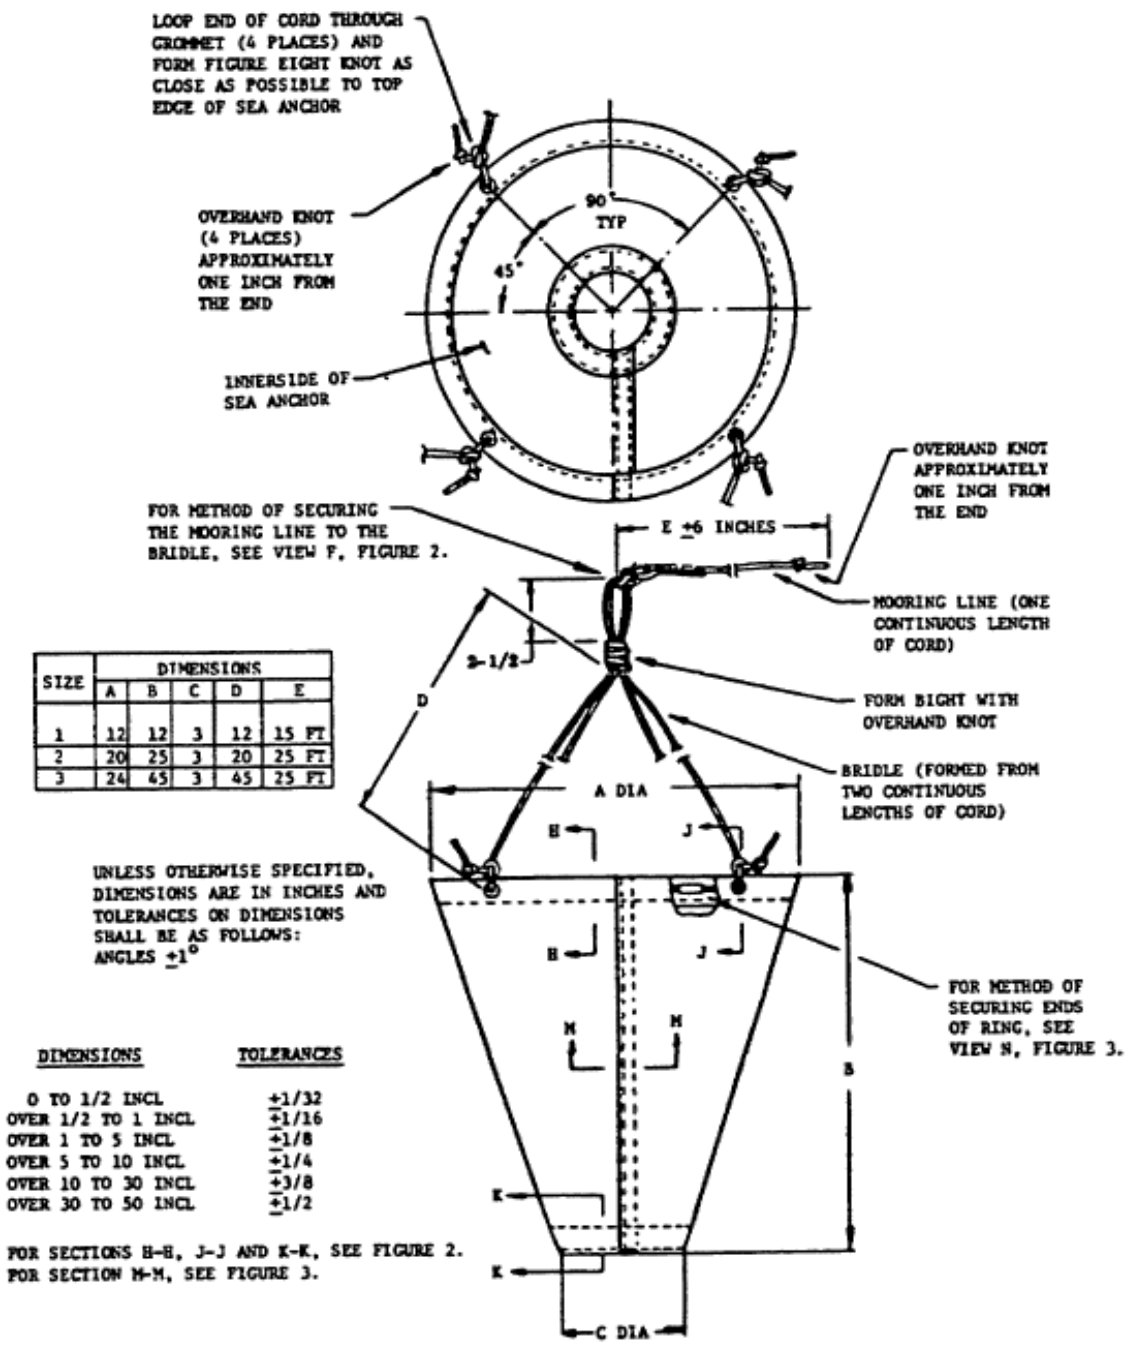

SIZE	DIMENSIONS				
	A	B	C	D	E
1	12	12	3	12	15 FT
2	20	25	3	20	25 FT
3	24	45	3	45	25 FT

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ON DIMENSIONS SHALL BE AS FOLLOWS:
ANGLES ±1°

DIMENSIONS	TOLERANCES
0 TO 1/2 INCL	±1/32
OVER 1/2 TO 1 INCL	±1/16
OVER 1 TO 5 INCL	±1/8
OVER 5 TO 10 INCL	±1/4
OVER 10 TO 30 INCL	±3/8
OVER 30 TO 50 INCL	±1/2

FOR SECTIONS H-H, J-J AND K-K, SEE FIGURE 2.
FOR SECTION M-M, SEE FIGURE 3.

FIGURE 1. Type I life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.



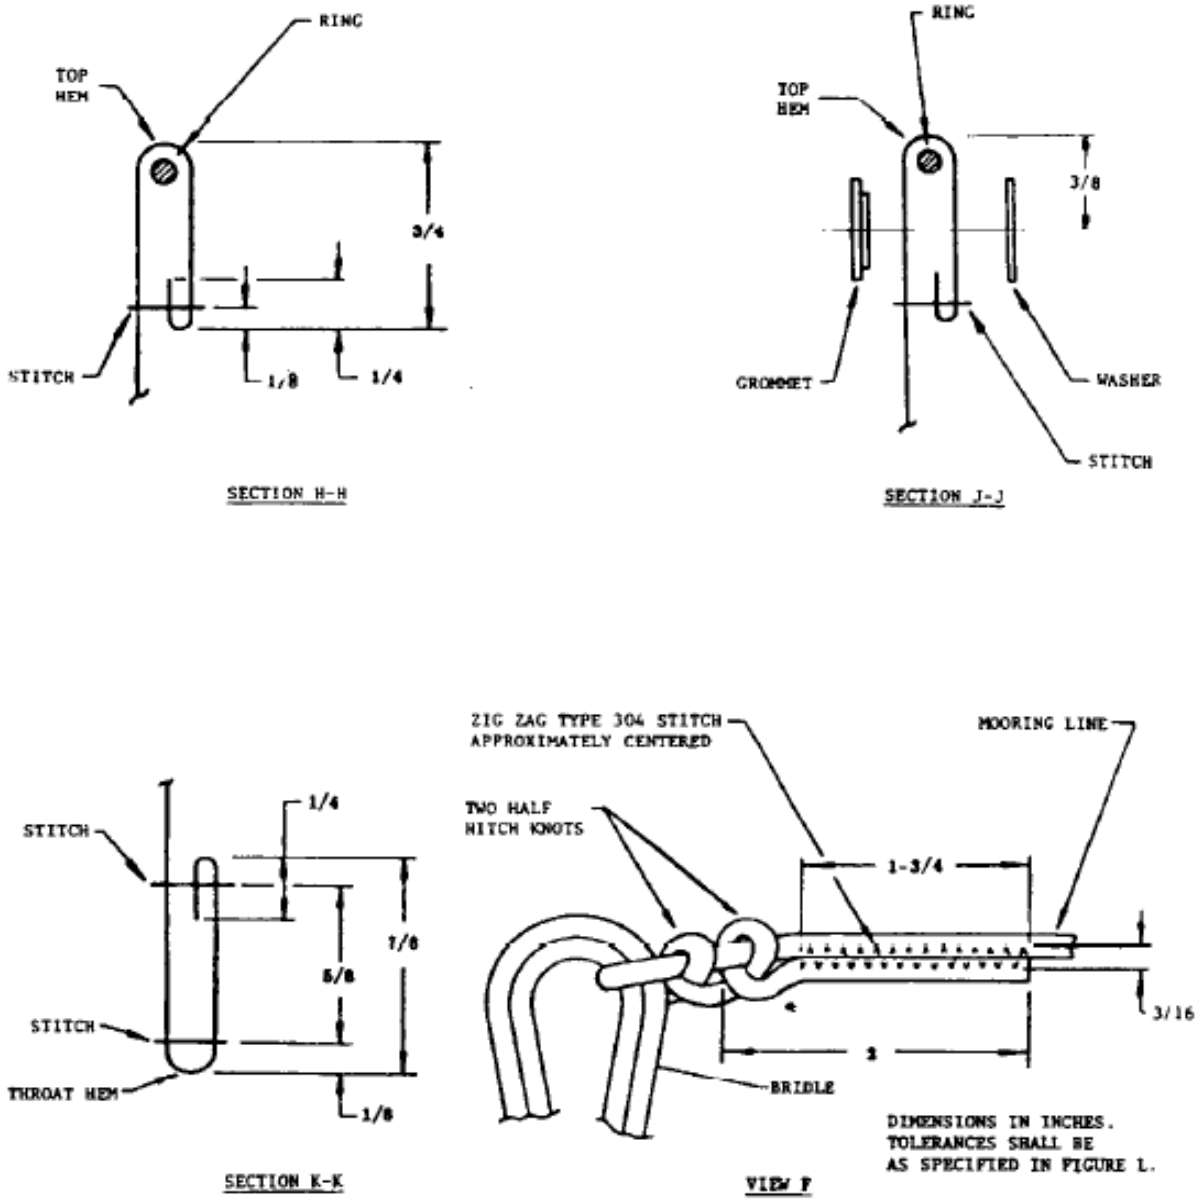


FIGURE 2. Type I life raft sea anchor sections.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

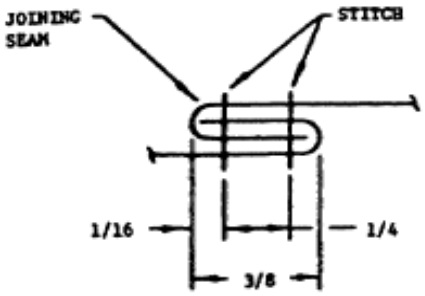

SECTION M-M

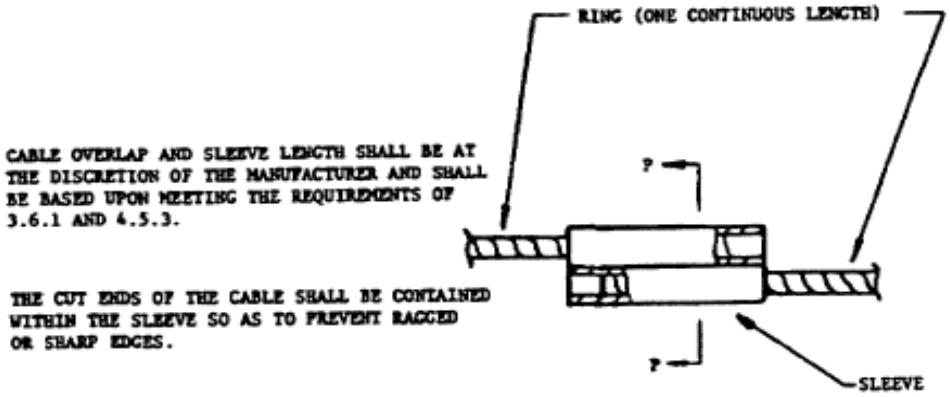

VIEW N



DIMENSIONS IN INCHES.
TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.

SECTION P-P

FIGURE 3. Type I life raft sea anchor sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.



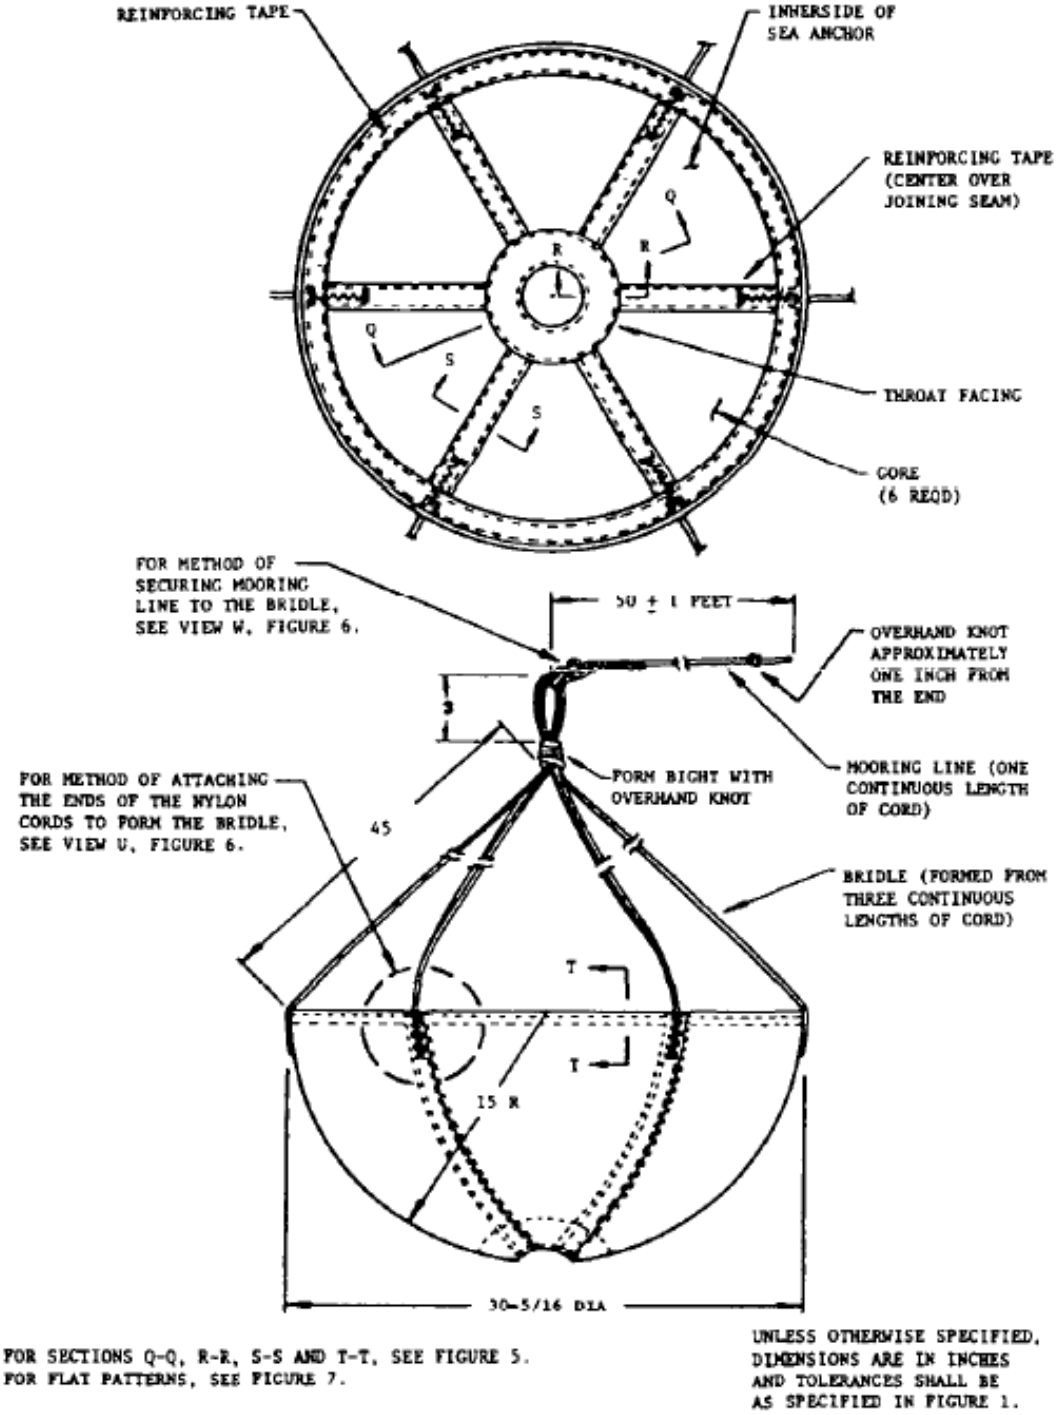


FIGURE 4. Type II, size 1, life raft sea anchor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

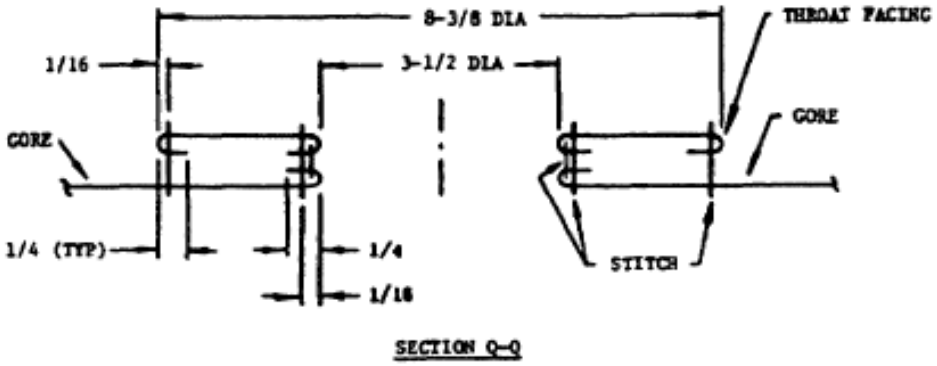


SECTION Q-Q

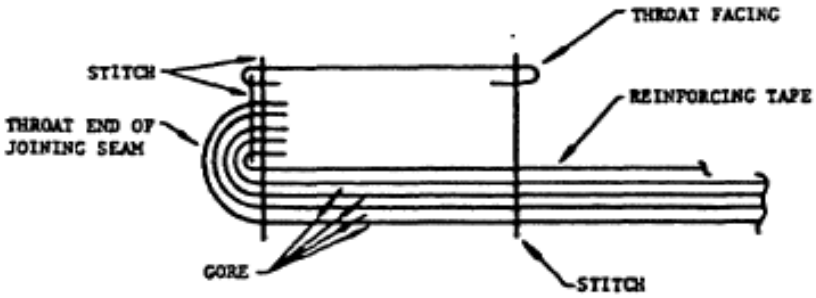

SECTION R-R

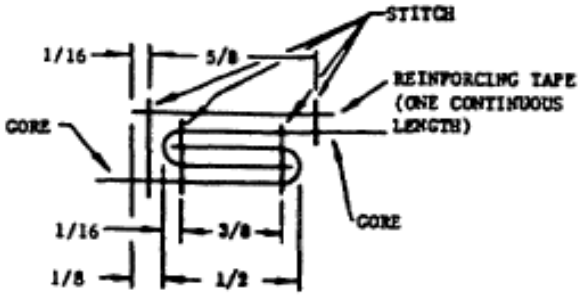

SECTION S-S
TYPICAL JOINING SEAM CONSTRUCTION

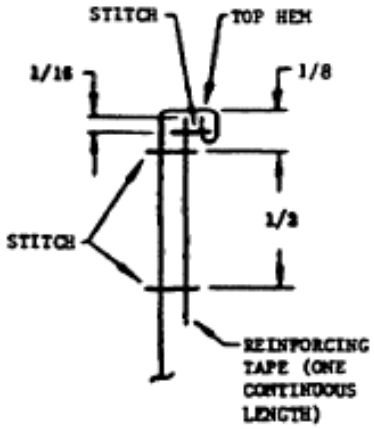


SECTION T-T

DIMENSIONS IN INCHES.
TOLERANCES SHALL BE
AS SPECIFIED IN FIGURE 1.


FIGURE 5. Type II, size 1, life raft sea anchor sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

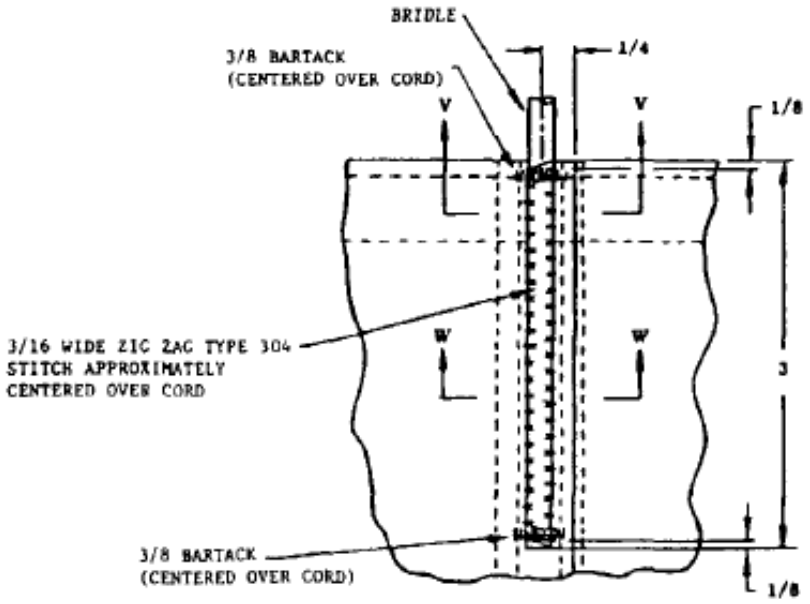


VIEW U

TYPICAL METHOD FOR ATTACHING THE NYLON CORD ENDS TO FORM THE BRIDLE.

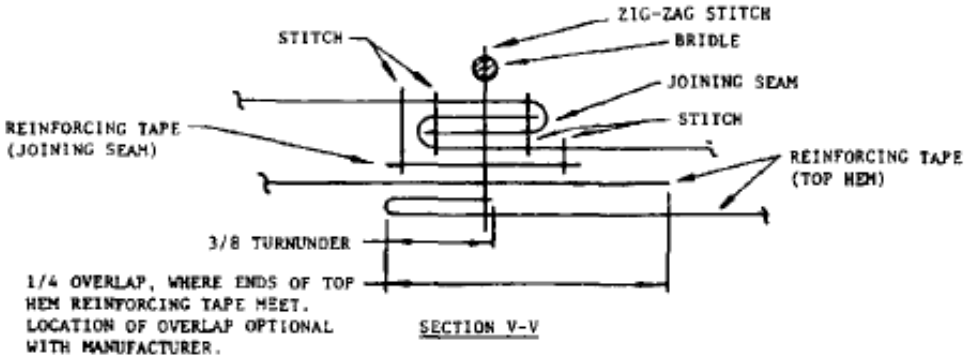

SECTION V-V

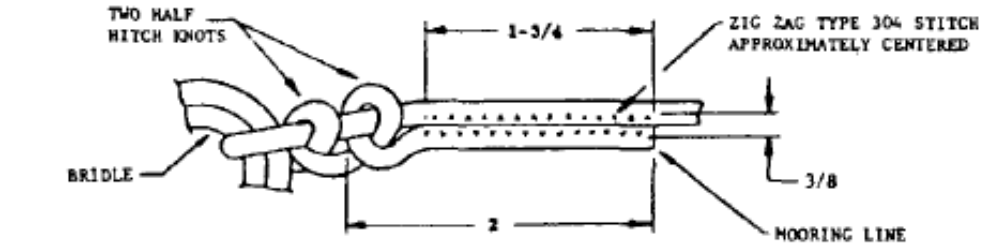

DIMENSIONS IN INCHES.
TOLERANCES SHALL BE
AS SPECIFIED IN FIGURE 1.

VIEW W

FIGURE 6. Type II, size 1, life raft sea anchor typical sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

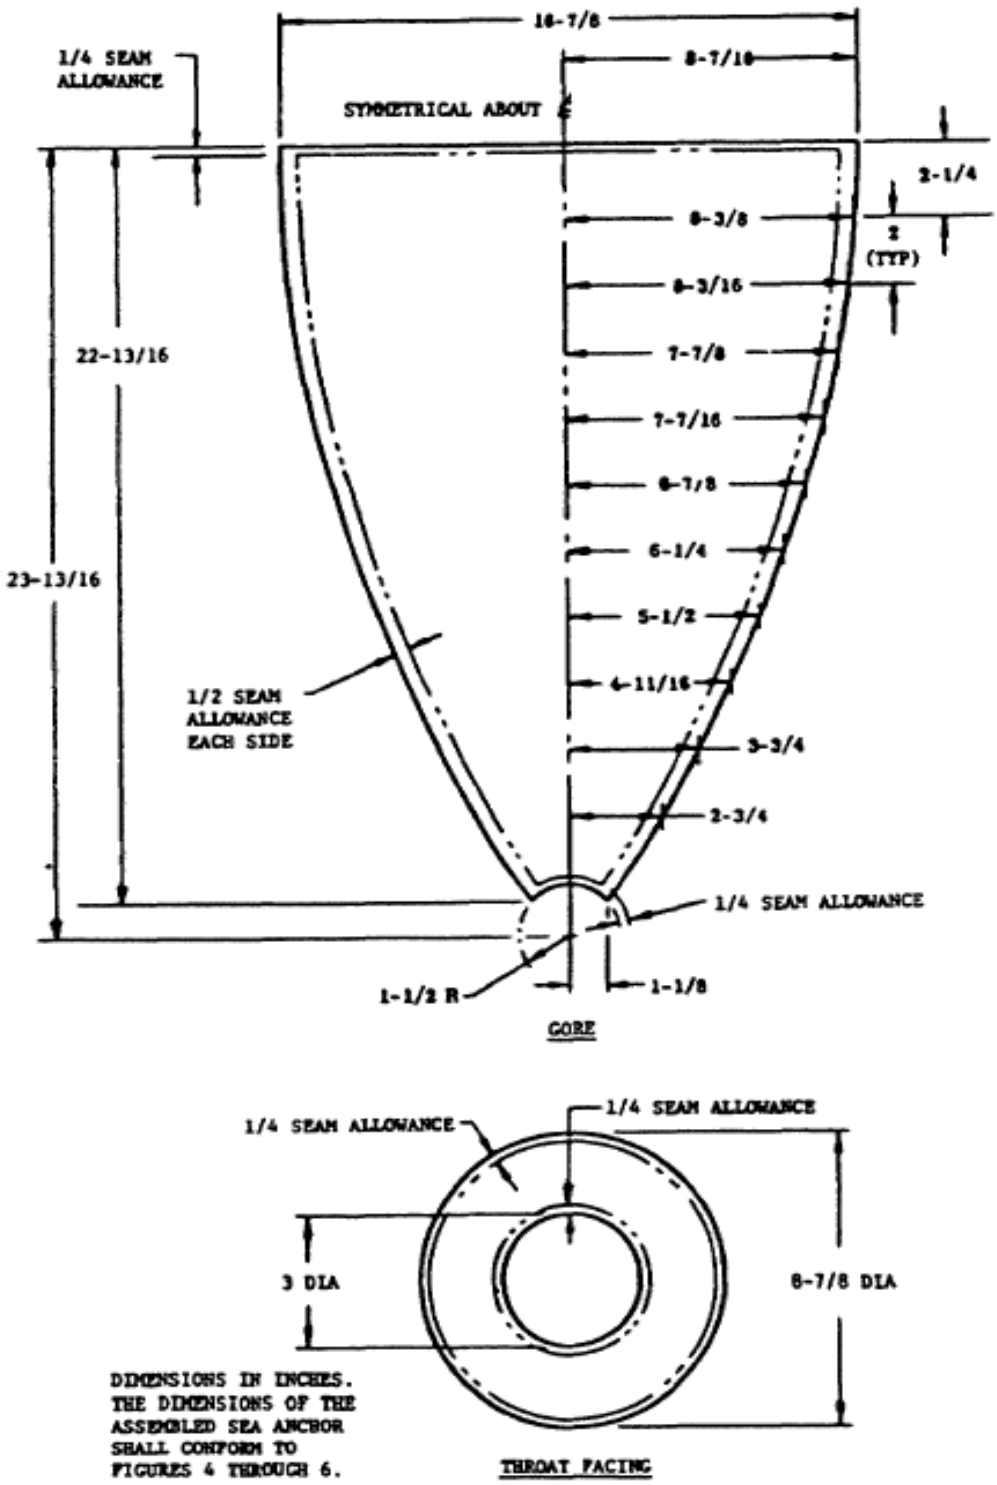


FIGURE 7. Flat patterns for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

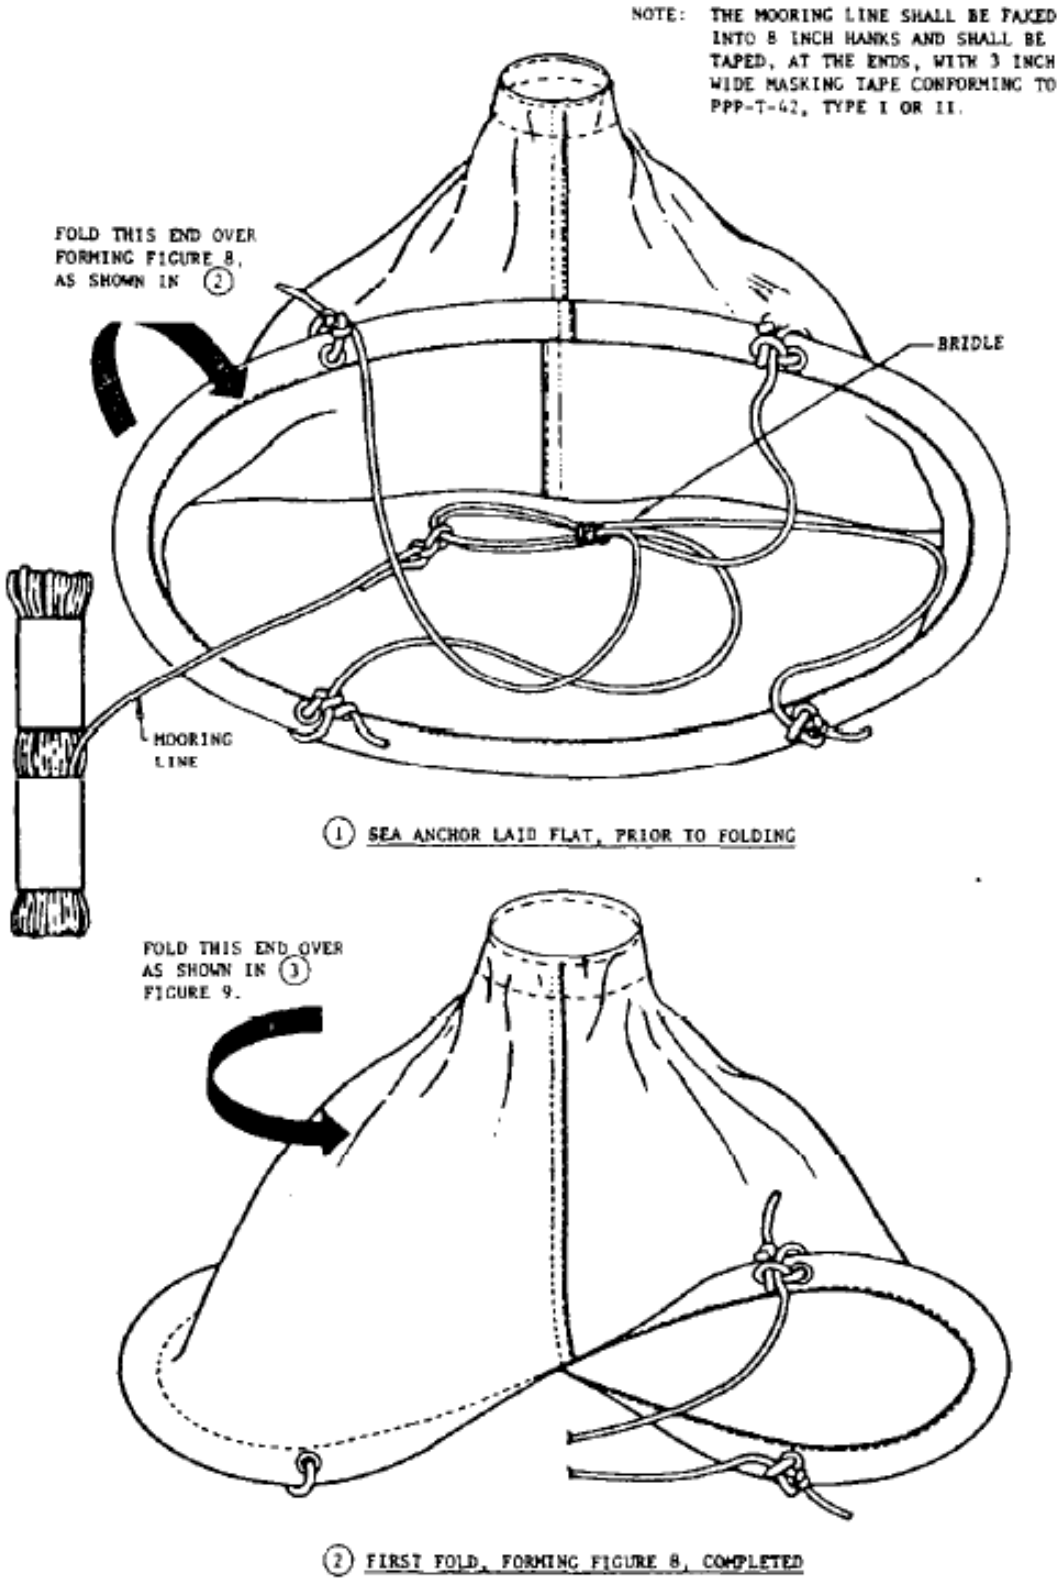


FIGURE 8. Folding procedure for type I life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

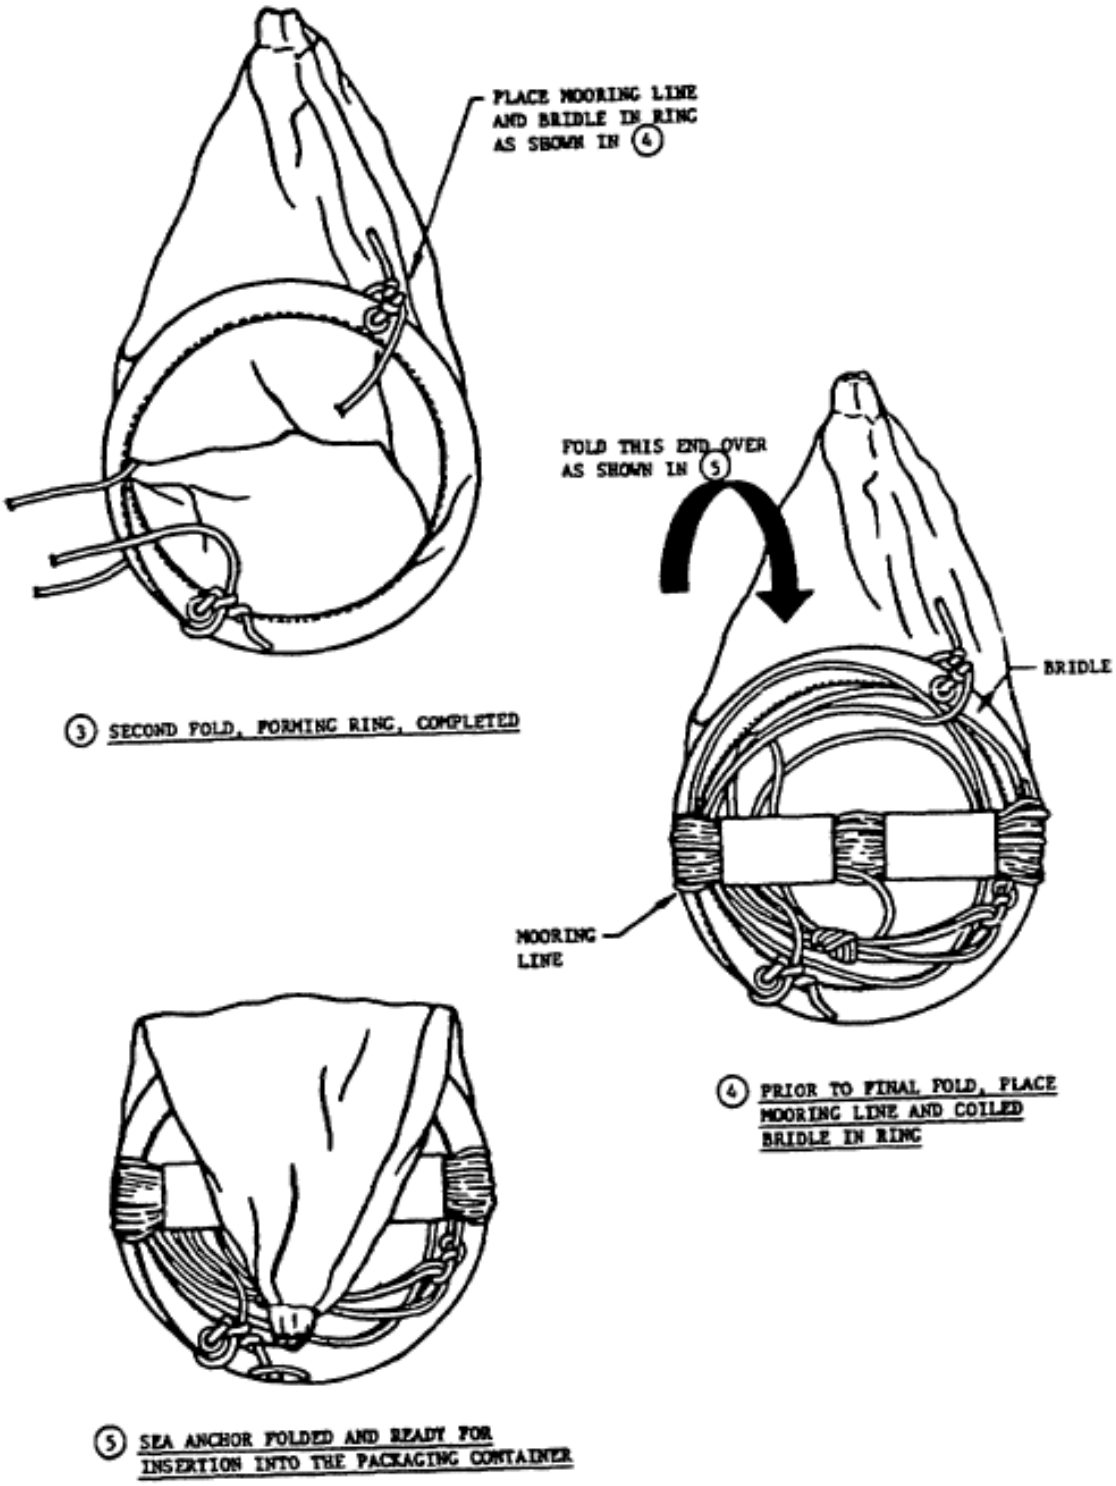


FIGURE 9. Folding procedure for type I life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.



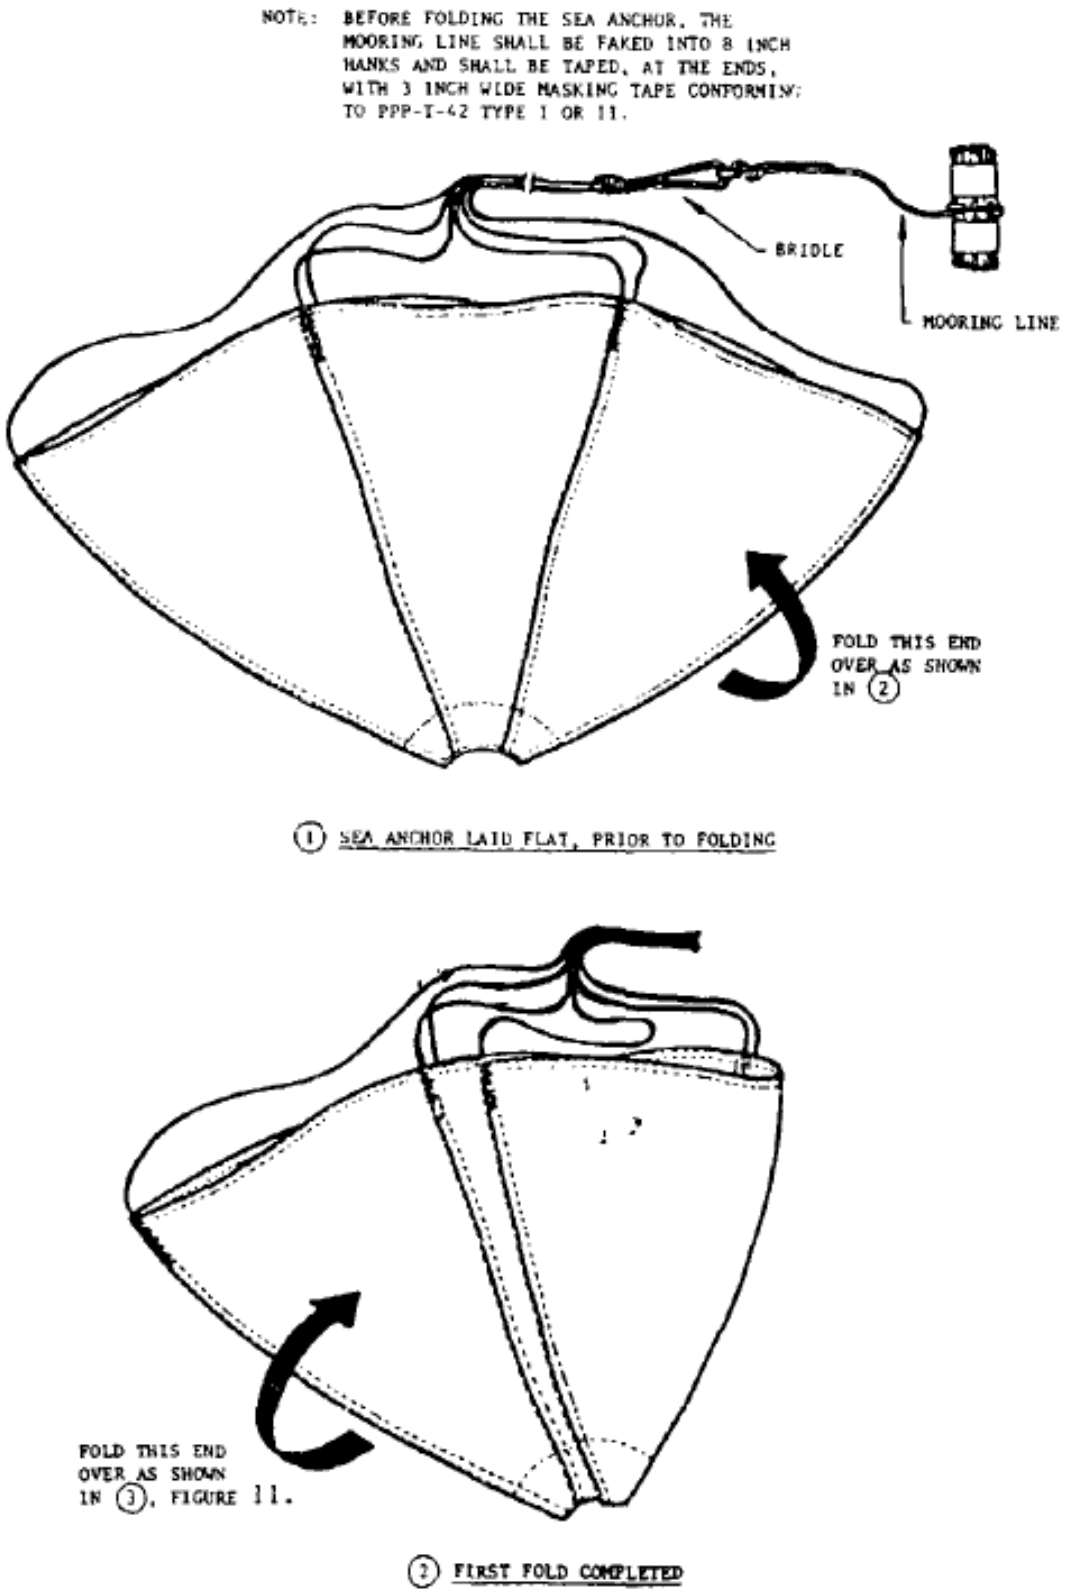


FIGURE 10. Folding procedure for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

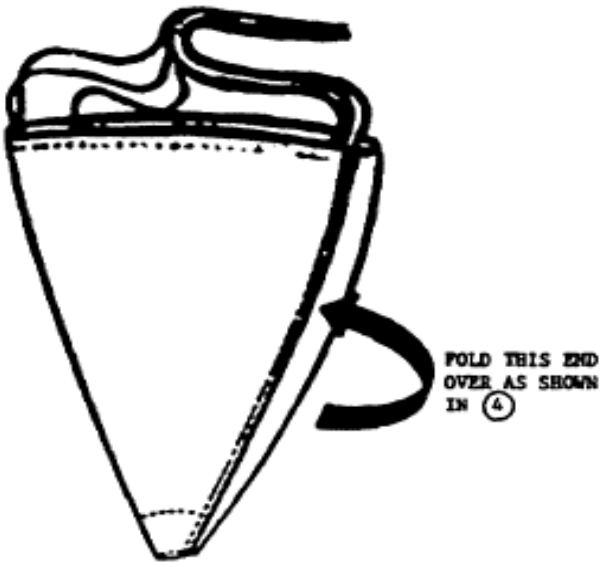


(3) SECOND FOLD COMPLETED

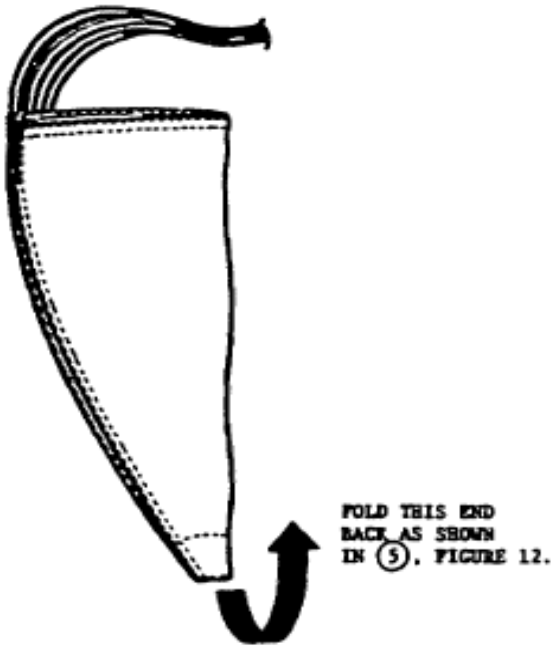


(4) THIRD FOLD COMPLETED

FIGURE 11. Folding procedure for type II, size 1, life raft sea anchor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

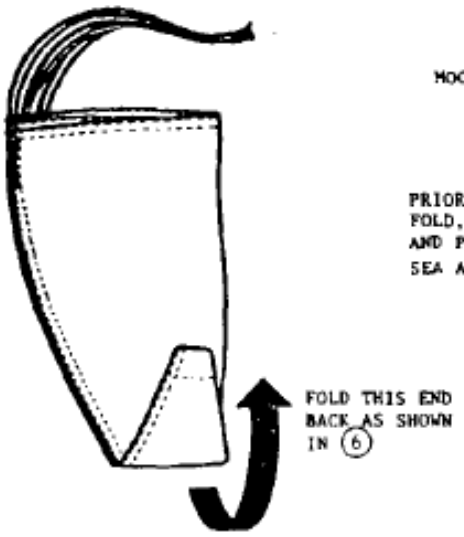

(5) FOURTH FOLD COMPLETED

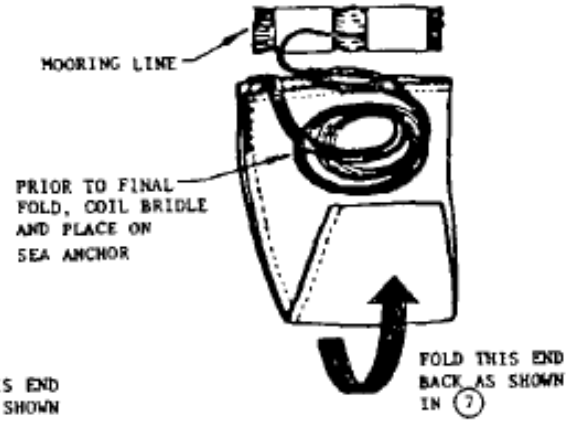

(6) FIFTH FOLD COMPLETED

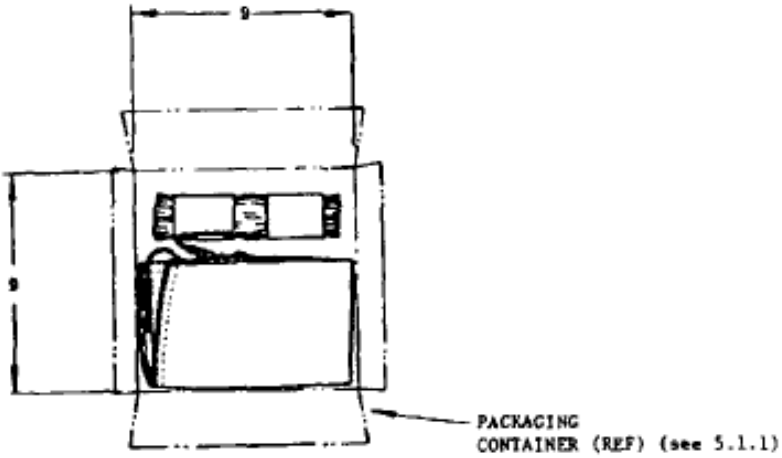

DIMENSIONS IN INCHES

(7) SEA ANCHOR FOLDED AND READY FOR INSERTION INTO THE PACKAGING CONTAINER

FIGURE 12. Folding procedure for type II, size 1, life raft sea anchor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy – AS
Air Force – 184

Preparing activity:
Air Force – 184

(Project 2040-2025-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:31Z
Check the source to verify that this is the current version before use.