INCH-POUND

MIL-C-82111B(MC)
27 July 1995
SUPERSEDING
MIL-C-82111A(MC)
31 October 1990

MILITARY SPECIFICATION

COVER, PURSE: WOMEN'S (OFFICER'S)

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a women's purse cover.

1.2 Classification. The purse cover shall be of one type in black shade 2606.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-52094	- Thread, Cotton
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use)

MILITARY

MIL-C-21115	- Cloth, Tropical: Wool and Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREADS

(Application for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Ave., New York, NY 10016.)

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption had been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection and approval (see 4.4 and 6.3).

3.3 Materials

3.3.1 Basic material. The basic material shall be cloth, tropical, polyester/wool blend, conforming to type III of MIL-C-21115. The color of the cloth shall be black shade 2606, except the colorfastness to perspiration shall not apply.

3.3.2 Cotton thread. The cotton thread shall conform to A-A-52094, type III, mercerized finish, ticket No. A, 3-ply for seaming, overedge, and stitching. The thread for basting shall be a good commercial grade.

3.3.2.1 Color and colorfastness. The color of the thread shall be black to match the basic material. The colored thread, shall show good fastness to wet (dry) cleaning when tested as specified in the applicable thread specification.

3.3.3 Label. Each cover shall have an identification label conforming to Type I, class 1 of DDD-L-20, and shall measure not less than 3 by 1 inches. Fastness to wet (dry) cleaning shall apply. The content and format shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Nomenclature (item description)
Name of contractor
Wool Products Act information

3.4 Design. The cover shall be the United States Marine Corps design, as shown on Figure 1.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide for a 3/8 inch seam allowance.

3.5.1 List of pattern parts. Covers shall be cut from the specified material in accordance with the pattern parts indicated:

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, tropical, polyester/wool blend	
1.	Body piece (pocket and flap)	1

3.6 Construction.

3.6.1 Manufacturing requirements. The covers shall be manufactured in strict accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Serge stitching. Serge stitching shall be done on serging machines having a knife attachment properly set to trim the raveled edges without cutting the material.

3.6.1.2.2. Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. All thread ends shall be trimmed and loose ends shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut covers in strict accordance with patterns furnished by the Government.					
	b. Cut material in the direction indicated by directional lines on the pattern.					
2	Replacement of damaged parts.					
	a. Replace at time of cutting the component part(s) containing damages such as holes or serious weakening defects, such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace component part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, mends or burns.					
3	Serge stitch ends. (See Figure 1, Folding and stitching details)					
	Finished appearance. The ends of the body piece shall be properly serge stitched.					
	a. Serge stitch top and bottom ends of body piece. When a serging	503 or 505	EFd-1 EFd-1	6-8 6-8	A A	A A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Serge stitch ends. (cont'd) machine having a knife attachment is used, care shall be exercised in setting the gage so that only the raveled edge of the material is trimmed off.					
4	Stitch identification label to pocket. a. Center the identification label horizontally at the bottom serged end of the pocket (see Figure 1). Stitch 1/16 inch from each edge of the label.	301	SSa-1	6-8	A	A
5	Make cover. (See Figure 1, Folding and stitching details) Finished appearance. The cover shall finish with the face of the material on the outside. a. Fold the body piece widthwise matching the second and third notches from the bottom. b. Turn the folded edge at the notch towards the top end of the cover to form the bellows pleat. Seam and overedge stitch, with a 3/8 inch seam from the raw side edges for a distance of approximately 3 inches form the folded	301 and 506 (combined)	SSa-2	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Make cover. (cont'd)					
	edge. Turn the serged edge of the pocket opening at the notch towards the bottom of pocket. Fold the body piece widthwise at the notches for the flap. Lap the serged edge of the flap over the folded serged edge of pocket opening. Continue the stitching to the folded edge of the flap.					
6	Finish cover.					
	a. Turn the cover right side out, completely working out the corners and folding the bellows pleat.					
	b. Baste along the folded edge of the bellows pleat, and the side, and top edges of the cover.	301 or Hand				
	c. Press the cover smooth and flat with a heated pressing machine.					
7	Clean cover.					
	a. Pull any basting thread, trim and remove any loose ends of thread, and remove any spots or stains.					
8	Press cover.					
	a. Press the cover smooth and flat with a heated pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished cover shall conform to the measurements shown in Figure 1.

3.8 Workmanship. The finished cover shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The presence of any defect may be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Component and material testing. Testing of components shall be made in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in MIL-STD-105 and FED-STD-191, wherever applicable. All requirements are applicable to the sample unit. The unit for expressing lot sizes and sample for testing each component shall be in accordance with applicable subsidiary specifications.

4.5.2 Examination of the end item. The end item shall be examined for defects listed in 4.5.2.1 and 4.5.2.2. The sample unit for the examination shall be one purse cover.

4.5.2.1 Classification of defects. All defects shall be classified as indicated below.

Examine	Defects	Classification Major	Minor A	Minor B
Material defects and workmanship damages	a. Any hole, needle chew, cut, tear, mend, or burn.	101		
	b. Any weakening defect, such as a smash, multiple float, or loose slub.	102		
	c. Unsightly slub or shade bar.		201	
Note:	Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.			
Cleanness	a. Any spot or stain on the outside.		202	
	b. Thread ends not trimmed or loose threads not removed.		203	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Components and assembly	a. Any component not as specified; or any component part omitted.	103		
	b. Any required operation omitted.		204	
Cutting	a. Cover not cut in accordance with directional lines on pattern or specification requirements.	104		
Seams and stitching	a. Accuracy of seaming:			
	1. Seam twisted, puckered, or pleated, affecting appearance.		205	
	2. End of seam, when not caught in other seam or stitching, backtacked less than 1/4 inch.		206	
	3. Thread break (all stitch types) stitched less than 1/2 inch beyond each end of break.		207	
	b. Open seams over 1/4 inch to 1 inch inclusive.	105		
Note:	One or more broken, or two or more continious skipped, or runoff stitches, constitute an open seam. Raw edges not caught in stitching shall be classified as an open seam.			
	c. Runoffs on joining seams, when resulting in an open seam, score as an open seam.		208	
	d. Seam and/ or stitch type not as specified.		209	
	e. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	106		
	2. Loose tension, resulting in a loosely exposed lower or top thread.	107		
	3. Tight tension, stitches break when normal strain is applied to the seam or stitching.	108		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Minor A	Minor B
Note:	Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting a pull in the lengthwise direction of seam of stitching.			
f. Stitches per inch: 1. Less than minimum specified - one or two stitches. 2. More than maximum specified.			210 211	
Note:	To be scored only when the condition exists on a major portion (i.e., over one half or more) of seam.			

4.5.2.2 Examination for dimensions. Any measurement not conforming to the specified dimension and tolerance shall be considered a defect.

4.5.3 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liner, container flaps; loose strapping, and inadequate stapling. Bulging or distortion of containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

Weight and content (exterior and interior)	Number per container is more or less than required; net weight exceeds requirement.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cover shall be folded widthwise and placed in an individual polyethylene measuring approximately 6-1/2 inches wide by 10 inches long with one inch lip at the open end along the 6-1/2 inch dimension. The polyethylene flexible film 0.0015 inch thick. All seams and closures shall be effected by heat sealing except where the 1 inch lip is tucked in for closure. Prior to or during the final heat sealing operation, excess air shall be expelled in order to insure that the maximum number of covers be packed in the shipping container. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The covers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be commercial.

5.2.1 Commercial. The covers preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be placed in each polyethylene bag in order to permit ready identification.

Nomenclature
Contract number
Name of contractor

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. The purse cover described herein is intended for use by female officers of the United States Marine Corps to cover an evening dress purse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of specification.
(b) Whether first article is required (see 3.2).
(c) Number of covers in the first article.
(d) Selection of applicable levels of packaging and packing (5.1 and 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first articles, pre-production samples, first production of sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Standard samples and shade samples. For information regarding the availability of standard samples and standard shades specified, address inquiry to acquiring activity issuing the invitation for bids.

6.5 Subject term (keyword) listing.

Black
Evening dress

6.7 Figures. Figure 1 shows the design, dimensions, and details of the purse cover. In the event of conflict between the figure and the text of this specification, the text shall govern.

Preparing Activity:
Navy - MC
Project No. 8445-N133

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

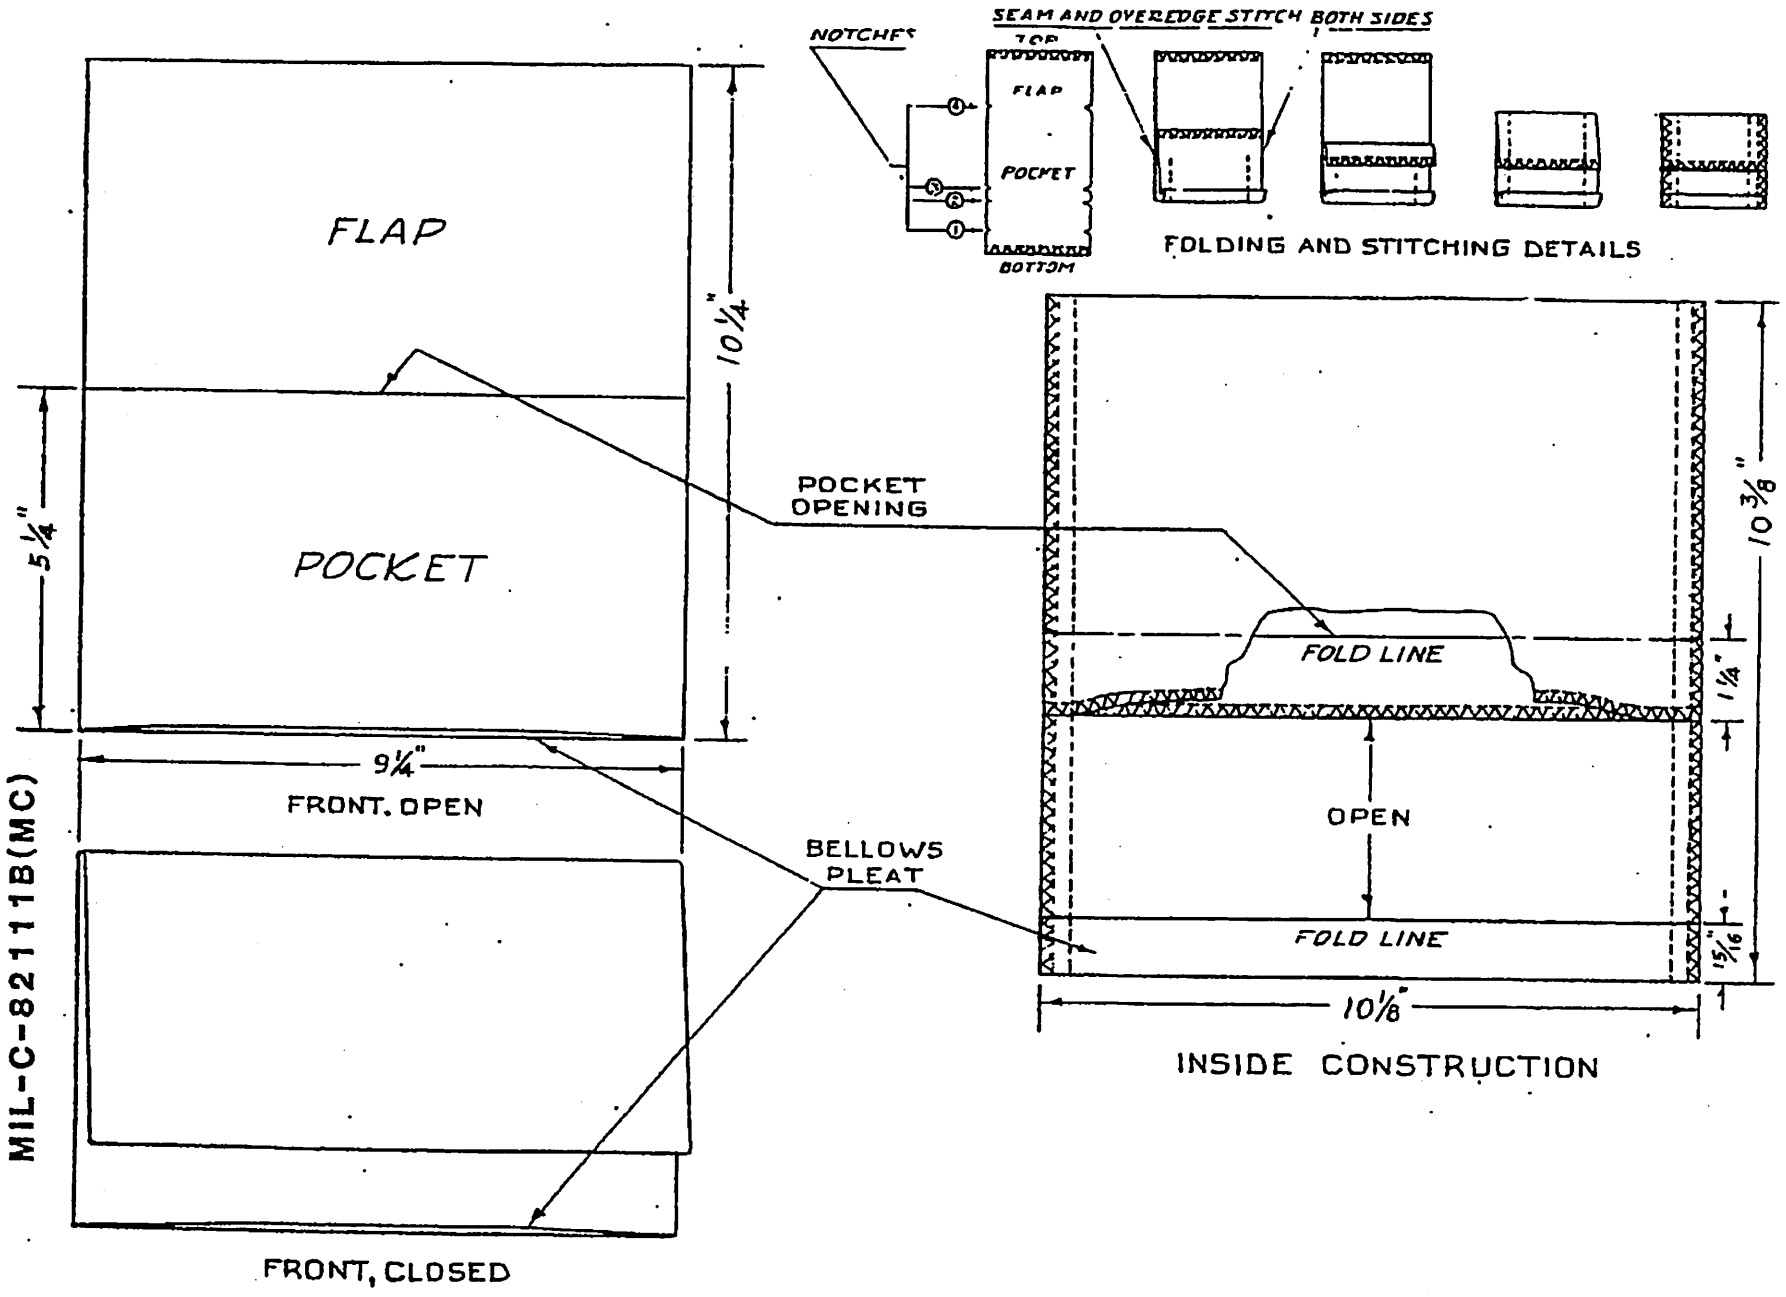


FIGURE 1. COVER, PURSE; WOMAN'S OFFICER'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.