MIL-F-58090A(AV)
7 October 1981
Superseding
MIL-F-58090(AV)
27 May 1970

MILITARY SPECIFICATION

FILTER ELEMENT, FLUID PRESSURE, OIL, RECIPROCATING ENGINE, AIRCRAFT

This specification is approved for use by US Army Aviation Systems Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a dual-density, depth-type, replaceable oil filter element which will retain particles exceeding 40 microns. Element is of full-flow design with outside-to-inside flow-path, for installation in oil filters on aircraft reciprocating engines.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extert specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard

MILITARY

MIL-P-116	Preservation, Methods of
MIL-L-6082	Lubricating Oil, Aircraft Reciprocating Engine (Piston)
MIL-L-22851	Lubricating Oil, Aircraft Piston Engine, (Ashless Dispersant)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Aviation Research and Development Command, ATTN: DRDAV-ERS, 4300 Goodfellow Boulevard, St. Louis, MO 63120, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 2945

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Federal Test Method Std. No. 791	Lubricants, Liquid Fuels, and Related Products; Methods of Testing

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Specifications and Standards Order of Precedence for the Selection of
MIL-STD-889	Dissimilar Metals
MIL-STD-1188	Commercial Packaging of Supplies and Equipment

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication.--The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 893-67	Standard Method for Test for Insolubles in Used Lubricating Oils

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Filter element characteristics.--The filter element shall consist of the element proper and an internal stiffener, assembled, as shown on Figure 1. Element shall be designed primarily for use with oils specified in 3.2.

3.1.1 First article.--If first article approval is required (see 6.2 and 6.3), approval and testing shall be in accordance with 4.4. Approval of the first article shall not relieve the contractor of his responsibility to furnish a product in accordance with this specification.

3.2 Materials.--Materials shall be of high quality suitable for aircraft operation, shall conform to requirements set forth herein and to applicable Government specifications, or contractor specifications which have the approval of the procuring activity. Selection of specifications and standards shall be in accordance with MIL-STD-143. All materials shall withstand the effects of lubricants conforming primarily to type II of MIL-L-22851 and to grade 1100 of MIL-L-6082.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

3.2.1 Recycled, virgin and reclaimed materials.--This specification shall require the use of reclaimed materials to the maximum extent possible (see 6.4).

3.2.2 Metals.--Metals shall be of the corrosion-resistant type, or shall be protected to resist corrosion apt to be encountered in normal service life, transportation, or storage. Cadmium-plated parts shall not be used. Dissimilar metals as defined in MIL-STD-889 shall not be used in intimate contact with each other unless suitably protected against electrolytic corrosion.

3.2.3 Fungusproof.--Materials which are not nutrients for fungi shall be used to the greatest extent possible; when materials which are nutrients for fungi are used, they shall be treated with a fungicidal agent or otherwise protected to prevent fungi.

3.3 Construction.--Filter element shall withstand the normal strains, jars, and other conditions incident to service use, installation, shipping, and storage.

3.3.1 Dimensions.--Dimensions shall be as shown on Figure 1, and shall not exceed an out-of-round condition caused by a wall thickness more than 1-3/8 inches, nor less than 1-1/4 inches at any point on the element.

3.3.2 Weight.--Weight of the filter element shall not exceed 2 pounds.

3.3.3 Sealing.--Each end of the filter element shall seal properly to preclude leakage at the sealing point when used with the filter element container shown on Figure 2.

3.4 Element filtering media.--The element shall be of dual media construction, completely contained within a double cotton knit covering.

3.4.1 Low-flow portion.--The low-flow portion (dense media) shall be the upper two-thirds of the total of the filter element. This low-flow media shall consist of approximately 35 percent American Excelsior Co. "Curlex" No. 328 (wood wool), or equivalent, cut to 6-inch lengths, 1/32-inch wide, and 1/100-inch thick. The remaining 65 percent shall be virgin cotton thread waste generated in the spinning mill process. The cotton thread waste shall be clean, dry, and free of foreign matter. The wood wool and the cotton thread waste shall be thoroughly mixed to become a homogeneous mass.

3.4.2 High-flow portion.--The low one-third of the total length of the filter element shall be of a high-flow media. The high-flow media shall be 100 percent American Excelsior Co. "Curlex" No. 328 (wood wool), or equivalent, cut to approximately 6-inch lengths. The high-flow media shall be mixed sufficiently to intertwine.

3.4.3 Outer covering.--The low-and high-flow media shall be jointly contained within a double covering of #48 gage graded staple cotton knit tubing. The tubing shall tightly enclose the filtering media, to maintain appropriate compression of the media and assure length and diametrical tolerances.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

3.4.4 Packing.--The filtering media shall be compacted to assure the rated flow within the filtering requirements specified herein.

3.5 Performence.--

3.5.1 End load strength.--Filter element shall withstand an end load of 100 pounds when tested in accordance with 4.6.1.

3.5.2 Temperature range.--The filter element shall operate satisfactorily throughout an oil temperature range of minus 25°F to 300°F.

3.5.3 Life.--The filter element shall have a life expectancy of 120,000 gallons of oil conforming primarily to type II of MIL-L-22851, when tested at rated flow of 90 pounds per minute at 225°F.

3.5.4 Pressure drop.--The filter element shall pass the pressure drop specified in 4.6.2.

3.5.5 Media migration.--The filter element shall meet the media migration tests specified in 4.6.3.

3.5.6 Additive removal.--The filter element shall pass the additive removal tests specified in 4.6.4.

3.5.7 Filtering.--The element shall prove its filtering capability in the tests specified in 4.6.5.

3.5.8 Differential pressure.--The element, when tested for resistance to differential pressure specified in 4.6.6, shall show its ability to perform satisfactorily.

3.6 Identification of product.--Filter element shall be identified in accordance with MIL-STD-130. Proper installation shall be assured by marking on the filter which end is the top or bottom. Packaged element identification shall include:

FILTER ELEMENT, OIL, FULL FLOW

Specification: MIL-F-58090A(AV)

Manufacturer's identification & part number: _____

National stock number (NSN): _____

Contract number: _____

U. S. PROPERTY

3.7 Technical data.--Technical data shall be furnished as specified in 6.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

3.8 Workmanship.--The filter element and all its parts shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness, thoroughness of welding, marking, and freedom from any defects which could affect its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.--Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all qualification, certification, and production inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the qualification, certification, or production inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the tests or inspections set forth in this specification where such tests or inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of tests and production inspections.--The requirements specified herein are classified as follows:

(a) First article (see 3.1.1 and 4.4).

(b) Quality conformance (see 4.5 and 4.6).

4.3 Test conditions.--

4.3.1 Test fluid.--The fluid used for all tests specified herein shall conform to type II of MIL-L-22851.

4.3.2 Filter can.--When tests require a filter can, the can shall be in accordance with that shown on Figure 2.

4.4 First article.--First-article examinations and tests (see 3.1.1) shall be as specified in 4.5 and 4.6. At the option of the procuring activity, the tests may be supplemented by tests under actual service conditions (see 6.2.1). The minimum quantity of test samples and the schedule for conducting the first-article examinations and tests shall be as shown in Table I. Failure to pass any examination or test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

TABLE I -- FIRST-ARTICLE TESTS

Items and Paragraph References	Samples		
	No. 1	No. 2	No. 3
Examination of product (4.5.1.1)	X	X	X
End-load strength (4.6.1)	X	X	X
Pressure drop (4.6.2)	X	X	X
Media migration (4.6.3)	X	X	X
Additive removal (4.6.4)		X	X
Filtering capability (4.6.5)	X	X	
Differential pressure (4.6.6)	X	X	

4.5 Quality conformance.--Filter elements submitted for acceptance shall have passed the following examinations and tests:

4.5.1 Sampling.--Sampling for testing shall consist of at least three elements (see Table I) selected at random from each lot of 1,000 items, or a fraction thereof. A lot is defined as products manufactured under essentially the same conditions and at essentially the same time and delivered under a single contract.

4.5.1.1 Visual examination.--Filter elements shall be examined to determine that materials, dimensions (see Figure 1), weight, identification, and workmanship conform to requirements of this specification. Inspection shall be in accordance with MIL-STD-105.

4.5.1.2 Testing.--Each sample shall pass all of the tests specified in 4.6.

4.5.2 Noncompliance.--When an item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure or rejection have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the quality conformance tests shall be repeated.

4.5.3 Continuance of tests.--For production reasons, quality conformance tests may continue pending the investigation of the test which failed; but final acceptance of items on hand or produced later, shall not be made until it is determined that all items meet all the requirements of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

4.5.4 Defects in items already accepted.--If the investigation of a quality conformance test failure indicates that defects may exist in items already accepted, the contractor shall fully advise the procuring activity of all defects liable to be found and the method of correcting them. If such defects are not correctable, the contractor shall replace, at the contractor's expense, all items determined to be defective.

4.5.5 Disposition of sample units.--Sample units which have been subjected for quality conformance shall not be delivered on contract or order.

4.6 Test methods.--

4.6.1 End load strength.--Filter elements shall be tested for resistance to static end-loading by installing the element over a center tube of appropriate diameter, supporting one end of the element on a plain surface and applying 100 pounds force to the opposite end of the element by means of a plain pressure surface. After constant force has been applied for 30 minutes, the element shall be examined. There shall be no evidence of permanent damage.

4.6.2 Pressure drop.--Pressure drop shall be tested with a rated flow rate of 90 pounds a minute, using type II oil of MIL-L-22851, at a temperature of 225°F. First, the pressure drop across the filter can without the filter element shall be measured, then the pressure drop across the filter can with the filter element installed, measured. Pressure drop across the element shall not exceed 6 pounds per square inch (psi) initially, and shall not exceed 12 psi before completion of the 160 hours of testing as required in 4.6.5. (Note: The pressure drop across the element is equal to the pressure drop across the filter can and element minus the pressure drop across the filter can at the same flow rate.)

4.6.3 Media migration.--Element shall be tested for media migration in a standard filter can mounted upstream of a 0.0015-inch spacing metal edge strainer (Purolator type D-21WM-20, or equivalent, with fabric element removed). Five gallons of type II oil of MIL-L-22851 shall be circulated through the filter can (without filter element installed) and through the metal edge strainer for a 4-hour period at 90 pounds a minute with the oil held at a temperature of 225°F. At the end of this 4-hour period, the strainer shall be removed and placed over a clean glass beaker to collect the oil drainings. The strainer shall be rinsed into the beaker with ASTM precipitation naphtha which has been filtered through a Gooch crucible (Selas Corp. of America #28-080XF, or equivalent, fritted or sintered integral bottom) using a rubber policeman to clean all strainer surfaces. All remaining oil in the strainer body shall be drained, the strainer body shall be rinsed with filtered naphtha, and both the oil and washings shall be collected in the same beaker used for the washings from the strainer. The oil and washings shall be diluted to assist filtration and filtered through a tared Gooch crucible as noted above. The crucible shall be washed with filtered naphtha, dried in an oven at 212°F, cooled in a desiccator, and weighed to the nearest 0.5-milligram. This 4-hour circulation, without element, shall be repeated until a run shows a removal of foreign matter from the oil not to exceed 5 milligrams. A sample oil filter element shall then be installed in the standard filter can and the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

oil circulated through the assembly for an 8-hour period at 90 pounds a minute with the oil held at a temperature of 225°F. This 8-hour circulation period shall be repeated on additional test elements until a total of four have been flowed in the same manner without a change or addition to the sump oil. Each element removed from the filter assembly shall be allowed to drain back into the filter can for 5 minutes prior to starting a subsequent run. At completion of the fourth 8-hour circulation period, the strainer and the strainer body shall be cleaned as prescribed for the 4-hour circulation periods without element, and the matter of foreign matter determined to the nearest 0.5-milligram. The total weight of foreign matter collected shall be divided by 4 and the value reported as media migration, not to exceed 15 milligrams. Strainer housing volume shall be 62 cubic inches. Slot area of strainer shall be 6.4 cubic inches.

4.6.4 Additive removal.--Elements shall be tested for oil additive removal with a testing apparatus consisting of an oil reservoir, a filter can, and an oil-circulating system provided with oil pressure, temperature, and flow-rate indicator and controls. The element shall not remove in excess of 10 percent of the additives when tested as follows: five gallons of new (unused) type II oil of MIL-L-22851 shall be circulated for 20 hours through the filter can (without element). The circulation of oil shall be at the rate of 90 pounds a minute. Oil temperature shall be held at 225°F. At the end of this 20-hour period, the additive content of the oil shall be determined by the sulphated residue method (average of three determinations)conforming to Method 5422.3 of Fed. Test Method Std. No. 791. This 20-hour circulation through the test apparatus without filter element shall be repeated until two consecutive runs show an additive retention by the oil of not less than 95 percent of its original value. During each 20-hour circulation, 5 gallons of new oil shall be used for each run. The second of the two consecutive readings showing an additive retention by the oil of not less than 95 percent of the original content shall be considered as the blank. A sample filter element shall be installed in the filter can. New test oil, in the applicable amount specified above, shall be added to the test apparatus and circulated through the element for 20 hours at the applicable rated flow, with the oil being held at a temperature of 225°F. At the end of this 20-hour period, the oil shall be examined for its additive content by the sulphated residue method (average of three determinations) conforming to Method 5422.3 of Fed. Test Method Std. No. 791. Correction for the blank shall be made and expressed as percent of original additive content of the new oil.

4.6.5 Filtering capability.--An element assembled in a filter can shall be tested for filtering ability with a testing apparatus consisting of an oil reservoir with oil level indicator, and a suitable oil circulating system provided with oil pressure rate of flow and temperature indicators and controls. The capacity of this system, exclusive of the element under test, shall be adequate for an oil change of 5 gallons, plus the contaminant added during a 40-hour period. A device shall be provided for adding the contaminant to the oil in the reservoir. This addition shall be made in small drop-size increments at a substantially uniform rate. A weighed quantity of contaminant appropriate for the add period employed, and which has been conditioned in an agitator for at least 1 hour, shall be blended at 30 psi pressure for 30 minutes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

with oil taken from the filter test system in preparation for charging the quadrant. The blending process shall be started 30 minutes before the quadrant is ready for its charge. Quadrant add periods of 4 or 5 hours are recommended for test purposes; longer add periods may be used provided a continuous mixing system is employed to keep the contaminant mixed. The element shall remove 75 percent of all particles larger than 10 microns and pass no particles larger than 40 microns. Additional test conditions and procedure shall be as specified in Table II.

4.6.6 Differential pressure. Elements shall be tested for resistance to differential pressure by means of a test apparatus similar to that employed for the filtering ability test. With the element installed in the filter can, a viscous oil shall be circulated through the system at room temperature. The system shall be started with the pump bypass valve in the open position. The bypass valve shall then be slowly and uniformly closed, causing the element differential pressure to rise gradually until element failure occurs or until 100 psi is observed. This psi differential pressure shall be held for 3 minutes. The bypass valve shall then be opened, the element shall be removed from the filter can, and a disassembly inspection shall be made. There shall be no evidence of deformation or other damage.

4.7 Inspection of preparation for delivery.--Preservation and packaging, packing, and marking of filter elements shall be examined to determine conformance with paragraph 3.6 and Section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.--Filter elements shall be packaged level A, B, or Commercial as specified.

5.1.1 Level A.--Filter elements shall be packaged one each, method IC2 of MIL-P-116.

5.1.2 Level B.-- Filter elements shall be packaged one each in a fiberboard box conforming to W6s or W6c of PPP-B-636.

5.1.3 Commercial.--Filter elements shall be packaged in accordance with MIL-STD-1188.

5.2 Packing.--Filter elements, packaged as specified in 5.1, shall be packed level A, B, or Commercial, as specified.

5.2.1 Level A.--Filter elements shall be packed in plywood boxes conforming to overseas type PPP-B-601, surface-treated in accordance with the requirements of the box specification. Gross weight of each box shall not exceed 200 pounds.

5.2.2 Level B.--Filter elements shall be packed in fiberboard boxes conforming to V3s or V3c of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial.--Filter elements shall be packed in accordance with MIL-STD-1188.

5.3 Marking.--In addition to any special requirements of the contract or order, shipments shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as specified (see 6.2).

6. NOTES

6.1 Intended use.--The filter element is intended for use in aircraft reciprocating engine oil systems at the specified rated flow temperature, to remove solid contaminants from the lubricating oil.

6.2 Ordering data.--Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.--

(a) Title, number, and date of this specification.

(b) First article, if required (see 3.1.1).

(c) Whether supplemental tests are required (see 4.4).

(d) Whether preservation and packaging, and packing shall be level A, B, or Commercial

(e) Markings required for shipment (per 5.3).

6.2.2 Contract data requirements.--Technical data (see 3.7) such as test report will be delivered as identified on a numbered DD Form 1664 when specified on a DD Form 1423 incorporated in the contract.

6.3 First article.--When first article approval is required under 3.1.1, the solicitations should include complete information concerning examination, test, and approval.

6.4 Reclaimed materials.--This specification requires the use of recovered materials to the maximum extent possible without jeopardizing the intended end use of the item (see 3.2.1).

Custodian:

Army - AV

Preparing Activity:

Army - AV

Review Activities:

User Activities:

Project No. 2945-A012

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

TABLE II. -- FILTERING ABILITY TEST CONDITIONS AND PROCEDURE FOR FILTER ELEMENTS

Test Oil*			Contaminant				
Oil temperature at filter inlet (°F.)	Oil in system (Gallons)	Flow rate (gpm)	5/Designation	Rate of addition of solids (grams per hour)	1/Total hours of filter operation	2/Oil sample to be analyzed	4/Cumulative filtering efficiency percent minimum
(107, ± 2.8) 225, ± 5	5	90	AC P/N 1543637	1.3	160	3/Normal pentane insolubles	75

1/ To be accumulated in successive units of 40-hour periods of continuous filter operation and contaminant addition, separated by 2-hour shutdown periods during which the oil bypasses the filter completely and no contaminant is added.

2/ Immediately after each 40-hour period, oil shall be withdrawn from the system to reestablish the initial oil level in the reservoir. The portion of oil so withdrawn shall constitute the sample for analysis.

3/ Normal pentane insolubles shall be determined by ASTM Method D 893-67, except that a 10,000 relative centrifugal force centrifuge shall be used.

4/ Cumulative filtering efficiency**= $\frac{\text{Total weight of contaminant solids added} - \text{Weight of contaminant solids in total test oil ***} \times 100}{\text{Total weight of contaminant solids added}}$

5/ Prepared dirt conforming to AC Spark Plug Co. P/N 1543637 (coarse Arizona road dust). Mixture as follows: 0-5 microns (12%) 5-10 Microns (12%) 10-20 microns (14%) 20-40 microns (23%) 40-80 microns (30%) 80-200 microns (9%).

*MIL-L-22851 type II oil shall be used.

**Expressed in percent.

***$\frac{\text{Weight of total test oil x percentage normal pentane insolubles}}{100}$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.


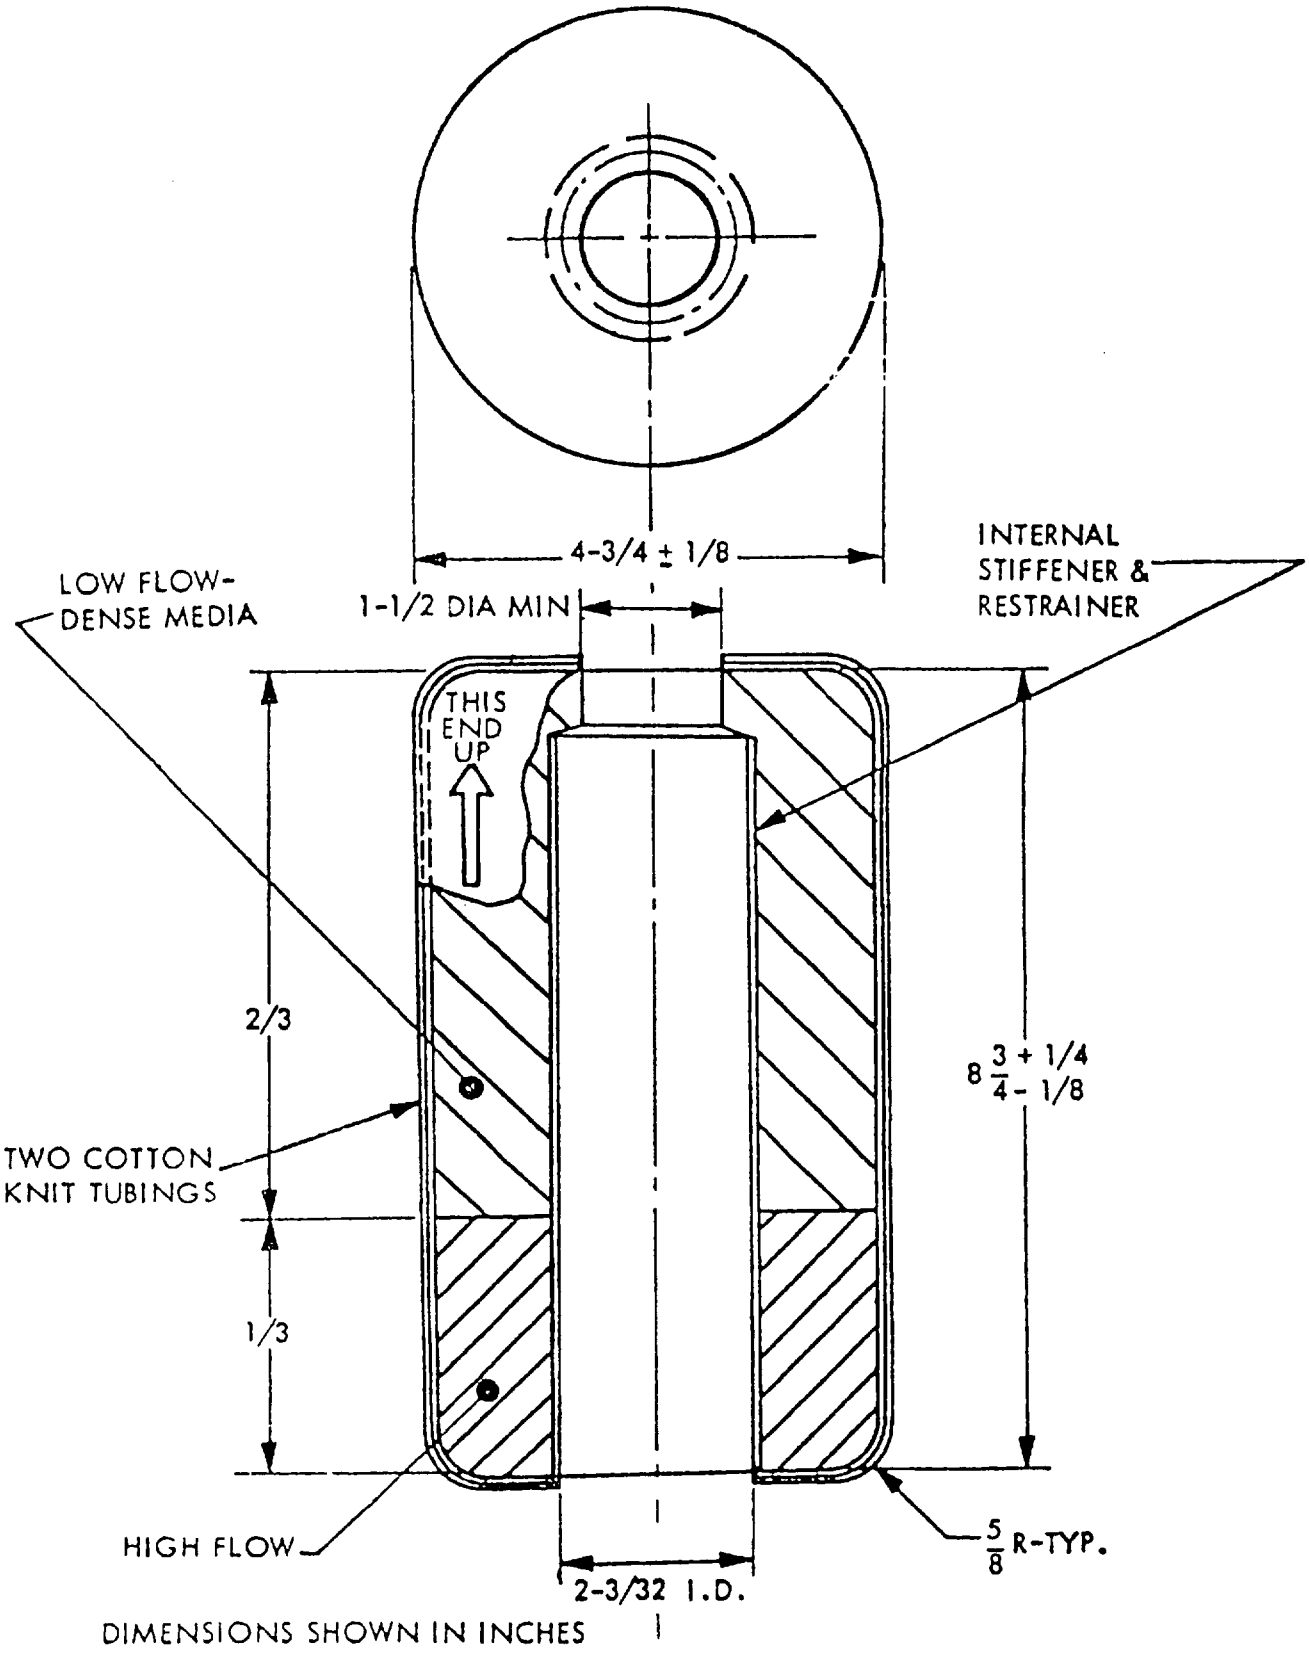


FIGURE 1. FILTER ELEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

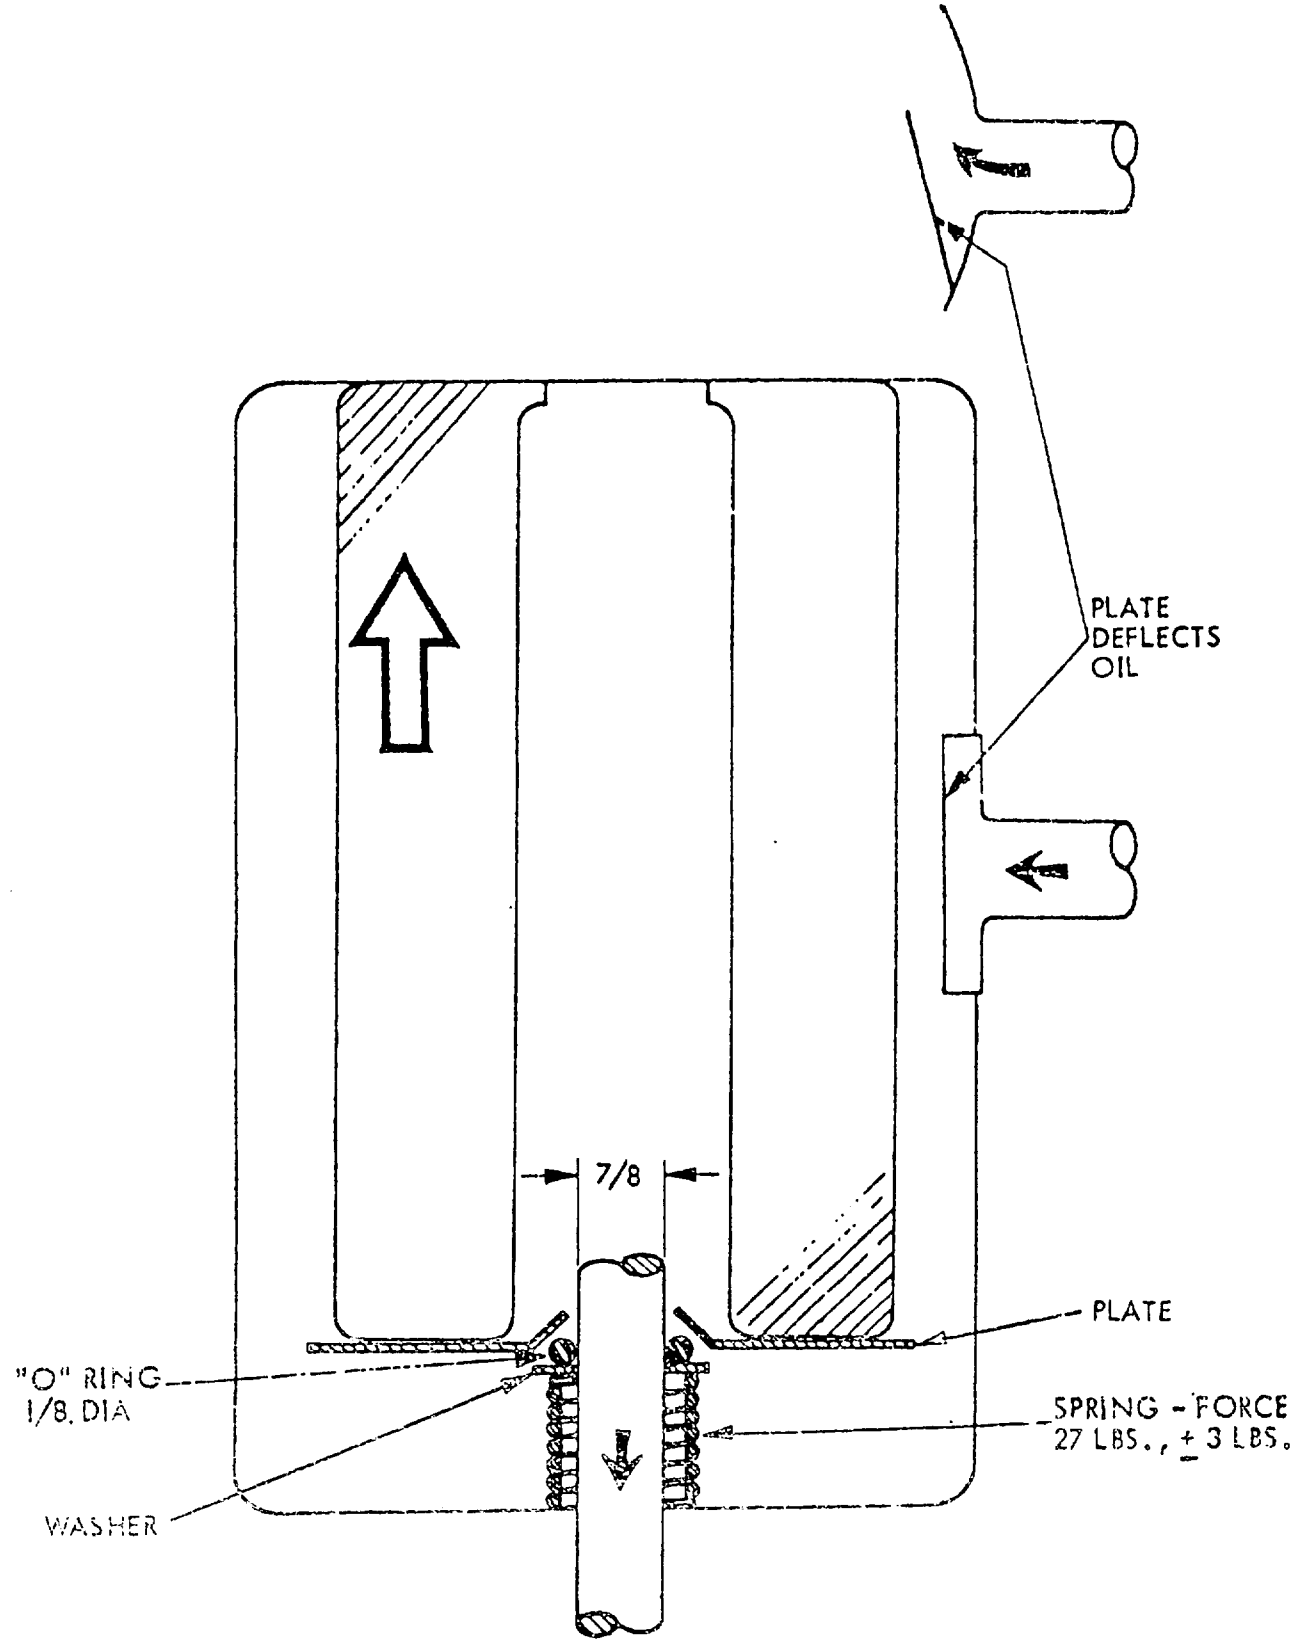

Dimensions in inches

FIGURE 2. -- FILTER CAN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

RTMENT OF THE ARMY

OFFICIAL BUSINESS
TY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding General
US Army Aviation Research and Development
Command
ATTN: DRDAV-ERS
4300 Goodfellow Boulevard
St. Louis, MO 63120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-F-5809C A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:00Z
Check the source to verify that this is the current version before use.