INCH-POUND

MIL-H-82244E
19 June 1989
SUPERSEDING
MIL-H-82244D
7 October 1982

MILITARY SPECIFICATION

# HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size of radioactive contaminant protective hood made of polyester and cotton twill cloth.

## 2. APPLICABLE DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

---

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

---

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

FEDERAL

| | |
|---|---|
| V-T-276 | - Thread, Cotton |
| NN-P-71 | - Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial) |
| DDD-L-20 | - Label; For Clothing, Equipage and Tentage (General Use) |

MILITARY

| | |
|---|---|
| MIL-P-15011 | - Pallet, Material Handling, Wood, Post Construction, 4 Way Entry |
| MIL-B-17757 | - Boxes, Shipping, Fiberboard (Modular Sizes) |
| MIL-F-21840 | - Fastener Tapes, Hook and Loop Synthetic |
| MIL-C-21851 | - Cloth, Twill, Polyester and Cotton |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-751 | - Stitches, Seams and Stitchings |

MILITARY

| | |
|---|---|
| MIL-STD-105 | - Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | - Marking for Shipment and Storage |
| MIL-STD-147 | - Palletized Unit Loads |
| * MIL-STD-2073-1 | - Department of Defense Materials Procedures Development and Application of Packaging Requirements |
| * MIL-STD-2073-2 | - Packaging Requirement Codes |

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation

US POSTAL SERVICE MANUAL

(Copies may be obtained from the Superintendent of Documents, U.S. Governemnt Printing Office, Washington, DC 20242-0001).

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide Sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First Article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials.

3.3.1 Cloth, twill, polyester and cotton. The basic material shall be a polyester and cotton twill cloth, color shade yellow 3511 conforming to MIL-C-21851, standard sample piece number 84058.

3.3.2 Thread, cotton. The cotton thread used for the hood shall be ticket numbers 30 and 50, 3 ply type 1A3 of V-T-276. The color of the thread shall approximate the base fabric.

3.3.3 Fastener tapes. The hook and loop fastener tapes shall be in accordance with type II Class I of MIL-F-21840. The hook tape for the neck closure and for the rear anchor point shall be 2 inches wide; the loop tape for the neck closure shall be 1 inch wide. The color of the fasteners shall be white 3054.

3.3.4 Identification and instruction label. Each hood shall have a combination identification and instruction label conforming to type VI, class 15 of DDD-L-20. The printing shall show fastness to laundering and shall bear the following inscription:



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE
FIBER CONTENT: 65% Polyester and 35% Cotton
CONTRACT NO: DLA-100-00-0-000 (Example)
STOCK NO: 8415-00-000-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (if other than contractor):

LAUNDER IN ACCORDANCE WITH PRESCRIBED REQUIREMENTS.

3.3.5 Radiation symbol. The marking for the radiation symbol shall be in accordance with type IV of DDD-L-20. The radiation symbol shall be 3-3/4 inches in diameter comforming to the design and dimensions as shown in Figure 2 and shall be black.

3.4 Design. The hood (see Figure 1) shall consist of a four section headpiece with a semi-circular cape. The cape shall have an adjustable nylon fastener tape front closure. A nylon hook fastener to be used for anchoring the hood to the coveralls shall be affixed to the underside center back of the cape. The hood shall have a black radiation symbol stamped on the lower left front of cape.

3.4.1 Figures. Figures 1 and 2 furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. The patterns allow 1/2 inch seam allowance for all seams, except as otherwise indicated in Table I.

3.5.1 Pattern parts. The component parts shall be cut from material as specified and in accordance with the following list of parts:

| Material | Pattern nomenclature | Cut parts |
|---|---|---|
| Cloth, polyester and cotton (basic material) | Right front quarter panel | 1 |
| | Left front quarter panel | 1 |
| | Back quarter panel | 2 |
| | Front quarter lining | 2 |

3.6 Construction.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

*3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on inside of hood. Ends of all seams produced by stitch type 401, shall be caught in other seams or stitchings. Unless otherwise specified, all double-needle stitching shall be 1/4 inch gauge with row of stitching next to folded edge not more than 1/16 to 1/8 inch from the finished edge. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Edgestitching and topstitching shall be 1/16 inch from folded edge. Hook and loop fastener tape stitching shall be 1/16 to 1/8 inch from the edge of the tape. When 2 inch wide hook fastener tape is used, add an extra row of stitching down the middle of the fastener tape.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and end of seams. End of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be secured by stitching back of break not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

* 3.7 Manufacturing operations requirements. The hoods shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished hoods are identical to that produced by following the sequence listed in Table I.

3.7.1 Shade marking. The component parts of the hoods shall be marked to insure a unifrom shade throughout the garment. Any method may be used except:

(1) Metal fastening devices.

(2) Sew-on shade tickets.

(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numering does not show on the outside of the garment and whenever possible, is covered by the seam allowance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

| | | |
|---|---|---|
| Stch | - | Stitch |
| in | - | inch |
| Ndl | - | Needle |
| Bob | - | Bobbin |
| Lpr | - | Looper |
| Mchne | - | Machine |
| Brtck | - | Bartack |
| Comrcl | - | Commercial |
| smlr | - | similar |
| Btnhl | - | Buttonhole |
| incl | - | including |
| dbl | - | double |
| chnstch | - | chainstitch |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| 1. | Cutting.<br>a. The hood shall be cut in strict accordance with the patterns furnished, which shall show shape and directional warp lines for cutting and notches for proper assembly of all parts. Direction lines shall be placed in the warp direction of the material.<br><br>b. All component parts shall be cut from one piece of material. The filling flush side shall be the face and shall finish as the exposed surface of the hood, except for the lining which shall have the twill side exposed. | | | | | |
| 2. | Replacement of defective components<br>During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components. | | | | | |
| 3. | Shade marking (see 3.7.1)<br>Mark, ticket or bundle all component parts to insure a uniform shade and proper assembly throughout the hoods. | | | | | |
| 4. | Assembly<br>a. Stitch the front quarter linings together from top of face opening to the top of hood. | 301<br>or<br>401 | LSc-2 | 10-12 | 30<br><br>30 | 30<br><br>50 |
| | b. Stitch front quarter panels together from top of face opening to top of hood, with the edges lapped towards either the right or the left. | 301<br>or<br>401 | LSc-2 | 10-12 | 30<br><br>30 | 30<br><br>50 |
| | c. Fold face to face the edge of the right front quarter panel 2-1/4 inches to form a closure facing. Turn back the raw edge of facing 1/4 inch. Stay stitch the top edge of the facing to hold facing in position. | | | | | |
| | d. Fold face to face the edge of the left front quarter panel 1-1/4 inches to form a closure facing. Turn back the raw edge of facing 1/4 inch. Stay stitch the top edge of facing to hold facing in position. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | e. Superimpose the linings, twill side down, to the face side of the front quarter panels with front ends of lining overlapping turned back edge of front facings. Stitch 1/4 inch from the raw edge around the face opening catching the top portion of facing. Turn lining to inside of hood. | 301 | SSa-1 | 10-12 | 30 | 30 |
| | f. Turn under both bottom lining raw edges 1/4 inch and stitch to the front quarter panels 1/16 inch from the folded edge. | 301 | LSd-1 | 10-12 | 30 | 30 |
| | g. Stitch along both lining back edges to front quarter panels 1/4 inch from the raw edges. | 301 | SSa-1 | 10-12 | 30 | 30 |
| | NOTE: Operations 4f and 4g may be done as one continuous operation. | | | | | |
| | h. Turn each closure facing to inside of hood and stitch each of the prefolded edges of the closure facings to the front quarter panels. | 301 | EFb-1 | 10-12 | 30 | 30 |
| | i. Stitch the back quarter panels together with the edges lapped towards either the right or left. | 301 or 401 | LSc-2 | 10-12 | 30<br>30 | 30<br>50 |
| | j. Stitch the front quarter panels to the back quarter panels with the front over the back. | 301 or 401 | LSc-2 | 10-12 | 30<br>30 | 30<br>50 |
| | k. Fold hem under and raw edge under 3/16 inch and topstitch simultaneously catching bottom of label in hem stitching. | 301 | EFb-1 | 10-12 | 30 | 30 |
| | l. Stitch the remaining three sides of label to hood 1/16 inch from edge. The ends of the label stitching shall be overlapped not less than 3 stitches. | 301 | Box Tacker | 8-12 | 30 | 30 |
| | OR | | | | | |
| | Box Tacker may be used to secure label around all 4 sides. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

TABLE I - Construction of Hood

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | m. Hem shall finish 1/4 (± 1/8) inch wide and the label shall be centered over the center back seam. | | | | | |
| * | n. Position and center a 3 inch cut length of 2 inch wide hook fastener tape vertically over the inside rear seam 2-1/4 (± 1/4) inch above the bottom edge of hem, with the long dimension parallel to the seam. Stitch 1/16 to 1/8 inch from edge around all four sides and through the lengthwise center of the tape. | 301 | LSbj-1 | 10-12 | 30 | 30 |
| * | o. Cut an 8 inch length of 2 inch hook fastener tape. Position 1/16 inch from folded edge on outside of right front faced closure. Stitch 1/16 to 1/8 inch from edge around all four sides and through the lengthwise center of the tape. | 301 | LSbj-1 | 10-12 | 30 | 30 |
| * | p. Cut an 8 inch length of 1 inch loop fastener tape. Position 1/16 inch from folded edge on facing on inside of left front closure. Stitch 1/16 to 1/8 inch from edge around all four sides. | 301 | LSbj-1 | 10-12 | 30 | 30 |
| 5. | Radiation symbol<br>The radiation symbol (see Figure 2) shall be stamped on the outside of the lower left front of the cape, 1-1/2 (± 1/4) inch from the hemmed edges as indicated in Figure 2. | | | | | |
| 6. | Cleanness<br>a. All thread ends shall be trimmed to not over 1/4 inch in length. | | | | | |
| | b. All loose threads shall be removed. | | | | | |
| * | NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result. | | | | | |
| | c. All spots and stains shall be removed. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements. The finished hood shall conform to the measurements shown in Table II (see Figure 1). All measurements are expressed in inches.

Table II - Measurements of Hood

| | Measurement | Tolerance |
|---|---|---|
| A. Width of cape | 26-1/2 | ± 1/2 |
| B. Length of cape | 8-3/4 | ± 1/4 |
| C. Length of face opening | 7 | ± 1/4 |
| D. Width of hood | 9-1/2 | ± 1/4 |

A. Width of cape. With the hood laid flat as shown in view B of Figure 1 and the front closure abutted, measure from the intersection of side seam and the hem to the same point on the opposite side.

B. Length of cape. With the hood laid flat as shown in view B of Figure 1, and the front closure abutted, measure from bottom edge of face opening to the bottom of hood at distance of one inch from the front opening.

C. Length of face opening. With hood laid flat as shown in view A of Figure 1, and the front edges of the facing opening and front closure superimposed and even, measure from top of face opening to a level in line with the bottom of face opening.

D. Width of hood. With the hood laid flat as shown in view A of Figure 1, and the front edges of the facing opening and front closure superimposed and even, measure from a point midway of face opening across the head to the back seam.

* 3.9 Workmanship. The finished hoods shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

*4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of references specification, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicted in 4.4.2.3. The sample shall be one finished hood. The lot size shall be expressed in units of hoods.

4.4.2.1 Visual examination. The hoods shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with the following list:

| Defect | Classification Major | Minor |
|---|---|---|
| I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES | | |
| a. Any weakening material defect, such as a smash, hole, cut, tear, burn, loose slub, mend, thin place, needle chew or drill hole | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor |
|---|---|---|
| b. One or more broken or missing yarns | X | |
| c. Any nonweakening material defect such as knot, misweave, unsightly slub, loose yarn, coarse yarn, area of no dye penetration, dye streak or woven in waste | | X |
| II. CLEANNESS | | |
| a. Any spot or stain on outside | | X |
| b. Thread ends not trimmed to 1/4 inch or less or loose threads not removed (to be scored only when condition exists on major portion of hood) | | X |
| c. Two or more shade or size tickets not removed | | X |
| d. Shade marking exposed and visible on outside of hood | | X |
| III. SHADED PARTS | | |
| a. Shade of hood other than specified | X | |
| b. Any outside part shaded | | X |
| c. Shade of thread markedly in contrast with shade of hood | | X |
| IV. CUTTING | | |
| Any part not cut in accordance with directional warp lines indicated on patterns or in accordance with specification requirements | X | |
| V. COMPONENT AND ASSEMBLY | | |
| A. Any component part omitted or required operation omitted (unless otherwise classified herein) | X | |
| b. Any component not as specified (type, size, color, etc) | X | |
| c. Any operation not as specified (unless otherwise classified herein) | | X |
| VI. SEAMS AND STITCHING | | |
| a. Accuracy of seaming | | |
| 1. Part of hood caught in any unrelated stitching operation | X | |
| 2. Seam puckered, twisted, or pleated (unless otherwise classified herein) | | X |
| 3. End of any seam stitching when not caught in other seam or stitching backtacked less than 3/8 inch | | X |
| 4. End of a continuous line of stitching overlapped less than 1/2 inch | | X |
| 5. Thread breaks not secured or stitched back of the break less than 1/2 inch | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor |
|---|---|---|
| b. Gauge of stitching | | |
| 1. Irregular, i.e., unevenly gauged, not uniform on major portion of seam | | X |
| 2. Beyond range of width specified or varies more than 1/16 inch when no range is specified | | X |
| 3. Edge or topstitching sewn too close to edge, resulting in damage to cloth | | X |
| c. Open seams 1/ | | |
| 1. 1/4 inch or less | | X |
| 2. More than 1/4 inch | X | |
| d. Runoff, skipped or broken stitches | | |
| * 1. On joining seam: Classify and score as open seam 1/ | | |
| 2. Edge or topstitching | | X |
| e. Raw edges | | |
| 1. On outside | | |
| -more than 1/8 inch but less than 1/2 inch | | X |
| -more than 1/2 inch | X | |
| 2. On inside | | |
| -more than 1/2 inch but less than 2 inches | | X |
| -more than 2 inches | X | |
| f. Seam and stitch types | | |
| 1. Not specified seam or stitch type | | X |
| 2. Looper thread on outside (when 401 stitch is used) | | X |
| g. Stitch tension | | |
| 1. Loose tension resulting in loose joining seam | X | |
| 2. Loose tension on edge or topstitching recognized by loosely exposed loops of lower or top thread | | X |
| * 3. Tight tension (stitches break when normal strain is applied to the seam or stitching): Classify and score as open seam 1/ | | |

1/ A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur. On double stitched seams a seam is considered open when one or both stitches of the seam is opened.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor |
|---|---|---|
| h. Stitches per inch | | |
| -less than minimum or more than maximum as specified | | X |
| VII. HEM | | |
| a. Hem puckered, twisted or pleated | X | |
| b. Hem finished more than 5/16 inch or less than 3/16 inch | X | |
| VIII. DIRECTION OF SEAM LAP | | |
| Any seam not lapped in the direction specified | X | |
| IX. STAGGERED SEAMS | | |
| The center front and center back panel seams staggered more than 1/4 inch at crown | X | |
| X. FASTENER TAPE | | |
| a. Misplaced, i.e., out of position in excess of 1/4 inch | X | |
| b. Foreign matter (threads, etc) trapped on hook tape | | X |
| c. Other than width or type specified | X | |
| d. Other than color required | | X |
| XI. IDENTIFICATION (label and radiation symbol) | | |
| a. Label | | |
| 1. Omitted, incorrect or illegible | X | |
| 2. Misplaced | | X |
| b. Radiation symbol | | |
| 1. Omitted, incorrect or illegible | X | |
| 2. Placed less than 1-1/4 or more than 1-3/4 inches from either front opening edge or bottom edge of cape | | X |

4.4.2.2 Dimensional examination. Any measurement deviating from the nominal dimensions and tolerances specified in the Table of measurements shall be scored as a measurement defect.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

| | AQL's | Inspection levels |
|---|---|---|
| For examination in 4.4.2.1 | | |
| Major | 2.5 | II |
| Total (Major and Minor combined) | 15.0 | II |
| For examination in 4.4.2.2 | | |
| One class of defect | 4.0 | S-3 |

* 4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

| Examine | Defect |
|---|---|
| Marking (exterior and interior | Omitted, incorrect, illegible, of improper size, location, sequence, or method of application. |
| Materials | Any component missing, damaged, or not as specified. |
| Workmanship | Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.<br>Open or noncontinuous heat sealed seams and closure of polyethylene bag. |
| Content | Number of hoods per shipping container is more or less than required.<br>Size shown on one or more items not as specified on shipping container. 1/ |

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the Acceptable Quality Level, AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted, incorrect, illegible, of improper size, location, sequence, or method of application. |

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each hood, with the front closed, shall be laid out flat, face up. The flared side shall be folded in to meet approximately at the center of the hood. Fold the hood approximately in half by bringing the crown down to the bottom edge. The hood shall again be folded approximately in half by superimposing one side over the other with the fold at either side of the front closure tape. The folded hood shall measure approximately 7-1/2 inches by 11-1/4 inches. The folded hood shall then be inserted in a snug-fitting flat or square style clear polyethylene film bag of 0.0015 inch thickness (+ 20 percent tolerance). All seams and closures shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, except heat seal closure and corner hole not required.

5.1.2 Level C. Hoods shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Thirty hoods packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF class weather-resistant, grade V15c, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and fifteen in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Thirty hoods packaged as specified in 5.1, shall be packed in a fiberboard container assembled and closed conforming to Type CF, variety DW, class domestic, grade 200 size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width and fifteen in depth within a shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The hoods are intended to be used as a protective garment by personnel working in low level radioactive contaminated areas in conjunction with the coveralls, gloves and footwear items of the related radioactive contaminants protective outfit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
d. Levels of packaging and packing required (see 5.1 and 5.2)
e. When palletization is required (see 5.4)
f. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

* 6.4 Recycled materials. It is encouraged that recycled materials be used when practical as long as it meets the requirements of this specification.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.

Head protector, low level radiation
Head protector, polyester/cotton twill
Head protector, unit of RCP outfit

Custodian:
Navy - NU
Air Force - 99

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT
Navy - SH, AS

Project No. 8415-0683

User Activities:
Navy - OS, CG



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

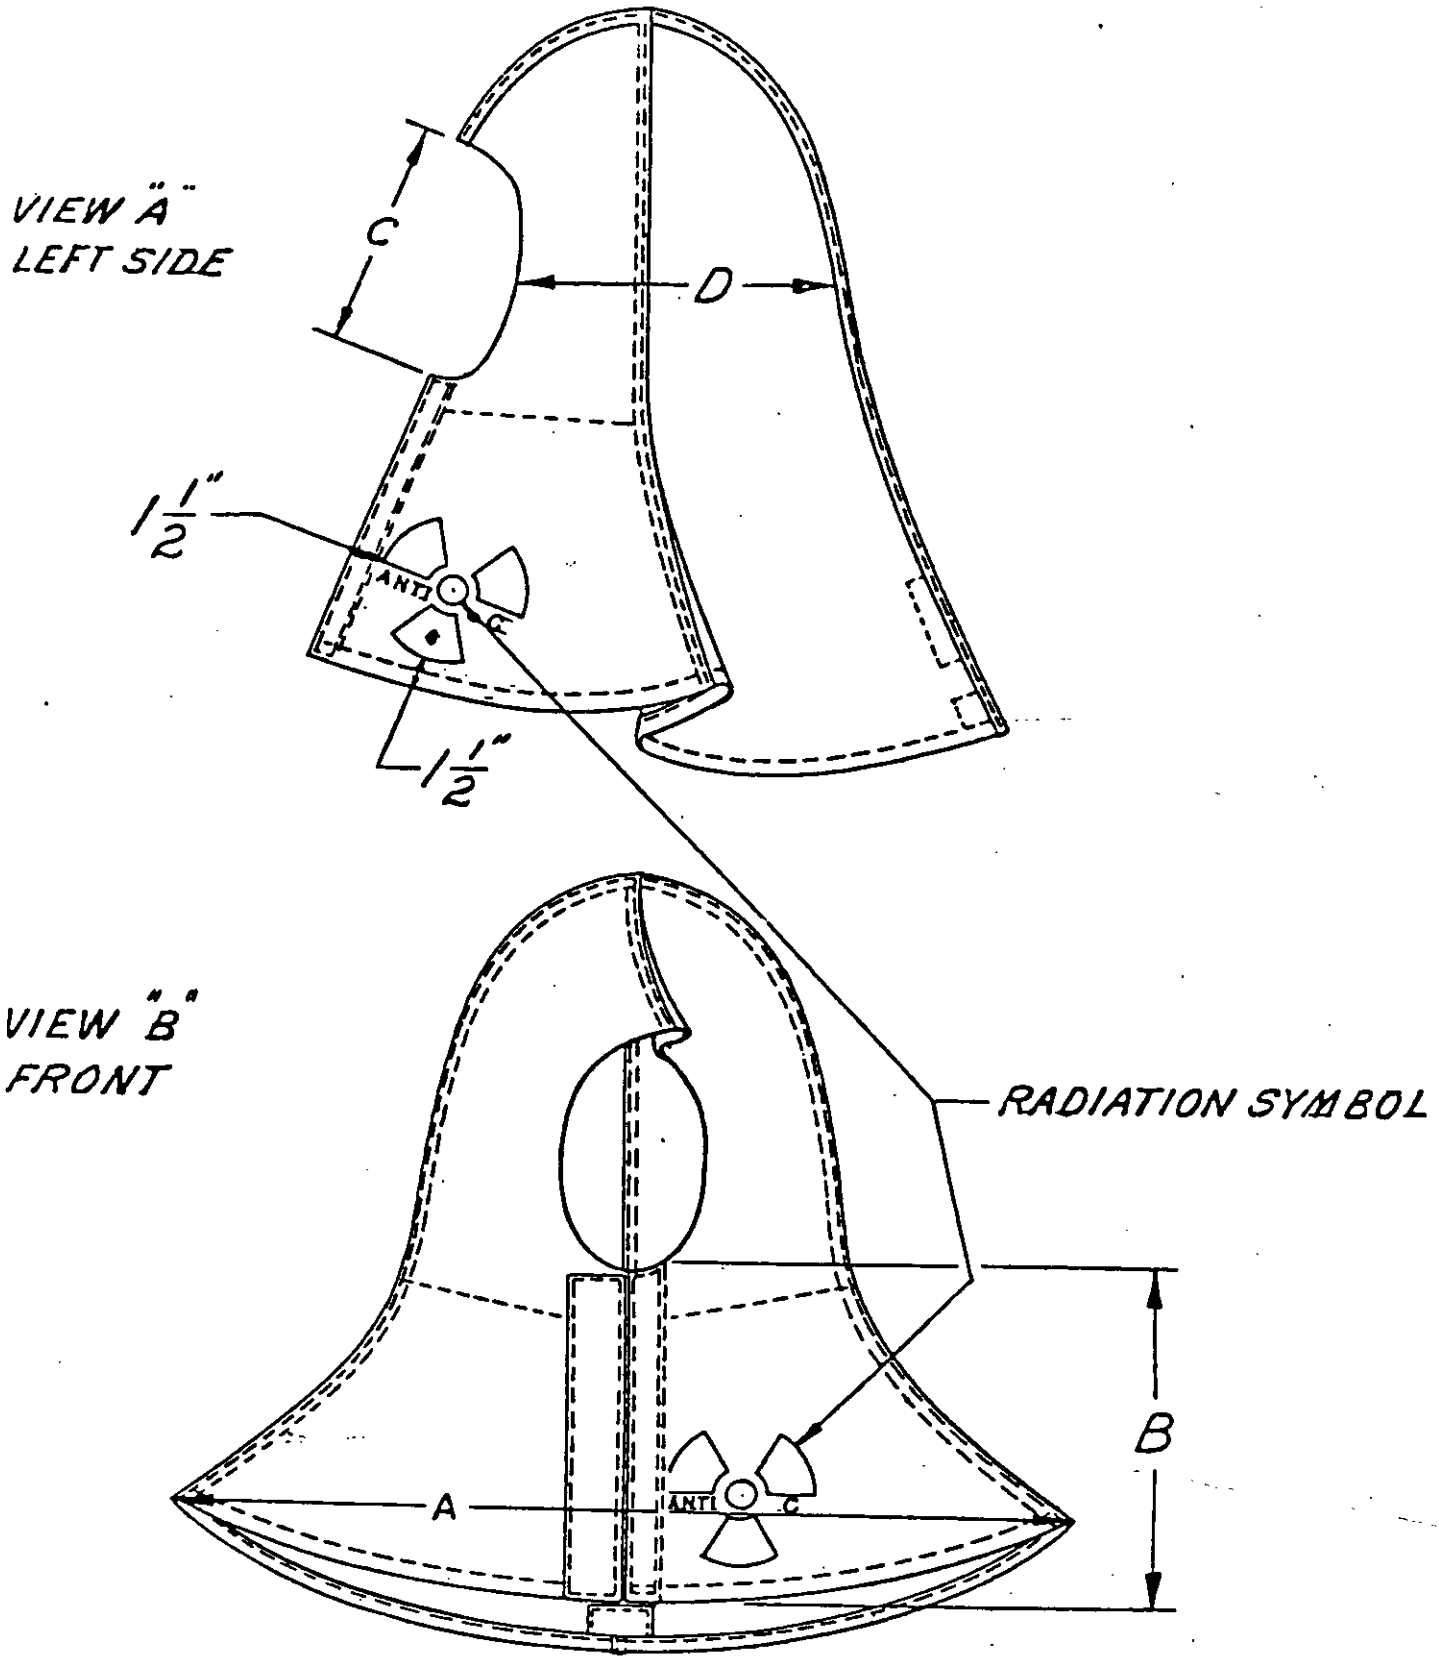



FIGURE 1. HOOD, RADIOACTIVE CONTAMINANTS PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

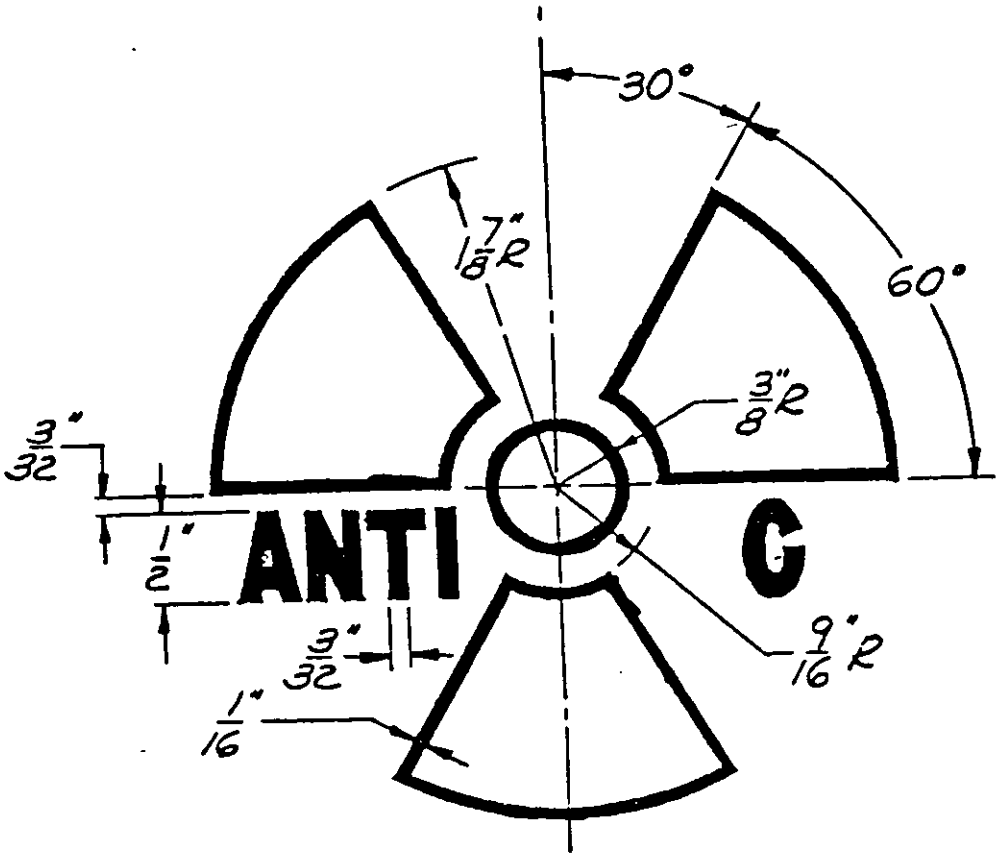



FIG. 2 RADIATION SYMBOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-H-82244E | HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

**5. PROBLEM AREAS**

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

**6. REMARKS**

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.