INCH-POUND

MIL-T-70700A (AR)
07 February 1992
SUPERSEDING
MIL-T-70700 (AR)
15 September 1988

MILITARY SPECIFICATION

TARGET HOLDING MECHANISM ASSEMBLY: 9375764

This specification is approved for use by the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for the target holding mechanism assembly of the Target Holding Mechanism/Tank Gunnery (THM/TG) unit used as a part of the Remote Target System (RETS) (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-E-70694	-	Electronic Control Unit

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:53Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines
MIL-STD-2000	-	Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9375764 - Target Holding Mechanism Assembly, RETS

SPECIAL PACKAGING INSTRUCTION

PS 9375764 - Special Packaging Instruction for Target Holding Mechanism Assembly

(Copies of drawings, publications and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General description. The target holding mechanism assembly consists of an electrical and hydraulic unit which rotates a drive shaft through an angular displacement of 90 degrees that raises and lowers an armored vehicle target. An electronic control unit provides on site front panel controls for on/off mode operations and hit sensitivity selection. The electronic control unit operates the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

target holding mechanism on site or remotely and controls the hit sensor sensitivity, target response to hits, visual hit indicator lamp (VHIL) and gunfire simulator (GUFS). Power is provided by a 12 volt lead acid battery with two power cable connections through the battery box assembly to the target holding mechanism assembly.

3.2 Fabrication. The target holding mechanism assembly shall be manufactured in accordance with drawing 9375764 and Military Specifications MIL-F-13926 and MIL-STD-454. The electronic control unit shall comply with Military Specification MIL-E-70694.

3.2.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2.2 Components and assemblies. The components and assemblies shall comply with all requirements specified in this specification and on Drawing 9375764, and all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Functions.

3.3.1 Commands. The target holding mechanism assembly shall, through its electronic control unit, execute commands to raise and lower targets and execute activation of the VHIL and GUFS.

3.3.2 Mechanism control. The mechanism shall be remotely controlled and shall respond as follows:

a. Upon receiving a remote raise or lower command signal the mechanism shall move the target to the position commanded. The mechanism shall not respond in any manner if commanded to a position that it is already in.

b. The mode of operation shall be selectable directly on the electronic control unit by a rotary switch. This rotary switch shall serve as an on/off switch. At position 0 all electrical power shall be removed from the electronic control unit. At position 1, the target shall be raised and lowered by remote command per 3.3.2.c and hits on the target shall have no effect. At position 2, the target shall be raised and lowered by remote command per 3.3.2.c and a hit on the target when raised will lower target and it will stay lowered until another raise remote signal is received. At position 3, the target shall be raised and lowered by remote command per 3.3.2.c and a hit on the target will lower the target, delay 11 $\pm$ 2 seconds, and then automatically raise the target until another hit occurs and causes it to repeat the above operation. At positions 4, 5 and 6 the VHIL will illuminate when the target is hit. Modes 4, 5 and 6 are the same as modes 1, 2 and 3 respectively except for VHIL operation. The 9 to 13 second time period is measured from the time the target is first hit until it begins to raise again.

c. Remote signal to raise or lower the target shall be a 12.0 volts dc $\pm$ 1 volt dc remote pulse equal to or greater than 40 ms in duration. Target shall be raised when signal is applied to

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

plug P1, contact D and target shall be lowered when signal is applied to plug P1, contact F.

d. A hit sensor signal of 12 volts indicating a hit has occurred shall be received through the electronic control unit connectors as follows:

Hit Sensor	Plug	Connector Pin
1	ST-5	A and B
2	ST-6	A and B
3	ST-7	A and B
4	ST-8	A and B

3.3.3 Gunfire simulator control (GUFS). The target device shall operate the gunfire simulator and fire a flash or smoke charge when a signal indicating a target hit has occurred in any rotary switch position from 1 to 6.

3.4 Performance requirements.

3.4.1 Output drive.

3.4.1.1 Position. The target holding mechanism assembly during operation shall raise the target to ninety degrees plus or minus five degrees (Up Position) from a horizontal position of zero degrees plus or minus five degrees (Down Position).

3.4.1.2 Cycling time. The target holding mechanism assembly during operation shall raise a target in less than eight seconds and lower a target within eight seconds, maximum.

3.4.1.3 Target size and weight. The target holding mechanism shall be capable of raising and lowering a target 8.0 $\pm$ 0.1 feet high by 12.0 $\pm$ 0.1 feet wide by 1.0 $\pm$ 0.1 inches thick and weighing 350 $\pm$ 10% pounds maximum or use the alternate Target Load Simulator (4.8.1a) for the raising and lowering testing.

3.4.2 Hydraulic requirements.

3.4.2.1 Oil tank capacity. The target holding mechanism hydraulic assembly shall have an oil tank capacity of 2.8 $\pm$ 0.1 pints.

3.4.2.2 Oil pump/motor current. The target mechanism hydraulic oil pump/motor current draw shall not exceed 150 amp.

3.4.2.3 Oil pump pressure. The target holding mechanism hydraulic operational oil pump pressure shall not exceed 2000 psi.

3.4.2.4 Inlet oil pressure. The target holding mechanism hydraulic inlet oil pressure shall not exceed 2000 psi.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

3.4.3 Battery requirements.

3.4.3.1 Battery voltage. The target holding mechanism battery input voltage shall be 12 volts dc nominal and shall not be less than 10.5 volts dc nor more than 15 volts dc during operation.

3.5 Environmental services conditions.

3.5.1 Temperature.

3.5.1.1 Operating. The target holding mechanism assembly shall meet the requirements of 3.3 and 3.4 when stabilized thermally at $-25^{\circ}F$ and $+125^{\circ}F$.

3.5.1.2 Non-operating (storage). The target holding mechanism assembly when subjected to at least four hours at each temperature extreme of $-40^{\circ}F$ and $+160^{\circ}F$ shall meet the requirements of 3.3 and 3.4 when returned to and thermally stabilized at ambient temperature ($+60^{\circ}F$ to $+90^{\circ}F$).

3.5.2 Vibration. The target holding mechanism assembly shall meet the requirements of 3.3 and 3.4 after being subjected to Method 514, Procedure I-3.3.1, using figure 514.4-1 of MIL-STD-810 for one hour of random vibration in the vertical axis.

3.5.3 Shock. The target holding mechanism assembly shall meet the requirements of 3.3 and 3.4 after being subjected to mechanical shock in accordance with Method 516 of MIL-STD-810, Procedure IV: "Transit Drop Test". Drop on bottom four corners only.

3.5.4 Upweight. The target holding mechanism assembly shall meet the requirements of 3.3 and 3.4 when weights are used to simulate a continuous 25 MPH horizontal wind directed perpendicular to the target board.

3.5.5 Immersion (non-operating). The immersion test shall be performed in accordance with 4.7.3.6. If penetration occurs, the applicable item shall be reimmersed and a negative pressure equivalent to three head-feet of water shall be applied. The item shall be observed for escaping air bubbles to determine penetration point.

3.6 First article inspection. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (See 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of MIL-STD-2000.

3.8 Workmanship. The workmanship requirements of MIL-STD-454 and MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5)

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+60°F to +90°F
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of (3) three target holding mechanism assemblies for inspection in accordance with 4.3.2.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:53Z
Check the source to verify that this is the current version before use.

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in Tables I and II herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogenous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. The contractor's quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

b. Alternative inspection procedures, methods or equipment, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the procuring contracting officer for evaluation and approval by the Government. When required, the contractor shall demonstrate that the effectiveness of the proposed alternative(s) is equal to or better than the specified quality assurance provisions herein. In cases of dispute as to

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:53Z
Check the source to verify that this is the currentversion before use.

whether the contractor's proposed alternative(s) provide equal assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program plan or detailed inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 shall be performed as specified in 4.4.2.3 and 4.5.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis and 4.5.

TABLE I. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Function	3.3	4.8
102. Performance	3.4	4.7.4
103. Soldering	3.7	4.9
104. Workmanship	3.8	Visual
Minor:	None	N/A

4.5 Special sampling. One Target Holding Mechanism Assembly shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling.

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
201. Vibration (non-operating)	3.5.2	4.7.3.3
202. Temperature (operating)	3.5.1.1	4.7.2.1, 4.7.2.2
203. Shock	3.5.3	4.7.3.4
204. Upweighted test	3.5.4	4.7.3.5
205. Immersion test	3.5.6	4.7.3.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

4.7.2 Operating.

4.7.2.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502, Procedure II. When thermally stabilized at -25°F, the assembly shall be operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4.

4.7.2.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501, Procedure II. When thermally stabilized at 125 degrees F, the assembly shall be operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4.

4.7.3 Non-operating.

4.7.3.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502, Procedure I. The assembly shall be stabilized at -40 degrees F for a minimum of 4 hours. After extreme temperature exposure, the assembly shall be stabilized at ambient (+60 degrees F to +90 degrees F), and operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4.

4.7.3.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501, Procedure I. The assembly shall be stabilized at +160 degrees F for a minimum of 4 hours. After extreme temperature exposure, the assembly shall be stabilized at ambient (+60 degrees F to +90 degrees F), and operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4..

4.7.3.3 Vibration. This test shall be performed as specified in MIL-STD-810, Method 514, Procedure I-3.3.1, using figure 514.4-1 for one hour along the vertical axis. After vibration the assembly shall be operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4.

4.7.3.4 Shock. This test shall be performed as specified in MIL-STD-810, Method 516, Procedure IV: "Transit Drop Test". Drop on bottom four corners only. After the shock impulses, the assembly shall be operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4.

4.7.3.5 Upweight. Test shall be performed when weights are used to simulate a continuous 25 MPH horizontal wind force directed perpendicular to the target board. After completion of test, the target holding mechanism assembly shall be operationally checked as specified in 4.7.4 and 4.8.3 to determine compliance with 3.3 and 3.4. Stabilizer bars are to be utilized to prevent target from tipping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

4.7.3.6 Immersion test. The following items shall be capable of withstanding the immersion test as specified in MIL-STD-810, Method 512, without being damaged or adversely affected. The hydraulic assembly 9375758 and the Hit Sensor 11784450. The ECU shall be tested per military specification MIL-E-70694. All cables and hydraulic lines should be connected to the hydraulic unit with the exception of the battery cables. The applicable items shall be immersed in water and subjected to a positive pressure equivalent to three head feet of water for a two hour period ± 5 minutes, no evidence of escaping air bubbles are allowed. Subsequent to the immersion test these items shall have no evidence of water penetration when cover is removed.

4.7.4 Performance tests.

4.7.4.1 Target size and weight. The target holding mechanism assembly shall be interfaced with the appropriate equipment and simulators as indicated in 4.8 and Figure 1.

4.7.4.2 Output drive and hydraulic tests. System shall perform as specified in the procedures below utilizing target per 3.4.1.3 to verify the following requirements:

4.7.4.2.1 Position. Measure angle to determine compliance with requirement of 3.4.1.1.

4.7.4.2.2 Cycling time. Measure raising time to determine compliance with requirement of 3.4.1.2.

4.7.4.2.3 Cycling time. Measure lowering time to determine compliance with requirement of 3.4.1.2.

4.7.4.2.2 Oil tank capacity. Check tank capacity to determine compliance with requirement 3.4.2.1.

4.7.4.2.5 Oil pump/motor current. Measure oil pump/motor current to determine compliance with requirement 3.4.2.2.

4.7.4.2.6 Oil pump pressure. Measure oil pump pressure to determine compliance with requirement 3.4.2.3.

4.7.4.2.7 Inlet oil pressure. Measure inlet oil pressure to determine compliance with requirement 3.4.2.4.

4.7.4.2.8 Battery voltage. Measure battery voltage to determine compliance with requirement 3.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

4.8 Function control test procedure.

4.8.1 Equipment. To be designed in accordance with 4.6 and to comply with 3.3 and 4.8.3 see (Figure 1).

a. Target Load Simulator (TLS)

b. Power Supply (P.S.)

c. Target Arm Simulator (TAS)

d. GUFS Simulator (GS)

e. Smoke Scorer Simulator (SSS)

f. Visual Hit Indicator Lamp Simulator (VHILS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

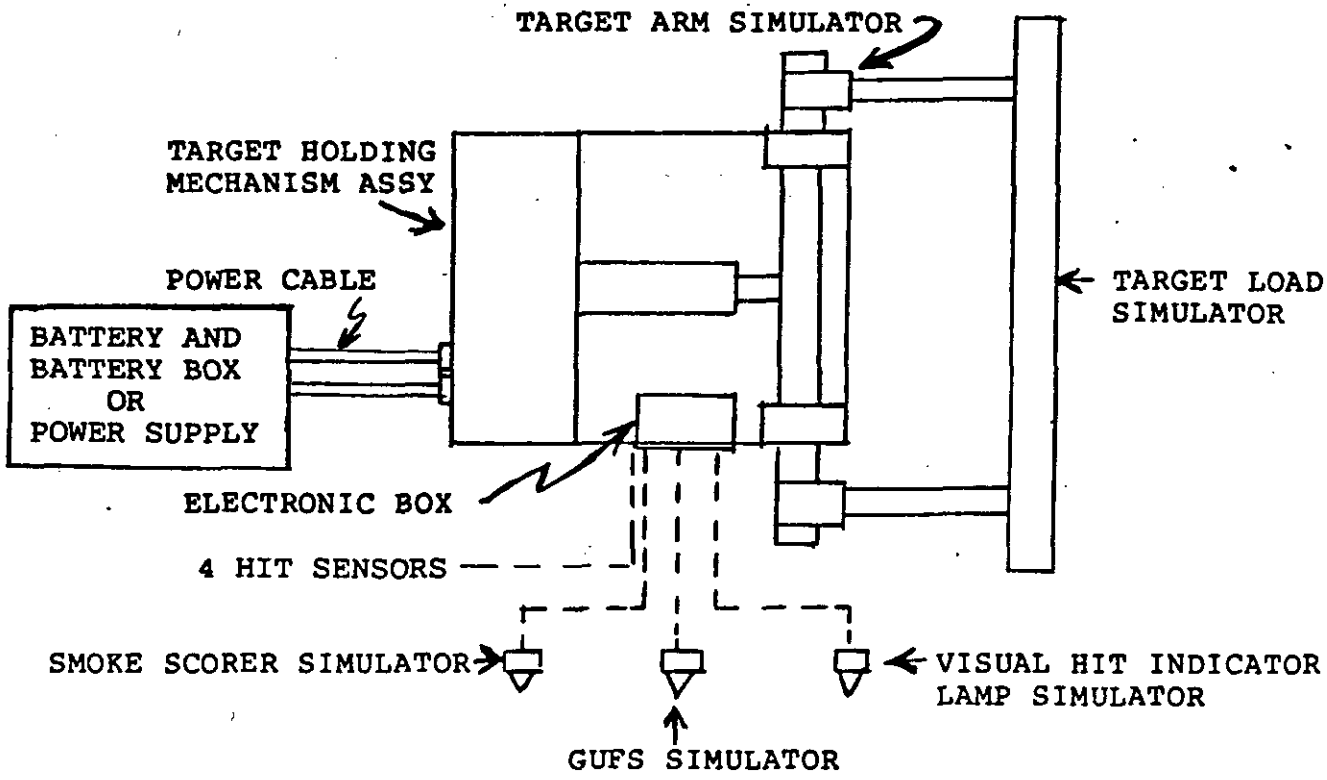


Figure 1. THM/TG overall assembly.

4.8.2 Test set up to simulate the following functions in 4.8.3.

4.8.3 Procedure.

4.8.3.1 Power Supply. The Black and Red power cables should plug into the 12V dc lead acid battery supply.

4.8.3.2 Position zero. Electronic box function switch should be on the "0" (zero) position.

4.8.3.3 Position one. Put the electronic box function switch on position one.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within $\pm$ 5° of the vertical up position (90^{0}).

b. Tap each of the four hit sensors. Observe that the smoke scorer simulator lamp and GUFS simulator lamp light momentarily for each tap. The target simulator should remain in the up position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.8.3.4 Position two. Put the electronic box function switch on #2 position.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within $\pm$ 5° of the up position (90°).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp and GUFS simulator lamp light momentarily. The target simulator should lower to the down position.

c. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.8.3.5 Position three. Put the electronic box function switch on #3 position.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulators raises to the up position and stops $\pm$ 5° of the up position (90°).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp and GUFS simulator lamp light momentarily. The target simulator should lower to the down position, delay 9 to 13 seconds, then raise to the up position. The 9 to 13 sec time period is measured from the time the target is first hit until it begins to raise again.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator should lower to the down position.

d. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.8.3.6 Position four. Put the electronic box function switch on position #4.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within $\pm$ 5° of the up position (90°).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

b. Tap each of the four hit sensors. Observe that the smoke scorer simulator lamp and GUFS simulator lamp light momentarily for each tap. The visual hit indicator lamp simulator lights momentarily. The target simulator should remain in the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator lowers to the down position.

d. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.8.3.7 Position five. Put the electronic box function switch on position #5.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops within $\pm$ 5° of the up position (90°).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp, visual hit indicator simulator lamp and GUFS simulator lamp light momentarily. The target simulator should lower to the down position.

c. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.8.3.8 Position six. Put the electronic box function switch on position #6.

a. Operate the electronic box test switch momentarily to the up position. Observe that the target simulator raises to the up position and stops $\pm$ 5° of the up position (90°).

b. Tap one of the four hit sensors. Observe that the smoke scorer simulator lamp, visual hit indicator simulator lamp and GUFS simulator lamp light momentarily. The target simulator should lower to the down position, delay 9 to 13 seconds, then raise to the up position.

c. Operate the electronic box test switch momentarily to the down position. Observe that the target simulator should lower to the down position.

d. Operate the remote signal and observe that the target simulator raises and lowers per 3.3.2.c.

4.9 Soldering. Soldering processes shall be inspected by inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in para 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Packaging Data Sheet PS 9375764. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification details the specific requirements for design, performance, quality assurance, and testing for the target holding mechanism assembly. The Target holding mechanism assembly will be used as part of the Target Holding Mechanism/Tank Gunnery (THM/TG) and will support live fire armor weapons training and qualification programs. These systems will provide training in identifying and firing on simulated stationary armored vehicles during training exercises.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Applicable stock number.
d. First article sample requirements.
e. Packaging requirements, if other than specified in Section 5.
f. Serialization requirements, if applicable.
g. Certification of conformance for each lot of shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Definitions.

6.5.1 Trainers. Training device terms are defined in MIL-HDBK-220. Other definitions, if required, will be furnished upon written request to the Procuring Contracting Officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

6.5.2 Contractor. Unless otherwise specified, the word Contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, sub-contractors, Government Owned-Contractor Operated (GOCO), and Government Owned-Government Operated (GOGO) plants.

6.5.3 Technical data package. A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists, specifications, standards, models, performance requirements, quality assurance provisions and packaging data.

6.5 Subject term (key word) listing.

Visual Hit Indicator lamp (VHIL)
Gunfire Simulator (GUFS)
Improved Lifting Target Elevating Mechanism (ILTEM)
Remote Target System (RETS)

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 6920-A106)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-70700A (AR)	7 FEBRUARY 1992

3. DOCUMENT TITLE: TARGET HOLDING MECHANISM ASSEMBLY: 9375764

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL,NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:53Z
Check the source to verify that this is the current version before use.