
MILITARY SPECIFICATION SHEET


MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 DIAMETER PIN CENTER


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-M-38527.

Inches	mm
.020	0.51
.025	0.64
.030	0.76
.031	0.79
.048	1.22
.055	1.40
.060	1.52
.096	2.44
.100	2.54
.192	4.88
.350	8.89

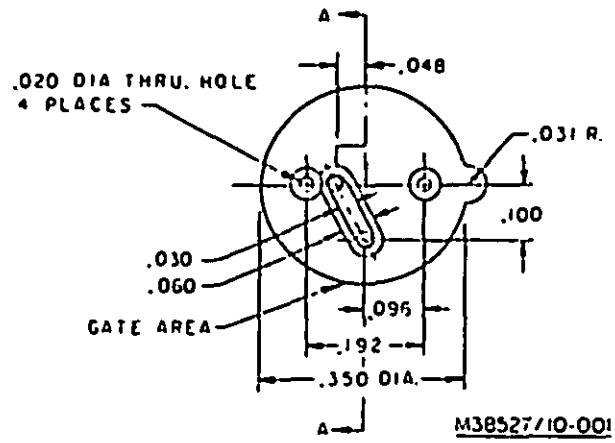



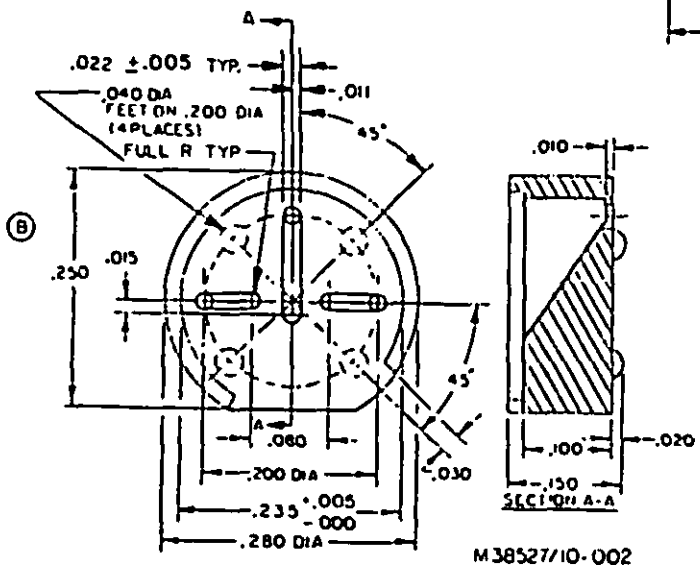


Inches	mm
.001	0.03
.005	0.13
.010	0.25
.011	0.28
.015	0.38
.020	0.51
.022	0.56
.030	0.76
.040	1.02
.080	2.03
.100	2.54
.150	3.81
.200	5.08
.235	5.97
.250	6.35
.280	7.11

FIGURE 1. Mounting pads.


(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

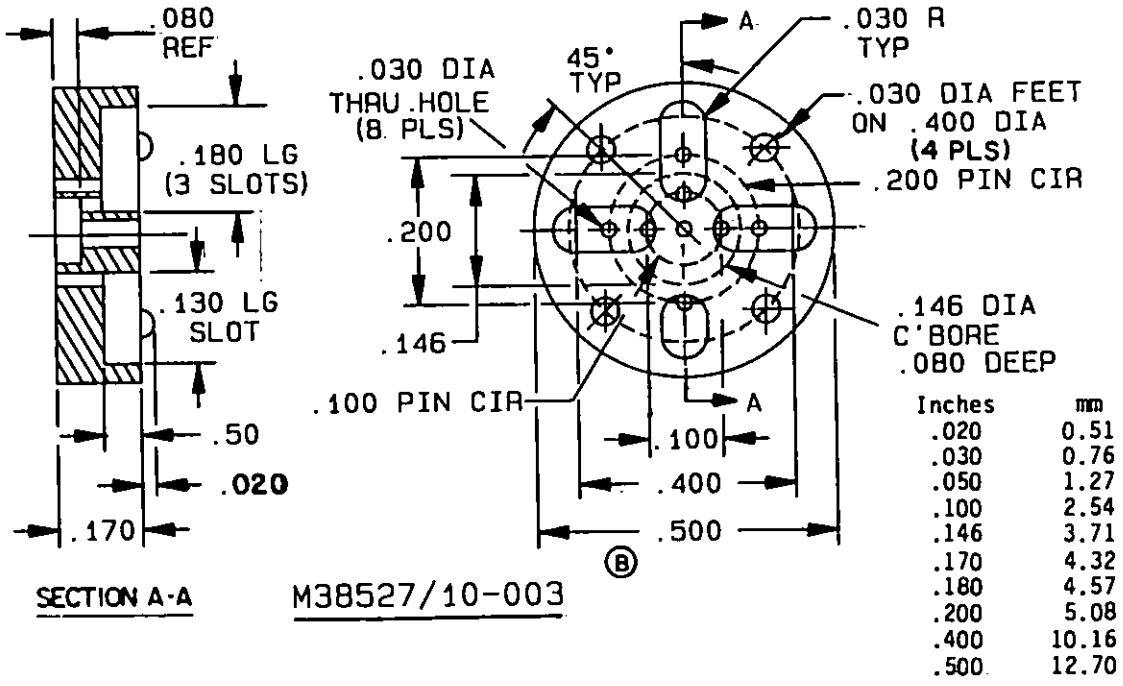


Inches	mm
.020	0.51
.030	0.76
.050	1.27
.100	2.54
.146	3.71
.170	4.32
.180	4.57
.200	5.08
.400	10.16
.500	12.70

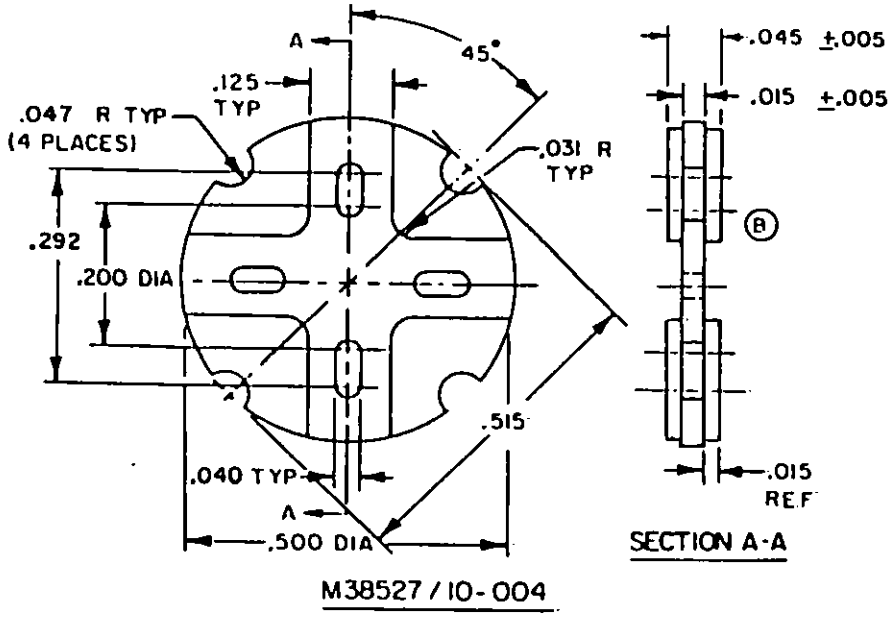

Inches	mm
.005	0.13
.015	0.38
.031	0.79
.040	1.02
.045	1.14
.047	1.19
.125	3.18
.200	5.08
.292	7.42
.550	12.70
.515	13.08


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

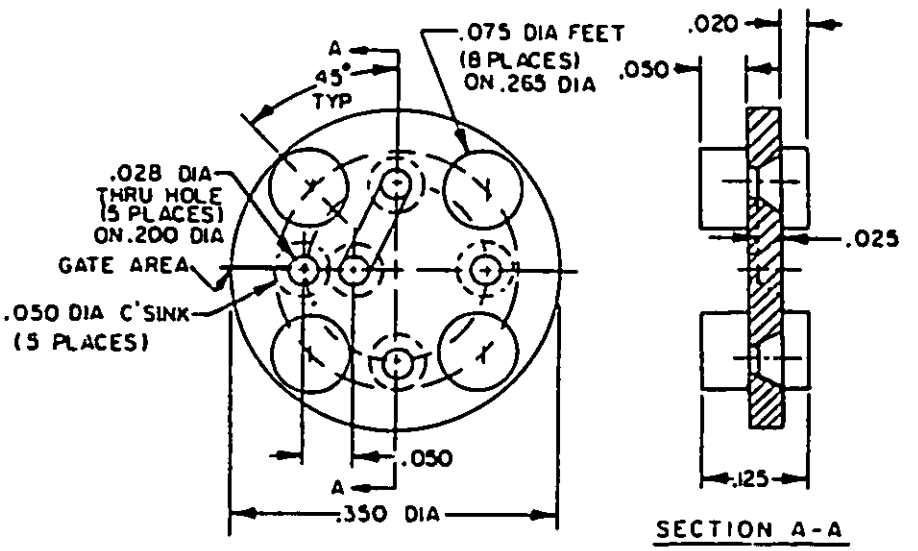

Inches	mm
.020	0.51
.025	0.64
.028	0.71
.050	1.27
.075	1.91
.125	3.18
.200	5.08
.265	6.73
.350	8.89

M38527/10-005

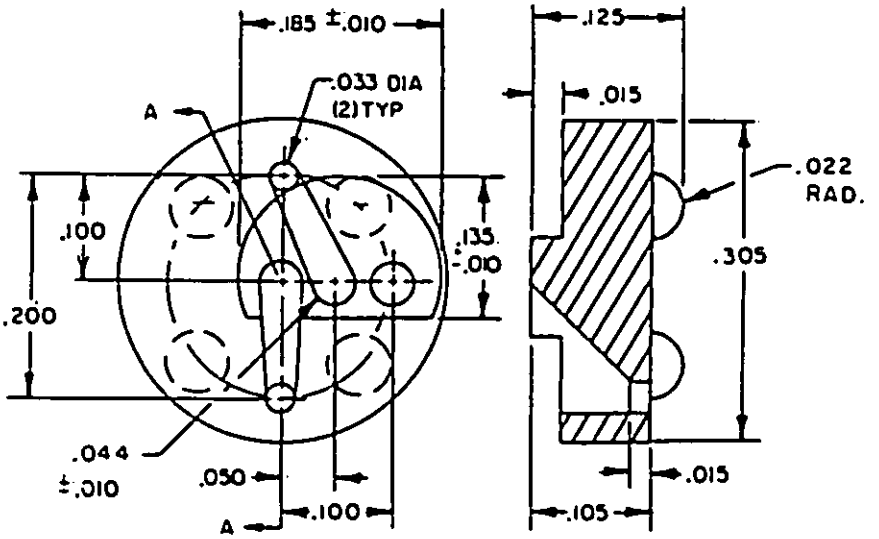

Inches	mm
.010	0.25
.015	0.38
.022	0.56
.033	0.84
.044	1.12
.050	1.27
.100	2.54
.105	2.67
.125	3.18
.135	3.43
.185	4.70
.200	5.08
.210	5.33
.305	7.75

M38527/10-006

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±1° on angles. A .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is allowed on sides.

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

Ⓑ REQUIREMENTS:

Design and dimensions: See figure 1.

Material: Diallyl phthalate or nylon.

Part or Identifying Number (PIN): M38527/10- (plus dash number from figure 1 and material suffix letter: D for diallyl phthalate or N for nylon).
Complete PIN example: M38527/10-001D.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 99
DLA - ES

User activities:
Navy - AS, CG, MC, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0238)

★U.S. GOVERNMENT PRINTING OFFICE: 1989 604-033/13322

Source: https://assist.dla.mil -- Downloaded: 2016-07-15T15:10Z
Check the source to verify that this is the current version before use.