
MILITARY SPECIFICATION SHEET

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, VERTICAL TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pads described herein shall consist of this specification and the latest issue of MIL-M-38527.

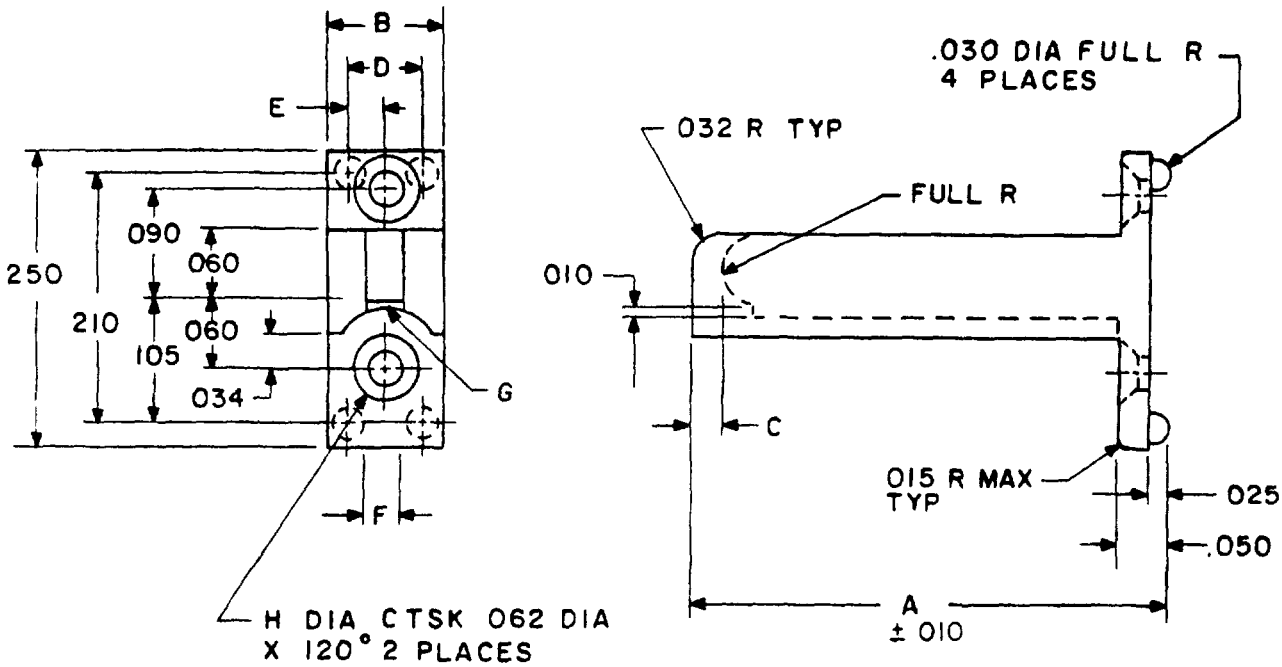

Dash No. M38527 /11-	DIMENSIONS AND MATERIAL								MATERIAL
	A	B	C	D	E	F	G	H	
-001	.312	.100	.030	.060	.030	.030	.055R	.030	A
-002	.437	.100	.030	.060	.030	.030	.055R	.030	A
-003	.562	.150	.040	.110	.055	.040	.080R	.040	A
-004	.312	.100	.030	.060	.030	.030	.055R	.030	C
-005	.437	.100	.030	.060	.030	.030	.055R	.030	C
-006	.562	.150	.040	.110	.055	.040	.080R	.040	C


INCHES	MM
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.110	2.79
.150	3.81
.210	5.33
.250	6.35
.312	7.92
.437	11.10
.562	14.27

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Material designations small be "A" for acetal copolymer, "C" for thermoplastic polyester (PBT).

FIGURE 1. Mounting pads vertical.

FSC 5999

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

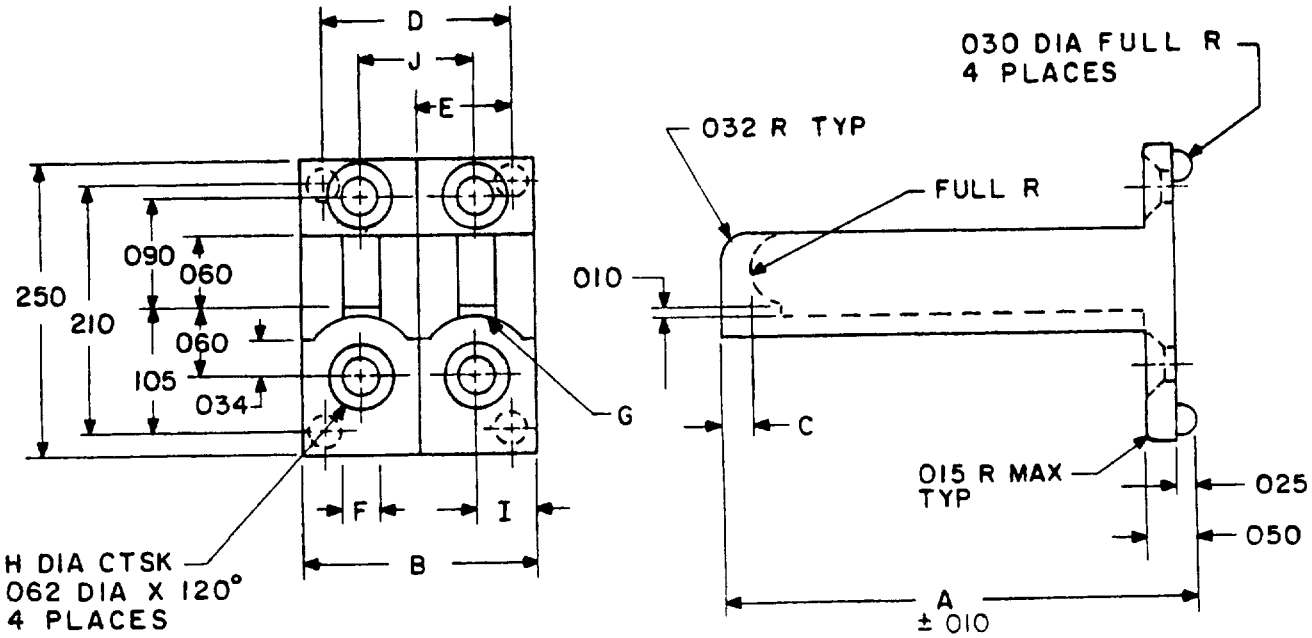


Dash No. M38527 /11-	DIMENSIONS AND MATERIAL										MATERIAL
	A	B	C	D	E	F	G	H	I	J	
-007	.312	.200	.030	.160	.080	.030	.055 R Typ	.030	.050	.100	A
-008	.437	.200	.030	.160	.080	.030	.055 R Typ	.030	.050	.100	A
-009	.562	.300	.040	.260	.130	.040	.080 R Typ	.040	.075	.150	A
-010	.312	.200	.030	.160	.080	.030	.055 R Typ	.030	.050	.100	C
-011	.437	.200	.030	.160	.080	.030	.055 R Typ	.030	.050	.100	C
-012	.562	.300	.040	.260	.130	.040	.080 R Typ	.040	.075	.150	C

INCHES	MM
.010	0.25
015	0 38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.075	1.91
.080	2.03
.090	2.29
.100	2 54
.105	2.67
.130	3.30
.150	3.81
.160	4.07
.200	5.08
.210	5.33
.250	6.35
.260	6.60
.300	7.62
.312	7.92
.437	11.10
.562	14.27

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Material designations shall be "A" for acetal copolymer, "C" for thermoplastic polyester (PBT).

FIGURE 1. Mounting pads, vertical - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

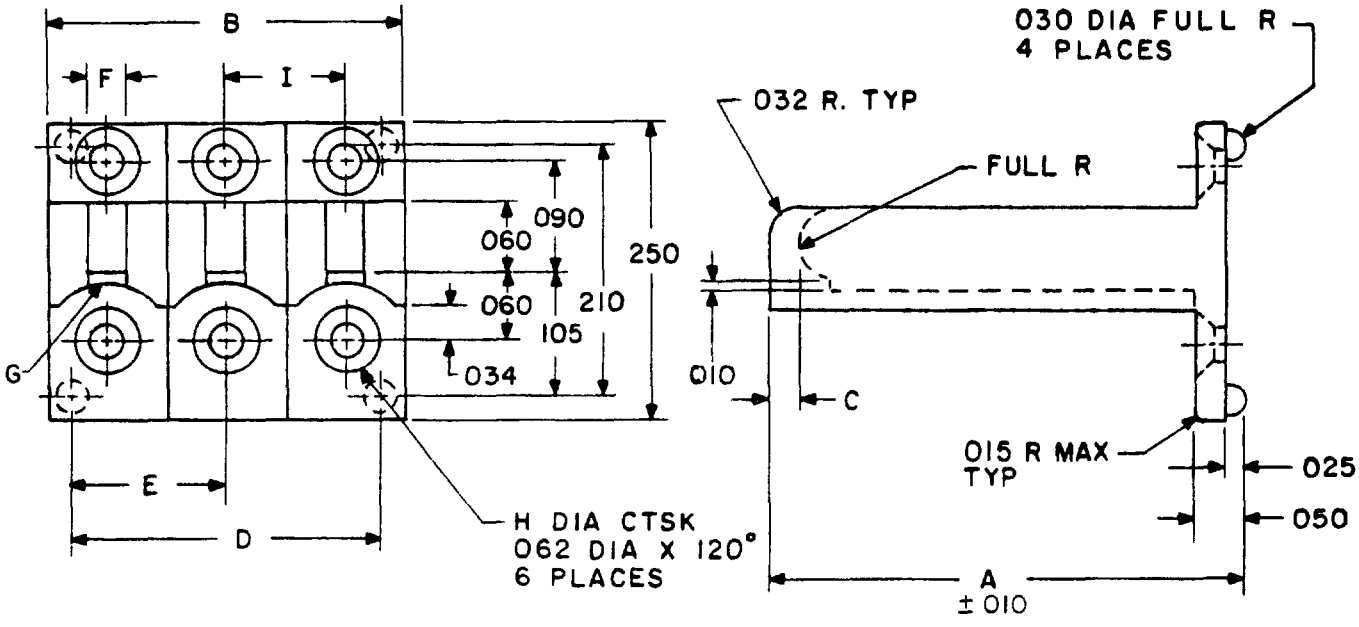


Dash No. M38527 /11-	DIMENSIONS AND MATERIAL									MATERIAL
	A	B	C	D	E	F	G	H	I	
-013	.312	.300	.030	.260	.130	.030	.055R	.030	.100	A
-014	.437	.300	.030	.260	.130	.030	.055R	.030	.100	A
-015	.562	.450	.040	.410	.205	.040	.080R	.040	.150	A
-016	.312	.300	.030	.260	.130	.030	.055R	.030	.100	C
-017	.437	.300	.030	.260	.130	.030	.055R	.030	.100	C
-018	.562	.450	.040	.410	.205	.040	.080R	.040	.150	C

INCHES	MM
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0,81
034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.130	3.30
.150	3.81
.205	5.21
.210	5.33
.250	6.35
.260	6.60
.300	7.62
.312	7.92
.410	10.41
.437	11.10
.450	11.43
.562	14.27

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Material designations shall be "A" for acetal copolymer, "C" for thermoplastic polyester (PBT).

FIGURE 1. Mounting pads, vertical- Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

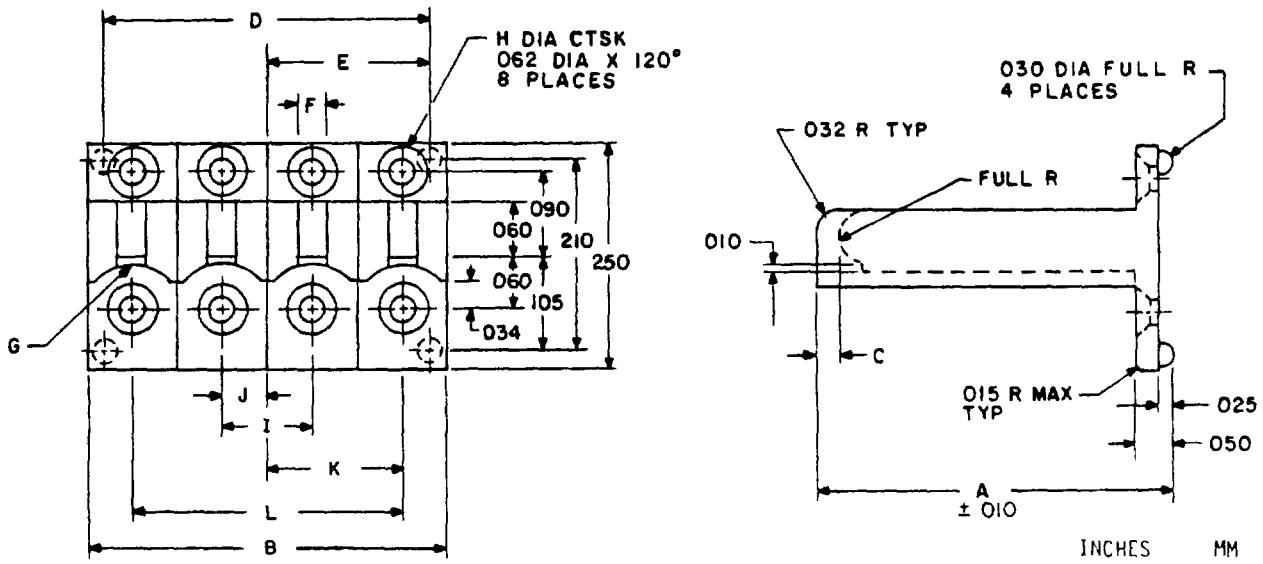

Dash No. M38527 /11-	DIMENSIONS AND MATERIAL												MATERIAL
	A	B	C	D	E	F	G	H	I	J	K	L	
-019	.312	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	A
-020	.437	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	A
-021	.562	.600	.040	.560	.280	.040	.080R	.040	.150	.075	.225	.450	A
-022	.312	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	C
-023	.437	.400	.030	.360	.180	.030	.055R	.030	.100	.050	.150	.300	C
-024	.562	.600	.040	.560	.280	.040	.080R	.040	.150	.075	.225	.450	C

INCHES	MM
.010	0.25
.015	0 38
.025	0.64
.030	0.76
.032	0.81
.034	0.86
.040	1.02
.050	1.27
.055	1.40
.060	1.52
.062	1.57
.075	1.91
.080	2.03
.090	2.29
.100	2.54
.105	2.67
.150	3.81
180	4.57
.210	5.33
.225	5.72
.250	6.35
.280	7.11
.300	7.62
.312	7.92
.360	9.14
.400	10.16
.437	11.10
.450	11.43
.560	14.22
.562	14.27
.600	15.24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Material designations shall be "A" for acetal copolymer, "C" for thermoplastic polyester (PBT).

FIGURE 1. Mounting pads, vertical - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design, construction, and material: See figure 1.

Material: Acetal copolymer material shall be in accordance with LP-392, type I, class III. Thermoplastic polyester (PBT) shall be in accordance with MIL-P-46161, grade B, class 30.

Operating temperature range: 0° - 85°C maximum.

Part number: M38527/11- (and dash number) (see figure 1).

Example. M38527/11-001

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities.
Air Force - 11, 19, 99
DLA - ES

User activities
Navy - AS, CG, MC, SH

Agent
DLA - ES

Preparing activity
Air Force - 85

(Project 5999-0148)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:10Z
Check the source to verify that this is the current version before use.