MILITARY SPECIFICATION

MANUALS, TECHNICAL: INSPECTION REQUIREMENTS; WORK CARDS; FOR MISSILE AND SPACE WEAPON SYSTEMS

This specification is approved for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 This specification provides instructions for the preparation of technical data necessary for accomplishment of planned preventive maintenance inspection requirements on a scheduled basis for missile and space weapon systems.

1.2 This specification is applicable to missile and space weapon systems, which include Airborne Equipment, Support Equipment (SE), Communication-Electronics Equipment and Guidance Equipment, as applicable. The term SE, as used herein, includes Operational Support Equipment (OSE) and Maintenance Support Equipment (MSE) operated and maintained by the missile or space activity.

1.2.1 Specific determination of SE and Communication-Electronics coverage shall be accomplished jointly by the contractor and the procuring agency.

1.2.2 This specification applies to all missile/space weapon systems except air launched missiles, rockets and drones.

1.2.3 Inspection work cards shall not be prepared by the contractor unless so directed by the procuring agency. Approval of HQ AFLC/LOLMF shall be required prior to the procuring agency directing contractor preparation.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATION
Military

MIL-M-38784	Manuals, Technical: General Style and Format Requirements
MIL-P-38790	Printing Production of Technical Manuals: General Requirements for

PUBLICATIONS
Technical Orders

TO 00-20-6	Inspection System, Documentation, and Status Reporting for Ground-Launched Missiles and Their Trainers, SE and Ground CEM Equipment
TO 21-XXXXX-06	Work Unit Code Manual (applicable to the Weapon System)

BULLETINS

ANA 275	Guide for the use of lubricants, compounds, and fluids in aircraft

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:17Z
Check the source to verify that this is the current version before use.

(Copies of documents required by contractors in connection with specific functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General

3.1.1 Identification. Technical order numbers, which will identify manuals and work cards, will be furnished by the procuring agency.

3.1.2 Notes, Cautions, and Warnings. The manuals and work cards shall contain any notes, cautions, and warnings as directed by the procuring agency.

3.2 Inspection Requirements Manuals

3.2.1 Preparation. Unless otherwise specified herein, the general manner of preparation shall be in accordance with MIL-M-38784 and MIL-P-38790.

3.2.2 Manuals Required

3.2.2.1 There shall be one manual that covers each of the Missile, Space Weapon System, Airborne Equipment, SE and Guidance Equipment.

3.2.2.2 Non-installed subsystems, such as the re-entry vehicle, rocket engine, supporting SE, and related components, removed from the launch area and returned to the repair facility, shall be covered in separate manuals and shall not be included in system inspection manuals. However, such manuals shall not be prepared unless specifically authorized by the procuring agency.

3.2.3. Information Required. The manuals shall establish and include a complete preventive maintenance program of scheduled and special inspection requirements and replacement schedules to assure operational readiness of that portion of the weapon system to which the manual pertains. The desired objective is to identify the minimum number of essential requirements and the maximum permissible intervals. All requirements shall initially be based upon the contractor's recommendations. Such recommendations are expected to be founded on the best available reliability data and must permit achievement of the required degree of operational readiness. As reliability data and field experience are accumulated, the requirements will be changed toward increasingly realistic conditions. The criteria upon which preventive maintenance (inspection) requirements should be based are as follows:

a. Inspections which will guard against hazards that could contribute to equipment damage and adversely affect personnel safety.

b. Inspections which will assure that systems or components removed during the course of scheduled maintenance are properly removed and re-installed.

c. Inspections which will assure that all systems and subsystems operate properly and that the weapon system is operationally ready and will perform its required mission satisfactorily.

d. Inspections which will assure the earliest possible detection of defects in order to minimize maintenance repair requirements, and which will assure the earliest discovery and correction of defects before they become serious.

e. Inspections which will assure a thorough and continuing effort to prevent or minimize the development of corrosion and which will assure early recognition of corrosion-producing conditions.

f. Requirements which will assure that inspection, test, etc, needed on a recurring basis are accomplished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

3.2.4 Security Classification. The basic manual shall be unclassified. If both classified and unclassified data are required, the data shall be divided into separate publications: An unclassified basic manual and a separate classified manual. Where a separate classified manual is issued, a reference that the basic manual is incomplete without the classified manual shall be included on the title page of the basic issue, revision or change, as long as the classified manual remains in existence. A similar reference to the basic manual shall be included on the title page of the classified manual.

3.2.5 Arrangement

3.2.5.1 Contents

3.2.5.1.1 In preparing Inspection Requirements manuals on a weapon system basis, scheduled inspection requirements should be compiled into a single manual as practicable to provide a more convenient reference for user personnel than would be the case if a separate manual were prepared for each of the major items of which the weapon system is composed. In order to state each requirement realistically and to correctly identify each requirement with the system to which it specifically applies, and further, to properly arrange and qualify the requirements in terms of each significant environmental condition affecting the inspection, due consideration must be given to the physical layout, design and operational plans applicable to each weapon system.

3.2.5.1.2 The design of a missile weapon system, unlike that of manned aircraft, is such that certain inspection requirements of a functional nature may simultaneously involve airborne, ground and interconnecting equipment, which together make up a functional system. Typical examples of such an inspection requirement are the integrated systems checkout and the partial countdown accomplished periodically as a part of the scheduled inspection program for certain missile weapon systems. When requirements of this type apply to a functional loop involving more than one major item of equipment, they must be broken out by functionally integrated systems under a suitable general heading such as "Missile/OSE." The visual inspection requirements related to the integrated systems functional checkout cited in the above example should be identified against specific equipment items. When a functional loop check is made, the basic requirement will be listed under the equipment on which the check is made.

3.2.5.2 Multiple Manuals

3.2.5.2.1 The manual shall normally be in one volume. If the size of the manual makes this impractical, two or three separate manuals shall be prepared with one or more complete sections in each manual.

3.2.5.2.2 The volumes shall be considered as independent manuals for the purpose of format: for example, each shall have a title page, separate publication number, list of effective pages, table of contents, separate sections, etc. Only the first volume shall contain an Introduction. Sections shall be numbered sequentially; i.e., numbering shall be continuous rather than beginning with number I for each volume.

3.2.5.3 Sectionalization

3.2.5.3.1 The manual(s) shall be divided into sections. Each section shall:

a. Not be broken out by work area. However, all the inspection requirements (regardless of work areas) which are required for each applicable system, subsystem, major item or component shall be listed.

b. Be compiled in numerical or alphabetical sequence by system compatible with the Work Unit Code manuals, as applicable, to the peculiar missile or space weapon system.

c. When a major system or subsystem is continued from one page to the next, the major system and subsystem, as applicable, shall be relisted at the top of each page with the word "continued" shown abbreviated in parentheses, thus "(contd)."

3.2.5.3.2 The sections may be arranged to cover systems or major items of equipment, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

3.2.5.3.3 An example of sectionalization is as follows:

SECTION I - Inspection Requirements (Missile, SE, Ground Guidance and Lubrication)

Missile
Control Center
Antenna Terminal
Weapon System Lubrication

SECTION II - Replacement Schedule

HGM-25A Missile, Stage I
HGM-25A Missile, Stage II

SECTION III - Communication-Electronics

3.2.5.4 Format. The arrangement of the technical manual shall be as follows:

Title Page
List of Effective Pages
Table of Contents
Introduction
Section I (Inspection Requirements - Figure 1 and 2)
Section II (Replacement Schedule - Figure 3 and 4)
Section III (Communication-Electronics - Figure 5)

3.2.5.4.1 Title Page, List of Effective Pages, and Table of Contents. The Title Page and List of Effective Pages and Table of Contents shall be prepared in accordance with MIL-M-38784.

3.2.5.4.2 Introduction

3.2.5.4.2.1 The introduction shall consist of the following as applicable to a specific weapon system. Any modifications to the following introduction text shall require prior approval of the procuring agency:

"This manual contains mandatory inspection requirements at maximum intervals to maintain an operational readiness condition for that portion of the weapon system to which this manual pertains. The inspection requirements in this manual are stated in such a manner as to establish what is to be inspected, when it is to be inspected, and what conditions are to be sought. When differences exist between this manual and the applicable maintenance manual, this manual shall take precedence. This manual does not in any way attempt to sequence the accomplishment of the inspections nor does it contain instructions for repair, adjustment or other means of rectifying defective conditions; it does not contain instructions for trouble shooting to find cause of malfunction. Applicable portions of the appropriate maintenance manual should be consulted for instructions that are beyond the scope of this manual."

"This manual pertains to all models of a certain series and may, therefore, contain inspection requirements that are not applicable to the specific equipment configuration to be inspected. When this situation is encountered, only those requirements that are applicable, as indicated by the 'Applicable At' Column, should be accomplished. Entries made in the 'Applicable At' Column are coded by Air Force Base, i.e., VAFB, DMAFB, LAFB, etc, as applicable."

"The inspections prescribed by this manual will be accomplished at specified periods by the organizations operating the missile or space weapon system with assistance, when required, from higher level maintenance facilities. Compliance with the requirements of this manual is required in order to assure timely discovery and correction of incipient failures which can cause malfunction."

"The periods designated in this manual for accomplishment of the inspections are the maximum intervals allowed. No change in intervals or requirements will be made to this manual without prior coordination with the AFLC ALC Director Materiel Management (DMM) for the _____ (enter the weapon system designation)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

"The time in man-minutes for accomplishment of inspection requirements reflects only average time required for inspection plus normal predictable maintenance and adjustment. These items are to aid maintenance supervisors in planning and scheduling."

"Additional information relative to recording inspection data and the use of this manual may be obtained by consulting applicable technical orders."

"Changes and revisions to this manual will be published when necessary to add, delete, change or revise requirements. Such changes and revisions will be based on factual data accumulated as a result of maintenance experience with the missile or support equipment. Data will be gathered by field evaluations; AFR 66-12, Improved Maintenance Program; unsatisfactory reports; etc. Recommendations initiated by Air Force organizations, proposing changes to this manual, will be submitted to the DMM through appropriate command headquarters as per TO 00-5-1."

"Definitions. For the purpose of clarification of terms used in this manual, the following definitions are given:

Periodic Inspection: is a type of inspection repetitively performed at specific periods of time.

Special Inspection: is a type of inspection which supplements other inspections and is accomplished because of specific circumstances.

Replacement Schedule: lists units of operating equipment that are to be replaced periodically and specifies how often they are to be replaced. Replacement means removal of the equipment and installation of a new or newly overhauled item in its place. Replacement intervals are indicated in operating hours, cycles, or calendar time, as appropriate. Replacement will be accomplished during the inspection period occurring nearest to the replacement time specified in this schedule.

Specified: refers to a definite amount, operation, or limitation which has been established and is contained in applicable directives.

Evidence: is proof of an existing or incipient unsatisfactory condition.

Security: means the component is properly mounted or attached to related equipment including applicable safetying.

Accessible: is the term applied to equipment that may be inspected without further disassembly or removal of panels, cowlings, etc, other than those required to accomplish the more specific requirements applicable to the particular inspection.

Condition: is a term used to describe a situation when specific limitations have not been established. A condition is excessive if it has progressed to the degree that, if not corrected, could result in failure or malfunction of the component prior to the next scheduled accomplishment of the requirement which directed attention to the condition (corrosion, fraying, loose, etc).

Support Equipment SE: All equipment required on the ground to make a weapon system, command control system, support system, advanced objective, subsystem, or end item of equipment operational in its intended environment. This includes all equipment required to install, launch, arrest, guide, control, direct, inspect, test, adjust, calibrate, appraise, gage, measure, assemble, disassemble, handle, transport, safeguard, store, actuate, service, repair, overhaul, maintain, or operate the system, subsystem, end item or component. SE is functionally subclassified only as Operating Support Equipment (OSE) or Maintenance Support Equipment (MSE)."

3.2.5.4.3 Section I, II and III

3.2.5.4.3.1 Inspection Types. Types of inspection requirements are classified as Periodic and Special.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

3.2.5.4.3.1.1 Periodic Inspection. This is a repetitive type of inspection to be accomplished on days of calendar time (30, 45, 90, 180, etc) with the interval of time to be designated by the procuring agency.

3.2.5.4.3.1.2 Special Inspection. These inspections supplement other inspections and are accomplished because of specific circumstances. All special inspections will be event oriented only.

3.2.5.4.3.2 Stating Requirements. Each inspection requirement shall be stated tersely, but completely, in language understandable to the average mechanic. Each inspection requirement shall specifically state what condition is to be sought or the operation required to obtain a desired condition. A requirement for checking certain equipment for a general condition is of little value to the mechanic, and such terms should, therefore, not be used. The format for stating inspection requirements shall be "noun," nomenclature, as used in applicable maintenance manuals for condition to be sought. Normally, more than one major item shall not be stated in the same requirement. If a requirement appears in more than one section of the manual and the intended scope of the requirement is the same for each inspection, each entry must be worded exactly the same. Further, the man-minute data when included shall also be identical. When magnafluxing, X-raying or zygloing is required, a statement to this effect shall be included as a part of the requirement. In no case shall the statement of an inspection requirement explain procedure for removal of equipment or rectification of trouble found as the result of inspection. The following type items are not to be included in the inspection requirements manual:

- Luxury items that do no harm if they fail.
- Items of a housekeeping nature.
- Checking for continuance of a static condition.

3.2.5.4.3.3 Arrangement of Sections. The arrangement of sections shall be: Section I, Inspection Requirements (Missile, SE, Ground Guidance and Lubrication Requirements); Section II, Replacement Schedule; and Section III, Communication-Electronics, as illustrated in Figures 1, 2, 3, 4 and 5.

3.2.5.4.3.3.1 Section I, Inspection Requirements. Inspection requirements shall be presented in the format illustrated in Figure 2. Instructions for entries to the format follow:

3.2.5.4.3.3.1.1 Inspection Requirements Column. Each requirement shall be stated concisely but completely and shall state specifically what condition is to be sought. The inspection requirements shall be grouped according to system, subsystem, end items or similar functional categories. The applicable system nomenclature and code number (two digit; i.e., System 11, 23, 56, BA, MA, etc) shall be entered preceding each group.

3.2.5.4.3.3.1.1.1 Preparation steps and special tools shall not be shown. This requirement is contained in the technical order or checklist that will be referenced for each inspection requirement.

3.2.5.4.3.3.1.1.2 Each inspection requirement entry shall reference the technical order or checklist that covers the requirement, as applicable. (Example: Reference TO 21-HGM25A-2-11 or TO 21-HGM25A-CL-3-1)

3.2.5.4.3.3.1.2 Type of Inspection Column. Each type of inspection column shall be completed as follows:

3.2.5.4.3.3.1.2.1 Periodic. The interval of time (in calendar days) shall be placed opposite each applicable inspection requirement in the "Periodic" Column. Only those requirements that fall due at an interval of time divisible by the basic interval (basic included) will be indicated in the "Periodic" Column; i.e., 30, 45, 90, 180, 270, 360. The interval of time of a basic periodic shall be established by the procuring agency.

3.2.5.4.3.3.1.2.2 Special. In the "Special" Column the frequency, condition or circumstance governing each applicable requirement shall be inserted. All special inspections will be event oriented only.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:17Z
Check the source to verify that this is the currentversion before use.

3.2.5.4.3.3.1.3 Applicable At Column. This manual will apply to all models of a certain series and may, therefore, contain inspection requirements that are not applicable to the specific equipment configuration to be inspected. When this situation is encountered, only those requirements that are applicable, as indicated by the 'Applicable At' Column, should be accomplished. Entries made in the column shall show the applicable model designation by Air Force Base; i.e., VAFB, DMAFB, LAFB, etc, as applicable.

3.2.5.4.3.3.1.4 Time Required Column. The time in man-minutes required to accomplish each inspection requirement shall be entered.

3.2.5.4.3.3.2 Section II, Replacement Schedule. This schedule lists units of operating equipment that are to be replaced periodically and specifies how often they are to be replaced. Replacement means removal of the equipment and installation of a new or newly overhauled item in its place. Replacement intervals are indicated in operating hours, cycles, or calendar time, as appropriate. Replacement will be accomplished during the inspection period occurring nearest to the replacement time specified in this schedule.

3.2.5.4.3.3.2.1 Contents. The replacement schedule shall contain a listing of those items of equipment to be replaced at the expiration of an interval of calendar time. Where this is not feasible, replacements should be accomplished at the expiration of a specified amount of operating hours or cycles, or at the occurrence of a specific condition.

3.2.5.4.3.3.2.1.1 The replacement components shall be segregated according to the major items on which usage data shall be maintained. This will be accomplished by identifying the major items in the nomenclature and part number column (Figure 4). This is to be followed with a listing of all time change components contained within the major item.

3.2.5.4.3.3.2.2 Format. Entries to the Replacement Schedule format shown in Figure 4 shall be accomplished as follows:

3.2.5.4.3.3.2.2.1 Replacement Frequency Column. The replacement frequency of each item shall be entered in this column. Replacement frequencies shall be listed in calendar time and aligned with scheduled inspections. If replacement frequencies for non-calendar life items cannot be converted to calendar time, the replacement frequencies shall be stated in operating hours/cycles, as appropriate.

3.2.5.4.3.3.2.2.2 System Column. The system code number (reference applicable work unit code manual) to which the major item and subordinate replacement items apply, shall be entered in this column.

3.2.5.4.3.3.2.2.3 Nomenclature and Part Number Column. The nomenclature and part number of the major item and each replacement item shall be entered. Replacement components under the major item shall be indented.

3.2.5.4.3.3.2.2.4 Quantity Column. The quantity of the item, as applicable, shall be entered.

3.2.5.4.3.3.2.2.5 Man-Minutes Column. The time in man-minutes required to replace the item, including time required to gain access to the item, shall be entered.

3.2.5.4.3.3.3 Section III, Communication-Electronics. The contents of paragraphs 3.2.5.4.3.3.1.1 through 3.2.5.4.3.3.1.4 will apply to this section.

3.3 Inspection Work Cards

3.3.1 General. Inspection work cards are the basic components of the periodic inspection concept of maintenance. Inspection work cards shall contain requirements sequenced and arranged in a pattern to provide efficient, effective and economical utilization by maintenance organizations. Procedures for preparing inspection work cards outlined herein are set forth as a method of establishing and maintaining the work cards to a predetermined standard. The forms and formats established herein shall not be deviated from without specific approval of the procuring agency. Instructions for the preparation of the work cards shall be uniformly followed.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

3.3.2 Work Card Requirements. Inspection work cards shall be prepared for all inspection requirements identified in the Inspection Requirements Manual (except special inspection items to be accomplished on an event oriented basis) and for lubrication requirements of the equipment involved.

3.3.3 Work Card Preparation. Sample card formats are provided in Figures 6 through 18 to serve as guides in the preparation of the inspection and lubrication work cards. Insofar as possible, spacing and arrangement shown in the referenced figures shall be utilized to achieve uniformity. However, the text of the introduction card shall be the same for all work card sets and shall be that shown in Figure 10.

3.3.3.1 Card Stock, Printing and Binding. Printing of the work cards shall be accomplished back to back, head to head except noted in 3.3.3.3.4 and 3.3.3.3.5. Inspection work cards shall be printed on 4x8 inch paper (50 to 60 pound stock), 6 hole drilled to fit standard binders (NSN 7510-00-082-2667).

3.3.3.2 Security Classification. The classification of the inspection work card sets shall be determined in accordance with applicable security regulations and will depend on the nature of the contents of the cards. Classification of the work card set, or any group of cards of the set shall be determined initially by the contractor concerned. Inspection work cards containing requirements or information classified Confidential or higher shall carry the appropriate classification printed on each card. Normally, the classification of the Inspection Requirements Manual will determine the classification of the work card sets. However, since the Inspection Requirements Manual requirements are generally expanded in work card preparation, this may introduce classified information into the work cards. Due to the security restrictions imposed on classified material, every effort shall be exerted to keep work card sets unclassified. Whenever practicable, classified work cards shall be contained in separate classified sets in lieu of classifying the entire work card set. The importance of avoiding "over-classification" cannot be overemphasized. Final determination of classification of work card sets shall be a procuring agency responsibility.

3.3.3.3 Work Card Sets. A separate and distinct set of inspection work cards shall be prepared for systems and equipment covered within a given section of the Inspection Requirements Manual, except for the Replacement Schedule section. The work card set for a given section of the Inspection Requirements Manual shall include the lubrication requirements that will be accomplished. Each work card set shall be divided into two sections. Section I (Figure 14) shall contain all inspection requirements cards, and Section II (Figure 15) all lubrication requirements cards.

3.3.3.3.1 Title Card and List of Effective Cards. The Title Card (Figures 6 and 7), with a List of Effective Cards numbered "A" (Figure 8) printed on the reverse side, shall be the first card of each work card set. When publishing changes, the Changed Title Card (Figure 7), with an appropriately completed "A" card on the reverse side, shall be the first card of a changed set. The Title Card shall contain the type of information shown in Figure 6 or 7, as appropriate.

3.3.3.3.2 Table of Contents. The table of contents page shall be numbered "a." It shall be arranged in the format of Figure 9.

3.3.3.3.3 Introduction Card. The Introduction page shall be numbered "i." It shall contain the heading and text shown in Figure 10. The text shall be the same for all work card sets.

3.3.3.3.4 Work Area Diagram. Sample work area diagrams (cards numbered "ii") are shown in Figures 11 and 12. Additional cards, numbered "iia," "iib," etc, may be used to indicate work areas on various items of other equipment involved in an inspection. Such work area diagrams shall be printed back to back, head to head, of each additional card except if the information is placed horizontally (Figure 12), pages shall be printed head to foot. The work area diagrams will include areas for lubrication requirements.

3.3.3.3.5 Inspection Flow Cards. Inspection Flow Cards shall be prepared in the style, format, and size shown in Figure 13. The card number in each work card set shall be "iii." Additional cards numbered "iiia," "iiib," "iiic," etc, will be used to indicate additional flow cards. The "iii" card shall not be furnished with changes to a set unless cards are added/deleted or the contents thereon are changed. Since these cards are placed horizontally on the page, they shall be printed head to foot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

3.3.3.3.5.1 Work Schedules. The Inspection Flow Cards depict basic planned work schedule for accomplishing inspections and are necessary to serve as a guide to squadron maintenance personnel in preparing the actual work schedule. The flow cards also serve as a means of controlling the assignment of work during an inspection and are a ready reference for determining the progress of these operations.

3.3.3.3.5.2 Determination of Sequence. The contractor shall conduct an analysis of the weapon system inspection requirements and determine the sequence of accomplishment for each work card within each work card grouping (see 3.3.3.3.6.1 Work Card Grouping Within a Set of Cards). After sequencing the cards for accomplishment, the sequence will be reflected by work area and card number on each respective inspection (days of calendar time) flow card.

3.3.3.3.5.3 Scheduling to Meet Operational Requirements. With certain types of equipment and under certain conditions, the time "out-of-commission" to perform the entire inspection operation may be such that the operational readiness of the weapon system would be adversely affected. In order to allow the equipment to be returned to readiness condition within time limits dictated by operational criteria, the inspection requirements shall be scheduled and sequenced in such a manner that at any given time during an inspection, work could be suspended and the equipment returned to "in-commission" (E.W.O.) status within the time prescribed by the operational plan.

3.3.3.3.5.4 Work Card Scheduling. In order to prepare the most realistic flow cards, the contractor shall prepare a preliminary sequence chart to be used for a trial run of an actual inspection and will make adjustments to the preliminary chart as necessary. Additional trial runs may be necessary to insure that the flow cards are the best possible product that can be submitted. To sequence the work cards on the preliminary chart or when making adjustments as described above, it is advisable to schedule the work cards for the critical work areas first. Of the remaining work cards, the cards reflecting "power on" requirements should be given the next consideration. The balance of the work cards can be considered as non-critical and can be plotted on the chart to complete the most realistic work schedule. Care should be taken to avoid overcrowding any work area when this plotting is being accomplished. An Inspection Sequence Chart, as such, shall not be published. However, they are required to properly and adequately prepare Inspection Flow Cards.

3.3.3.3.5.5 Preparation of Inspection Flow Cards. The flow card shall be prepared using the format shown in Figure 13. Each flow card shall consist of heading blocks across the top of the flow card and shall indicate the work schedule.

3.3.3.3.5.5.1 Heading Blocks. The individual blocks are relatively self-explanatory. Information to be inserted in these blocks can be determined by following the example given on the sample flow card, Figure 13.

3.3.3.3.5.5.2 Work Area Column. The work area portion of the card shall contain a listing of work areas shown on the work area diagrams (card "ii," "iia," "iib," etc) and shall reflect a complete work schedule of all inspection work cards for which the flow card is prepared.

3.3.3.3.5.5.3 On E.W.O. Block. All work cards that can or must be accomplished prior to placing the missile "Off E.W.O." shall be listed. This shall cover those work cards that can be accomplished simultaneously and those work cards that must be accomplished in sequence.

3.3.3.3.5.5.4 Off E.W.O. Block. All work cards that, when accomplished, will place the missile "Off E.W.O." shall be listed. This shall cover those work cards that can be accomplished simultaneously and those work cards that must be accomplished in sequence.

3.3.3.3.6 Work Cards

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

3.3.3.3.6.1 Work Card Grouping Within a Set of Cards. The cards contained in an inspection work card set shall be so numbered in each section as to arrange all inspections due at a given date (days of calendar time). Example: Cards numbered 1-1 through 1-9 shall be for 90-day inspection, cards 1-10 through 1-22 shall be for the 180-day inspection, cards 2-1 through 2-19 for the 90-day lubrication requirements and cards 2-20 through 2-31 for the 180-day lubrication requirements. There shall be an inspection flow card for each grouping of the work cards. The work card grouping will contain all cards appearing on the respective flow card. By contrast, the requirements identified in a given section of the Inspection Requirements Manual basically will be oriented to items or systems without regard to combining or otherwise organizing the requirements for inspection planning purposes. Therefore, there will not necessarily be a direct correlation between a part within a section of the Inspection Requirements Manual and a group within a work card set.

3.3.3.3.6.2 The sequencing of the work cards within a group for accomplishment will be documented on the flow card(s) for each respective grouping of work cards.

3.3.3.3.6.3 Work Card Heading Blocks. Data blocks at the top of the work cards shall be completed as follows:

3.3.3.3.6.3.1 Work Unit Code. This block shall be subdivided into two blocks, as noted in paragraphs 3.3.3.3.6.3.5.1 and 3.3.3.3.6.3.5.2.

3.3.3.3.6.3.2 Work Area(s). Entry in this block shall be made to indicate the specific work area or areas in which the requirements listed on the card will be performed. The work area identification numbers listed on the work area diagram (cards numbered "ii") will be used for entries in this block. When more than one work area is involved, the work area numbers shall be listed in the order in which the areas will be occupied.

3.3.3.3.6.3.3 Card Time. This entry shall indicate the amount of time needed by the average skilled mechanic or specialist to accomplish the work prescribed by the card. This time shall be the total of the time required for all items reflected in the body portion of the card and shall include a cushion time which will be based on ten minutes for each two hours of work. The time shall be indicated in hours and minutes; i.e., 02:15, 01:40, 00:25, etc. All time shall be reflected to the nearest minute and reflected in four digits.

3.3.3.3.6.3.4 Card Number. This number identifies the card for publication and revision purposes and provides a means for plotting and adjusting the flow card. Work cards shall be numbered consecutively after the cards have been arranged in accordance with instructions previously provided.

3.3.3.3.6.3.5 System Block, and Subsystem and Component Blocks.

3.3.3.3.6.3.5.1 System Block. Entries shall be made in this block to denote the work unit code number of the system to which the requirement or requirements apply, as indicated in the Work Unit Code Manual.

3.3.3.3.6.3.5.2 Subsystem and Component Block. Entries shall be made in this block to denote the official subsystem and component work unit code number to which each requirement is applicable, as indicated in the Work Unit Code Manual.

3.3.3.3.6.3.6 Inspection Number Block. Entries shall be made in this block to denote the interval of accomplishment of the card. Entries will be days of calendar time (30, 45, 90, 180, etc) with the interval of time to be designated by the procuring agency.

3.3.3.3.6.3.7 Power Block. Instructions for identifying the power status in the body portion of the work cards are as follows:

3.3.3.3.6.3.7.1 Power On. If it is mandatory that power be on during the accomplishment of the tasks entered on the work card, an "X" shall be placed in the ON block.

3.3.3.3.6.3.7.2 Power Off. If it is mandatory that power be off during the accomplishment of the tasks entered on the work card, an "X" shall be placed in the OFF block.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:17Z
Check the source to verify that this is the currentversion before use.

3.3.3.3.6.3.7.3 Power Optional. A given inspection requirement shall be designated as a "Power On" or a "Power Off" requirement only if a specified power status is mandatory during the accomplishment of the requirement. If the power may either be ON or OFF without affecting the accomplishment of that requirement, the power block shall be left blank.

3.3.3.3.6.3.7.4 Power On and Off. If a given card contains mandatory "Power On" and "Power Off" requirements, the power status for those requirements shall be identified in the body portion of the card. This may be accomplished either by entering the headings "Power On" or "Power Off" above each group of requirements, or by entering the abbreviation "Pwr On" or "Pwr Off" within parentheses in front of each applicable requirement. An "X" must be entered in both power ON and OFF blocks when this situation arises.

3.3.3.3.6.3.8 Inspection Requirements

3.3.3.3.6.3.8.1 Each inspection requirement shall be stated concisely but completely and shall state specifically what condition is to be sought. Normally, a verb shall not be used in stating a requirement. Where feasible, the statement shall be structured as follows: "(Insert noun name of item, and part number if significant) for (insert condition to be sought, and quantity of item if appropriate)." To avoid vagueness or repetition, a series of related line items shall, when practicable, be preceded by a qualifying statement such as "perform the following safety checks." Additional essential information shall be included in the narrative statement or tabulated on the card as necessary. This information shall include specified torque values, pressures, clearances, tolerances, and so on. Such information shall be based upon the applicable technical order, which shall be referenced after each inspection requirement.

3.3.3.3.6.3.8.2 In no case shall the statement of an inspection requirement explain the procedure for accomplishing the requirement, or for disassembly of the equipment, removal of equipment, or rectification of troubles found as a result of the inspection. Reference shall be made in the body of the work card to the technical manual containing the detailed procedures. The reference shall contain the applicable technical order number, to identify specifically the procedures necessary to support the particular inspection requirement.

3.3.3.3.6.3.8.3 Each inspection requirement shall be treated individually and specifically. A requirement for checking certain equipment for general condition is of little value to maintenance personnel. Similarly, statements which fail to clarify which of the conditions specified is applicable to each item of equipment identified, or which fail to clarify which of the conditions specified is desirable and which is undesirable are of little value to maintenance personnel, and shall be avoided.

3.3.3.3.6.3.8.4 Requirements on each work card shall be sequenced in the order of accomplishment. Each line item shall be numbered beginning with number one for each subsystem under a major system (1, 2, 3, 4, etc) and shall be continued on the back of the card, as applicable. Each inspection requirement listed under each subsystem shall be numbered as subparagraphs (a, b, c, d, etc), as applicable.

3.3.3.3.6.3.8.5 Special inspection requirements to be accomplished on event oriented only, shall not have inspection work cards.

3.3.3.3.6.4 Stating Lubrication Requirements. The following additional instructions are provided for preparation of inspection work cards containing lubrication requirements.

3.3.3.3.6.4.1 The front side of the lubrication requirements work card (Figure 17) shall be completed the same as for inspection work cards, except for the body of the card. The body of the card shall contain the following standard sentence: "Lubricate as indicated on back side of card using table for reference to type of lubricant." Below this standard sentence, list (by sub-letters) the next lower assemblies to be lubricated and, if applicable, the total number of lubrication points on each assembly, as shown by the following examples:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

(a) Four engine actuators, total eight places.

(b) Two gimbal mount assemblies, total twelve places.

3.3.3.3.6.4.2 Only those lubricants listed in ANA Bulletin No. 275 or other Government approved lubricants, as applicable, shall be used.

3.3.3.3.6.4.3 A lubrication diagram shall be placed on the back side of the card. The diagram shall consist of an overall location drawing showing the major item of equipment to be lubricated. Detail views shall be used when necessary to better identify specific lubrication points. Detail views shall be identified by capital letters (A, B, etc) and the view shall be inclosed with a solid line. Lubrication points shall not be identified numerically for sequence purposes. Detail views shall be identified in clockwise rotation. Lubrication information for each point shall be the type of lubrication and method of application. The lubricant shall be identified by the letter code assigned in ANA Bulletin No. 275, the applicable specification for that type of lubricant, and narrative identification of the code letters. A table of lubricants shall be included in the lubrication diagram, as shown in Figure 18.

3.3.3.3.6.5 Work Cards for Communication-Electronics. Work cards shall be prepared for all Communication-Electronics requirements (Section III of the Inspection Requirements Manual) as outlined in paragraphs 3.3.1 through 3.3.3.3.6.4.3.

3.3.3.3.6.6 Changes and Revisions. Changes to inspection work cards shall be made as necessity dictates. In this respect, changes to work cards shall be mandatory prior to releasing changes to or revisions of the Inspection Requirements Manual to insure concurrent or preconcurrent distribution of work card changes to the service activities. If the work cards contain inspection requirements which are not included in the current Inspection Requirements Manual but will be included at some future unknown date, the new item shall be identified by a black change symbol to the right of the affected items. In such cases, the title card shall contain the following statement after the reference to the manual: "Items identified by a change symbol (black line in margin) will be incorporated into a future change to or revision of the Inspection Requirements Manual." When change action necessitates an additional card, it shall carry the basic number of the card which it will follow, suffixed with the letter A. For example, if card 100 is being changed but does not provide sufficient space for listing all the requirements, the new card will be 100A. If the total number of cards in the set prior to the change was 150 and no other A, B, C, D, etc, cards, other than 100A were added, the new total for the card set would be 151 cards. When the total volume of all changed cards reaches approximately 60% of the volume of the basic set, the set should be revised. However, when less than 60% of the cards are changed and the changes, because of the complexity of the weapon system and the workload and the personnel involved, could affect the usability of the cards, authority to issue a revision in lieu of a change may be requested from the appropriate contracting officer.

4. QUALITY ASSURANCE PROVISION

4.1. Unless otherwise specified herein, the supplier is responsible for the performance of all preliminary manual inspection requirements prior to submission of copy for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government, as specified in the contract.

4.2 In order to determine the adequacy and accuracy of the preliminary manual in relation to maintainability of the missile or space weapon and assure compliance with this specification, the contractor shall furnish personnel, qualified on the missile or space weapon system, to demonstrate the performance of specified inspections for representatives of the Government at a time designated by the Government. This demonstration shall be mandatory for Air Force procured missiles and space weapons.

4.3 Prior to this demonstration and after the contents of the preliminary manual have been determined, the contractor shall conduct a pre-planning conference with representatives of the Government to determine the time phase schedule for the demonstration of the requirements. This will permit grouping of participating personnel by specialties and demonstrations to be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

4.4 The demonstration shall be accomplished on an incremental basis as the equipment and inspection data become available. Demonstrations may be accomplished at the contractor's facility, in the operational environment, or any other location jointly agreed to by the Government and contractor.

4.5. Upon completion of the demonstration, the responsible representative of the Government will advise the contractor of changes required and approve the manual as corrected for publication.

4.6. Unless otherwise specified in the applicable contract, inspection and approval shall be in accordance with the provisions of Specification MIL-M-38784.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking for shipment shall be in accordance with Specification MIL-M-38784 and MIL-P-38790.

6. NOTES

6.1 Intended Use. Technical data prepared to this specificaton is intended for use by Air Force organizational, field and depot level maintenance activities as a guide for performing preventive maintenance on related missile and space weapon systems.

6.2 Additional Information. Additional information relative to Air Force missile and space weapon inspection systems, policies, and procedures may be obtained from TO 00-20-6.

6.3 Recommendations and Determinations. The contractor shall recommend what is to be inspected and when it is to be inspected in calendar time for the Periodic Inspections. Special Inspections and Replacement Schedule items should be expressed in calendar time, if possible; however, if this cannot be accomplished, individual items may be inspected or replaced when a certain condition occurs or exists on an hour or cycle basis. The number of hour and cycle items should be kept to an absolute minimum. The frequence of performance of the Periodic inspections and inclusion of standard "in-service" operational limits shall be determined by the Government.

6.4 Use of "Shall," "Will," "Should," and "May" in this Specification. The definitions of "shall," "will," "should," and "may" contained in Specification MIL-M-38784 shall be applicable to use of these terms in this specification.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Air Force - 16

Reviewer:
Air Force - 01
Air Force - 10

Preparing Activity:
Air Force - 16

Project No:
TMSS-F455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

SECTION I

INSPECTION REQUIREMENTS

1-1 This section contains the inspection and lubrication requirements for the HGM25A Missile Weapon System. Inspection and lubrication to be performed are listed with reference to the appropriate technical order(s). Missile Weapon System exercises to be performed on a periodic basis are also listed with reference to applicable technical orders.

Figure-1. Section I, Inspection Requirement (text)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

INSPECTION REQUIREMENTS	TYPE OF INSPECTION		APPLICABLE AT	TIME REQUIRED
	PERIODIC	SPECIAL		
ANTENNA TERMINAL (CONT)				
RADAR TEST SET (RD) TS-1401A GRW-5 (SYSTEM MD) (CONT)				
2. Unit 34 air filters for cleanliness, TO 21-HGM25A-2J-7-1-2	90		ALL	00:15
3. Waveguide on rear for specified pressure 5-8 PSIG, TO 21-HGM25A-2J-7-1-2	90		LAFB	00:05
EQUIPMENT TERMINAL				
LAUNCH CONTROL AND FACILITIES (SYSTEM NC)				
BATTERY POWER SUPPLY A/E 24A-5				
1. Battery charger, blower, and filter for cleanliness, TO 21-HGM25A-2J-10-2 and TO 35C-1-2-33-2	45		ALL	01:00
2. Battery electrolyte for level, TO 21-HGM25A-2J-10-2 and TO 35C-1-2-33-2	45		ALL	00:15

Figure 2. Section I, Inspection Requirements (format)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

SECTION II

REPLACEMENT SCHEDULE

2-1 This section lists units of equipment that are to be replaced on a periodic basis and specifies the frequency of replacement. Replacement is defined as removal of the equipment and installation of a new or newly overhauled item in its place. Replacement intervals are indicated by calendar time and operating hours/cycles when the capability exists for monitoring elapsed time. For replacement schedule of explosive components, comply with TO 11A15-1-___, Storage, Handling, and Inspection of Explosive Components.

Figure 3. Section II, Replacement Schedule (text)

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

REPLACEMENT FREQUENCY	SYSTEM	NOMENCLATURE & PART NUMBER	QUANTITY	MAN MINUTES
---------	--	HGM25A Missile, Stage I, 327B000000	---	--------
18 MO or One Over Pressure	32	Accumulator Burst Disc Assembly, 57E78	1	00:30
1500 HR or 48 MO	56	Rate Gyro, PS830600001D (Integral Time Meter)	1	00:45
---------	--	HGM25A Missile, Stage II, 327B7000000	---	--------
1500 HR	56	Rate Gyro, PS830600001D (Integral Time Meter)	1	00:45

Figure 4. Section II, Replacement Schedule (format)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

SECTION III

COMMUNICATION-ELECTRONICS

3-1 This section contains the inspection and lubrication requirements for Communication-Electronics in direct support of the HGM25A Missile Weapon System. Inspection and lubrication to be performed are listed with reference to the appropriate technical order(s).

Figure 5. Section III, Communication-Electronics (text)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

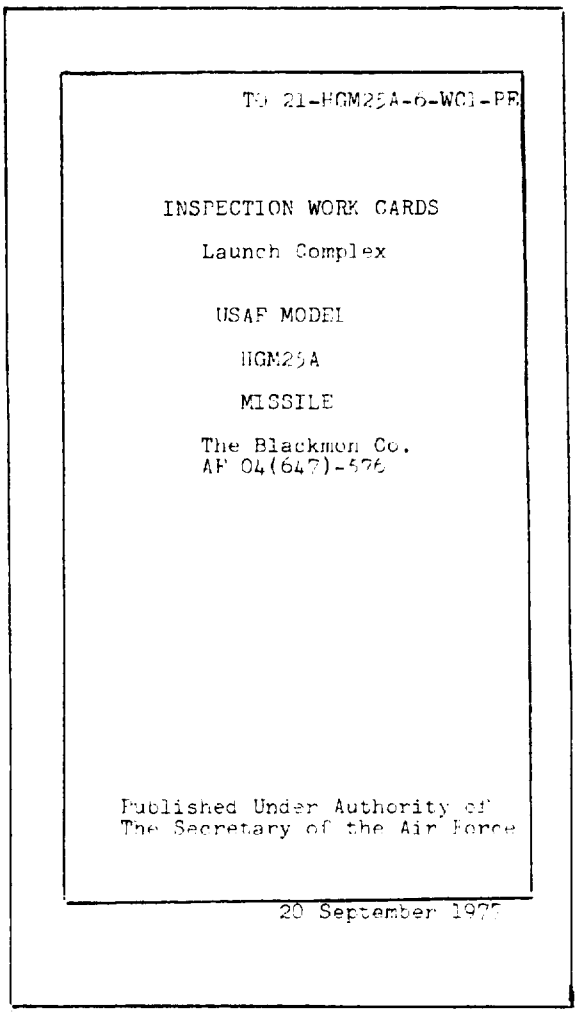


Figure 6. Sample Format, Work Cards Title Page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.


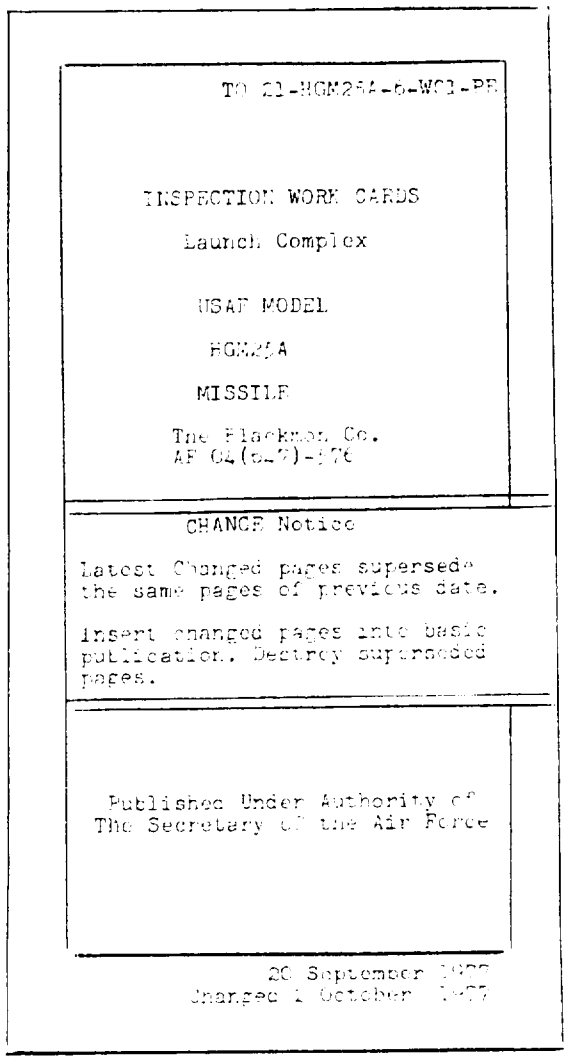


Figure 7. Sample Format. Work Cards. Changed Title Page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

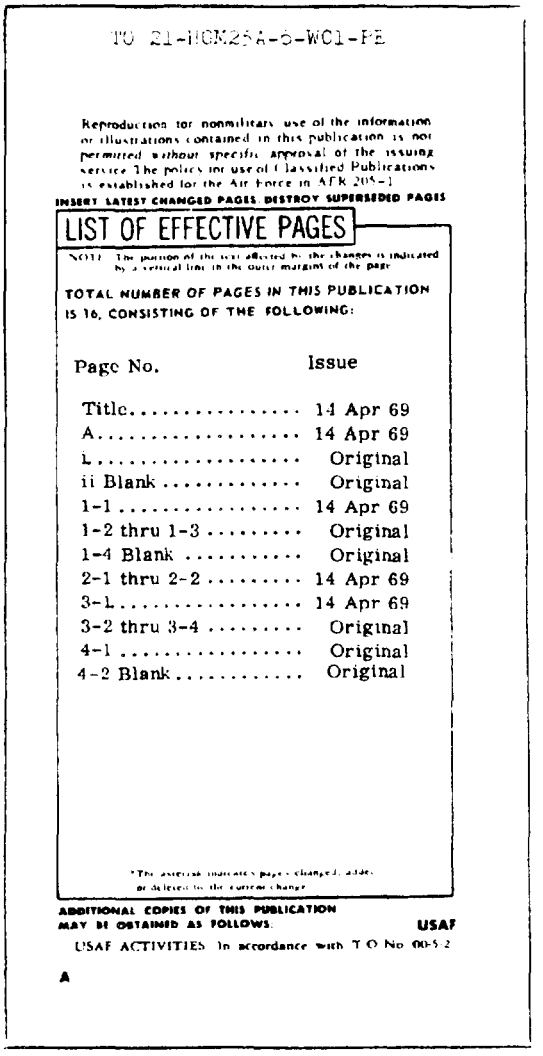

TO 21-HGM25A-5-WC1-PE

Reproduction for nonmilitary use of the information or illustrations contained in this publication is not permitted without specific approval of the issuing service. The policy for use of Classified Publications is established for the Air Force in AFR 205-1.

INSERT LATEST CHANGED PAGES. DESTROY SUPERSEDED PAGES

LIST OF EFFECTIVE PAGES

NOTE: The portion of the text affected by the changes is indicated by a vertical line in the outer margins of the page.

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 16, CONSISTING OF THE FOLLOWING:

Page No.	Issue
Title	14 Apr 69
A	14 Apr 69
i	Original
ii Blank	Original
1-1	14 Apr 69
1-2 thru 1-3	Original
1-4 Blank	Original
2-1 thru 2-2	14 Apr 69
3-1	14 Apr 69
3-2 thru 3-4	Original
4-1	Original
4-2 Blank	Original

*The asterisk indicates pages changed, added or deleted by the current change.

ADDITIONAL COPIES OF THIS PUBLICATION MAY BE OBTAINED AS FOLLOWS: USAF

USAF ACTIVITIES: In accordance with T.O. No. 00-5-2

A

Figure 8. Sample Format, Page A, List of Effective Pages/Cards.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:17Z
Check the source to verify that this is the current version before use.

TO 21-SGM-9A-WC1-1B

TABLE OF CONTENTS

Introduction i
Work Areas
General ii
Missile iia
Missile Silo iic
Propellant Terminal iic

Inspection Flow Cards
No. 40 iii
No. 60 iiia
No. 90 iiic
No. 180 iiie

Section I Inspection I-1

Section II Lubrication I-1

Figure 1. Sample format, Table of Contents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

TO 21-HGM25A-6-WC1-PE

INTRODUCTION

These inspection work cards provide the requirements of the Inspection Requirements Manual and will be used as a guide in performing the inspection to insure that no item is overlooked. The car size affords convenient handling by maintenance personnel while performing an inspection. Work assignment information is provided at the top of each card to permit establishment of a convenient filing system for the set of cards and to make it possible to readily select any particular card or group of cards in making work assignments to maintenance personnel. To afford more efficient maintenance planning and assignment of work, the requirements are arranged by work areas utilizing separate cards for requirements to be accomplished by each type mechanic or specialist required to perform the inspection.

The inspection requirements on each card are arranged to provide a logical sequence of performance of the requirements pertaining to the area or areas to which the card applies. Detailed instructions for use of these cards and the description and application of other forms and charts to be used in conjunction with these cards are contained in TO 00-20E-1. The data on the reverse side of this card and on subsequent cards indicate the location, code, and title of work areas which are referred to in this set of cards. Recommendations proposing changes to these work cards are encouraged and should be submitted on AFTO Form 22 to the responsible AFLC Air Logistics Center, Attn: DMM, Technical Data Branch, through appropriate command headquarters as per TO 00-5-1.

i

Figure 10. Sample Format, Introduction to Work Cards

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

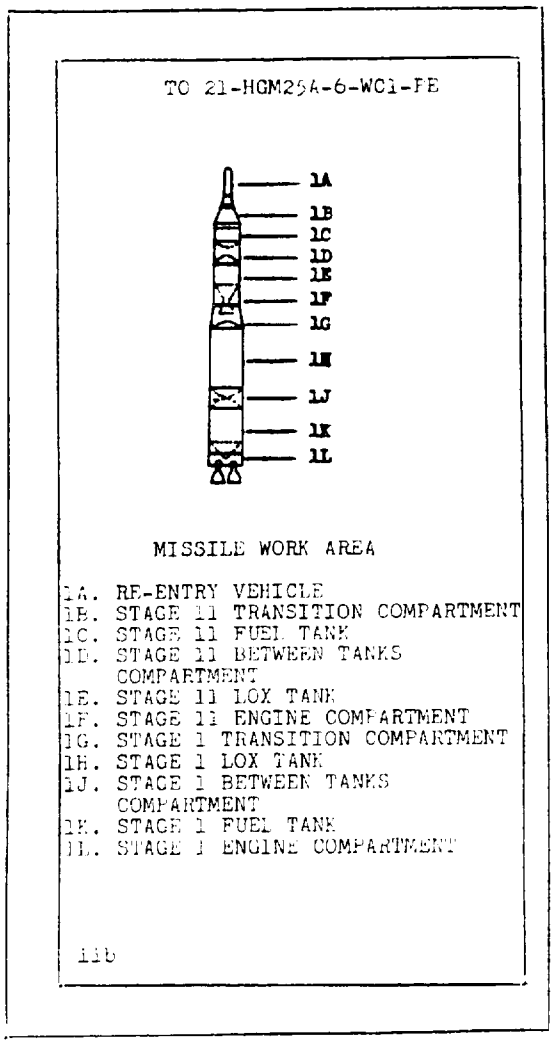


Figure 11. Sample Format, Missile Work Area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

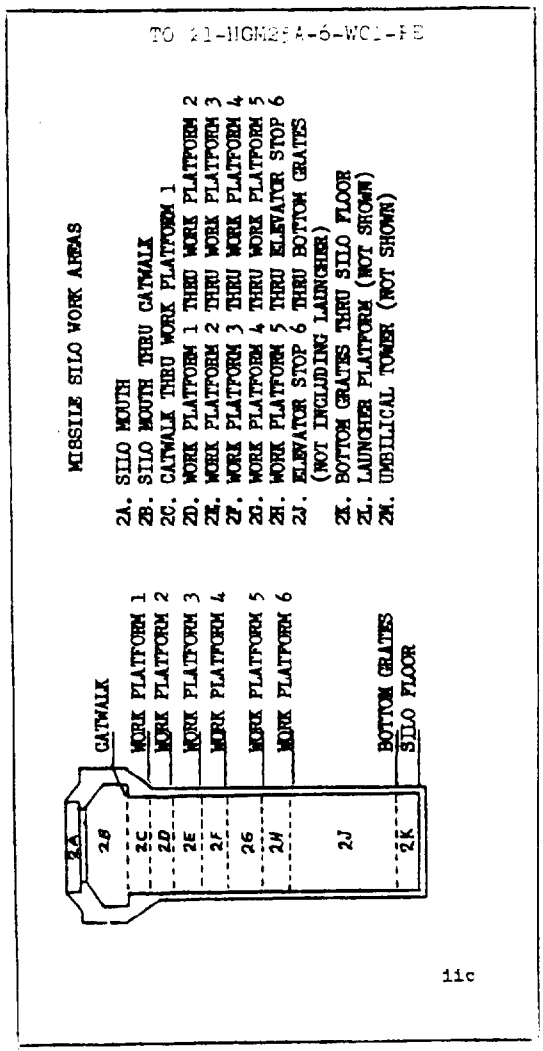


Figure 12. Sample Format, Missile Silo Work Area.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

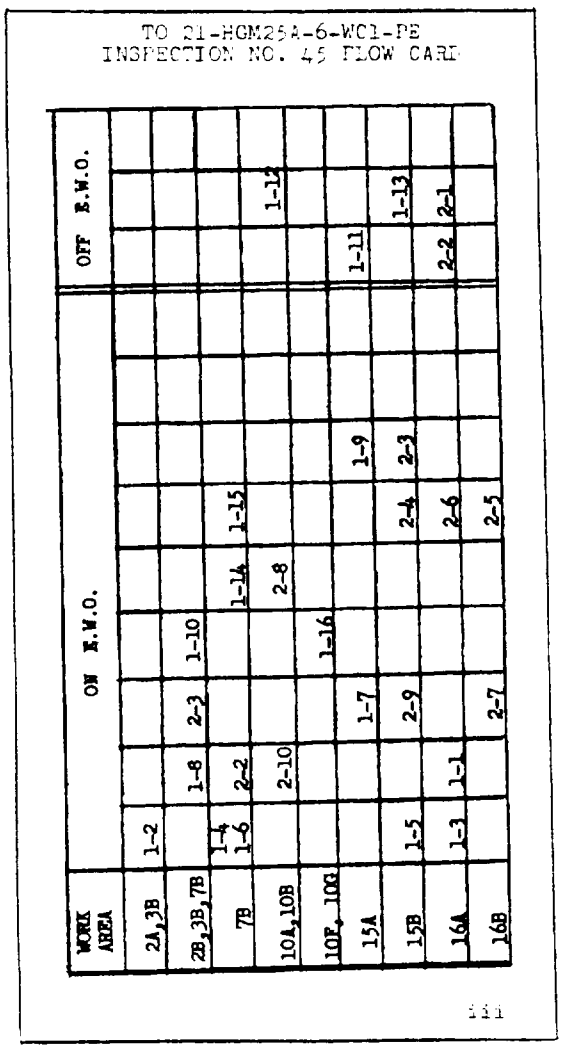


Figure 13. Sample Format, Inspection Flow Card.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T15:17Z
Check the source to verify that this is the current version before use.

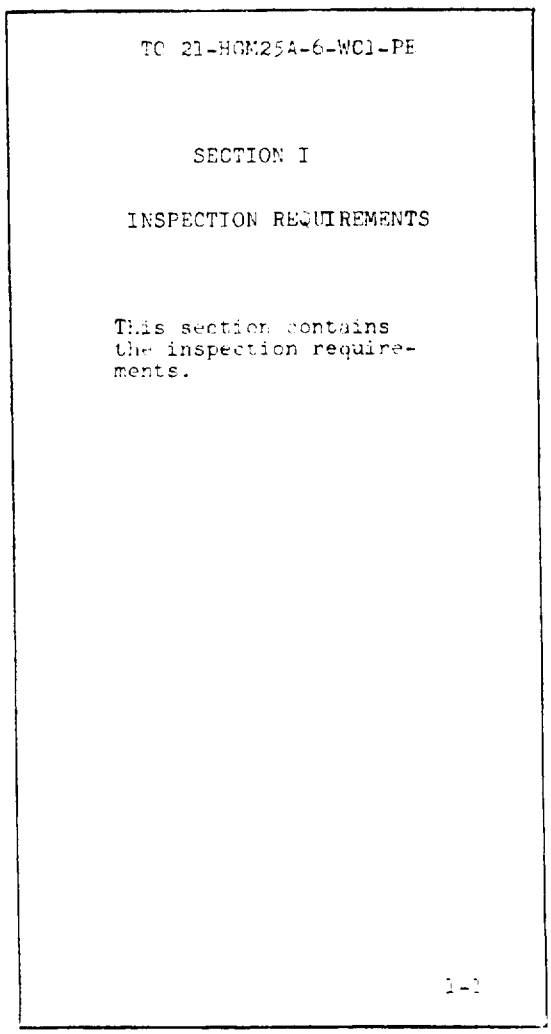
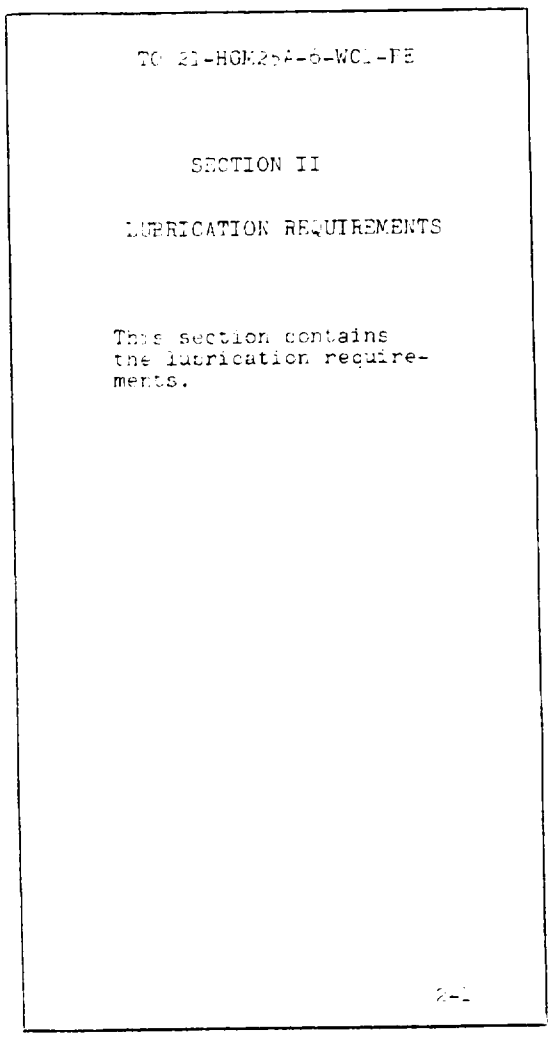


Figure 14. Sample Format, Inspection Requirements Section, First Page

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.


TO 21-HGM25A-6-WCL-FE

SECTION II

LUBRICATION REQUIREMENTS

This section contains the lubrication requirements.

2-1

Figure 1?. Sample Format, Lubrication Requirements Section, First Page

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

TO 21-HGM25A-6-WC1-PE

WORK UNIT CODE		WORK AREA 1E	CARD TIME 00:30	CARD NO. 1-3
SYS	SUB-SYS AND COMP	INSPECTION NO. 90 DAY REQ		POWER [X] OFF ON
		INSPECTION PREPARATION		
		NOTE		
		At least two men are required when working in area of re-entry vehicle		
		FLIGHT CONTROL SYSTEM		
		1. FLIGHT REFERENCE		
56	110	a. Autopilot magnetic amplifier assembly for specified pressure of 5 PSIG, TO 21-HGM25A-2J-11-2		
56	260	b. Spin motor detector assembly for specified pressure of 3.5 PSIG, TO 21-HGM25A-2J-11-2		
61	500	2. COMMAND GUIDANCE AN/DRW		
		a. Missile guidance set and waveguide assembly for specified pressure of 15 PSIG, TO 21-HGM25A-2FJ-7-1		

1-3

Figure 16. Sample Format, Inspection Work Card.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

TM 21-HGM-25A-5-WC1-PF

WORK UNIT CODE		WORK AREA 6L	CARD TIME 00:04	CARD NO. 2-01
SYS	SUB-SYS AND COMP	INSPECTION NO. 180 DAY REQ	POWER	[X] OFF [ ] ON
MC	600	"LUBRICATE AS INDICATED ON BACK SIDE OF CARD USING TABLE FOR REFERENCE TO TYPE OF LUBRICANT." MISSILE GUIDANCE COMPUTER SET AN/GSK-1 1. DIGITAL DATA PRINTER RO-144/GSK-1 A VIEW: a. (1) Pivot points, total six places. B VIEW: b. (2) Pivot points, total seven places. c. (3) Gear tooth surface, total one place. C VIEW: c. (4) Pivot points, total seven places. c. (5) Bushing, total two places.		

2-63

Figure 17. Sample Format, Lubrication Work Card, Front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.

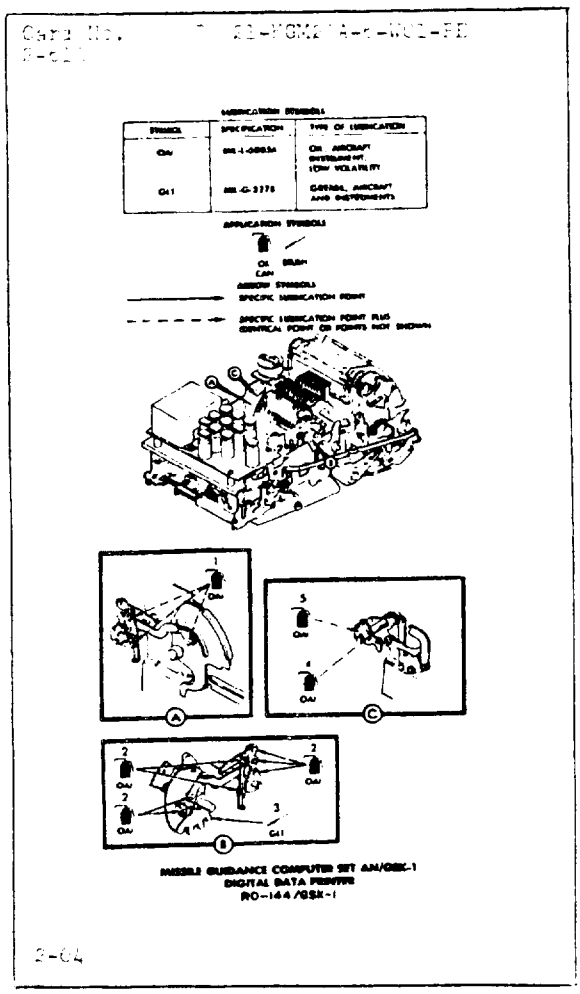


Figure 18. Sample format, Lubrication Work Card, Reverse.

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 703 122/3663

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-M-38701A (USAF) Manuals, Technical: Inspection Requirements; Work Cards; for Missile and Space Weapon Systems

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:17Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HQ AFLC/LOLMP
WRIGHT-PATTERSON AFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:17Z
Check the source to verify that this is the current version before use.