MILITARY SPECIFICATION SHEET


TRANSFORMERS, PULSE, LOW POWER,


TYPE TP7UX5510HZ001

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformers described herein shall consist of this specification and the latest issue of MIL-T-21038.

Ⓐ This specification is inactive for new design after the date of this specification.

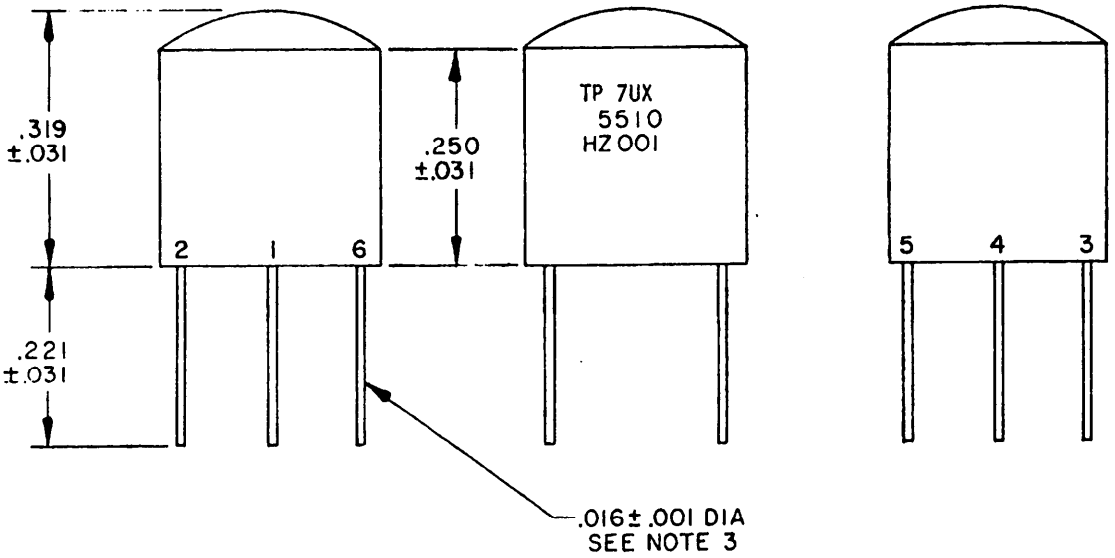

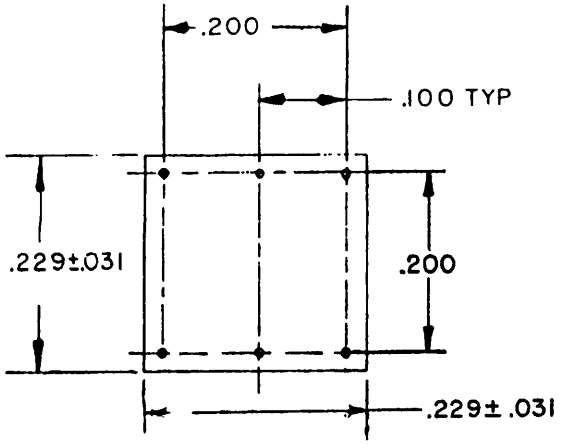

INCHES	MM
.031	.79
.100	2.54
.200	5.08
.221	5.61
.229	5.82
.250	6.35
.319	8.10

NOTES:
1. Dimensions are in inches. Tolerance ±0.010, unless otherwise specified.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Gold plated nickel leads.

FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Encapsulated.

Terminals: Pin.

Weight: .002 pound (1.2 grams), maximum.

Terminal strength: Method 211, MIL-STD-202, test condition A - pull 2.5 pounds.

Sealing: Transformer shall be immersed for 2 to 3 minutes in a bath of water or any other suitable liquid of no greater density maintained at a temperature of at least 85°C. The temperature of the transformer shall not exceed 40°C at the time of immersion.

Dielectric withstanding voltage:

At atmospheric pressure: Method 301, MIL-STD-202. 1120 VRMS between secondary winding to each winding, case and core; 100 VRMS between primary winding to feedback winding, and between primary and feedback windings to case.

At reduced pressure: Method 301, MIL-STD-202 and method 105, test condition C, MIL-STD-202. 450 VRMS between secondary winding to each winding, case and core; 90 VRMS between primary winding to feedback winding, and between primary winding and feedback winding to case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms.

Electrical characteristics: See table I.

Life: Applicable.

Temperature rise: 25°C.

Vibration: Method 204, MIL-STD-202.

Shock: Method 213, test condition H, MIL-STD-202.

(A) Quality assurance provisions

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Groups A and B tests of MIL-T-21038 shall be applicable.

Part number: M21038/1-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics including waveform parameters.

Impedance (ohms)		Current (mA)		Voltage peak			DCR ±20% (ohms)		Capacitance winding to winding (pf)			Turns ratio			Pulse duration (μs)	Pulse rise time (μs)	Over-shoot (% max)	Droop (% max)	Back-swing (% max)	Decay time max (μs)	Pulse repetition frequency (K PPS)
Source	Load	1-2	3-4	1-2	3-4	5-6	1-2	3-4	1-2 / 3-4	1-2 / 5-6		1-2 / 4-3		1-2 / 5-6							
10	18	50	300	30 ±3	5.1 ±.5	31 ±3	9.5	.39	16 ±4	37 ±9		5.5		.95	17 ±2	1	25	10	200	3.5	18 to 30

Custodian
Air Force - 85

Review Activities

Air Force - 11,17

User Activities
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5950-F194-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-21038/1A(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:31Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—505-022/204 2-1

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:31Z
Check the source to verify that this is the current version before use.