
MILITARY SPECIFICATION SHEET

TRANSFORMER, PULSE, LOW POWER

TYPE TP7RX1100CZ

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-21038.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

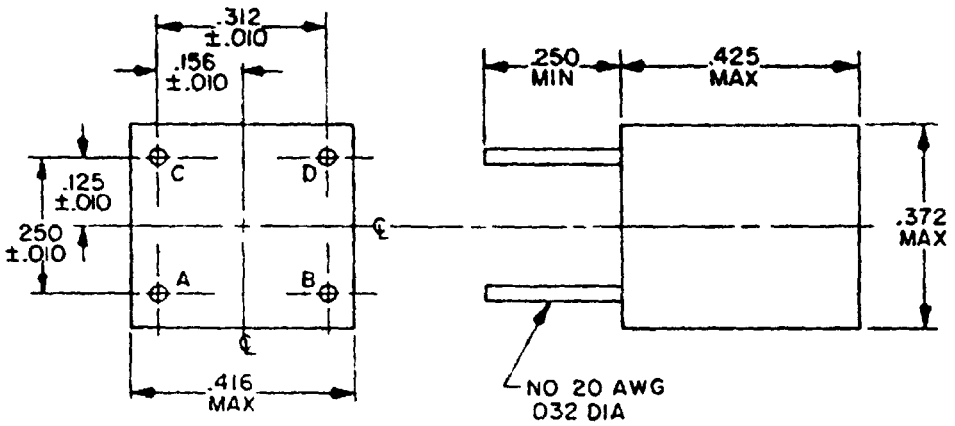

INCHES	MM
.010	.25
032	.81
.125	3.18
156	3.96
.250	6 35
.312	7.92
.372	9 45
.416	10.57
.425	10 80

NOTES.
1 Dimensions are in inches
2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3 Tinned copper lead

FIGURE 1 Transformer type TP7RX1100CZ.

(A) Denotes change

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1.

Case Encapsulated.

Terminals Pin.

Weight. 3.12 grams maximum.

Terminal strength: Method 211, MIL-STD-202, test condition A - pull 2.5 pounds.

Dielectric withstanding voltage:

At atmospheric pressure: Method 301, MIL-STD-202. 100 volts rms between primary and secondary windings, primary and case, and secondary and case.

At reduced pressure: Method 301, MIL-STD-202 and method 105, test condition A, MIL-STD-202. 100 V rms between primary and secondary windings, primary and case, and secondary and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202 Not less than 10,000 megohms.

Electrical characteristics: See table I

Test circuit: See figure 2.

Life: See MIL-T-21038, life expectancy X.

Temperature rise: Not applicable.

Vibration: Method 204, MIL-STD-202

Shock (specified pulse): Method 213, test condition H, MIL-STD-202.

Part number. M21038/2-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

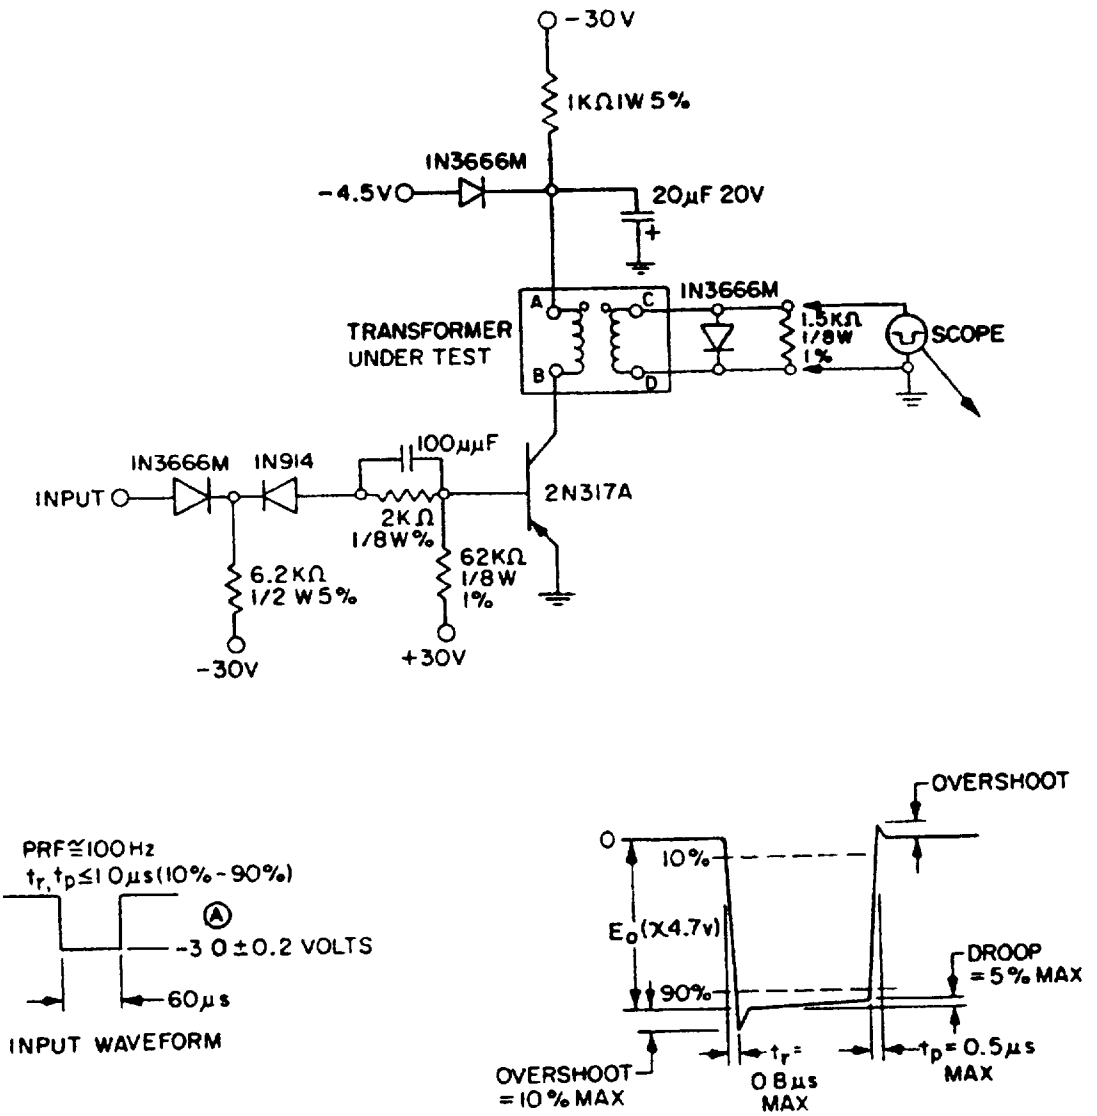


FIGURE 2 Test circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics including waveform parameters.

Voltage peak		DCR ±20% (ohms)		Turns ratio	Inductance (mh)	Pulse duration (μs)	Pulse rise time (μs)	Over-shoot (% max)	Droop (% max)	Decay time max (μs)	Pulse repetition frequency (Hz)
A/B	C/D	A/B	C/D								
3	4.7	32	40	1:1 ±3%	200 min at 1 V, 1 kHz	60	0.8	10	5	0.5	100

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities.
Army - EL, MU, MI
Navy - AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities·
Army - ME
Navy - MC , SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5950-0435)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 714-147/8012

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22 R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.