
MILITARY SPECIFICATION SHEET

TRANSFORMER, PULSE, LOW POWER, (SUBMINIATURE) TYPE TP7SX1100HZ

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformers described herein shall consist of this specification and the latest issue of MIL-T-21038.

Ⓐ This specification is inactive for new design after the date of this specification.

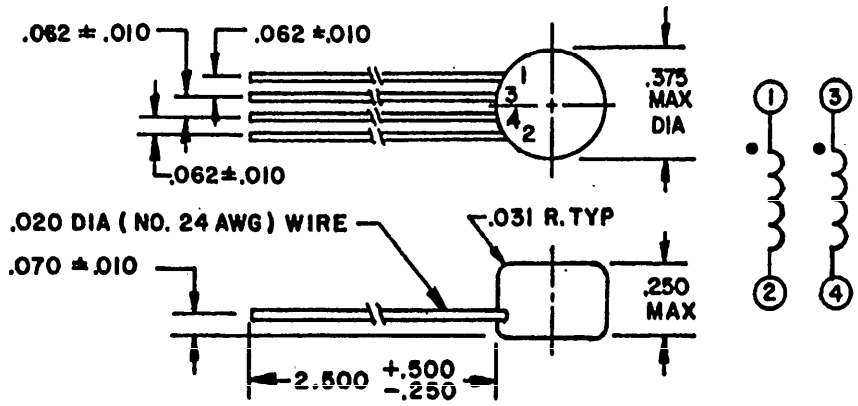

INCHES	MM
.010	.25
.020	.51
.031	.79
.062	1.57
.070	1.78
.250	6.35
.375	9.53
.500	12.70
2.500	63.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tinned copper lead.

FIGURE 1. Transformer type TP7SX1100HZ.

Ⓐ denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Terminals: Solid tinned copper wire leads.

Weight: 0.06 ounce.

Terminal strength: Method 211, MIL-STD-202, test condition A - pull 2.5 pounds.

Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202. 300 volts rms for 5 seconds between windings.
Barometric pressure (reduced): Not applicable.

Reliability conditioning (burn-in): Applicable.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms at 100 volts.

Electrical characteristics: See table I.

Test circuit: See figure 2.

Life (expectancy "x"): Applicable.

Temperature rise: Not applicable.

Vibration high frequency: Method 204, test condition B, MIL-STD-202.

Shock (specified pulse): Method 213, test condition H, MIL-STD-202.

Moisture resistance: Polarizing voltage not applicable.

(A) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Groups A and B tests of MIL-T-21038 shall be applicable.

Part number: M21038/4-001.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics including waveform parameters.

Impedance (ohms)		Current (mA)		Voltage peak		DCR (ohms)		Capacitance winding to winding (pF)	Turns ratio	Pulse duration (μs)	Pulse rise time (ns)	Over-shoot (% max)	Droop (% max)	Back-swing (% max)	Decay time max (ns)	Pulse repetition frequency (kHz)	Inductance (mH)
Source	Load	Pri	Sec	1-2	3-4	Pri	Sec										
50	50	3.3	3.3	2	2	4.5	5.5	20	1:1	5	11	5	10	15	12	20	3

Source: https://assist.dla.mil -- Downloaded: 20260-19T08:31Z
Check the source to verify that this is the current version before use.

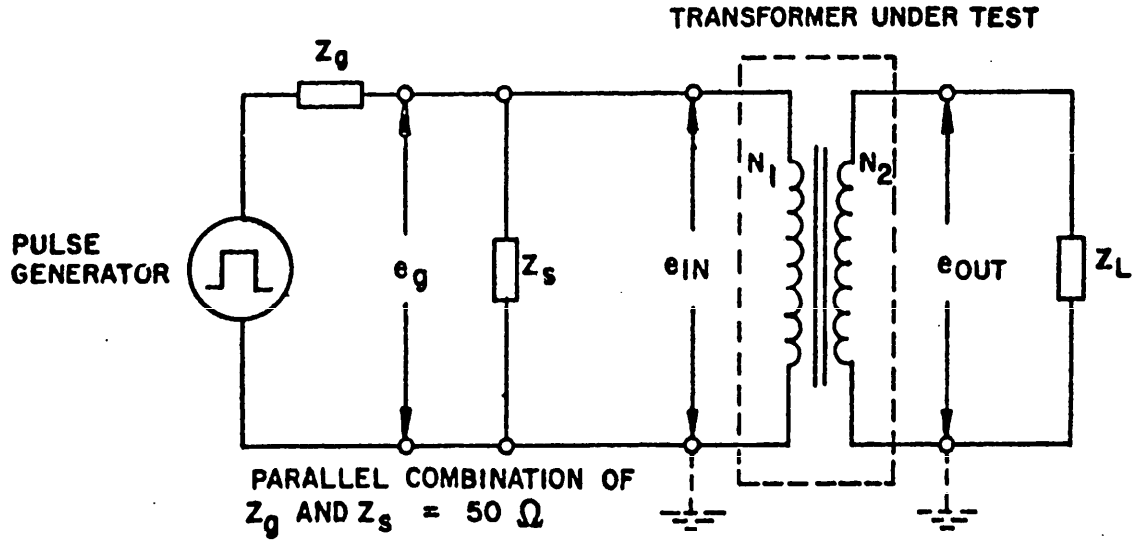


FIGURE 2. Test circuit.

Custodian:
Air Force - 85

Review Activities:
Air Force - 11, 17

User Activities
Air Force - 19

Preparing Activity:
Air Force - 85

(Project 5950-F194-2)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:31Z
Check the source to verify that this is the current version before use.