
MILITARY SPECIFICATION SHEET

TRANSFORMERS, PULSE, LOW POWER, (MINIATURE) TYPES TP7RX1100AZ AND TP7RX1110AZ

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformers described herein shall consist of this specification and the latest issue of MIL-T-31038.

Ⓐ This specification is inactive for new design after the date of this specification.

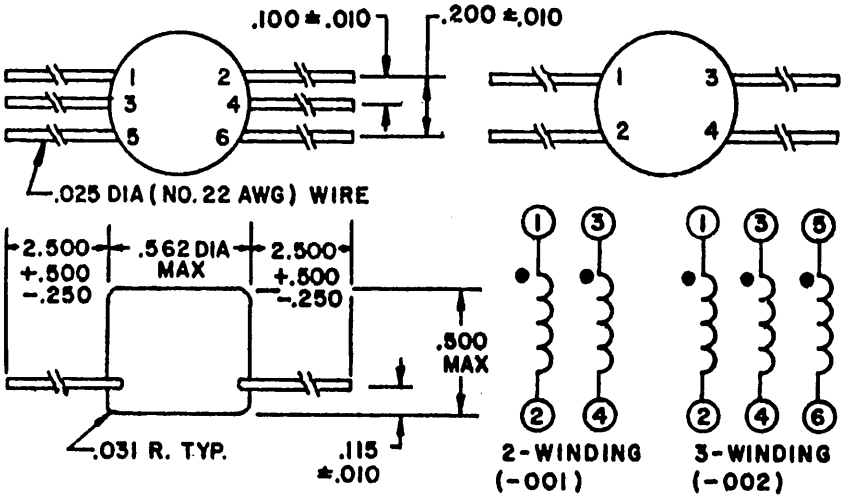

INCHES	MM
.010	.25
.025	.64
.031	.79
.100	2.54
.115	2.92
.200	5.08
.250	6.35
.500	12.70
.562	14.27
2.500	63.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tinned copper lead.

FIGURE 1. Transformer types TP7RX1100AZ and TP7RX1100AZ.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Terminals: Solid tinned copper wire leads.

Weight: 0.4 ounce.

Terminal strength: Method 211, MIL-STD-202, test condition A - pull 2.5 pounds.

Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202, 300 volts rms for 5 seconds between windings.
Barometric pressure (reduced): Not applicable.

Reliability conditioning (burn-in): Applicable.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms at 100 volts.

Electrical characteristics: See table I.

Test circuit: See figure 2.

Life (expectancy "x"): Applicable.

Temperature rise: Not applicable.

Vibration high frequency: Method 204, test condition B, MIL-STD-202.

Shock (specified pulse): Method 213, test condition H, MIL-STD-202.

Moisture resistance: Polarizing voltage not applicable.

(A) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Groups A and B tests of MIL-T-21038 shall be applicable.

Part number: M21038/5 - (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics including waveform parameters.

Dash No.	Impedance (ohms)		Current (mA)		Voltage peak			DCR ±20% (ohms)		Capacitance winding to winding (pF)	Turns ratio	Pulse duration (μs)	Pulse rise time (ns)	Over-shoot (% max)	Droop (% max)	Back-swing (% max)	Decay time max (ns)	Pulse repetition frequency (kHz)	Inductance (mH)
	Source	Load	Pri	Sec	1-2	3-4	5-6	Pri	Sec										
001	50	50	3.3	3.3	2	2	---	3.8	4.8	40	1:1	5	11	5	10	15	12	20	3
002	50	50	3.3	3.3	2	2	2	3.8	4.8	40	1:1:1	5	11	5	10	15	12	20	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

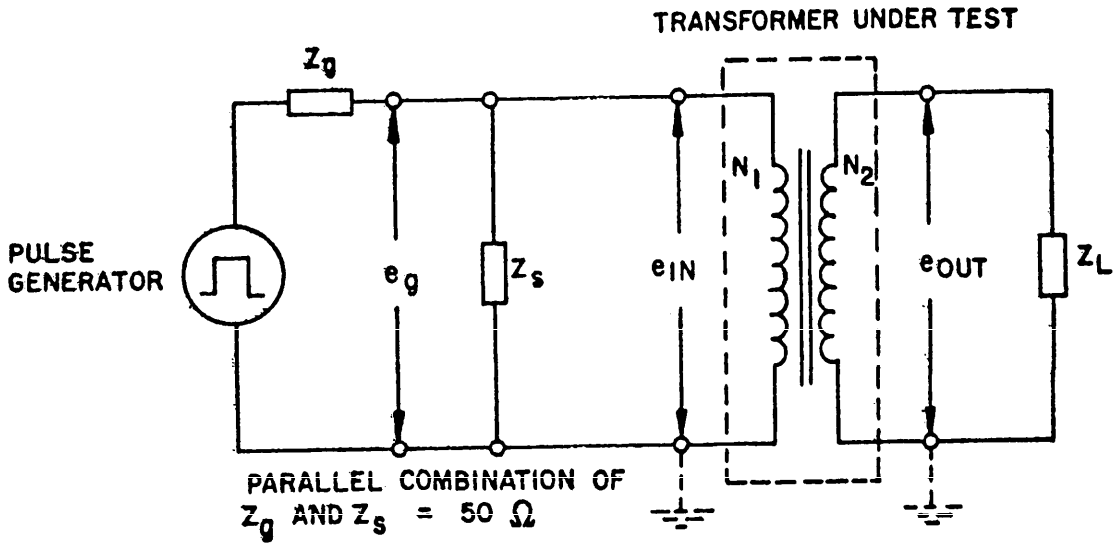


FIGURE 2. Test circuit.

Preparing activity
Air Force - 85

(Project 5950-0587-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-21038/5A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

★ U.S.GOVERNMENT PRINTING OFFICE: 1982—505-022/500 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:31Z
Check the source to verify that this is the current version before use.