INCH-POUND

MIL-T-21038/8D
22 January 1990
SUPERSEDING
MIL-T-21038/8C
18 November 1986


MILITARY SPECIFICATION SHEET

TRANSFORMERS, PULSE, LOW POWER,

TYPE TP7SX1110AZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-21038.

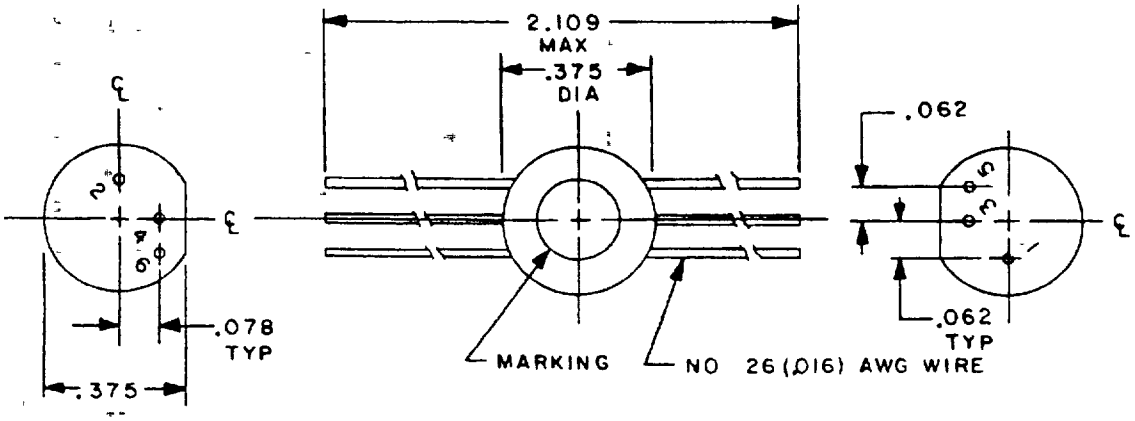

Inches	mm
.016	0.41
.062	1.57
.078	1.98
.375	9.52
2.109	53.57

NOTES
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ±.032 (0.81 mm)

FIGURE 1. Dimensions and configuration.

(D) denotes change

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics including waveform parameters.

Dash no.	DCR (ohms ±25%)			Blocking oscillator pulse					Coupling circuit characteristics							Frequency response 2/ ±2 dB
				Pulse width (us)	Rise time (us)	Over-shoot %	Droop %	Back swing %	Pulse width (us)	Volts out	Rise time (us)	Over-shoot %	Droop %	Back swing %	Impedance out, in (ohms) 1/	
	1-2	3-4	5-6													kHz MHz
001	3	3 5	4	05	.022	0	20	10	05	17	01	20	0	35	250	260 to 34
002	5.5	6.5	7	.10	.024	0	25	10	.10	19	.01	30	10	50	250	220 to 34

1/ See figure 2.
2/ Per coupling circuit (Z), in or out, 1 V input.

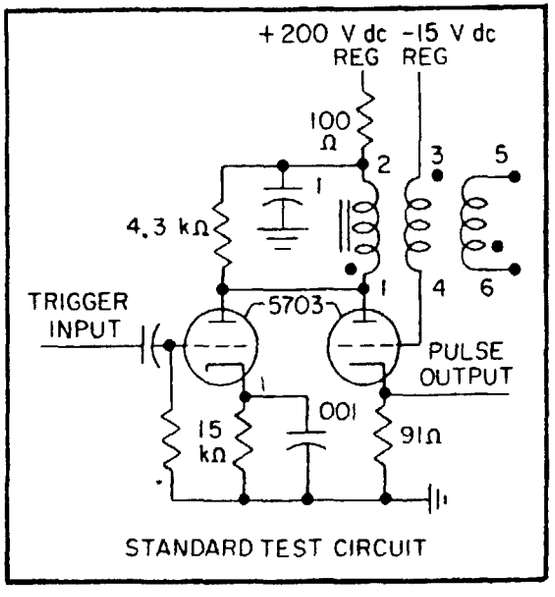


FIGURE 2. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Terminals: Solid wire leads, type D in accordance with MIL-STD-1276, tinned.

(D) Weight: 2.5 grams maximum.

Turns ratio: 1.1:1.

Terminal strength: Method 211, MIL-STD-202, test condition A, pull 2.5 pounds.

Dielectric withstanding voltage:

At atmospheric pressure: Method 301, MIL-STD-202, 1,250 volts rms for 60 seconds between windings and ground.

Barometric pressure (reduced): Method 105, test condition B, MIL-STD-202, 565 volts rms between windings and ground.

Insulation resistance: Method 302, test condition B, MIL-STD-202, not less than 10,000 megohms.

Electrical characteristics: See table I.

Test circuit: See figure 2.

Life (expectancy "X"): Applicable.

Temperature rise: Not applicable.

Vibration high frequency: Method 204, test condition B, MIL-STD-202.

Shock (specified pulse): Method 213, test condition H, MIL-STD-202.

(D) Part or Identifying Number (PIN): M21038/8- (dash number from table I). The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
Navy - AS, OS, SH
Air Force - 11, 17
DLA - ES

User activities
Army - ME
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5950-0743-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.