[INCH-POUND]

MIL-T-21038/9D
January 10, 1991
SUPERSEDING
MIL-T-21038/9C
22 January 1990


MILITARY SPECIFICATION SHEET

TRANSFORMERS, PULSE, LOW POWER,

TYPE TP7SX1110AZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-21038.

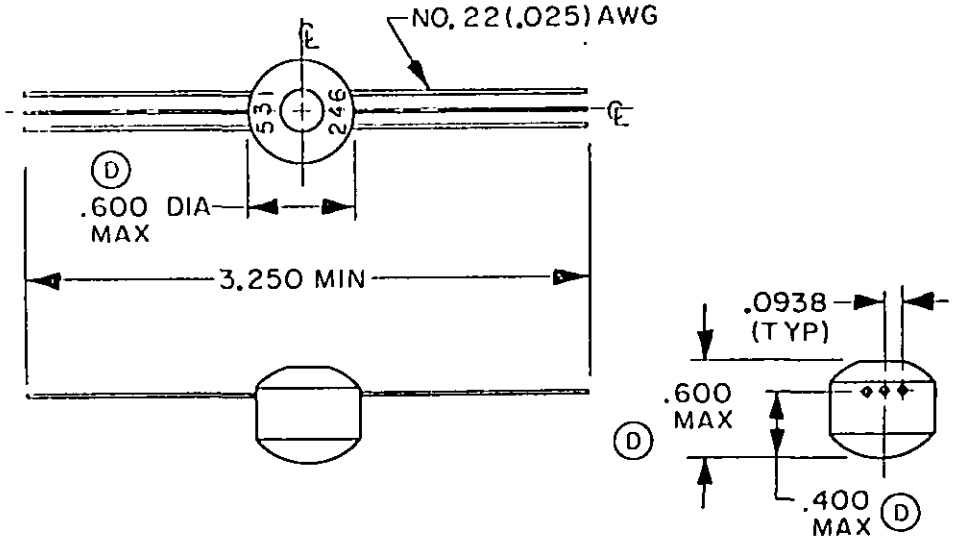

Inches	mm
.025	0.64
.0938	2.38
.400	10.16
.600	15.24
3.250	82.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.032 (0.81 mm).

FIGURE 1. Dimensions and configurations.

Ⓓ denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Terminals: Solid wire leads, type D in accordance with MIL-STD-1276, tinned.

Weight: 5.5 grams maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, pull 2.5 pounds.

Dielectric withstanding voltage:

At atmospheric pressure: MIL-STD-202, method 301, 1,250 volts rms for 60 seconds between windings and ground.

Barometric pressure (reduced): MIL-STD-202, method 301, and test condition B of method 105, 565 volts rms between windings and ground.

Insulation resistance: MIL-STD-202, method 302, test condition B, not less than 10,000 megohms.

Electrical characteristics: See table I.

Test circuit: See figure 2.

Life (expectancy "X"): Applicable.

Temperature rise: Not applicable.

Vibration high frequency: MIL-STD-202, method 204, test condition B.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Ⓓ Part or Identifying Number (PIN): M21038/9- (dash number from table I). The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification.

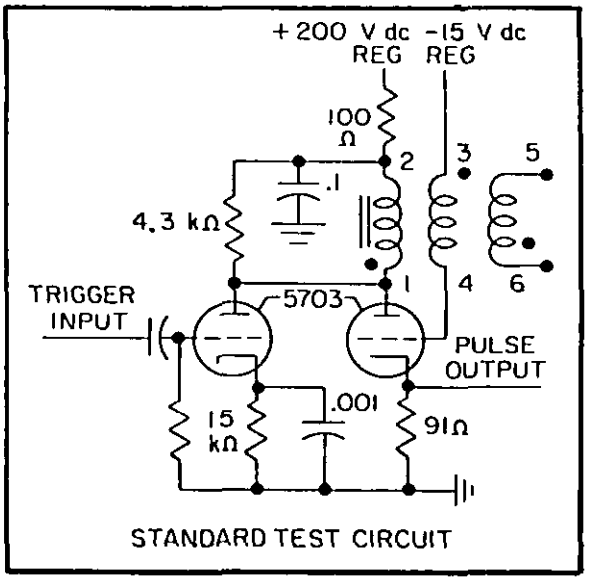


FIGURE 2. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics including waveform parameters.

Dash no.	DCR (ohms ±25%)			Blocking oscillator pulse					Coupling circuit characteristics							Frequency response 2/ ±2 dB
				Pulse width (µs)	Rise time (µs)	Over-shoot %	Droop %	Back swing %	Pulse width (µs)	Volts out	Rise time (µs)	Over-shoot %	Droop %	Back swing %	Impedance out, in (ohms) 1/	
	1-2	3-4	5-6													kHz MHz
001	3.7	4.0	4	.20	.026	0	25	8	.20	18	.01	30	15	65	500	260 to 93
002	5.5	5.8	6	.50	.03	0	20	5	.50	20	.01	30	20	65	500	85 to 73
003	8	8.5	9	1	.04	0	20	10	1	24	.02	15	15	65	500	50 to 62.5
004	20	21	22	2	.05	0	20	10	2	27	.05	10	15	35	500	24.5 to 49
005	28	31	33	3	.10	1	20	8	3	26	.07	10	10	35	500	12.6 to 5.65
006	36	41	44	5	.13	1	25	8	5	23	.15	10	10	45	1000	13 to 3.465

1/ See figure 2.
2/ Per coupling circuit (Z), in or out, 1 V input.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17
DLA - ES

User activities:
Army - ME
Navy - MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5950-0766)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:32Z
Check the source to verify that this is the current version before use.