NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/166C
5 October 2020
SUPERSEDING
MIL-DTL-3628/166B
4 December 2015

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, AVIATION, ASTRONAUT DEVICE FOR AVIATOR, FLIGHT SURGEON AND AIRCRAFT CREWMAN, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

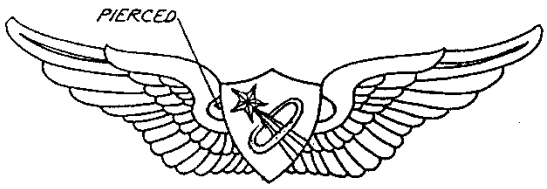

AVIATION BADGE WITH ASTRONAUT DEVICE

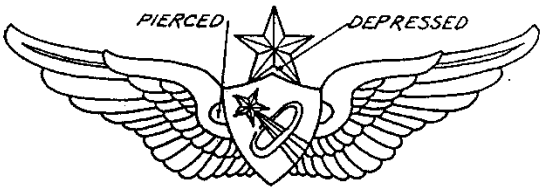

SENIOR AVIATION BADGE WITH ASTRONAUT DEVICE

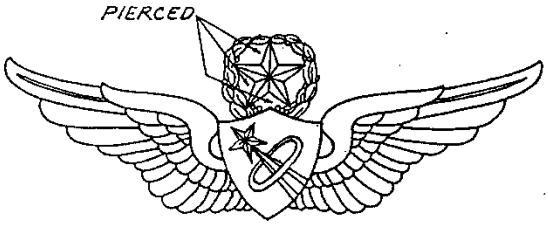

MASTER AVIATION BADGE WITH ASTRONAUT DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size, Subdued

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:56Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1, -2, -3: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No.C-752)

-4: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1, -2, -3: 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-4: Dull, Flat Brown Enamel Finish and shall match TIOH Metal Finish Chip Number 22.

DIMENSIONS (DEVICE):
HEIGHT (Overall):
-1, -4: 15/32 inch (REF)
-2: 3/8 inch (REF)
-3: 15/64 inch (REF)
WIDTH (Overall):
-1, -4: 11/32 inch (REF)
-2: 9/32 inch (REF)
-3: 11/64 inch (REF)
THICKNESS (At thickest point): 0.050 inch $\pm$ 0.005 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. When specified in acquisition documents, an astronaut device shall be affixed to the shield portion of the Army Aviator, Army Flight Surgeon, and Army Aircraft Crewman badges as shown on TIOH Drawing B-5-84. That portion of the design element of the flight surgeon and aircraft crewman badges to which the astronaut device will be affixed shall be recessed sufficiently to provide a flat platform to which the device shall be soldered. At the option of the manufacturer, the platform may be cut into the working die.

4. Badges with the astronaut device attached shall be manufactured in accordance with the latest revision to the following specification sheets:

MIL-DTL-3628/157 Badge, Qualification, Aviation, Aviator, Army
MIL-DTL-3628/158 Badge, Qualification, Aviation, Aviator, Senior, Army
MIL-DTL-3628/159 Badge, Qualification, Aviation, Aviator, Master, Army
MIL-DTL-3628/160 Badge, Qualification, Aviation, Flight Surgeon, Army
MIL-DTL-3628/161 Badge, Qualification, Aviation, Flight Surgeon, Senior, Army
MIL-DTL-3628/162 Badge, Qualification, Aviation, Flight Surgeon, Master, Army

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:56Z
Check the source to verify that this is the current version before use.

MIL-DTL-3628/163 Badge, Qualification, Aviation, Aircraft Crewman, Army
MIL-DTL-3628/164 Badge, Qualification, Aviation, Aircraft Crewman, Senior, Army
MIL-DTL-3628/165 Badge, Qualification, Aviation, Aircraft Crewman, Master, Army

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-593)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:56Z
Check the source to verify that this is the current version before use.