[INCH-POUND]
A-A-52507
November 3, 1994
SUPERSEDING
(see 5.4)

COMMERCIAL ITEM DESCRIPTION

CHAIN ASSEMBLY AND CROSS CHAIN, TIRE: FOR MILITARY VEHICLES

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE

This CID covers tire chain assemblies and replacement cross chains with cross chain hooks for use on military tactical wheeled vehicles equipped with military single pneumatic tires. Tire chain assemblies are referred to herein as "chain assemblies".

1.1 Description. Each chain assembly is comprised of two side chains and the required number of cross chains for each tire. Cross chain hooks are used to connect the cross chains to the side chains. Side chain fasteners are used to connect the ends of each side chain. Replacement cross chains are used to repair chain assemblies.

2. SALIENT CHARACTERISTICS

2.1 Materials. All tire chain components shall be made of carbon steel, Unified Numbering System (UNS) grade G10060 through G10200, except for the cross chain hooks. The cross chain hooks shall be carbon steel, UNS grade G10120 through G10220, and shall be stress relieved after cold forming. The use of recovered materials made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 5.5).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-T, Warren, MI 48397-5000.

FSC 2540

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.2 Heat treatment. Cross chains shall be case hardened by carburizing or carbonitriding to a case depth as specified in NACM-5179(TC) and shall have a Rockwell hardness C53 minimum or equivalent.

2.3 Design and construction. Unless otherwise specified herein, chain assembly components shall conform to the requirements specified in NACM-5179(TC), such as wire sizes, dimensions, and tolerances.

2.3.1 Chain assemblies. Chain assemblies shall be comprised of side chains, cross chains, side chain fasteners, and cross chain hooks as illustrated in figure 1. Chain assemblies shall be constructed and selected for the tire sizes listed in table I. For the tire sizes listed in table II, chain assemblies shall conform to the requirements as specified in table II.

2.3.1.1 Cross chains. Cross chains shall be constructed of regular, twist link chain.

2.3.1.2 Side chain fasteners. Side chain fasteners shall provide a secure attachment to one side chain end, and shall provide a quick, secure lock to the other side chain end. The lock shall be readily opened and closed. Side chain fasteners shall not be open-type keeper links.

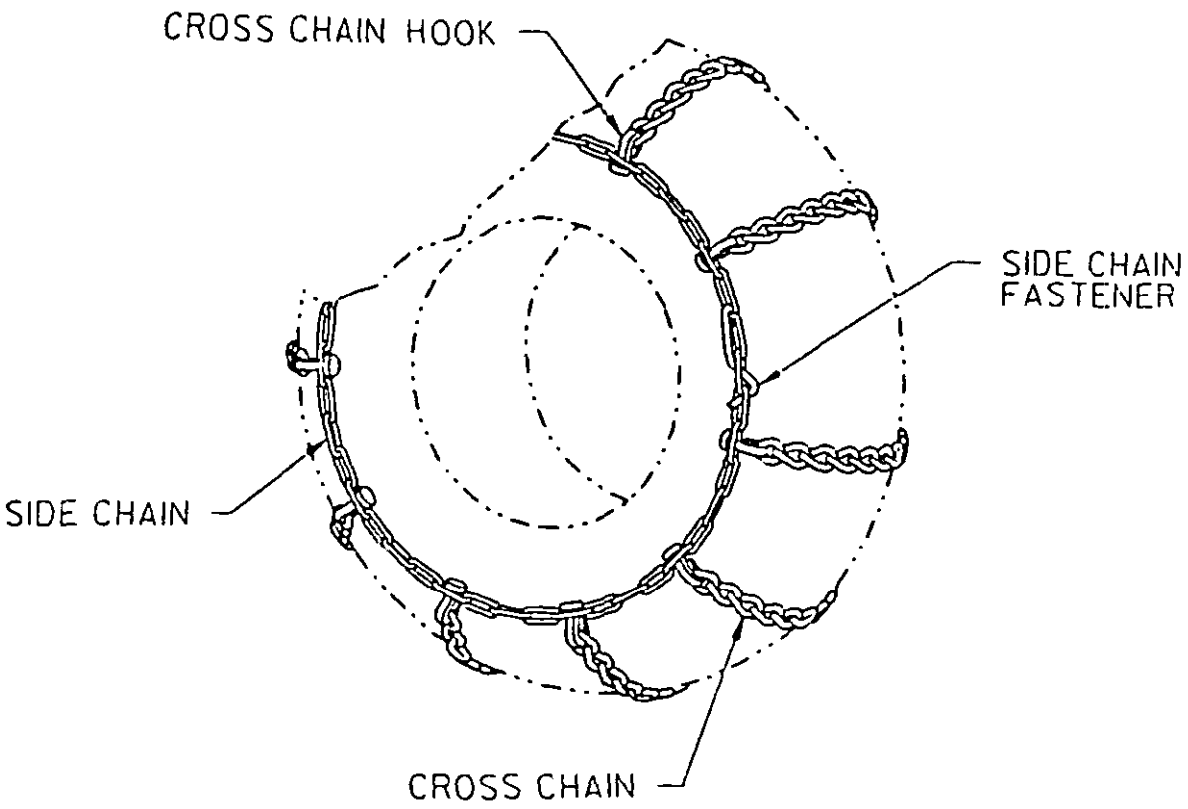


FIGURE 1. Chain Assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

TABLE I. Chain assembly and replacement cross chain sizes conforming to NACM-5179(TC).

Tire Size	Chain Assembly PIN A52507- 1/	Former MS500055 Dash No.	Replacement Cross Chain PIN A52507- 1/	Former MS500057 Dash No.
6.00-13	1207	-33	5214	-12
6.50-13	1217	-36	5214	-12
7.00-14	2209	-38	6219	-12
6.00-15	1210	-34	5214	-12
6.50-15	1240	-37	5220	-12
7.50-15	2219	- 5	6221	- 2
9.00-15	2211	-12	6219	- 6
6.00-16	2203	- 1	6218	- 1
6.50-16	2206	- 2	6218	- 1
7.00-16	2219	-53	6221	- 2
7.50-16	2221	- 6	6221	- 2
8.25-16	2228	-10	6225	- 3
9.00-16	2237	-13	6251	- 6
7.50-17	2214	- 7	6221	- 2
7.00-20	2233	- 4	6251	- 4
7.50-20	2237	- 8	6251	- 4
8.25-20	2239	-11	6251	- 5
9.00-20	2241	-14	6251	- 6
10.00-20	2245	-16	6251	- 6
11.00-20	2251	-22	6260	- 7
12.00-20	2255	-24	6253	- 7
14.00-20	2271	-27	6266	- 8
16.00-20	2627	-29	6640	-10
16.00-20	2624	-80	6640	- 9
10.00-22	2249	-17	6253	- 6
11.00-24	2253	-23	6260	- 7
12.00-24	2257	-25	6263	- 7
13.00-24	2612	-26	7422	- 8
14.00-24	2615	-28	7422	- 8
16.00-24	2627	-31	6640	-10
16.00-25	2627	-32	6640	-10

NOTE:

1/ The PIN numbers listed are the chain assembly and replacement cross chain code numbers specified in NACM-5179(TC).

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:11Z
Check the source to verify that this is the current version before use.

TABLE II. Chain assembly and replacement cross chain sizes.

Tire Size 1/	Side Chain		Cross Chain		Number of Cross Chains per 1/2 Pair	Chain Assembly		Replacement Cross Chain	
	Wire DIA 2/	Length w/o Fastener	Wire DIA 2/	Length w/Hooks		PIN A52507-	Former MS500055 Dash No.	PIN A52507-	Former MS500057 Dash No.
7.50-14	.218	70.1	.281	12.12	12	0001	-39	0101	-14
8.00-14	.218	71.5	.281	14.12	12	0002	-40	0102	-15
8.50-14	.218	71.5	.281	14.12	12	0003	-41	0103	-15
8.20-15	.281	78.3	.312	16.69	10	0004	- 9	0104	- 5
10.00-15	.281	91.0	.312	17.81	12	0005	-15	0105	- 6
6.25-16	.192	75.9	.207	11.81	14	0006	-35	0106	-13
10.50-18	.312	98.9	.375	20.31	12	0007	-19	0107	- 7
11.00-18	.312	94.3	.375	20.31	11	0008	-20	0108	- 7
11.00-19	.312	113.3	.375	20.31	13	0009	-21	0109	- 7
18.00-22.5	.437	92.8	.437	28.00	19	0010	-43	0110	-10
10.00-24	.281	121.9	.312	17.81	16	0011	-18	0111	- 6
17.50-25	.437	164.1	.437	25.50	21	0012	-42	0112	-11

NOTES:

1/ The tire sizes listed do not appear in NACM-5179(TC).

2/ Diameter (DIA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.3.1.3 Cross chain hooks. Cross chain hooks shall be capable of being installed and removed without the use of any tool(s).

2.3.2 Replacement cross chains. Replacement cross chains shall be constructed and selected for the tire sizes listed in table I. For the tire sizes listed in table II, replacement cross chains shall conform to the requirements as specified in table II. Replacement cross chains shall be supplied with two (2) cross chain hooks.

2.4 Identification and marking. Unless otherwise specified (see 5.2), identification and marking shall be on the side chain fasteners or cross chain hooks, in a permanent, legible manner. Information shall include, as a minimum, the manufacturer's identification code (CAGE), and the item part or identification number (PIN) (see 5.3).

3. QUALITY ASSURANCE PROVISIONS

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING

Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract or order (see 5.2).

5. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)


5.1. Addresses for obtaining copies of referenced Non-Government publications. Copies of NACM-5179(TC) "Tire Chain Specifications" are available from the National Association of Chain Manufacturers, P.O. Box 3143, York, PA 17402-0143. Copies of SAE HS1086 "Metal & Alloys in the Unified Numbering System" are available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

5.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of Department of Defense Index of Specifications and Standards (DODISS) to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c. Chain assembly PIN or replacement cross chain PIN and quantity required.
d. If special identification or marking is required.
e. Selection of applicable level and packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

5.3 Part or identification number (PIN). The PIN structure to be used for acquisition of chain assemblies and replacement cross chains in accordance with this CID are created as follows:

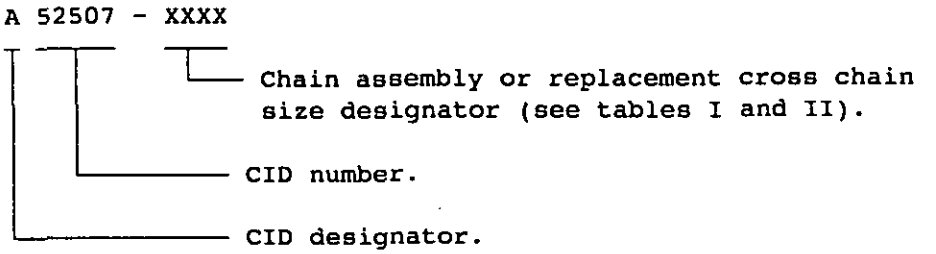

5.4 Cross-reference and supersession data. Tire chains conforming to this CID are interchangeable/substitutable with tire chains conforming to MIL-C-62040A(AT), dated 16 December 1985; MS500055E(AT), dated 28 March 1986; MS500056E(AT), dated 28 March 1986; MS500057D(AT), dated 28 March 1986; MS500058D(AT), dated 16 September 1986; MS500059G(AT), dated 10 November 1986; and MS500060G(AT), dated 16 September 1986 which have been superseded by this CID.

5.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY INTERESTS:

Custodians:
Army - AT
Air Force - 99

Review Activity:
Air Force - 84
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 2540-0382)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.