[METRIC]
A-A-52511
September 14, 1995
SUPERSEDING
MIL-T-19147D
16 November 1984.

COMMERCIAL ITEM DESCRIPTION

TRUCKS, DOLLY, RECTANGULAR, WITH 4 SWIVEL CASTERS (GENERAL PURPOSE AND MACHINERY) (METRIC)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE. This CID covers requirements for general purpose and machinery dolly trucks with rectangular frames and four swivel casters. General purpose dolly trucks are intended for moving loads, not exceeding 454 kilograms (kg) (1000 pounds), over short distances on paved surfaces. Machinery dolly trucks are intended for use singularily or in pairs for moving machinery and other bulky loads, not exceeding 1089 kg (2400 pounds) per truck. over short distances on paved surfaces.

1.1 Classification. Dolly trucks shall be of the following types as specified (see 5.1):

Type I - General purpose: 454 kg (1000 pound) minimum capacity, with rubber molded-on doily wheels, 610 x 762 millimeters (mm) (24 x 30 inches).
Type II - Machinery: 1089 kg (2400 pound) minimum capacity, with steel, plastic, or hard rubber dolly wheels, 457 x 610 mm (18 x 24 inches).

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein; Materials shall be in accordance with the manufacturers material specifications for dolly trucks. The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 5.4).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E, Warren, MI 48397-5000.

FSC 3920

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. The dolly trucks shall consist of a rectangular frame and four swivel casters as shown in figure 1. The type II dolly trucks shall have two platform boards attached to the frame. Frame material shall be wood or steel for type I dolly trucks and steel for type II. Steel frames shall be of an all welded construction. The capacities and sizes of the trucks shall be as shown in table I.

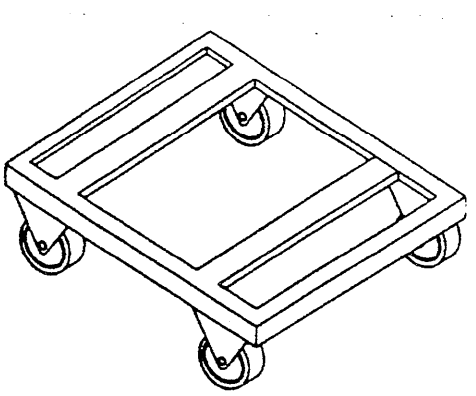

Type I. General purpose dolly truck

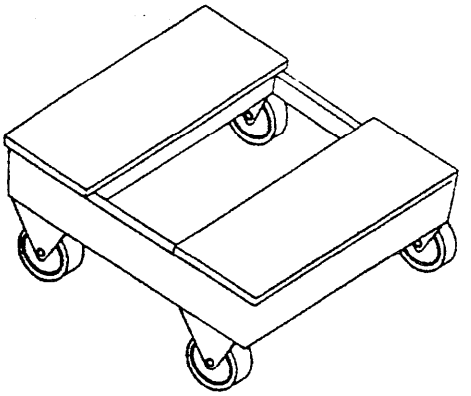

Type II. Machinery dolly truck

FIGURE 1. Dolly trucks.

TABLE I. Capacities and sizes.

Type	Width and length (mm)	Maximum height to top of frame (mm)	Rated capacity (kg)
I	610 x 762	203	454
II	457 x 610	203	1089

2.2.1 Casters. The casters shall be securely attached to the underside of the frame, each locatcd as close as practicable to each of the four corners. If corners are rounded, the caster mounting plate shall be rounded concentrically or flush with the frame. The swivel casters shall be capable of fully swiveling with dolly trucks loaded to rated capacity. Caster size shall be fully compatible with the rated capacity of the dolly truck.

2.2.2 Type II dolly truck platforms. Each platform board shall be not less than 20.6 mm (13/16 inch) thick and 190.5 mm (7-1/2 inches) wide. Lengths shall be as required for the ends to fit flush with the 610 mm (24-inch) sides of the frame. Each board shall be securely fastened to the frame. Fastening devices shall not protrude above the board top surfaces.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:11Z
Check the source to verify that this is the current version before use.

2.3 Performance.

2.3.1 Static load. The dolly trucks shall withstand unifomly distributed loads of 200 percent of rated capacity (see table I) for 1 hour duration without evidence of damage, weld failure, distortion, or permanent deformation.

2.3.2 Rolling resistance. The uniformly loaded to rated capacity dolly trucks shall be capable of being pushed or towed on dry, smooth, level concrete surfaces with a maximum force no greater than 2.25 percent of rated load plus the weight of the applicable truck.

2.4 Finish Treatment. The parts of the dolly trucks normally painted shall be cleaned, treated, and painted in accordance with the manufacturer's own commercial practices.

2.5 Identification and markings. Identification and markings of the dolly trucks shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), the contract number, the part identification number (PIN) (see 5.2), and the national stock number (NSN).

3. QUALITY ASSURANCE PROVISIONS.

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as maybe otherwise provided for under the provisions of the contract.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING.

Preservation, packaging, packing, labeling, and marking shall be as specified in the contract (see 5.1).

5. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:11Z
Check the source to verify that this is the current version before use.

5.1 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation.
c. Type, PIN and quantity of dolly trucks required.
d. Selection of applicable level and packaging requirements.

5.2 Part or identification number (PIN). The PINs to be used for dolly trucks acquired to this CID are created as follows:

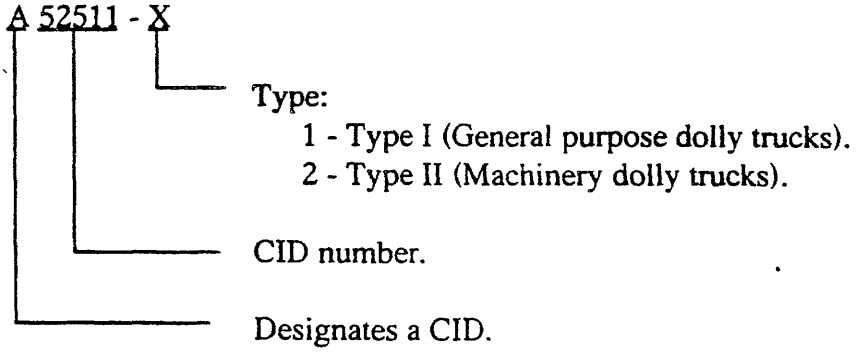

5.3 Cross-reference data. Doily trucks conforming to this CID are interchangeable/substitutable with dolly trucks conforming to MIL-T-19147D.

5.4 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Publice Law 94-580 to the maximum extent practicable.

MILITARY INTERESTS:

Custodian.
Army - AT

Review Activities
Navy - MC
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 3920-0006)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.