[METRIC]
A-A-52513
May 22, 1995
SUPERCEDING
MS53052A(AT)
21 December 1966

COMMERCIAL ITEM DESCRIPTION

BRACKET ASSEMBLY, LIQUID CONTAINER, FIVE GALLON

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE.

This CID covers a bracket assembly used for securing 5 gallon liquid containers to military vehicles. The assembly consists of a bracket and a strap assembly.

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein or in the applicable engineering drawing (AED), the material used shall be in accordance with the manufacturer's material specifications/drawings. The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 5.4).


2.1.1 Carbon steel. The bracket shall be made of carbon steel, hot rolled or cold rolled (2 millimeters (mm) nominal thickness), drawing quality temper 4 or 5, Unified Numbering System (UNS) G10080 through G10200 in the form of sheet or strip (see 5.1.2).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-T, Warren, MI 48397-5000.

FSC 2590

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

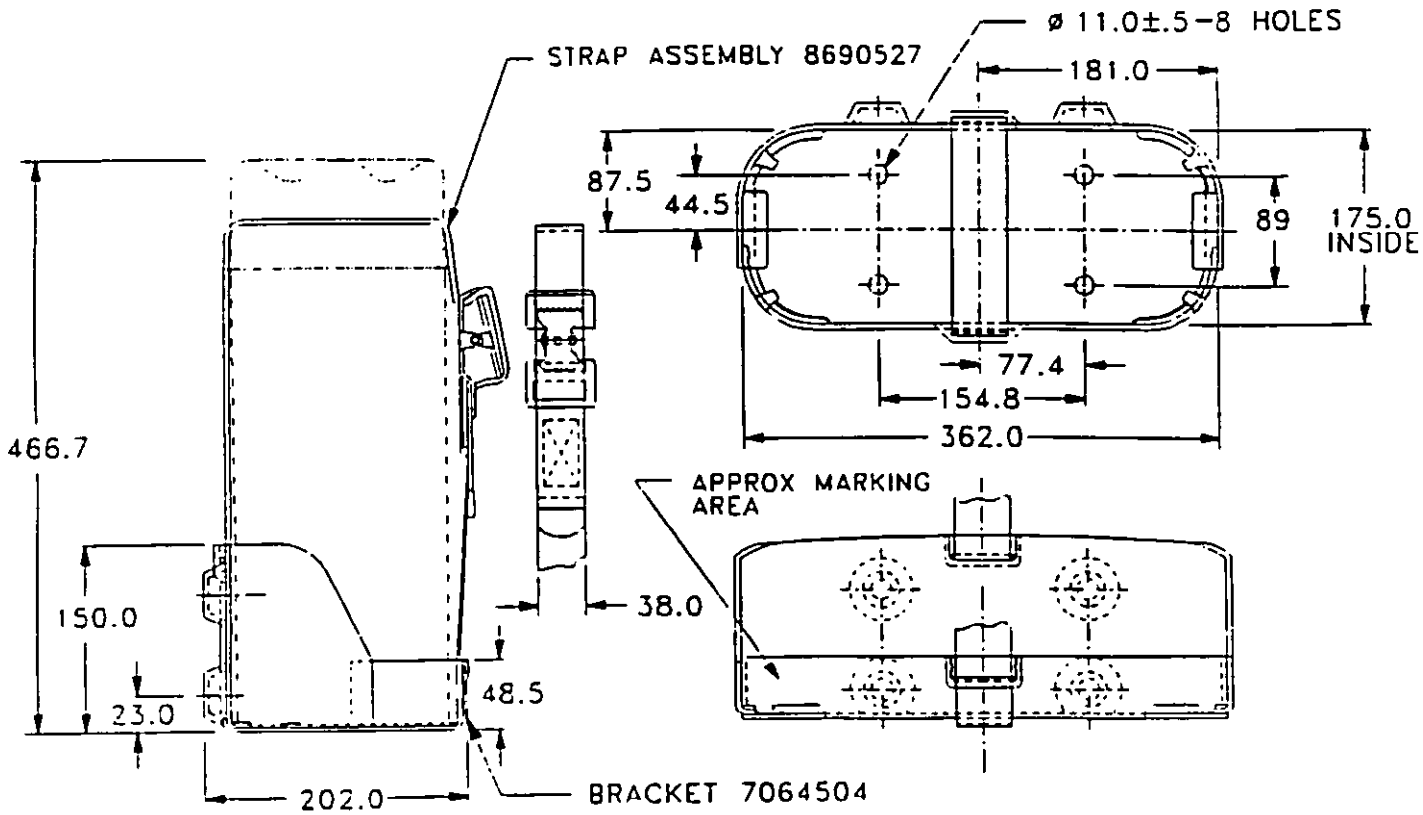

Cross Reference		
CID Part number	Former MS part number	Drawing number
A52513-1	MS53052-1	6566675

NOTE:

1. Dimensions are in millimeters and are for engineering reference only.
2. Strap to be attached as shown during installation of bracket.
3. Unless otherwise specified, tolerances are ± 1 millimeter.

FIGURE 1. Bracket assembly.

2.2 Design and construction. Except as specified herein, the bracket assembly shall be designed and constructed in accordance with drawing number 6566675 and its referenced drawings 7064504 and 8690527 (see engineering parts list EPL6566675). Figure 1 shows the bracket assembly with the 5 gallon can in place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.2.1 Welds. Welds shall be of the resistance spot weld type as shown on the AED. Prior to welding, the parts shall be appropriately cleaned and coated with an epoxy based zinc rich weld through primer or an equivalent suitable primer.

2.3 Weld strength. The weldment of a simulated specimen shall be separated by driving a chisel between the welded components in an unwelded area or by peeling one sheet back against the weld until failure occurs around the periphery of the weld or until the part fails. Failure of the base metal outside the weld area shall be evidence that the welds are satisfactory. The minimum button diameter, as measured in two perpendicular directions of the faying surface, shall be 6 mm.

2.4 Protective finish. Cleaning, pretreating, priming, and painting of the bracket assembly shall conform to an appropriate CARC paint system selected from drawing number 12369000 for external applications. Color of paint final top coat shall be green 383 (see 5.1.1).

2.5 Identification markings. Identification marking shall be placed on the bracket assembly as shown in figure 1. It shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), manufacturer's part number and the part identification number (PIN) A52513-1.

3. QUALITY ASSURANCE PROVISIONS.

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING.

Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see 5.2).

5. NOTES.

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

5.1 Addresses for obtaining copies of referenced documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

5.1.1 Government drawings. Army drawings 12369000 "Chemical Agent Resistant Coating (CARC) Paint Systems", 6566675 "Bracket Assembly", 7064504 "Bracket, Liquid Container", EPL 6566675 Engineering parts list for Bracket Assembly and 8690527 "Strap Assembly, Webbing w/Buckle" are available from the Contracting Officer, U.S. Army Tank-automotive and Armaments Command, Warren, MI 48397-5000.

5.1.2 Non-Government publications. SAE document "Metals & Alloys in the Unified Numbering System" is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001.

5.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. PIN number and quantity required.
c. Selection of applicable level and packaging requirements.
d. Issue of Department of Defense Index of Specifications and Standards (DODISS) to be cited in the solicitation, and if required, the specific issue of individual documents referenced.

5.3 Cross-reference data. Bracket assemblies conforming to this CID are interchangeable/ substitutable with bracket assemblies conforming to MS53052A(AT).

5.4 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. Recovered material is material made in conformance to section 402 of the Clean Air Act (33 U.S.C. 1342 et. seq.).

MILITARY INTERESTS:

Custodian:
Army - AT

Review activity:
Army - ME
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

PREPARING ACTIVITY:
Army - AT

(Project 2590-0232)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:11Z
Check the source to verify that this is the current version before use.