[INCH-POUND]
A-A-52523
September 26, 1995
SUPERSEDING
MS500093A
25 February 1974

COMMERCIAL ITEM DESCRIPTION

TANK, PRESSURE: AIR BRAKE, TACTICAL TRAILERS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers air pressure tanks of various capacities used in 125 pounds per square inch (psi) air brake systems of trailers.

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein, the materials shall be in accordance with the manufacturer's material specifications for pressure tanks.

2.1.1 Tank shell and head. The tank shell and head shall be sheet or strip carbon steel in accordance with ASTM A568/A568M.

2.1.2 Tank ferrules (threaded boss, figure 1, items C, D, E, F). Tank ferrules shall be UNS G10110 - G10250, UNS G11160 - G11190, or UNS G12110 - G12130.

2.1.3 Tank block-drain (figure 1, item G). The tank block-drain shall be UNS G10200 - G10300.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E, Warren, MI 48397-5000.

FSC 2530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. Tanks shall be designed and constructed in accordance with figure 1 and the envelope dimensions of the applicable referenced drawing (see 6.3).

2.2.1 Tank ferrules and block drains. Tank ferrules and block drains shall be designed and located in accordance with the applicable referenced drawing (see 6.3).

2.3 Mounting brackets. Mounting brackets shall be furnished where applicable and as designed and located in the applicable referenced drawing (see 6.3).

2.4 Protective plugs and caps. Threaded holes shall be fitted with protective plugs or caps.

2.5 Welding. Welding shall be of such quality as to preclude failure. Threads shall not be damaged after all welding operations are complete.

2.6 Pressure. Tanks shall be subjected to an air pressure of 250 pounds per square inch (psi) in accordance with SAE J10 without leaking or permanent deformation.

2.7 Tank finish. Interior and exterior of tank shall be cleaned, pre-treated, and primed for ferrous surfaces. Final top coat of tank exterior shall be a semi gloss alkyd enamel with low volatile organic compound (420 grams/liter maximum) content. The final top coat color shall be forest green, unless otherwise specified in the contract or order (see 6.2).

2.8 Identification and markings. Identification markings shall be permanent and legible and as a minimum, the manufacturer's identification code (CAGE), the contract number, and the Part or Identification Number (PIN).

3. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspections. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 6.2).

6. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Addresses for obtaining copies of referenced documents.

6.1.1 Government documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

6.1.2 Army drawings. Army drawings are available from the U.S. Army Tank-automotive and Armaments Command, Warren, MI 48397-5000.

6.1.3 Non-Government documents. Copies of ASTM A568/A568M Rev. A-93 "Standard Specification for Steel, Sheet, Carbon, and High-Strength, Low Alloy, Hot-Rolled and Cold-Rolled, General Requirements for" are available from the American Society for Testing and Materials (ASTM), 1916 Race Street, Philadelphia, PA 19103. Copies of SAE J10 "Automotive and Off-Highway Air Brake Reservoir Performance and Identification Requirements, Standard" are available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. PIN and quantity required (see 6.4).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
d. Title, number, and revision letter of the applicable engineering drawing (see 6.3).
e. Color of tank final top coat, if other than olive drab.
f. Selection of applicable level and packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

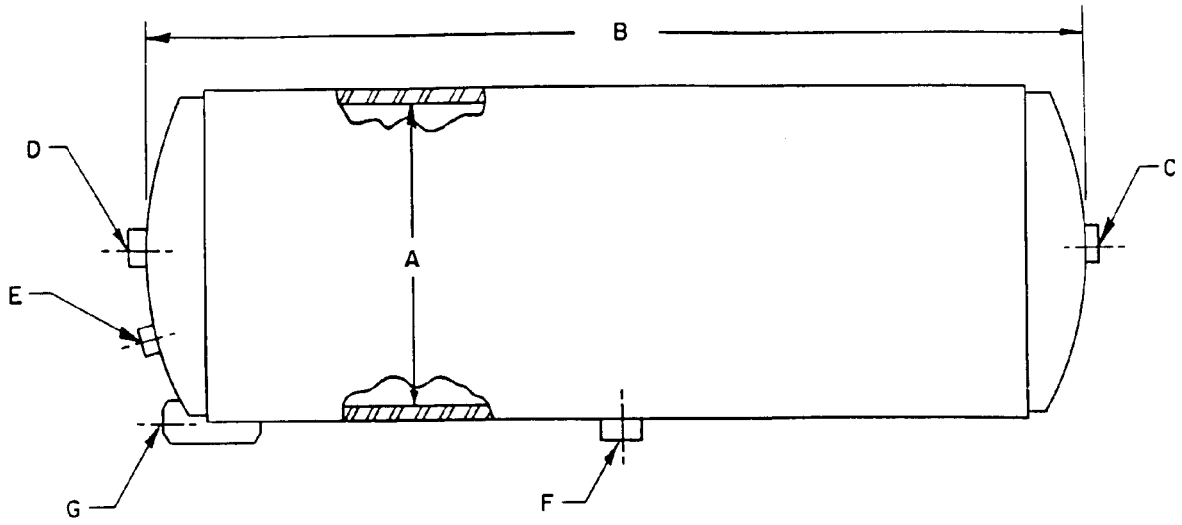

D PIN	Former MS Part Number	Capacity (in^3)	A	B	C 1/	D 1/	E 1/	F 1/	G 1/
A52523-1	MS500093-1	1760	9.50	27.0	3/8-18	3/8-18	--	1/4-18	--
A52523-2	MS500093-2	650	6.88	19.0	--	3/8-18	--	--	1/4-18
A52523-3	MS500093-3	830	6.88	24.0	--	--	1/4-18	1/4-18	--
A52523-4	MS500093-4	940	6.88	27.0	--	--	1/4-18	1/4-18	--
A52523-5	MS500093-5	1040	8.00	22.5	3/8-18	3/8-18	--	1/4-18	--
A52523-6	MS500093-6	845	6.88	24.0	3/8-18	3/8-18	--	1/4-18	--
A52523-7	MS500093-7	1040	8.00	22.5	3/8-18	3/8-18	--	1/4-18	--
A52523-8	MS500093-8	1400	9.50	21.5	--	--	3/8-18	1/4-18	--
A52523-9	MS500093-9	1760	9.50	27.0	3/4-14	3/4-14	--	--	3/8-18
A52523-10	MS500093-10	940	7.06	27.0	3/8-18	3/8-18	--	1/4-18	--

1/ NPTF

NOTES:

1. Dimensions are inches and are for engineering reference only.
2. This CID is not intended to limit construction to features other than as shown herein by dimensions, notations, and referenced documents.

FIGURE 1. Tank, pressure: air brake.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

6.3 Applicable pressure tank Army drawings. Applicable Army drawing numbers cross-referenced to applicable CID PIN's are listed as follows:

Army drawing number	CID PIN number	Army drawing number	CID PIN number
8336707	A52523-1	6169300	A52523-6
7411078	A52523-2	9152454	A52523-7
7974404	A52523-3	7979298	A52523-8
8735806	A52523-4	8333049	A52523-9
8017035	A52523-5	8327379	A52523-10

6.4 Part or identification number (PIN). The PINs to be used for pressure tanks acquired by this CID are created as follows:

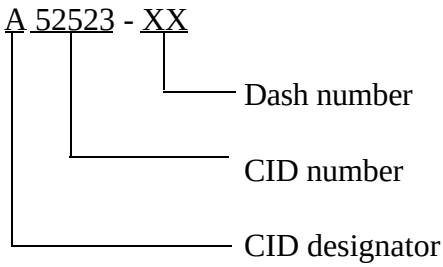

6.5 Cross-reference data. Air brake pressure tanks conforming to this CID are interchangeable/ substitutable with air brake pressure tanks conforming to MS500093A.

MILITARY INTERESTS:

Custodians
Army - AT
Air Force - 99

Review Activities
Army - MI
Navy - MC
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 2530-0378)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.