FEDERAL SPECIFICATION

SHIELD, EYE, SURGICAL, FOX

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of Fox eye shield used as a post-operative eye dressing to prevent inadvertent trauma to the eye.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

QQ–A–318—Aluminum Alloy Plate and Sheet 5052.
PPP–B–566—Boxes, Folding, Paperboard.
PPP–B–585—Boxes, Wood, Wirebound.
PPP–B–601—Boxes, Wood, Cleated-Plywood.
PPP–B–621—Boxes, Wood, Nailed and Lock-Corner.
PPP–B–636—Box, Fiberboard.
PPP–B–676—Boxes, Set-Up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking For Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D .C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL–L–10547—Liners, Case, Waterproof.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129—Marking for Shipment and Storage.


(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The eye shield shall be fabricated of aluminum alloy, comparable to 5052 of H32 temper as specified in Federal Specification QQ–A–318 (see 3.2).

3.2 Style, design, and dimensions. Eye shield shall be of the Fox design, capable of being molded by hand to fit facial contours of patient, and shall be suitable for preventing inadvertent trauma to the eye following intraocular surgery. The eye shield shall be in accordance with figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

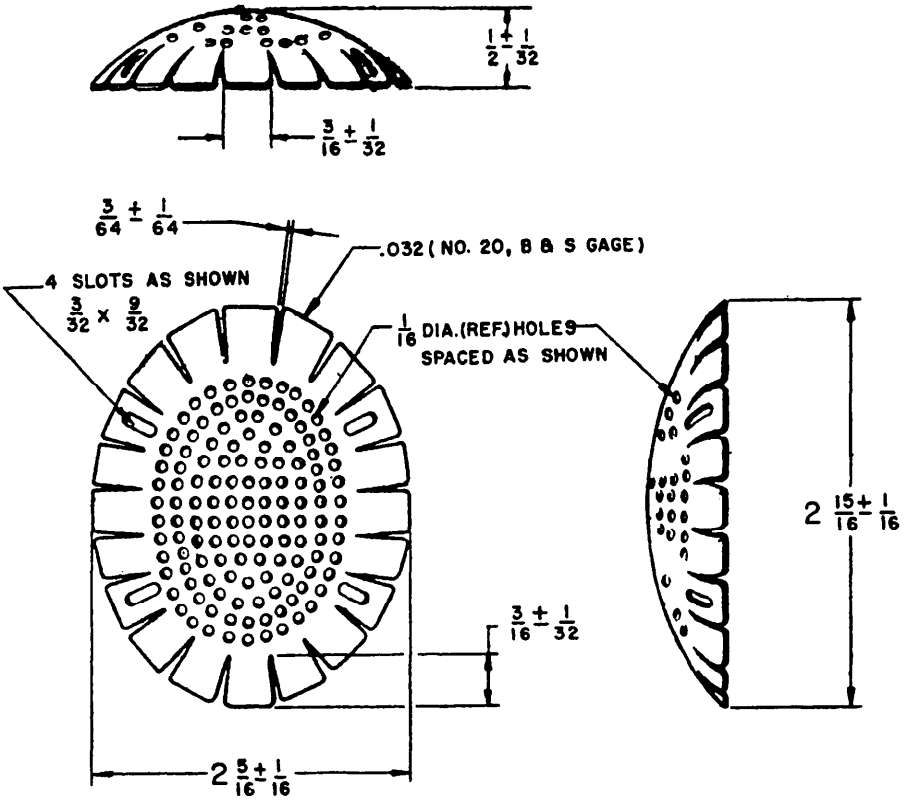

NOTES

1. REMOVE BURRS AND BREAK SHARP EDGES.
2. UNLESS OTHERWISE SPECIFIED:
   DIMENSIONS ARE IN INCHES:
   TOLERANCES: FRACTIONS ± 1/64

FIG. 1

3.3 Finish. The shield shall have a smooth finish and shall be free of burs and sharp edges.

3.4 Workmanship. Workmanship shall be first class throughout. Eye shields shall be free from defects which detract from their appearance or may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Supplier responsibilities for inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:50Z
Check the source to verify that this is the current version before use.

4.1.2 *Certificates of quality.* When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling for lot acceptance.

4.2.1 *Inspection lot.* The inspection lot shall be determined by the cognizant government inspector and shall be based on the unit of product being one shield (end item).

4.2.2 *Sampling for examination.* A random sample of shields shall be selected from each lot offered to the Government in accordance with Military Standard MIL–STD–105. Examination for dimensions shall be in accordance with Military Standard MIL–STD–105 and as indicated in table I.

4.3 Examination. The shields shall be examined to determine compliance with all requirements contained in this specification.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

For civil agency procurement only, Federal Standard No. 102 should be referred to for definitions and applications of the various levels of packaging and packing protection for supplies and equipment.

5.1 Packaging.

5.1.1 *Level A or B.* Each shield shall be packaged in a paperboard folding or set-up box of appropriate size constructed in accordance with Federal Specification PPP–B–566 or PPP–B–676. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.1.1 *Intermediate package.* Twelve shields, packaged as specified in 5.1.1 shall be intermediately packaged in a paperboard folding or set-up box of appropriate size constructed in accordance with Federal Specification PPP–B–566 or PPP–B–676. Alternatively, twelve shields packaged as specified in 5.1.1 shall be wrapped in kraft paper of suitable weight and secured with tape or adhesive to prevent spillage of contents under normal handling.

5.1.2 *Level C.* Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.* Forty-eight intermediate packages (5.1.1.1) shall be packed in containers designed for type 2 load, constructed in accordance with Federal Specification PPP–B–585, style 3, for class 3 use; PPP–B–601, table II, using type III, class 1 plywood, or PPP–B–621, table III. Each box shall be lined with a waterproof case liner conforming to Military Specification MIL–L–10547, closure and sealing shall conform to applicable paragraphs of appendix thereto. Strapping when required, shall be in accordance with the applicable box specification.

NOTE: Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 *Level B.* Forty-eight intermediate packages (5.1.1.1) shall be packed in containers conforming to Federal Specification PPP–B–601,

TABLE I.—*Sampling criteria*

Component	Characteristic	Req.	Test procedure	Unit of product	Insp. level	AQL (percent defective)
Shield (end item) ...	Dimensions	3.2	....	1-shield	L3	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

table I, using type III, class 1 plywood, or shall be designed for type 2 load constructed in accordance with PPP–B–621, table I, or PPP–B–636, type I, class 1, of not less than 275-pound test fiberboard.

5.2.3 *Level C.* The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carrier, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.2.4 *Standard pack for civil agency procurement.* The standard pack for this commodity shall be as specified in 5.1.1 and 5.2.2.

5.3 Marking.

5.3.1 *Civil agencies.*

5.3.1.1 *Shipping containers.* In addition to any special marking specified in the contract or order, containers shall be marked in accordance with Federal Standard No. 123.

5.3.2 *Military agencies.*

5.3.2.1 *Unit package.* Each unit package shall be marked with stock number, item identification, unit, quantity, and name of contractor.

5.3.2.2 *Intermediate package.* Each intermediate package shall be marked in accordance with 5.2 of Military Standard MIL–STD–129.

5.3.2.3 *Exterior container.* Exterior container shall be marked in accordance with Military Standard MIL–STD–129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Selection of applicable levels of packaging and packing.

(*c*) Standard pack requirements (5.2.4 and 6.3).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

6.3 The standard pack requirements in 5.1.1 and 5.2.2 are intended for use in procurements of Stores stock replenishments. Procuring officers should use the Standard Pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot or intermediate storage point for temporary storage, subsequent issue and/or shipment to eventual user.

6.4 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:

Aluminum articles, not otherwise indexed by name.

Carload minimum weights 14,000 and 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Aluminum articles, not otherwise indexed.

Truckload minimum weight 14,000 pounds, subject to Rule 34, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—M

Navy—Md

Air Force—AFCSC

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:50Z
Check the source to verify that this is the current version before use.