GG-T-00380A (DSA-DM)
November 8, 1973
Interim revision of
GG-T-380
March 4, 1958

FEDERAL SPECIFICATION

THIMBLE, EXTRACTION

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pa. 19101 based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized the use of this interim Federal specification as a valid exception to Federal specification GG-T-380.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers extraction thimbles, suitable for use with standard extraction apparatus for analytical determination of fat in organic materials.

1.2 Classification.

1.2.1 Types and sizes. Extraction thimbles shall be of the following types and sizes, as specified (see 6.1):

Type I - Single thickness wall.

Size 1 - Inside diameter-33 millimeters (mm.)
Length————80 mm.
Size 2 - Inside diameter-10 mm.
Length————50 mm.

Type II - Double thickness wall

Inside diameter-22 mm.
Length————80 mm.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper (for Carton Sealing).
MMM-A-250	Adhesive, Water-Resistant (for Sealing Waterproof Paper).
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Setup.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

TECHNICAL ASSOCIATION OF PULP AND PAPER INDUSTRY (TAPPI)

T401m-60	Fiber Analysis of Paper and Paperboard.
T429os-69	Alpha-Cellulose in Paper.
T430su-68	Copper Number of Paper and Paperboard.
T435su-68	Hydrogen Ion Concentration (pH) of Paper Extracts—Hot Extraction Method.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, 1 Dunwoody Park, Atlanta, Ga. 30341.)

3. REQUIREMENTS

3.1 Material. Extraction thimble shall be of fat-free, close-textured, filter paper. The filter paper shall be composed of 100 percent fully bleached cellulose fibers when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

3.1.1 Alpha-cellulose. The filter paper shall contain not less than 95 percent alpha-cellulose when tested as specified in 4.4.2.

3.1.2 Copper number. The copper number shall be not more than 0.5 when tested as specified in 4.4.3.

3.1.3 Acidity. The pH value shall be not less than 6.0 and not more than 8.0 when tested as specified in 4.4.4.

3.2 Construction. Thimble shall be a seamless rigid tube of single- or double-wall thickness, as specified, with a round bottom. Wall shall be symmetrical, well-compressed and hard, with a smooth inner surface to facilitate removal of extracted matter. The open end shall be cut off squarely and evenly.

3.3 Dimensions. Extraction thimbles shall conform to the dimensions shown in Table I.

Table I Dimensions

Type	Size	Inside diameter (mm.)	Overall length (mm.)	Wall thickness (mm.)
I	1	33 ± 1	80 ± 2	1 ± 0.3
I	2	10 ± 0.4	50 ± 2	1 ± 0.3
II	-	22 ± 0.7	80 ± 2	2 ± 0.4

3.4 Workmanship. Workmanship shall be first class throughout. Thimble shall have uniform formation, and shall be clean and free from imperfections which detract from its appearance or which may impair its serviceability. Thimble shall be free from pinholes, cracks, breaks or other openings and shall have rigid walls. Thimble shall be free of dirt particles, foreign matter, fat, grease, pigments or other organic materials. Open end shall be free of chipped, cracked or fraying edges and interior surface shall be free from overlaps and marked wrinkles.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificate of quality. Certificate of quality, supplied by the manufacturer of the filter paper, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The Certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and Table II.

Table II Sampling for examination

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	2.5
For dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and Table III. Inspection level shall be S-2. Sample unit shall be the extraction thimble.

Table III Sampling for tests

Characteristic	Requirement	Test procedure	AQL
Fiber identification	3.1	4.4.1	*
Alpha-cellulose content	3.1.1	4.4.2	*
Copper number	3.1.2	4.4.3	*
pH value	3.1.3	4.4.4	*

* Acceptance number shall be zero.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

4.3 Examination. The extraction thimble shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Table IV Classification of defects

Categories	Defects *
Major	
101	Walls of thimble not free from pinholes.
102	Walls of thimble not free from cracks, breaks or other openings.
103	Walls of thimble not rigid.
104	Thimble walls not free from dirt particles or other foreign matter (unclean paper pulp used).
105	Wall surfaces not free from fat, grease, pigments, or other organic or inorganic materials which will tend to adulterate the filtrate.
106	Dimensions not as specified.
107	Walls of thimble not seamless.
Minor	
201	Inside diameter and wall thickness not uniform.
202	Thimble not symmetrical, out of shape.
203	Open end not evenly or squarely cut.
204	Thimble not free from localized thin walls.
205	Open end not free from chipped, cracked or fraying edges.
206	Interior surface not free from overlaps or marked wrinkles.

* Examination shall not be restricted to the defects listed above.

4.3.2 Dimensional examination. The thimble shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Fiber identification. The test for fiber identification shall be conducted in accordance with TAPPI Test Method T401m-60.

4.4.2 Alpha-cellulose. The alpha-cellulose content shall be determined in accordance with TAPPI Test Method T429os-69.

4.4.3 Copper number. The copper number shall be determined in accordance with TAPPI Test Method T430su-68.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

4.4.4 Acidity. The pH value shall be determined in accordance with TAPPI Test Method T435su-68.

5. PREPARATION FOR DELIVERY

5.1 Unit of issue. One box, containing 25 thimbles, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in the following table shall be packaged in each unit, intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table V Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	6 units	48 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Unit package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors will be acceptable, or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.3.2 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-636, type CF, class weather-resistant. Boxes shall be closed by taping the top and bottom flaps with 2-inch wide tape conforming to PPP-T-76. Closing of bottom flap with adhesive conforming to MMM-A-250 or metal stitches is permitted.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:50Z
Check the source to verify that this is the current version before use.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements of Table II of PPP-B-636 shall apply for PPP-B-636 Box.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of Table I of PPP-B-636 shall apply for PPP-B-636 Box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. National Stock Number (NSN).
c. Type and size required (see 1.2.1).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

6.2 This specification does not cover all types, classes, grades or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types normally procured to meet Federal requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6640-0769

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
GG-T-00380A (DSA-DM)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS


SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.

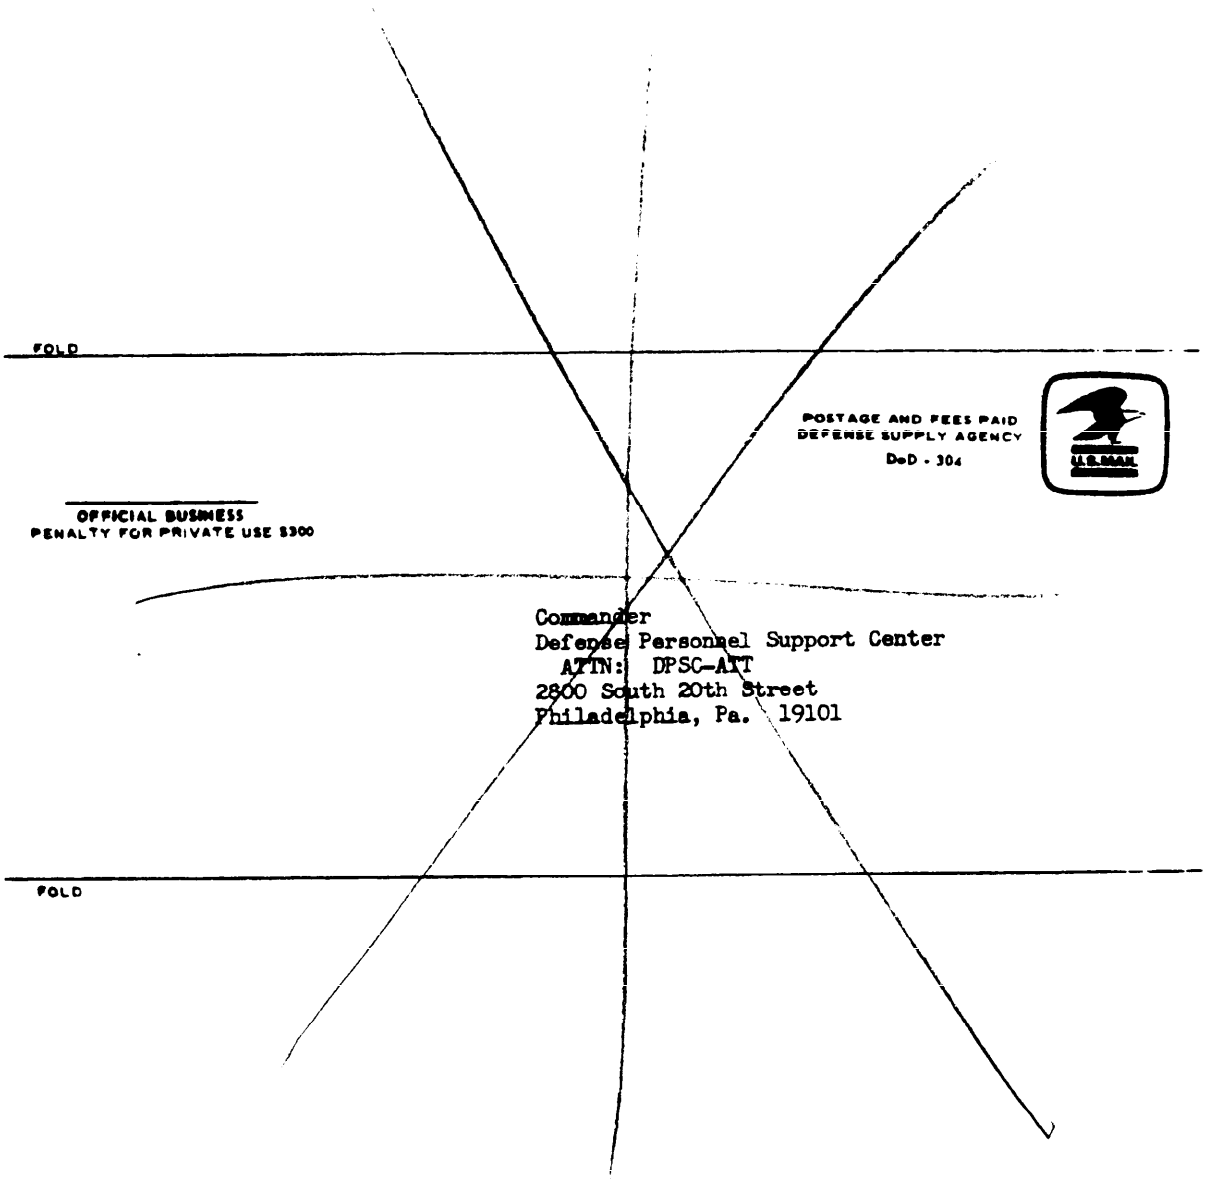

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:50Z
Check the source to verify that this is the current version before use.