INCH-POUND

GG-T-35C
April 27, 1989
SUPERSEDING
GG-T-35B
October 12, 1970

FEDERAL SPECIFICATION

TABLES; DRAWING, TRACING, AND SCRIBING

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal Agencies.

1. SCOPE and CLASSIFICATION

1.1 Scope. This specification covers drawing, tracing and scribing tables.

1.2 Classification. The tables shall be of the following types, styles, and classes, as specified (see 6.2).

Type I	- Table, drawing.
Style 1	- Lifting and tilting (see figure 1).
Style 2	- Tilting only (see figures 2 and 3).
Type II	- Table, tracing and scribing.
Style 1	- Lifting and tilting (see figure 1).
Style 2	- Tilting only (see figures 2 and 3).
Type III	- Table, tracing, portable.
Type IV	- Table, drawing, L-shaped, lifting and tilting (see figure 7).
Class 1	- Right-hand reference desk.
Class 2	- Left-hand reference desk.
Type V	- Table, drawing and reference desk, free standing (see figure 8).

2. APPLICABLE DOCUMENTS

2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6675
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the current version before use.

Federal Specifications:

W-C-596	- Connector, Plug, Receptacle and Cable Outlet, Electrical Power, General Specification For.
W-C-596/13	- Connector, Plug, Electrical, General Purpose, Hospital Grade, Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz.
DD-G-451	- Glass, Float or Plate, Sheet, Figured, (Flat, for Glazing, Mirrors and Other Uses).
GG-T-671	- Triangles, Drafting: Line Guides, Lettering, Adjustable and Nonadjustable (General Specification).
GG-T-671/1	- Triangles, Drafting, Plastic, Transparent.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-B-640	- Box, Fiberboard, Corrugated, Triple-Wall.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.
PPP-P-291	- Paperboard, Wrapping and Cushioning.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-T-97	- Tape, Pressure Sensitive Adhesive, Filament Reinforced.

Federal Standards:

FED-STD-123	- Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions, as outlined under General Information in the Index of Federal Specifications and Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification, other Federal specifications, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Forth Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Auburn, WA.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specifications:

MIL-P-116	- Preservation, Methods of.
MIL-V-173	- Varnish, Moisture and Fungus-Resistant (For Treatment of Communications, Electronic, and Associated Equipment).
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-838	- Lubrication of Military Equipment.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

Handbooks:

Military

MIL-HDBK-113	- Guide for the Selection of Lubricants, Functional Fluids, Preservatives and Specialty Products for Use in Ground Equipment Systems.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN; NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Federal Regulations:

Code of Federal Regulations (CFR)

48 CFR 23.4 - Use of Recovered Materials.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

American National Standards Institute (ANSI):

ANSI/SAE J429	- Mechanical and Material Requirement for Externally Threaded Fasteners.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

National Electrical Manufacturers Association (NEMA):

WD-1 - General Requirements for Wiring Devices.
WD-6 - Wiring Devices Dimensional Requirements.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Suite 300, Washington, D.C. 20037.)

National Fire Protection Association (NFPA):

No. 70 - National Electrical Code.

(Application for Copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

National Motor Freight Traffic Association (NMFTA):

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, ATTN: Traffic Order Section, 2200 Mill Road, Alexandria, VA 22314.)

South Coast Air Quality Management Control District:

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management Control District, 9150 East Flair Drive, El Monte, CA 91731.)

Uniform Classification Committee (UCC):

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

3. REQUIREMENTS

3.1 Description. The types I, II, and III tables shall consist of a base and drawing board, tracing table, or scribing table. The type IV and V tables shall consist of a base, drawing board, and reference desk.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of tables from the approved first article during production will be

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:48Z
Check the source to verify that this is the current version before use.

subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish tables conforming to this specification.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The table shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the table may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 (48 CFR 23.4) to the maximum extent practical.

3.4 Type I, table, drawing. The type I drawing table shall consist of a base and drawing board.

3.4.1 Drawing boards. Drawing boards and drafting surfaces shall be white pine, basswood, ponderosa pine or cellular-core, three-ply basswood. Metal end cleats shall be furnished on all drawing boards. The working surface shall be flat within 0.0156 inch for each 12.0 inches (304.8 mm) of length or width, and all corners and edges shall be square. Wood shall be free of decay, splits, checks, shake, bark or pitch pockets, holes, and knots. Crossgrain (slopes of grain), whether on the face or edge of the piece, shall be not greater than 1.0 inch (25.4 mm) in a length of 10.0 (254.0 mm). The moisture content of the wood shall be between 5 and 9 percent. Wood drawing boards shall be constructed of continuous wood lengths, 1.75 to 5.0 inches (44.1 to 127.0 mm) in width, extending the entire length of the working surface with the grain running lengthwise. Lengths making up the body of the board shall be bonded together with liquid-resin waterproof adhesive. Bonded joints shall have a strength greater than the wood being bonded.

3.4.1.1 Vinyl. The drawing board shall be covered with vinyl bonded to the drawing board (see 6.2). The color of the vinyl shall blend with the color of the base.

3.4.2 Base. The base of the drawing tables shall be of wood or steel construction, as specified (see 6.2), and shall be as shown in figures 1, 2, or 3. Individual adjustments shall be provided on the legs for leveling the table on irregular floors.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:48Z
Check the source to verify that this is the current version before use.

3.4.2.1 Drawer arrangement. When drawers are required, drawer arrangement shall be as shown on figure 4, as specified (see 6.2). Drawer designations shall be as follows:

a. Without drawers (see figure 4a).
b. With reference drawer only (see figure 4b).
c. With tool drawer only (see figure 4c).
d. With reference drawer and tool drawer (see figure 4d).
e. With reference drawer, tool drawer, and letter or file drawer (see figure 4e).
f. With reference drawer, tool drawer, and auxiliary drawer unit (see figure 4f).
g. With five-drawer plan file only (see figure 4g).
h. With reference drawer and five-drawer plan file (see figure 4h).
i. With reference drawer, auxiliary drawer unit, and five-drawer plan file (see figure 4i).

3.4.2.2 Drawer locks. When tables are required for use in mobile vans, all drawers shall have positive catches for security while in transit (see 6.2).

3.4.3 Size. The drawing tables shall be the width and length of the drawing board and the height of the table, as specified (see 6.2).

3.4.4 Style 1, lifting and tilting. The lifting and tilting style drawing table shall have a base with a sliding reference top in the rear, extending approximately 10.0 inches (254.0 mm). The drawing board shall be attached to the base through a lifting and tilting mechanism with an approximate range from a minimum of 35.0 inches (889.0 mm) to a maximum of 46.0 inches (1168.4 mm) and a tilt angle from a horizontal position (0 degrees) to a vertical position (90 degrees). An adjustable locking device for each function shall lock the drawing board at any desired height or tilt angle.

3.4.5 Style 2, tilting only. Style 2 shall consist of a base with the drawing board hinged near the front edge to permit tilting. An adjustable locking device shall lock the drawing board at any desired tilt angle from horizontal position (0 degrees) to not less than 40 degrees above horizontal. A pencil tray shall be attached to the front edge of the board (see figure 3).

3.5 Type II, table, tracing and scribing. The type II table shall consist of a base frame, a lamp housing, and a tabletop frame with a glass working surface, and as shown in figure 5.

3.5.1 Base frame. The base frame shall be of wood or metal construction as specified (see 6.2). When assembled, the base frame shall be rigid. Individual adjustments shall be provided on each leg for leveling the table on irregular floors.

3.5.2 Lamp housing. An enclosed metal lamp housing shall be attached to the tabletop beneath the glass working surface. Doors or removable panels shall be provided for obtaining access to the interior of the lamp housing to facilitate removal and installation of lamps. The lamp housing shall be provided with louvers or holes for ventilation.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the currentversion before use.

3.5.2.1 Illumination. Illumination shall be provided by fluorescent lamps arranged to provide not less than 160 foot-candles at the center and 130 foot-candles at the corners of the glass working surface. The illumination circuit shall include an electric cord not less than 10.0 feet (254.0 mm) long. The cord shall be flexible, rubber or plastic covered, and shall terminate in a two-blade, parallel, male plug with ground. The illumination circuit shall include an "ON-OFF" switch. The location and position of the switch shall be convenient for right-hand operation. ALl wiring shall conform to NFPA No. 70.

3.5.3 Tabletop frame. The tabletop frame shall have an outside edge of wood or metal with a metal frame for mounting the glass working surface. The tabletop shall be hinged near the front edge to allow for tilting. An adjustable locking device shall lock the tabletop at any desired tilt from horizontal to not less than 40 degrees. The edges shall be straight and all corners shall be square.

3.5.3.1 Glass working surface. Glass working surfaces shall be polished plate glass conforming to DD-G-451, type I, class 1, quality 3, and shall not be less than 0.25 inch (6.350 mm) thick. All edges of the glass shall be ground and rounded, or beveled to remove sharp edges.

3.5.3.2 Light diffusion. An opaline or milky-white plastic sheet not less than 0.125 inch (3.175 mm) thick shall be placed beneath the glass working surface for light diffusion or the underside of the glass shall be sandblasted. The plastic sheet shall be the same size as the glass working surface.

3.5.4 Size. The size of the plastic diffuser and glass working area and the height of the tracing and scribing table shall be as specified (see 6.2).

3.5.5 Style 1, lifting and tilting. The lifting and tilting style tracing table shall have a base with a sliding reference top in the rear, extending approximately 10.0 inches (254.0 mm). The tracing board shall be attached to the base through a lifting and tilting mechanism with an approximate range from a minimum of 35.0 inches (889.0 mm) to a maximum of 46.0 (1168.4 mm) and a tilt angle from a horizontal position of 0 degrees to a vertical position of 90 degrees. An adjustable locking device for each function shall lock the tracing board at any desired height or tilt angle.

3.5.6 Style 2, tilting only. Style 2 shall consist of a base with the tracing board hinged near the front edge to permit tilting. An adjustable locking device shall lock the tracing board at any desired tilt angle from horizontal position (0 degrees) to not less than 40 degrees above horizontal. A pencil tray shall be attached to the front edge of the board (see figure 3).

3.6 Type III, table, tracing portable. The portable tracing table shall consist of a frame, a glass working surface, and one or more lamps. The table shall be as shown in figure 6 and shall be furnished with a T-square and a triangle. The table shall have adjustable legs and shall be equipped with typewriter scales.

3.6.1 Table frame. The table frame shall be of molded plastic, low-carbon sheet steel, or corrosion-resisting sheet steel. The outer edge of the frame shall be parallel to the respective edges of the glass working surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.6.1.1 Typewriter scales. A typewriter scale consisting of six lines per inch shall be located on the top surface of the frame parallel to each long edge of the glass working surface. One or both scales shall be full-divided in 0.0625 or 0.125 inch (1.5875 or 3.1750 mm) divisions. Each scale shall be in alignment with, and parallel to the other, and shall extend from within +1 (25.4 mm) or -0.25 inch (6.350 mm) of the top edge of the working surface to within 1.25 (26.65 mm) ±0.25 (6.350 mm) inch of the bottom edge of the working surface. A separate typewriter scale consisting of six lines per inch and a stencil button bar for standard punched stencils shall be located on the top surface of the frame parallel to the short edge of the glass working surface. The scales and stencil button bar shall not restrict the movement of the T-square in any direction.

3.6.1.2 Dimensions. The overall dimensions of the frame shall not be greater than 22 by 16 by 4 inches (558.8 by 406.4 by 101.6 mm) with all legs in the fully retracted position.

3.6.1.3 Adjustable legs. The adjustable or folding legs shall permit setting the table in an inclined position with either end elevated, with either side elevated, or for a level position with the legs extended or retracted. The legs shall be rigid when in the extended position and shall include locking devices to prevent accidental retraction.

3.6.1.4 Angle of tilt. With two legs extended on any one side or end of the table, the frame and top surface shall form an angle not greater than 25 degrees nor less than 8 degrees with the horizontal.

3.6.2 Glass working surface. The glass working surface shall be grade A window glass not greater than 9 by 16 inches (228.6 by 406.4 mm) nor less than 8 by 14 1/2 inches (203.2 by 368.3 mm), with a normal thickness of 0.125 inch (3.175 mm), except when opal glass is used (see 3.6.2.1). The glass shall be free from seeds, strings, lines, scratches, cracks, chips, or uneven surfaces that affect the appearance or which might impair the serviceability of the glass as a working surface. The glass working surface shall be held in place with corrosion-resisting metal clips; the clips shall not interfere with the drafting operation. The clips may also be used to hold down the stencil or other work being performed.

3.6.2.1 Light diffusion. Light diffusion shall be accomplished by one of the following methods:

a. Underside of glass working surface shall be fine-grained.
b. Glass working surface shall be of opal glass in lieu of window glass.
c. An opaline plastic sheet not less than 0.125 inch (3.175 mm) thick shall be placed in the area between the lamps and the glass working surface.

3.6.3 Lamp housing. The lamp housing shall be accessible to facilitate replacement of the lamps. The housing shall contain the lamp ballasts.

3.6.3.1 Illumination. Illumination shall be provided by not more than two 15-watt fluorescent lamps. The lamps shall operate on 120-volt, 60-cycle current. A lamp switch shall be mounted in a position for right-hand operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

The switch shall be connected to a three-conductor, flexible, electrical cord not less than 6.0 feet (152.4 mm) long, terminated with a male electrical plug in accordance with W-C-596, W-C-596/13.

3.6.4 Triangle. The triangle shall conform to GG-T-671, GG-T-671/1, class B, size 6 inch (152.4 mm).

3.6.5 T-square. The T-square shall be the fixed-head type and shall have locks to permit clamping the blade to the table in both the horizontal and vertical positions. The overall length of the T-square shall be not greater than 36.0 inches (914.4 mm).

3.6.6 Weight. The total weight of the table without the triangle and T-square shall be not greater than 15 pounds (6.75 Kg).

3.7 Type IV, table, drawing L-shaped. The type IV, L-shaped drawing table shall consist of a base, drawing board, and a reference desk attached at right angles to the drawing table (see figure 7).

3.7.1 Drawing boards. Drawing boards and drafting surface shall be either cellular core, basswood, or cellular core steel construction. Metal end cleats shall be furnished on all boards. The working surface shall be flat within 0.0625 inch (1.5875 mm) for each 12.0 inches (304.8 mm) of length or width and all corners and edges shall be square. A pencil trough shall be attached to the front edge of the drawing board.

3.7.2 Vinyl. The drawing board shall be covered with vinyl bonded to the drawing board. The color of the vinyl shall blend with the color of the base.

3.7.3 Base and reference desk. The base and reference desk shall be of steel construction. Individual height adjustments shall be provided on the legs for leveling on irregular floors. The desk top shall be high-pressure laminated plastic.

3.7.4 Drawers. The reference desk shall have a plan drawer, tool drawer, and file drawer. Drawer locks are not required.

3.7.5 Size. The drawing board shall be of the width and length specified (see 6.2).

3.7.6 L-shaped drawing table and desk. The L-shaped drawing table and desk shall consist of a drawing board attached to the base through a lifting and tilting mechanism with a reference desk attached at right angles either on the right or left side, as specified (see 6.2). An adjustable locking device for each function shall lock the drawing board at any desired height or tilt angle. The color shall be at the option of the manufacturer.

3.7.7 Receptacle. A duplex electrical receptacle NEMA WD-1 and WD-6, configuration 5-15R, shall be mounted in the base.

3.8 Type V, table, drawing and reference desk, free standing. The type V free-standing table and desk shall consist of a base, drawing board, and a separate reference desk (see figure 8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.8.1 Drawing boards. Drawing boards and drafting surfaces shall be either cellular core basswood or cellular core steel construction. Metal-end cleats shall be furnished on all boards. The working surface shall be flat within 0.0625 inch (1.5875 mm) for each 12.0 inches (304.8 mm) of length or width, and all corners and edges shall be square. A pencil trough shall be attached to the front edge of the drawing board.

3.8.2 Vinyl. The drawing board shall be covered with vinyl bonded to the drawing board. The color of the vinyl shall blend with the color of the base.

3.8.3 Base and reference desk. The base and reference desk shall be of steel construction. Individual height adjustments shall be provided on the legs for leveling on irregular floors.

3.8.3.1 Base. The base shall be either a single pedestal with outrigger legs or a double pedestal unit. One pedestal of the double pedestal unit is at each end of the drawing board. The drawing board is attached to the base through a lifting and tilting mechanism. A single locking device or a locking device for each function shall lock the drawing board at any desired height or tilt angle. The color shall be at the option of the manufacturer.

3.8.3.2 Desk. The desk shall be of steel construction and have a high-pressure laminated plastic top. The reference desk shall have a plan drawer, or a plans storage section, tool drawer, and file drawer. Drawer locks are not required. The color shall be at the option of the manufacturer.

3.8.4 Size. The drawing board shall be the width and length as specified (see 6.2).

3.8.5 Receptacle. A duplex electrical receptacle, NEMA WD-1 and WD-6, configuration 5-15R, shall be mounted in the base.

3.9 Wiring. All wiring shall conform to NFPA No. 70.

3.10 Fungus and moisture resistance. When specified (see 6.2), the electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition I or II, as applicable (see 3.10.1), with 1 percent copper 8 quinolinolate (by weight) based on the nonvolatile content of the varnish:

a. Components of circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions shall be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness not less than 1 mil to the component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.10.1 Composition. Composition II shall be used only in the case when local air-pollution regulations in the application of varnish precludes the use of composition I. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required, and shall certify that the composition II material complies with Rule 442, South Coast Air Quality Management Control District.

3.11 Lubrication. All moving parts shall be provided with suitable means of lubrication.

3.11.1 Lubricants. The procedure for the selection of lubricants shall be in accordance with section 5 of MIL-STD-838. Lubricants selected shall be in accordance with chapter 2 of MIL-HDBK-113. When the specification of the lubricant selected includes a requirement for a Qualified Products List (QPL), the lubricant supplied shall be from a source that is listed on the applicable QPL.

3.12 Treatment and painting. The portions of the table normally painted internally and externally shall be cleaned, treated, and painted in accordance with MIL-T-704, unless otherwise specified (see 6.2).

3.12.1 Wood finish. The wood shall be treated for serviceability and preserved in accordance with the contractor's standard commercial practice (see 6.2).

3.12.2 Steel finish. Steel requiring paint for preservation shall be cleaned and pretreated equivalent to minimum requirements specified in MIL-T-704 (see 6.2).

3.13 Identification marking. The table shall be identified in accordance with MIL-STD-130. The marking shall be applied to the table on plates conforming to MIL-P-514, type I, style I, composition C, of type I, grade A, class 1 material. Plates shall be attached by screws, bolts or rivets in a location as shown on the figures.

3.14 Instruction plates. Each table shall be equipped with instruction plates or diagrams, including warning and cautions, describing any special or important procedure to be followed in assembling, operating or servicing the table. Instruction plates shall conform to MIL-P-514, type II, composition C, of type I, grade A, class 1 material.

3.15 Workmanship.

3.15.1 Castings and forgings. All parts, components, and assemblies of the table that include castings and forgings shall be free of harmful extraneous material such as sand, dirt, sprues, scale, and flux. Rework shall be limited to procedures that do not reduce mechanical properties or affect function.

3.15.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to ensure uniformity of size and shape. Precautions shall be taken to avoid

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the current version before use.

overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free from burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.15.3 Bolted connections. Bolt holes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to ANSI/SAE J429 or capscrews shall be of sufficient strength to withstand the tensile of the bolt shank. All fasteners shall be correctly torqued and shall have full thread engagement. Bolts shall protrude through nuts or nut plates not more than two full threads.

3.15.4 Machine work. Tolerance and gauge for metal fits shall conform to the limits specified herein.

3.16 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale and other foreign matter that can be removed by chipping and wire brushing. Parent materials, weld filler metals, and fabrication techniques shall be as required to enable the table to conform to the examination and test requirements specified in section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 0.187 inch (4.749 mm) unless appropriate bridging techniques are used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspection. The inspection requirement specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.

4.5 Inspection procedure.

4.5.1 Examination. The table shall be examined as specified herein for the following defects:

101. Material not as specified (see 3.3).
102. Material not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
103. Dissimilar metals, as defined in MIL-STD-889, are not effectively insulated from each other (see 3.3.1.1).
104. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.1.2).
105. Used, rebuilt or remanufactured components, pieces or parts incorporated in the table (see 3.3.2).
106. Drawing boards for type I table not as specified (see 3.4.1).
107. Vinyl cover for type I table not as specified (see 3.4.1.1).
108. Base of type I table not as specified (see 3.4.2).
109. Drawer arrangement not as specified (see 3.4.2.1).
110. Drawer locks not as specified (see 3.4.2.2).
111. Size of tables not as specified (see 3.4.3).
112. Style 1 of the type I table does not lift or tilt, as specified (see 3.4.4).
113. Style 2 of the type I table does not tilt as specified (see 3.4.5).
114. Base frame of the type II table not as specified (see 3.5.1).
115. Lamp housing of the type II table not as specified (see 3.5.2).
116. Illumination of table not as specified (see 3.5.2.1).
117. Table-top frame not as specified (see 3.5.3).
118. Glass working surface does not conform to DD-G-451, or as specified (see 3.5.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

119. Light diffusion not as specified (see 3.5.3.2).
120. Size of type II table not as specified (see 3.5.4).
121. Style 1 of the type II table not as specified (see 3.5.5).
122. Style 2 of the type II table not as specified (see 3.5.6).
123. Type III table not as specified (see 3.6).
124. Table frame of type III table not as specified (see 3.6.1).
125. Typewriter scale missing, or not as specified (see 3.6.1.1).
126. Dimensions of type III table not as specified (see 3.6.1.2).
127. The adjustable legs of type III table not as specified (see 3.6.1.3).
128. Angle of tilt of type III table not as specified (see 3.6.1.4).
129. Glass working surface of type III table not as specified (see 3.6.2).
130. Light diffusion of type III table not as specified see 3.6.2.1).
131. Lamphousing of type III table not as specified (see 3.6.3).
132. Illumination of type III table not as specified (see 3.6.3.1).
133. Triangle of type III table does not conform to GG-T-671/1, or as specified (see 3.6.4).
134. T-square of type III table not as specified (see 3.6.5).
135. Weight of type III not as specified (see 3.6.6).
136. Type IV table not as specified (see 3.7).
137. Drawing boards and sizes of type IV table not as specified (see 3.7.1 and 3.7.5).
138. Vinyl cover of type IV table not bonded to drawing board as specified (see 3.7.2).
139. Base and reference desk not as specified (see 3.7.3).
140. Drawers of type IV table not as specified (see 3.7.4).
141. The L-shaped table and desk of type IV table not as specified (see 3.7.6).
142. Electrical receptacle not as specified (see 3.7.7).
143. Type V table not as specified (see 3.8).
144. Drawing boards of type V table not as specified (see 3.8.1).
145. Vinyl cover of type V table not as specified (see 3.8.2).
146. Base and reference desk not of steel construction (see 3.8.3).
147. The base of type V table not as specified (see 3.8.3.1).
148. Desk of type V table not of steel construction (see 3.8.3.2).
149. Size of type V table drawing board not as specified (see 3.8.4).
150. Electrical receptacle of type V table not as specified (see 3.8.5).
151. Electrical wiring not as specified (see 3.9).
152. Fungus and moisture resistance not as specified (see 3.10).
153. Composition not as specified (see 3.10.1).
154. Lubrication not as specified (see 3.11).
155. Lubricants not as specified (see 3.11.1).
156. Treatment and painting not as specified (see 3.12).
157. Paint color not as specified (see 3.12).
158. Wood finish not as specified (see 3.12.1).
159. Steel finish not as specified (see 3.12.2).
160. Identification marking not as specified (see 3.13).
161. Instruction plates not as specified (see 3.14).
162. Castings and forgings not as specified (see 3.15.1).
163. Metal fabrication not as specified (see 3.15.2).
164. Bolted connections not as specified (see 3.15.3).
165. Machine work not as specified (see 3.15.4).
166. Welding not as specified (see 3.16).

4.5.2 Tests.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the current version before use.

4.5.2.1 Moisture content of type I tables. A sample of each lot of the wood used in the drawing tables shall be tested by either the oven-drying method or electrical-resistance method. A moisture content greater than 9 or less than 5 percent shall constitute failure of this test (see 3.4.1).

4.5.2.2 Flatness of type I, IV and V tables. The working surface of the table shall be tested for flatness by the use of a machinist's steel straightedge and a thickness gage. Nonconformance to 3.4.1 shall constitute failure of this test.

4.5.2.3 Glue joint of type I tables. A glued joint on the drawing board shall be broken along the plane of a glue joint by bending, twisting, or pulling, and the break shall be examined. Breakage within the glue rather than the wood shall constitute failure of this test. In lieu of the drawing board, a glued sample joint may be prepared for this test. The sample shall use the same species of wood and the same process as used on the drawing board (see 3.4.1).

4.5.2.4 Illumination test for type II table. With the light turned on, a light meter shall be placed over the center and the four corners of the table. Illumination of less than 160 foot-candles in the center or 130 foot-candles on the four corners shall constitute failure of this test (see 3.5.2.1).

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of preparation for delivery.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 1.0 percent defective.

167.	Disassembly not as specified for level A (see 5.2.1.1).
168.	Unpainted metal surfaces requiring a contact preservative not coated as specified for level A (see 5.2.1.2).
169.	Openings in electrical components not sealed as specified for level A (see 5.2.1.4).
170.	Disassembled table components not wrapped or boxed as specified for level A (see 5.2.1.5.1).
171.	Components wrapped or boxed together not protected to prevent contacting each other as specified for level A (see 5.2.1.5.1).
172.	Finished and glass tops not protected as specified for level A (see 5.2.1.5.1.2).
173.	Drawers not provided with locking mechanisms not secured as specified for level A (see 5.2.1.5.2).
174.	Assembled tables not protected with a full shroud as specified for level A (see 5.2.1.5.2).
175.	Packing not as specified for level A or B (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

176. Cushioning, blocking, and bracing not in accordance with the referenced document for level A or B (see 5.3.1).
177. Strapping not zinc coated for level A (see 5.3.1).
178. Marking missing, illegible, incorrect, or incomplete.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packing, and marking. The contractor shall furnish a first article pack for examination within the timeframe specified (see 6.2), to prove, prior to starting production preservation and packing, that the applied preservation, packing, and marking comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Disassembly. Tables designed for repeated assembly and disassembly shall be disassembled to accomplish reduction in cubage in accordance with the recommendation of the supplier. Fluorescent lamps and starters in all tables shall be removed.

5.2.1.2 Unpainted metal surfaces. Unpainted metal surfaces of the table requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

5.2.1.3 T-square and triangle. Each T-square and each triangle shall be individually preserved in accordance with MIL-P-116, method IC-1 or IC-3.

5.2.1.4 Electrical components. Fluorescent lamps shall be individually preserved in accordance with MIL-P-116, method III, using a box conforming to PPP-B-636, type CF, class domestic, variety SW, grade 125. Starters shall be preserved together in accordance with MIL-P-116, method IC-1, or IC-3. The lamps and starters shall be placed in one of the drawers, when the drawers are of sufficient size, and shall be cushioned to prevent damage. When drawers are not of sufficient size, the lamps shall be secured to the table in a protected location with tape conforming to PPP-T-60, type IV. The electrical cord shall be coiled and the coil secured to the table. Openings in electrical components, such as starter openings, switches, receptacles, and exposed ends of wire, plugs or other openings shall be sealed with tape specified herein.

5.2.1.5 Tables.

5.2.1.5.1 Disassembled tables. The components of disassembled tables other than glass tops (see 5.2.1.5.1.2) shall be wrapped with barrier material conforming to PPP-B-1055, type C-1 or C-2, and the seams shall be secured with tape conforming to PPP-T-60, type IV; or the components shall be packaged in boxes conforming to PPP-B-636, type CF, class domestic, variety SW, grade as applicable to the weight of the contents. When more than one component is wrapped together or packaged in the same box, protection shall be provided to prevent the components from contacting each other.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

5.2.1.5.1.1 Bolts, nuts, fittings, and washers. Loose bolts, nuts, fittings, and washers shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3 and packaged with the disassembled table components specified in 5.2.1.5.1.

5.2.1.5.1.2 Glass tops. When the glass top remains an attached component of the table, it shall be protected as specified in 5.2.1.5.2. Loose glass tops shall be wrapped with paperboard conforming to PPP-P-291, type III, style 1, and the wrap secured in place with tape conforming to PPP-T-60, type IV. The wrapped glass shall be placed between fitted pieces of 1/4-inch thick plywood or hardboard and secured with tape conforming to PPP-T-97, type II, class A or B, size 3/4 inch. The protected glass shall then be wrapped with paper conforming to PPP-B-1055, type C-1 or C-2, and the seams shall be secured with tape conforming to PPP-T-60, type IV.

5.2.1.5.2 Assembled tables. All finished and glass surfaces of assembled tables shall be protected with paperboard conforming to PPP-P-291, type III, style 1, secured in place with tape conforming to PPP-T-60, type IV. Drawers, if not provided with a locking mechanism, shall be secured with tape conforming to PPP-T-97, type II, class A or B, size 3/4 inch. Each table shall then be covered with a full shroud fabricated from barrier material conforming to PPP-B-1055, type C-1 or C-2. The seams of the shroud shall be secured with tape specified herein.

5.2.2 Level C. Each complete table shall be preserved and packaged to afford adequate protection against deterioration and damage from the supply source to the initial destination. The supplier's standard commercial packaging is acceptable when it fulfills these requirements.

5.3 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.3.1 Level A. Each complete assembled table or the unassembled components comprising a complete table shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, style optional. The contents shall be cushioned, blocked, and braced within the box in accordance with MIL-STD-1186. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall be zinc coated.

5.3.2 Level B. Tables shall be packed as specified in 5.3.1 for level A, except boxes shall be domestic type and strapping need not be zinc coated; or tables not exceeding the limitation of the box specification shall be packed in a fiberboard box conforming to PPP-B-640, class 2, style optional. Closure shall be in accordance with the appendix to the box specification.

5.3.3 Level C. Each complete table shall be packed to assure carrier acceptance and safe delivery to destination at lowest rating in a container complying with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.4 Marking.

5.4.1 Civil agencies. Marking shall be in accordance with FED-STD-123.

5.4.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked for shipment and storage in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The type I, IV and V tables are intended for use in general drafting work. The type II tables are intended for use in tracing, scribing, and drafting work. The type III tables are intended for use in preparation of duplicator stencils to incorporate drafting, drawing, ruling, illustrating, or lettering, and can be utilized, to a limited extent, in general drafting and tracing work. The type I, style 2 and type II tables are also intended for installation in a motorized photomapping van.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type of table required (see 1.2).
d. Style of table if type I or type II, and class of table if type IV (see 1.2).
e. When a first article is required for inspection and approval, and the number of units required (see 3.2).
f. Color of vinyl required (see 3.4.1.1).
g. Type of construction required for type I table (see 3.4.2).
h. Drawer arrangement required for type I table (see 3.4.2.1).
i. When drawer locks are required for type I table (see 3.4.2.2).
j. Size and height required for type I table (see 3.4.3).
k. Type of construction for type II table (see 3.5.1).
l. Size of plastic diffuser and glass working area and height required for type II table (see 3.5.4).
m. Width and length of type IV table (see 3.7.5).
n. Type of attachment for type IV table to base (see 3.7.6).
o. Size of drawing board for type V table (see 3.8.4).
p. When fungus and moisture resistance treatment is required (see 3.10).
q. Treatment and painting other than specified (see 3.12).
r. Color of finish coat required (see 3.12.1 and 3.12.2).
s. Level of preservation and packing required (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item should b e a preproduction table. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.4 Information figures. Figures 1 through 8 show the type of tables which have been found acceptable; however, the figures are included for illustration only and are not intended to preclude the furnishing of other tables which conform to this specification.

6.5 Lubricants. MIL-STD-838 prescribes the policy for using specification-type products wherever possible and provides specific requirements for potential use of non-standard proprietary products. MIL-STD-838 is implemented by MIL-HDBK-113, The contracting officer should note that unless otherwise

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

authorized by the US Army Belvoir Research, Development, and Engineering Center (ATTN: STRBE-VF), Fort Belvoir, VA 22026-5606, lubricants, fluids, and greases for ground equipment systems must be restricted to those listed under MIL-HDBK-113, chapter 2.

6.6 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

6.7 Subject term (key word) listing.

Drawing table
Scribing table
Table
Tracing table

6.8 Classification change. Changes in classification of the tables between this revision of the specification and previous editions are as follows:

Old designation	New designation
Type I	Type I
Style 1	Style 1
Style 2	Style 2
Type II	Type II
N/A	Style 1
N/A	Style 2
Type III	Type III
N/A	Type IV
N/A	Class 1
N/A	Class 2
N/A	Type V

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTEREST:

Custodians:
Army - ME
AF - 99

Review Activity:
Civil - GSA

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FCGC

Preparing activity:
Army - ME

Project 6675-0842

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

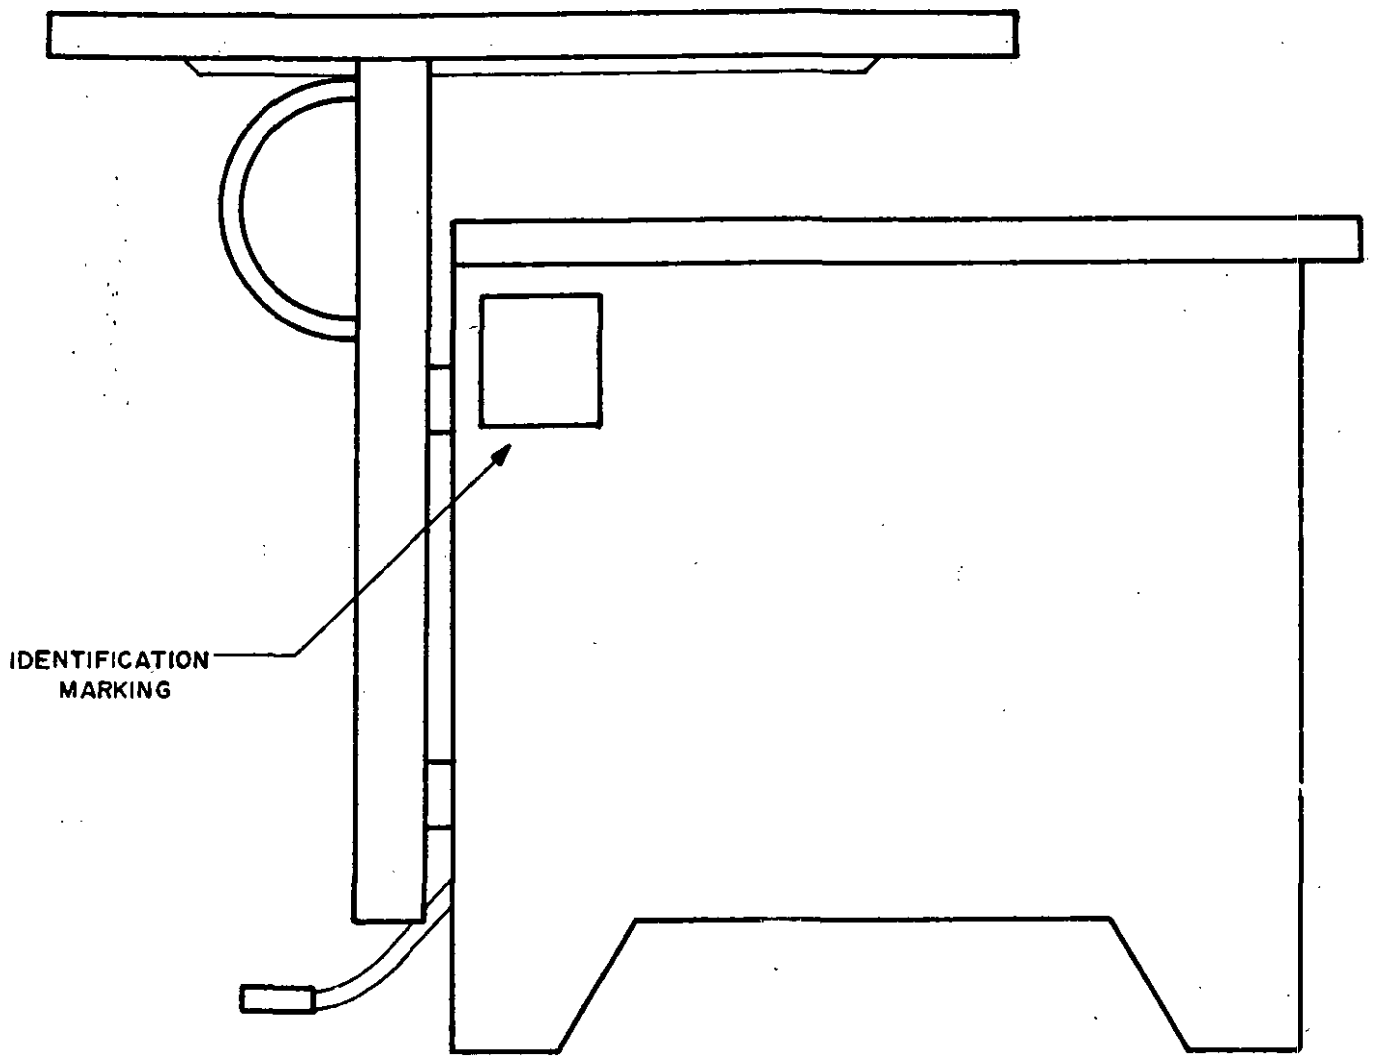


Figure I. DRAWING TABLE, TYPE I, STYLE I.

Illustration for reference only, see 6.4

CX 179C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

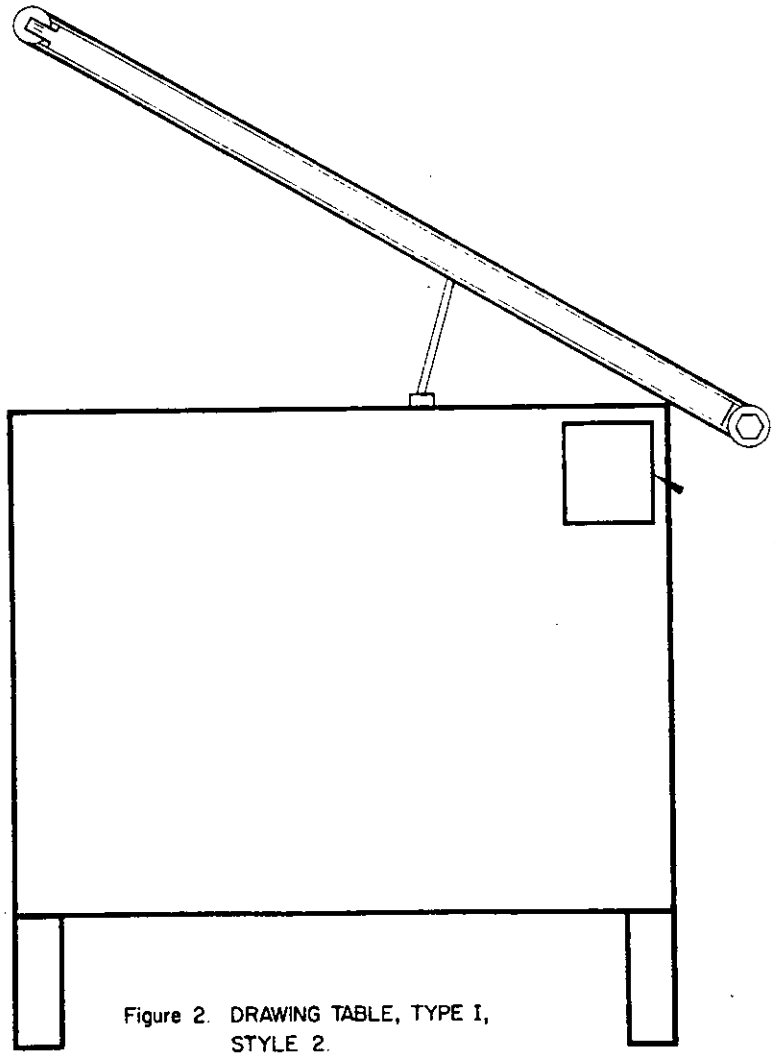


Figure 2. DRAWING TABLE, TYPE I, STYLE 2.

DX 180C

Illustration for reference only, see 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

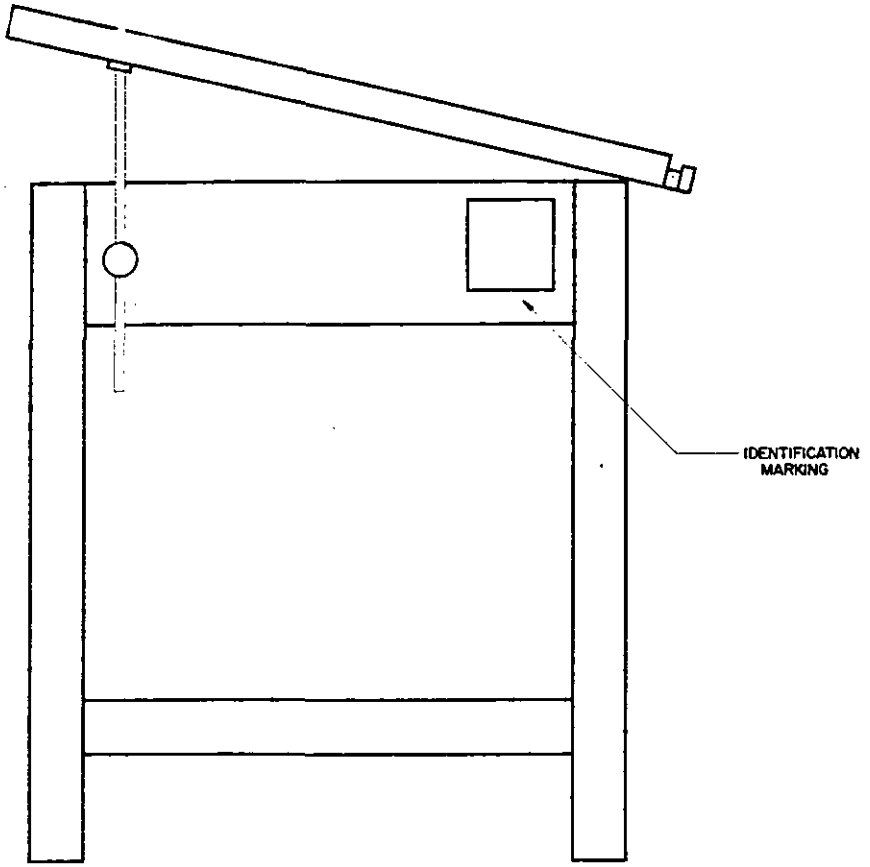


Figure 3. DRAWING TABLE, TYPE I, STYLE 2.

Illustration reference only, see 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

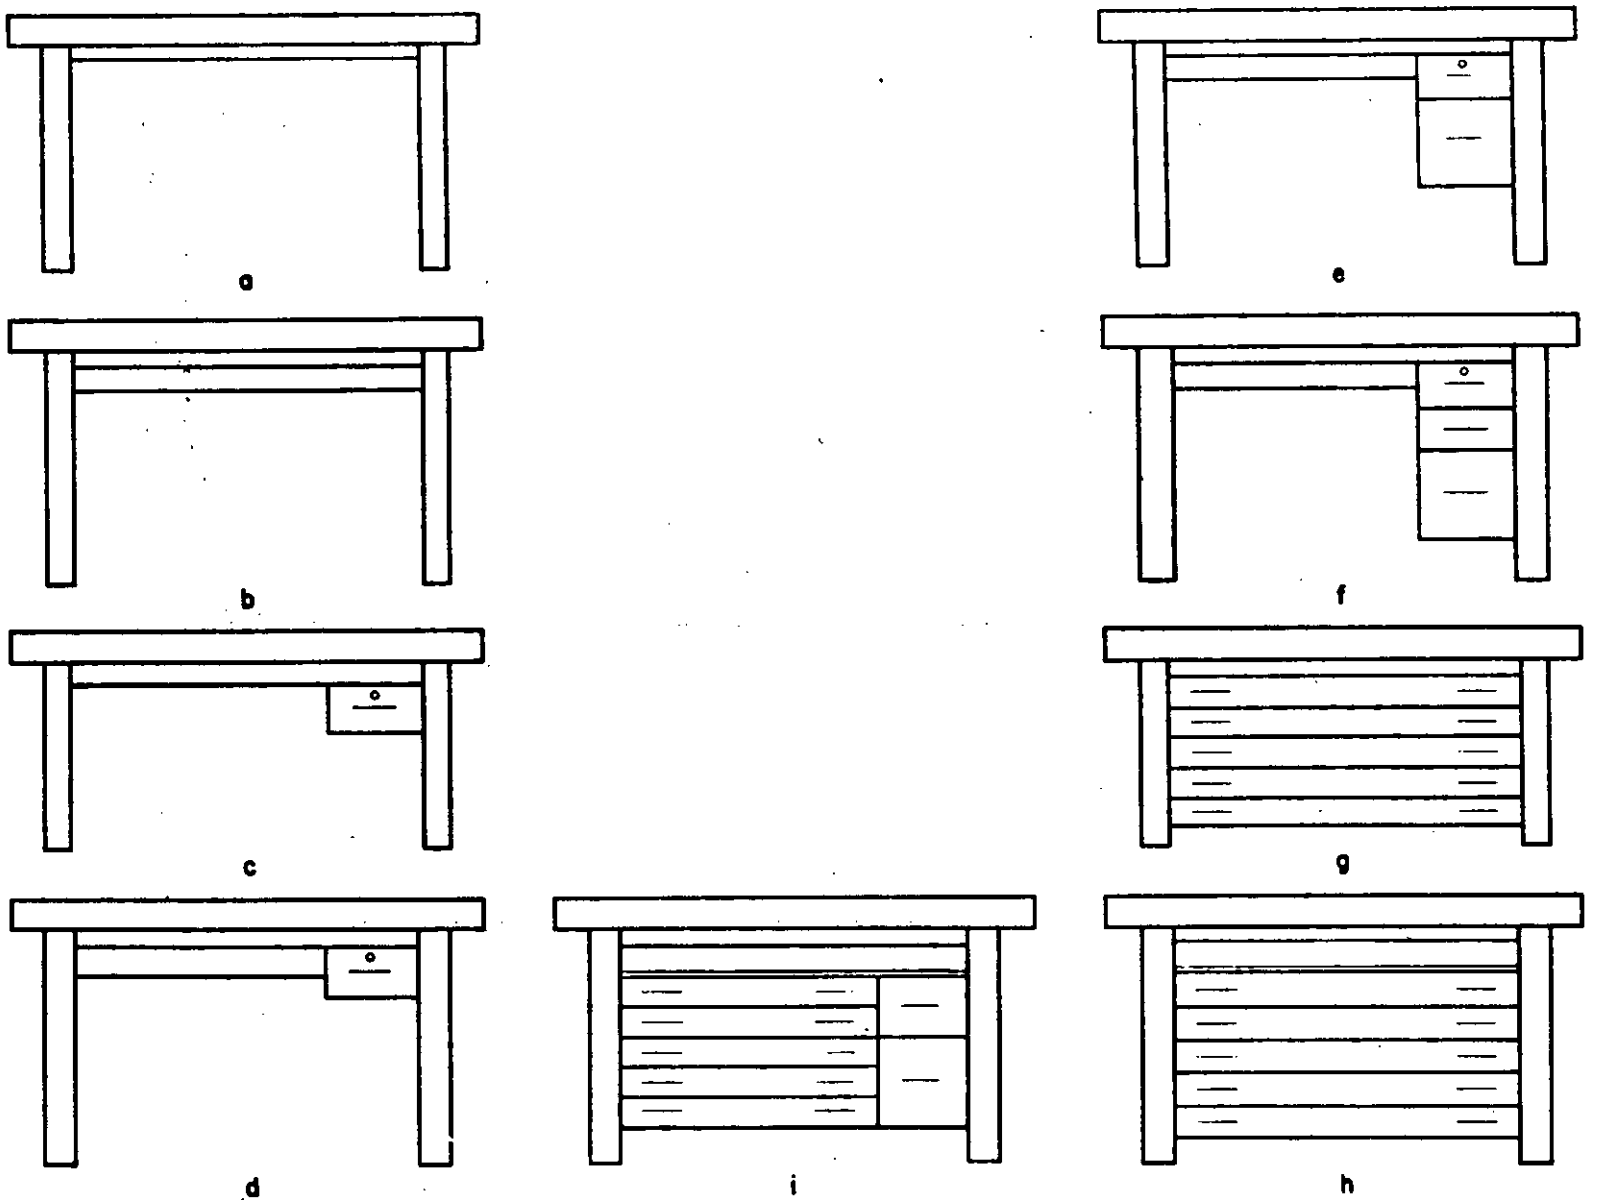


FIGURE 4. Drawer arrangements

X-183A

Illustration for reference only, see 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

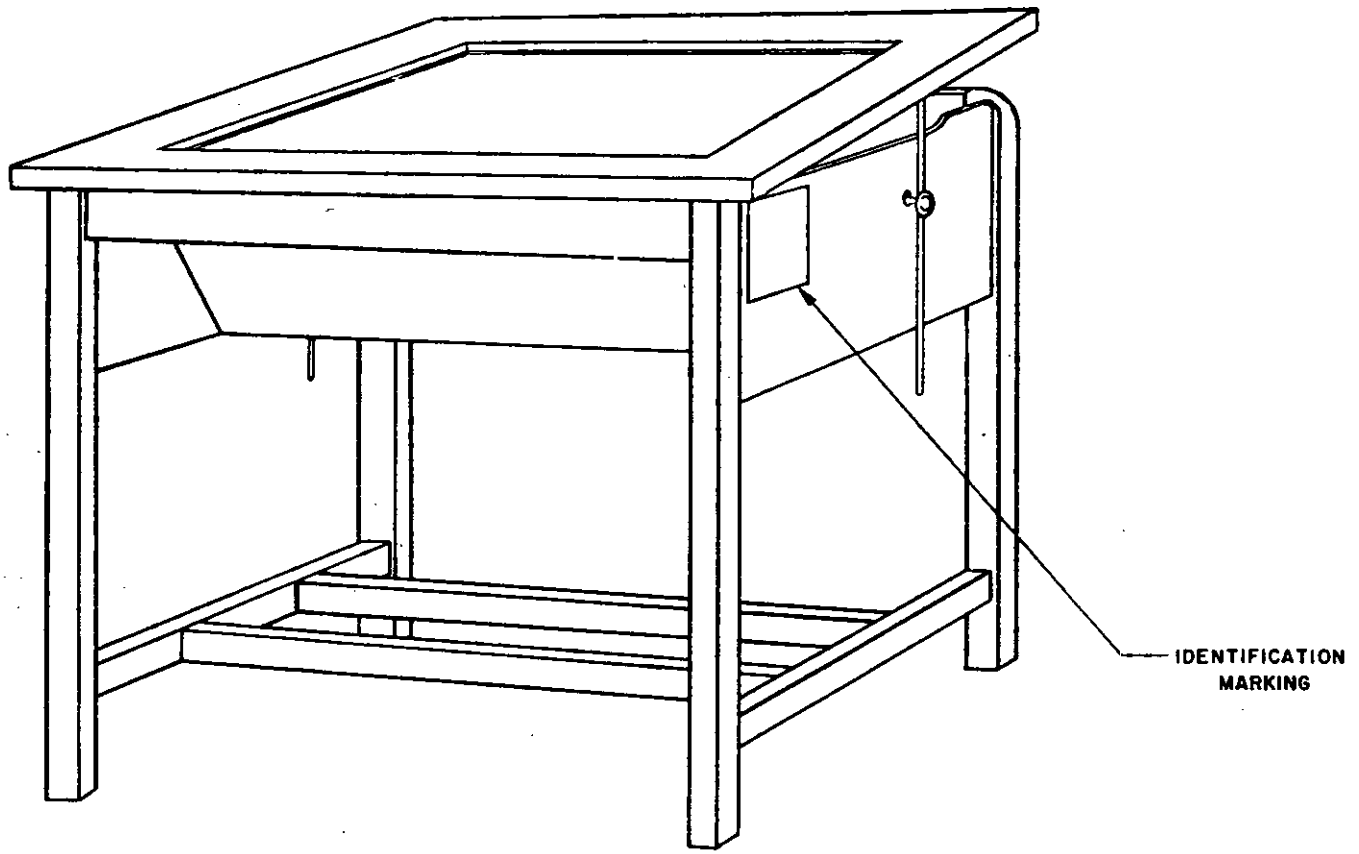


FIGURE 5 - TRACING TABLE, TYPE II

Illustraion for reference only, see 6.4

X 182B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

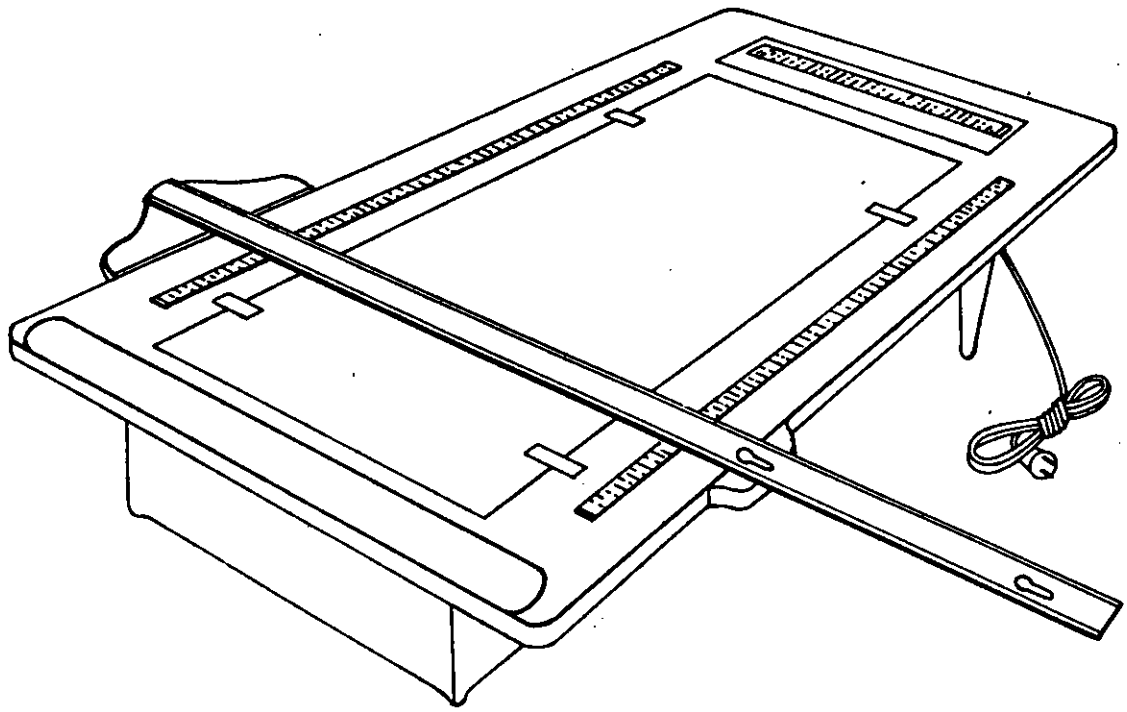


FIGURE 6. TYPE III-TABLE, TRACING, PORTABLE

Illustration for reference only, see 6.4

CX465A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

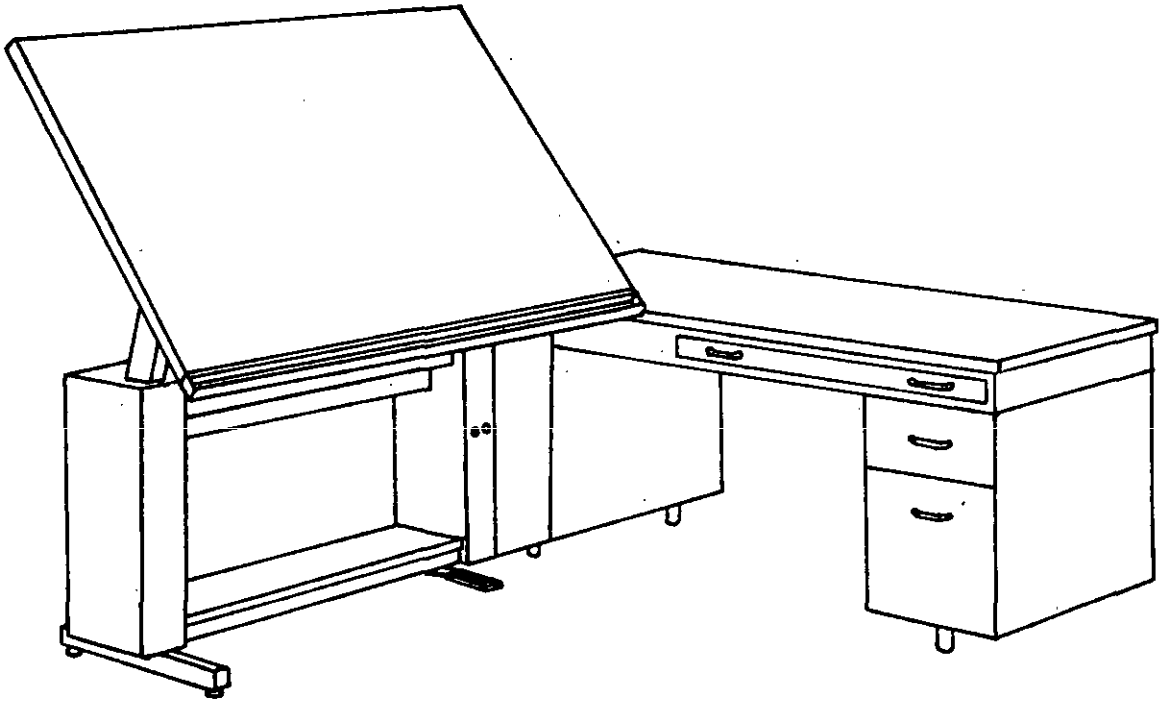


FIGURE 7. L-shaped table and desk, type IV, class 1.

X 3995A

Illustration for reference only, see 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

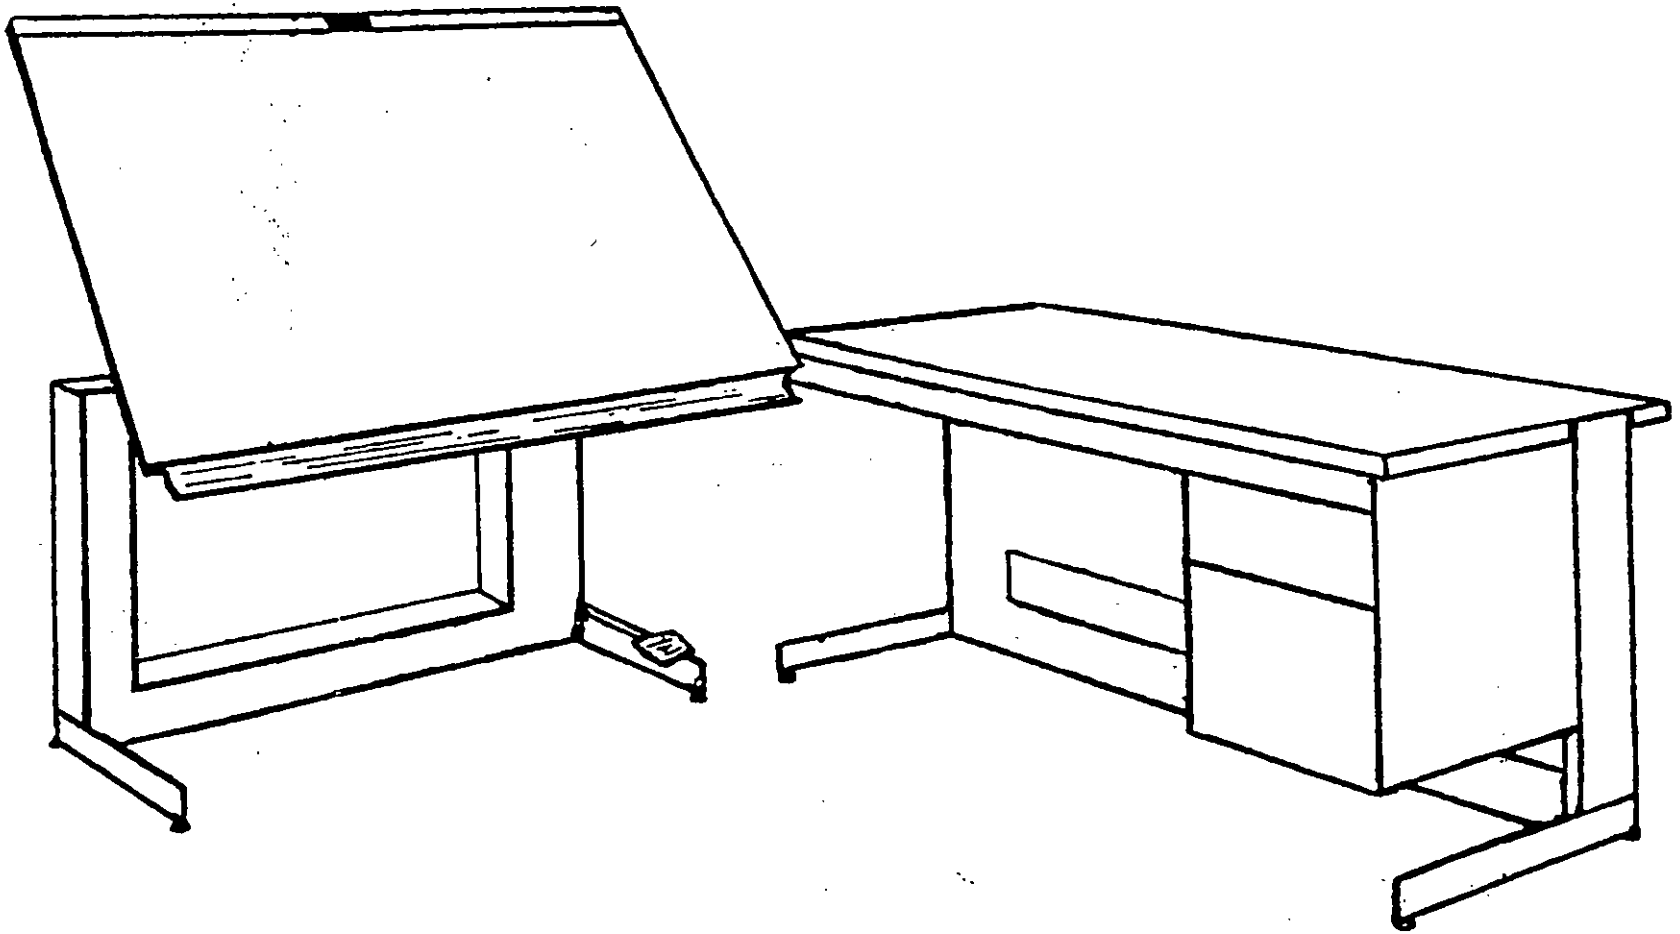


Figure 8. Desk and Table Type V. X-3996A

Illustration for reference only, see 6.4

*U.S. GOVERNMENT PRINTING OFFICE 1989 - 604-033/13009

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
GG-T-35	Tables, Drawing, Tracing, and Scribing

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the current version before use.