MIL-C-85049/60
16 January 1980
SUPERSEDING
MS3158B(AS)
27 April 1977, and
MS3416C(AS)
20 May 1977
(IN PART), and
MIL-C-83723/16B(USAF)
21 September 1972
(IN PART)

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, ADAPTER, SHRINK BOOT, CATEGORY 5
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3 AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

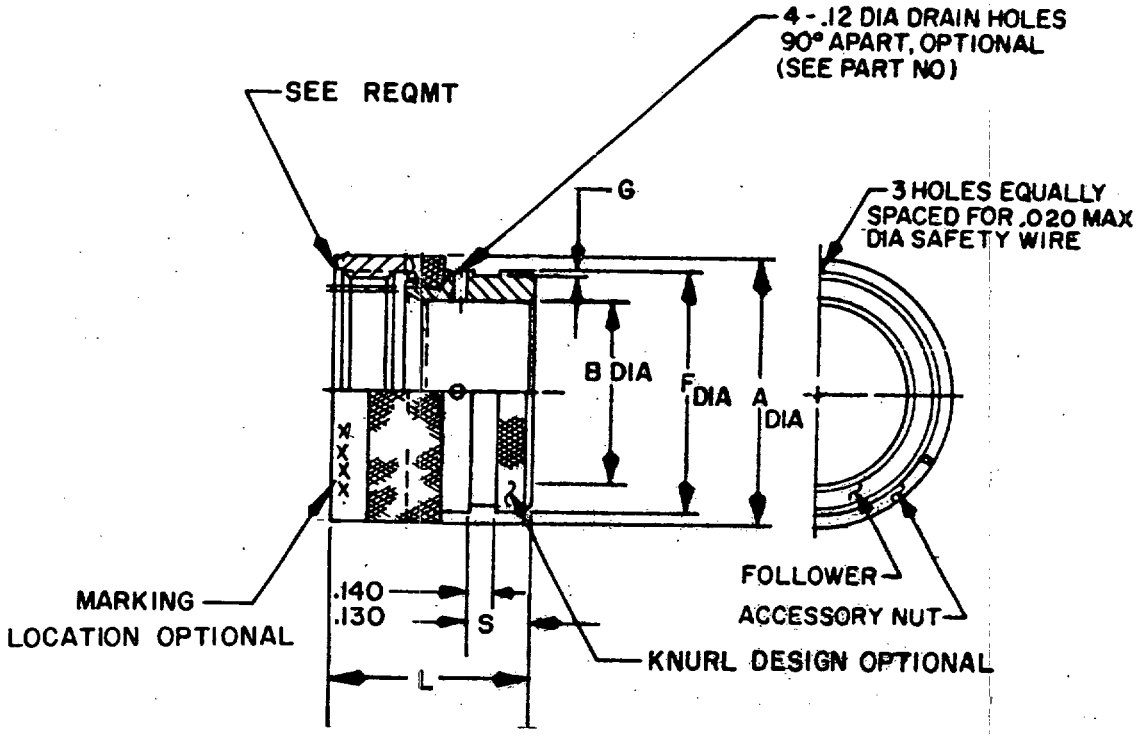


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	For connector shell size (Ref)			A	F	G	L	S	B
	MIL-C-81703 series 3	MIL-C-26482 series 2 & MIL-C-83723 series III	MIL-C-5015 crimp	Max Dia.	+.000 -.020 (.51) Dia.	+.008 (.20) -.000	Max	Max	Min Dia.
-3	3			.669 (16.99)	.533 (13.54)	.044 (1.12)	1.125 (28.58)	.425 (10.80)	.250 (6.35)
-8		8	8S	.617 (15.67)	.533 (13.54)				.250 (6.35)
-10		10	10S, 10SL	.734 (18.64)	.605 (15.37)				.355 (9.02)
-12	7	12	12S, 12	.858 (21.79)	.774 (19.66)				.491 (12.47)
-14	12	14	14S, 14	.984 (24.99)	.838 (21.29)				.565 (14.35)
-16	19	16	16S, 16	1.112 (28.24)	.963 (24.46)				.690 (17.53)
-18	27	18	18	1.218 (30.94)	1.042 (26.47)	.044 (1.12)			.769 (19.53)
-20	37	20	20	1.345 (34.16)	1.217 (30.91)	.069 (1.75)			.894 (22.71)
-22		22	22	1.468 (37.29)	1.355 (34.42)				1.019 (25.88)
-24		24	24	1.593 (40.46)	1.443 (36.65)		1.125 (28.58)		1.134 (28.80)
-28			28	1.969 (50.01)	1.709 (43.41)	.069 (1.75)	1.287 (32.69)	.425 (10.80)	1.369 (34.77)
-32			32	2.219 (56.36)	1.919 (48.74)	.086 (2.18)	1.449 (36.80)	.587 (14.91)	1.615 (41.02)
-36			36	2.469 (62.71)	2.169 (55.09)				1.830 (46.48)
-40			40	2.719 (69.06)	2.402 (61.01)				2.045 (51.94)
-44			44	2.969 (75.41)	2.657 (67.49)				2.300 (58.42)
-48			48	3.219 (81.76)	2.907 (73.84)	.086 (2.18)	1.449 (36.80)	.587 (14.91)	2.550 (64.77)
-61	61			1.653 (41.99)	1.529 (38.84)	.069 (1.75)	1.125 (28.58)	.425 (10.80)	1.174 (29.82)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

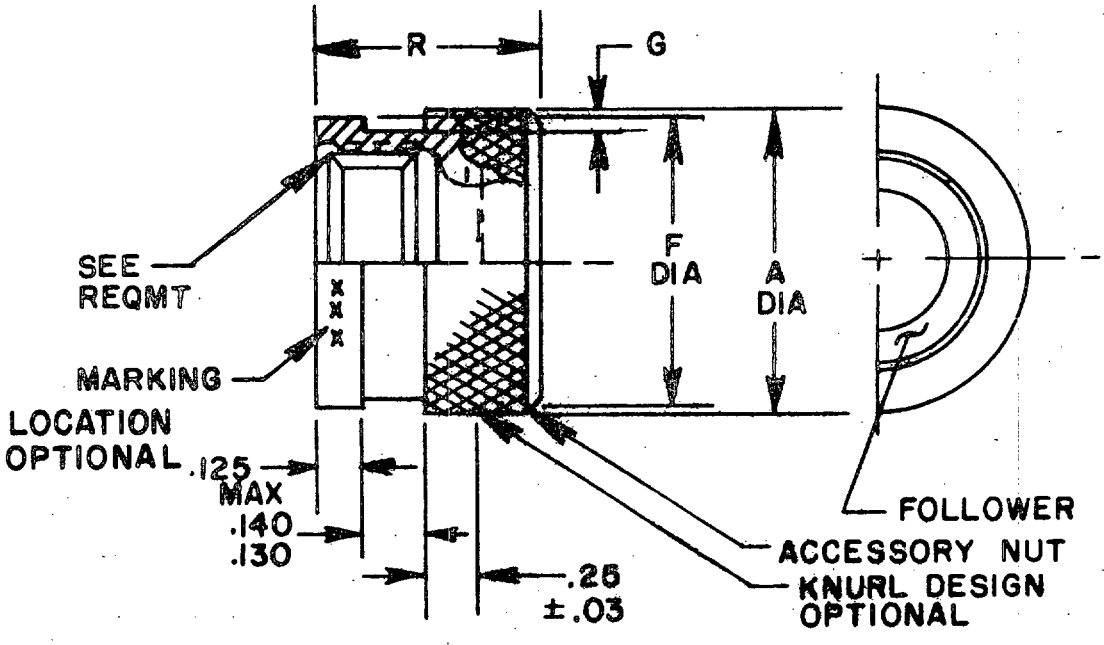


FIGURE 2. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	For connector shell size (Ref)			A +.000 -.045 (1.14) Dia.	F +.000 -.020 (.51) Dia.	G +.008 (.20) -.000	R +.000 -.062 (1.57)
	MIL-C-81703 series 3	MIL-C-26482 series 2 & MIL-C-83723 series III	MIL-C-5015 crimp				
-03	3			.750 (19.05)	.709 (18.01)	.044 (1.12)	.540 (13.72)
-08		8	8S	.688 (17.48)	.657 (16.69)		
-10		10	10S, 10SL	.803 (20.40)	.774 (19.66)		
-12	7	12	12S, 12	.938 (23.83)	.898 (22.81)		
-14	12	14	14S, 14	1.063 (27.00)	1.024 (26.01)	.044 (1.12)	
-16	19	16	16S, 16	1.238 (31.45)	1.152 (29.26)	.069 (1.75)	
-18	27	18	18	1.310 (33.27)	1.243 (31.57)		
-20	37	20	20	1.436 (36.47)	1.370 (34.80)		
-22		22	22	1.560 (39.62)	1.443 (36.65)		
-24		24	24	1.686 (42.82)	1.618 (41.10)	.069 (1.75)	.540 (13.72)
-28			28	2.062 (52.37)	1.969 (50.01)	.086 (2.18)	.702 (17.83)
-32			32	2.312 (58.72)	2.219 (56.36)		
-36			36	2.562 (65.07)	2.469 (62.71)		
-40			40	2.812 (71.42)	2.719 (69.06)		
-44			44	3.062 (77.77)	2.969 (75.41)		
-48			48	3.312 (84.12)	3.219 (81.76)	.086 (2.18)	.702 (17.83)
-61	61			1.748 (44.40)	1.653 (41.99)	.069 (1.75)	.540 (13.72)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions apply after plating.

FIGURE 2. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configurations: See figures 1 and 2.
Interface dimensions shall conform to MS3155.
Complete accessory consists of an accessory nut and follower. The accessory nut shall be captivated to, and free to rotate on the follower.
Material: Aluminum alloy in accordance with MIL-C-85049.
Finish: A,W
1/ N
Part number:
For figure 1, see example below.

M85049/ 60 - 1 W 10 D

- Military designator
- Specification sheet
- Figure
- Finish
- Dash number (see figure 1)
- Drain hole option (if required)

For figure 2, see example below.

M85049/ 60 - 2 G 10 W

- Military designator
- Specification sheet
- Figure
- Style
- Dash number (see figure 2)
- Finish

Application: Used to adapt MIL-C-85049/68 shrink boots.
Qualification: See MIL-C-85049, category 5.
QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.
Supersession data:

MS3158- * * * M85049/60-1 * * *


- Dash number
- Finish

Old	New
C	W
N	N
	A

- Drain hole option

1/ Not for Navy use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

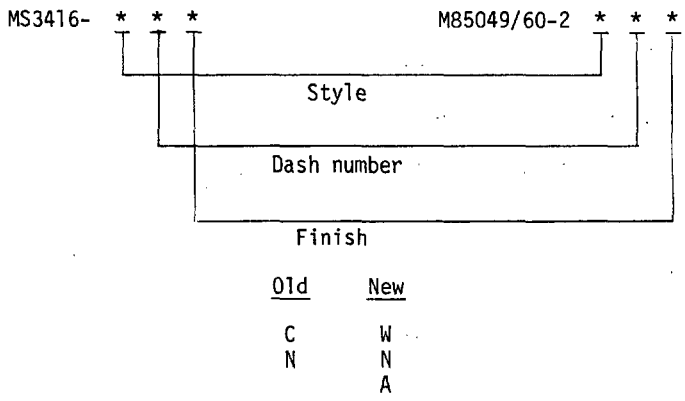

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-41)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/803

Source: https://assist.dla.mil Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/60

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.