MILITARY SPECIFICATION

CONNECTOR, ELECTRIC (CIRCULAR, ENVIRONMENT RESISTING) PLUG, THREADED COUPLING (PUSH-PULL, QUICK-DISCONNECT WITH LANYARD) CRIMP PIN CONTACT, SERIES III, CLASSES A, G, AND R

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of specification MIL-C-83723(USAF).

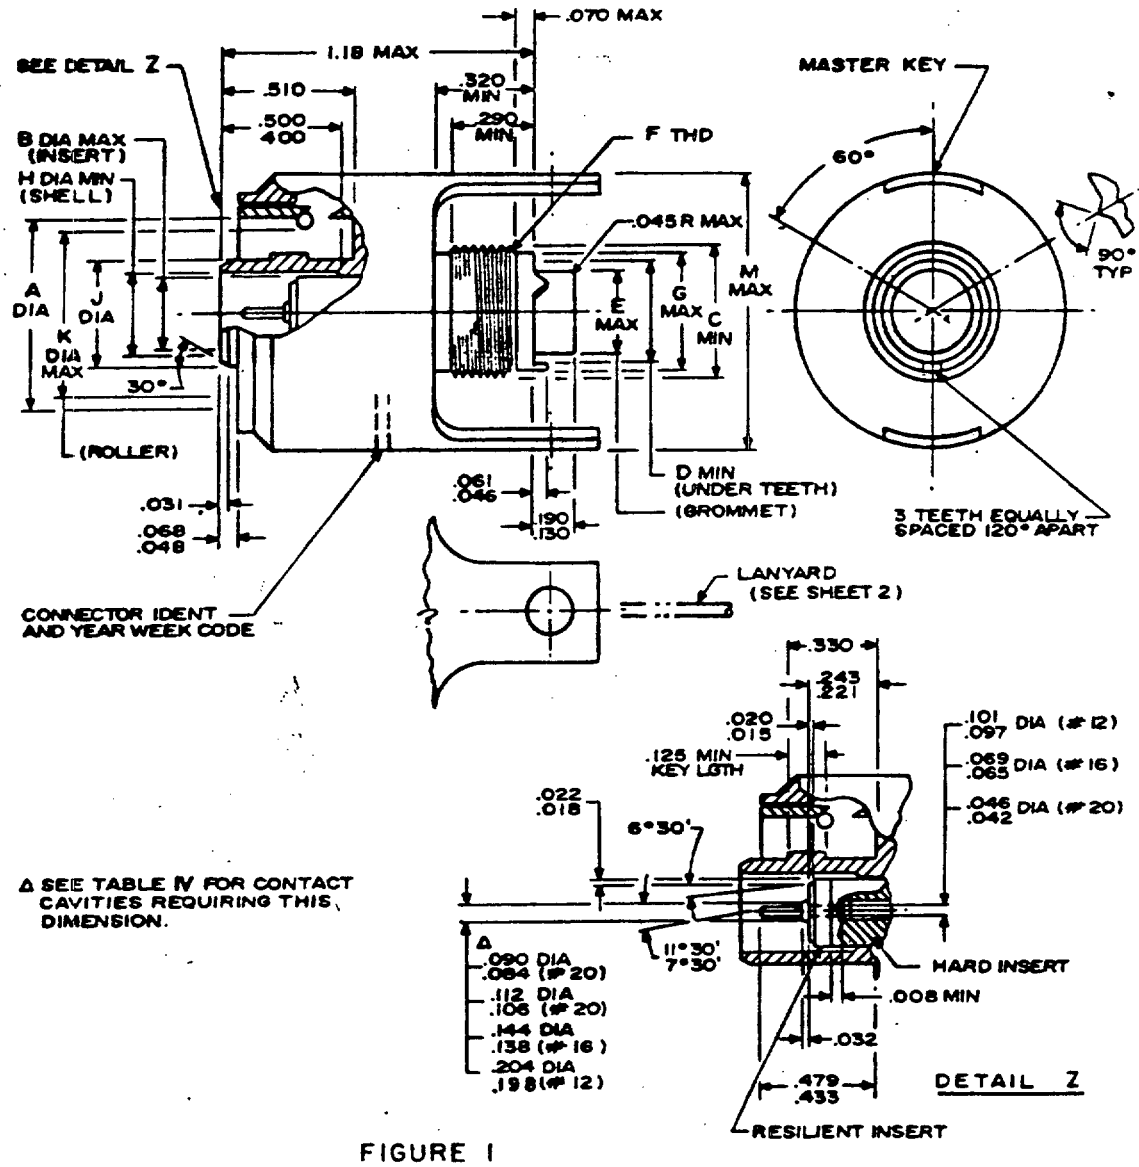


FIGURE 1

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

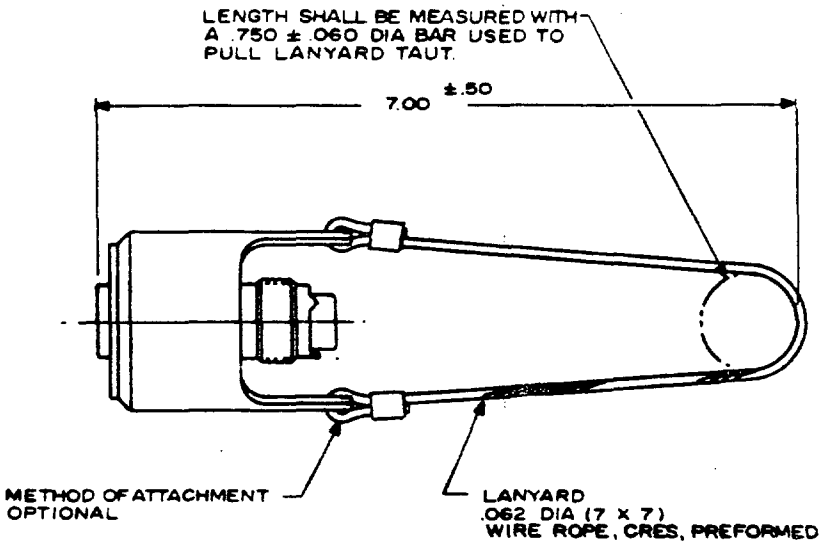


FIGURE 1. (continued)

TABLE I

SHELL SIZE	A	B	C	D	E	F THREAD	G	H	J	K	L	M	N
8	.704	.290	.470	.370	.305	.500-20 UNF-2A	.437	.294	.405 .400	.612	.087 .081	1.095	.225 .222
10	.829	.388	.600	.497	.405	.625-24 UNEF-2A	.572	.428	.526 .521	.737	↕	1.240	.285 .282
12	1.016	.558	.724	.613	.531	.750-20 UNEF-2A	.687	.598	.696 .691	.925	↕	1.432	.370 .367
14	1.079	.627	.849	.738	.665	.875-20 UNEF-2A	.812	.667	.765 .760	.987	.087 .081	1.490	.405 .402
16	1.204	.772	.974	.863	.790	1.000-20 UNEF-2A	.937	.794	.892 .887	1.112	.118 .112	1.711	.466 .465
18	1.345	.860	1.030	.919	.869	1.0625-18 UNEF-2A	.992	.900	.998 .993	1.237	↕	1.815	.521 .518
20	1.470	.985	1.154	1.044	.994	1.1875-18 UNEF-2A	1.117	1.025	1.123 1.118	1.362	↕	1.962	.583 .580
22	1.595	1.110	1.279	1.169	1.119	1.3125-18 UNEF-2A	1.242	1.150	1.248 1.243	1.487	↕	2.070	.646 .643
24	1.720	1.235	1.404	1.294	1.244	1.4375-18 UNEF-2A	1.367	1.275	1.373 1.368	1.612	.118 .112	2.195	.708 .705

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

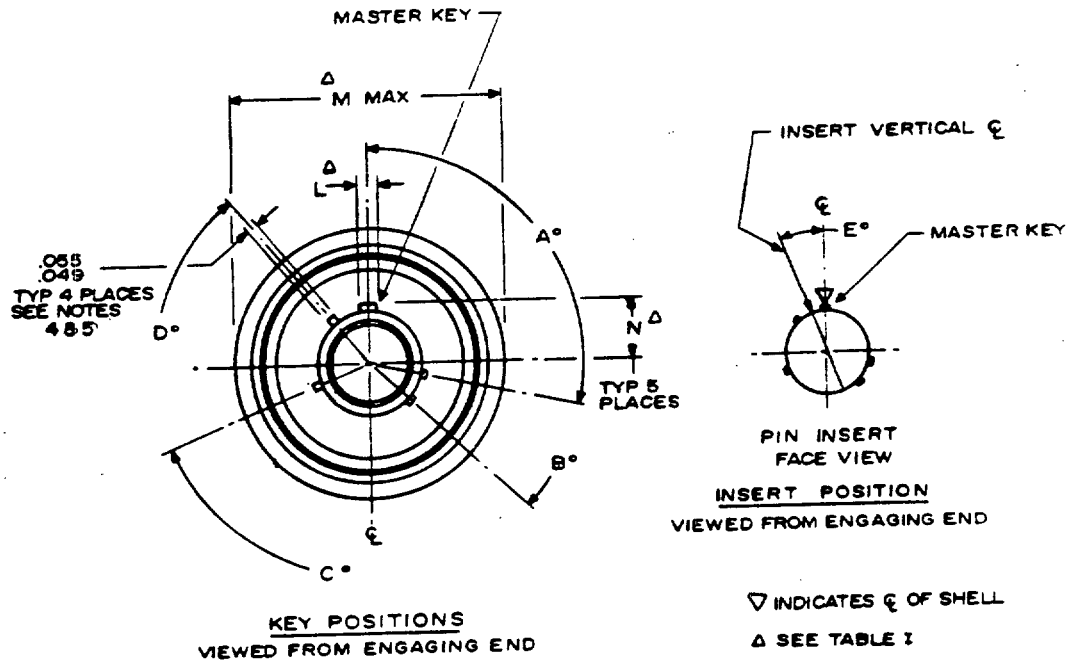


FIGURE 2

TABLE II

SHELL SIZE	POLARIZING POSITION	KEY POSITIONS				INSERT POSITION
		A°	B°	C°	D°	E°
ALL	N	105	140	215	265	0
10,12,14, 16,18,20, 22,24 NOTE 8	1	105	140	215	265	10
	2	105	140	215	265	20
	3	105	140	215	265	30
	4	105	140	215	265	40
18	5	105	140	215	265	50
8,10	6	102	132	248	320	0
	7	80	118	230	312	0
	8	35	140	206	275	0
	9	64	155	234	304	0
10	10	25	115	220	270	0
12,14,16 18,20 22,24	6	18	149	192	259	0
	7	92	152	222	342	0
	8	84	152	204	334	0
	9	24	135	199	240	0
	10	98	152	288	338	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

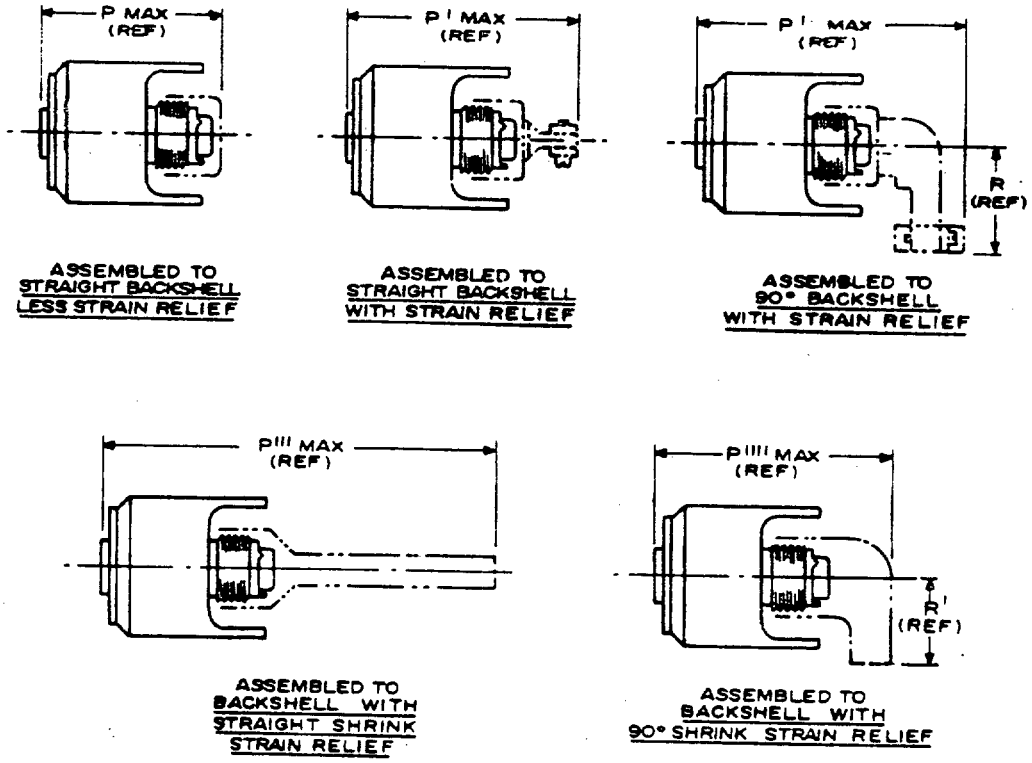


FIGURE 3

TABLE III

SHELL SIZE	P	P'	P''	P'''	P''''	R	R'
8	1.457	1.869	2.018	5.838	1.848	.830	4.585
10	↕	1.979	2.100	6.528	1.888	.880	5.390
12		2.124	2.293	7.348	1.928	.950	6.330
14		2.124	2.353	7.348	1.928	1.010	6.330
16		2.229	2.502	8.068	2.028	1.070	6.710
18		2.474	2.614	8.068	2.028	1.130	6.710
20		2.604	2.739	9.068	2.148	1.190	7.740
22		2.729	2.864	9.068	2.148	1.260	7.740
24	1.457	2.854	2.989	9.068	2.228	1.320	8.030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

TABLE IV

Insert Arrangements Requiring Reduced Diameters for Raised Seal Barriers on Outer Row of Contact Cavities as Indicated

Shell Size	Insert Arrange-ments	Contact Cavities
8	-3	1, 2, and 3

NOTES:

1. For alternate polarizing positions, the connector insert is rotated in respect to the shell.

2. In "normal position" (position "N") the insert vertical centerline coincides with the center line of the master key of the shell.

3. In "alternate insert positions: (positions 1, 2, 3, 4, and 5) the pin insert is rotated counter clockwise relative to the centerline of the master key of shell.

4. In the "alternate keying position" (positions 6, 7, 8, 9, and 10) the keys are positioned as indicated in Table II with reference to the master key.

5. Four keys (MMC) and insert shall be located within .004 either side of (TP) relative to master key (MMC) and shell O.D. (MMC).

6. Dimensions in inches. Unless otherwise specified, tolerance shall be .XX ± .010 and .XXX ± .005, angular, X° ± 1°0' and X°X ± 30'.

7. The dimensions showing relationship of coupling ring to shell apply only when coupling ring is in full forward position.

8. Alternate polarizing positions 1, 2, 3, 4, and 5 are for interchangeability use only. Not recommended for new design.

9. The quick-disconnect connector plug is intended to be used with Series III threaded coupling receptacle (MIL-C-83723/82 and /84) with adapter (MIL-C-83723/70) permanently attached to the receptacle.

10. Coupling of the quick-disconnect connector plug is to be accomplished by a straight axial push with no cocking of the coupling mechanism.

11. Uncoupling of the quick-disconnect connector plug is to be accomplished by a straight axial pull on the lanyard attached to the outer coupling ring.

REQUIREMENTS:

1. For insert arrangements see MS24260 through MS24263, MS27561, and Supplement 2. Cavity identification shall be per MIL-C-83723.

2. Rear hardware must be used per MIL-C-83723/15 and /15(USAF).

3. Unless otherwise specified in the purchase order:

a. Contacts shall be furnished with the connector. The total quantity shall include 10% or 1, whichever is greater, spare contacts of each size contacts used. See MIL-C-83723/33.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

b. Grommet seal plugs shall be furnished with the connector. Total quantity shall be 15% of each contact size or 3, whichever is greater. See MIL-C-83723/28 (USAF).

c. The insertion/extraction tool for each size contact shall be included in the connector package. See MIL-C-83723/31(USAF) or MS27534(USAF).

4. Connector assembly must include a backshell to meet the moisture sealing requirements. See requirement 2.

5. The coupling mechanism of the connector plug shall withstand a minimum tensile load of 100 lbs. Load to be applied to rear accessory hardware in a straight axial direction.

6. The quick-disconnect connector plug shall meet the vibration and shock requirements per paragraph 3.6.19 and 3.6.20 of MIL-C-83723 and the coupling mechanism shall maintain the plug and receptacle in a locked condition.

7. The tensile force required to unlock the coupling mechanism shall be 5 lbs. minimum and 20 lbs. maximum.


8. Locking mechanism as required to meet performance requirements of MIL-C-83723.

9. Materials: Class A - Aluminum Shell per QQ-A-367; Black Anodize, Non-Conductive Finish per MIL-A-8625.

Class G - Stainless Steel per QQ-S-764.

Class R - Aluminum shell per QQ-A-367.

PART NUMBER EXAMPLE:

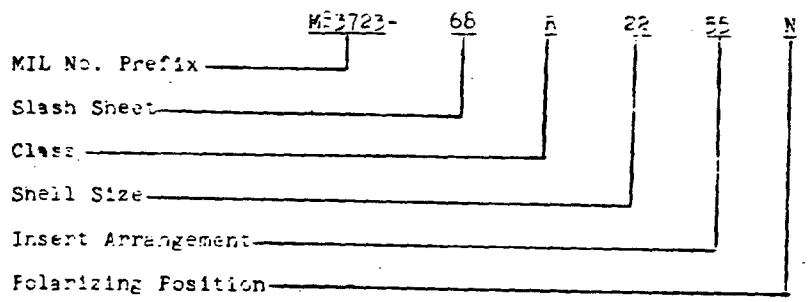

Custodians:

Air Force - 85

Review Activities:

Air Force - 11, 70, 80, 84

Preparing Activity:

Air Force - 85

Project No. 5935-F910-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: **This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.**

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.