INCH-POUND
MIL-PRF-83726/35F
W/AMENDMENT 1
30 August 2024
SUPERSEDING
MIL-PRF-83726/35F
17 December 2019

PERFORMANCE SPECIFICATION SHEET

RELAYS, HYBRID, TIME DELAY (ON OPERATE), CLASS B, TYPE I, HERMETICALLY SEALED, 4PDT, 10 AMPERES, FIXED TIME DELAY, 0.1 TO 600 SECONDS

Inactive for new design after 30 August 2024.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-83726.

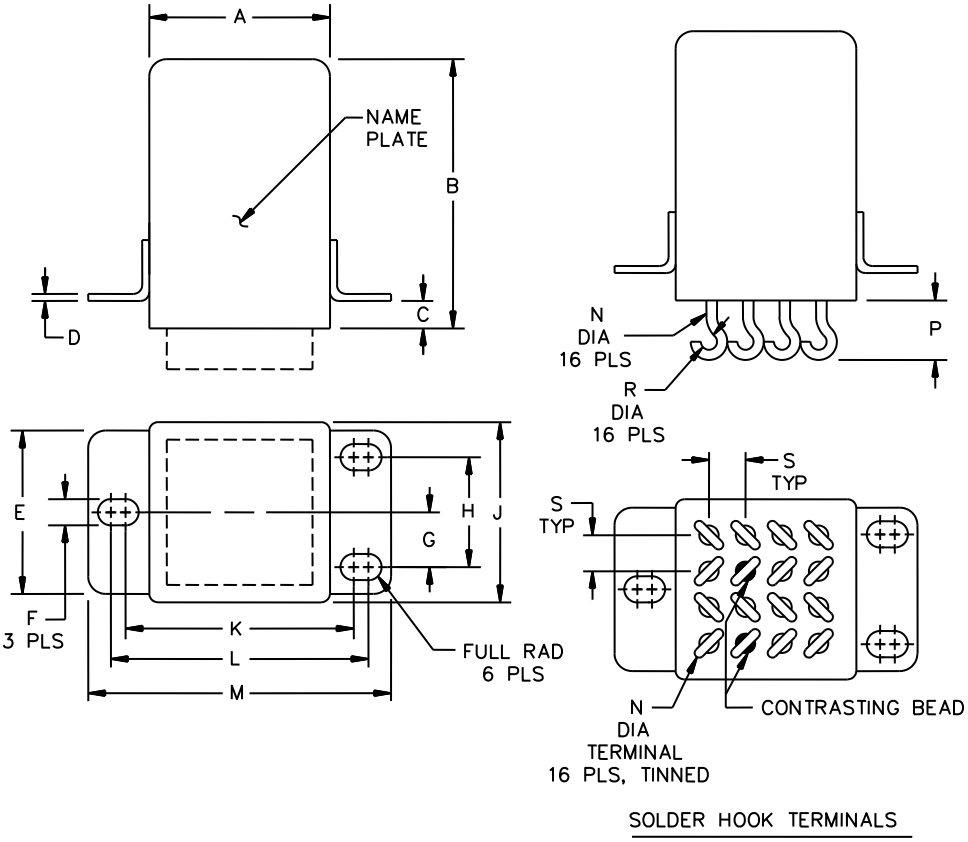


FIGURE 1. Outline dimensions and configuration of relay.

AMSC N/A FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

Ltr	Inches		Mm	
	Min	Max	Min	Max
A	---	1.025	---	26.04
B	---	1.510	---	38.35
C	.146	.166	3.71	4.22
D	.030	.050	0.76	1.27
E	.92	.94	23.37	34.88
F	.140	.160	3.56	4.06
G	.302	.322	7.67	8.18
H	.615	.635	15.62	16.13
J	---	1.025	---	26.04
K	1.386	1.406	35.20	35.71
L	1.436	1.456	36.47	36.98
M	---	1.718	---	43.64
N	.060	.064	1.52	1.63
P	.300	.320	7.37	7.87
R	.070	.090	1.78	2.29
S	.190	.210	4.83	5.33

FIGURE 1. Outline dimensions and configuration of relay - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

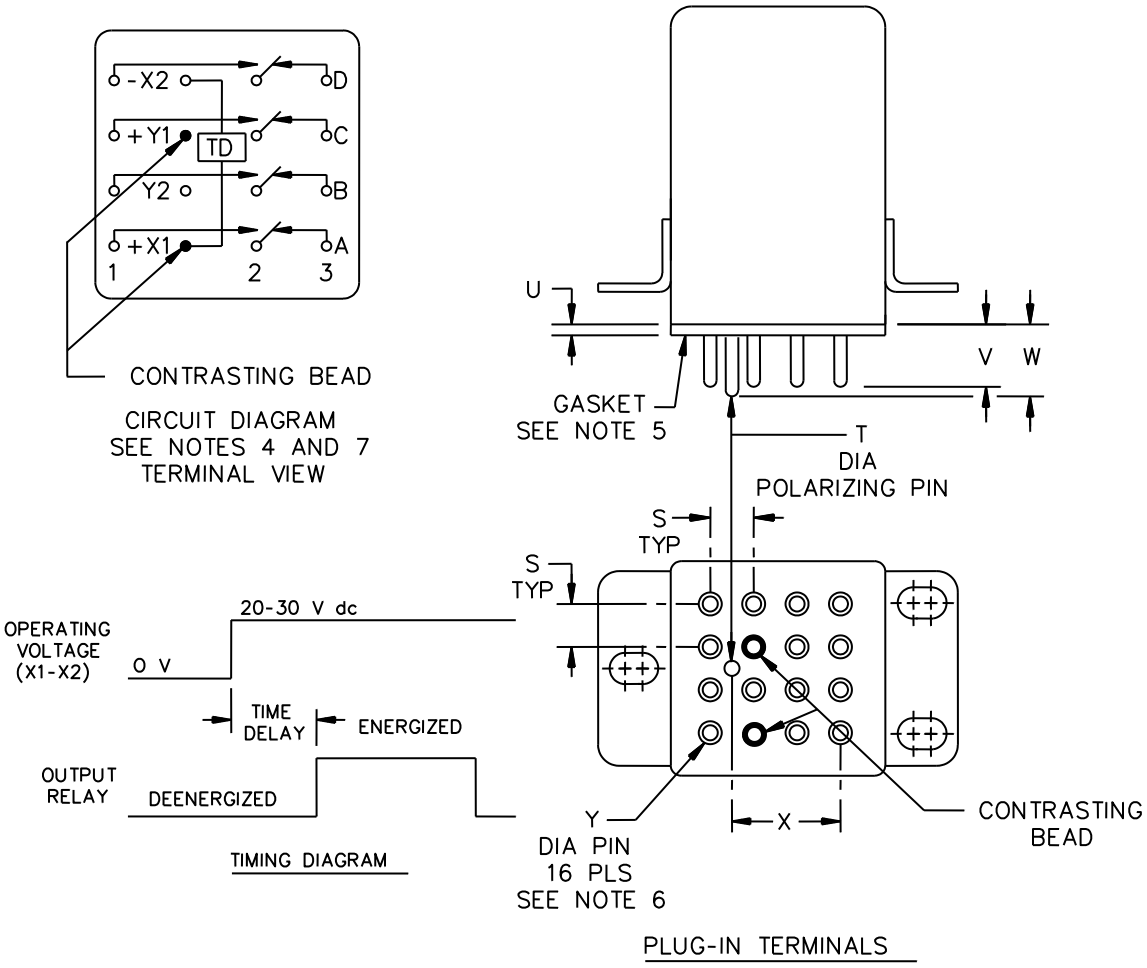


FIGURE 1. Outline dimensions and configuration of relay - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

Ltr	Inches		Mm	
	Min	Max	Min	Max
S	.190	.210	4.83	5.33
T	.061	.064	1.55	1.63
U	.040	.060	1.02	1.52
V	.260	.280	6.60	7.11
W	.290	.310	7.37	7.87
X	.490	.510	12.45	12.95
Y	.061	.063	1.55	1.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm) for three place decimals and ±.03 inch (0.76 mm) for two place decimals.
4. Terminal numbers shall not appear on the relay header and there shall be a legible circuit diagram on the relay which identifies each terminal location specified.
5. Gasket material: The gasket material shall be of such quality to ensure the relay meets all the performance requirements of this specification. Silicone rubber gasket SAE-AMS3332, shore hardness 15 to 35 has been considered acceptable.
6. Terminal composition: The terminal composition shall be of such quality to ensure the relay meets all the performance requirements of this specification. Gold in accordance with SAE-AMS2422 or ASTM-B488, Type 3; underplating: nickel, 50 to 150 microinches thick; has been considered acceptable.
7. Terminals Y1 and Y2 are not used.

FIGURE 1. Outline dimensions and configuration of relay - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

OPERATING REQUIREMENTS:

Timing action: Delay-on-operate.

Time delay: Fixed; select from 0.1 second to 600 seconds.

Timing accuracy: ±10 percent of nominal value. (The accuracy requirement applies for any combination of operating temperature and voltage. Add ±10 ms for timing less than 1 second.)

Recycle time: 50 milliseconds maximum.

Power interrupt: 500 microseconds. (Transient and power loss specifications are based on a maximum duty cycle of 1/50.)

Operating current: 150 mA maximum at 25°C.

INPUT REQUIREMENTS:

Input voltage range: 20 V dc to 30 V dc. (Minimum high temperature test 21 V dc, minimum continuous current test 23.5 V dc.)

Duty rating: Continuous.

Polarity protection: The timer shall be inoperative during, and undamaged by, reversal of the polarity of the operating voltage.

OUTPUT REQUIREMENTS: (At +25°C, unless otherwise specified.)

Configuration: 4PDT.

Life: See table I.

TABLE I. Life load ratings (relay case grounded).

Type of load	Life (cycles)	Amperes 28 V dc	Amperes 115/200 V ac 400 Hz
Resistive	100,000	10	10
Inductive	20,000	8	8
Motor	100,000	4	4
Lamp	100,000	2	2
Low level 1/	100,000	---	---

1/ Contact load 10 µA to 50 µA at 10 mV to 50 mV (dc or peak ac).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

ELECTRICAL REQUIREMENTS:

Transients: In accordance with MIL-STD-704 for 28 volts dc system.

Spike:

Self-generated: ±50 volts maximum.

Spike transients: ±600V, 10 microseconds maximum.

Susceptibility: + 80V maximum; -600 V maximum.

Electromagnetic interference: In accordance with MIL-STD-461(methods CS101, CS114, RS101, and RS103) for PIN's with suffix letter W. (EMI test limits will not be exceeded during the timing interval or when continuously energized under steady-state conditions in accordance with the EMI test of MIL-PRF-83726.)

Insulation resistance: 1,000 megohms at 500 V dc at sea level, and 100 V dc at 80,000 feet between each pin and case. (Terminals X1 and X2 must be connected together during this test. Insulation resistance is measured between all mutually insulated terminals and between all terminals and case.)

Dielelectric withstanding voltage: 1,000 V rms at 60 Hz at sea level, and 350 V rms at 80,000 feet between case and pins connected together. (Terminals X1 and X2 must be connected together during this test. Dielectric withstanding voltage is measured between all mutually insulated terminals and between all terminals and case.)

ENVIRONMENTAL REQUIREMENTS:

Ambient temperature:

Operating: -55°C to +125°C.

Non-operating: -65°C to +125°C.

Vibration (sinusoidal): 30 G, 10 Hz to 3,000 Hz.

Vibration (random): 0.4 g^2/Hz power spectral density, 50 Hz to 2,000 Hz in accordance with MIL-STD-202-214, test condition 1B.

Shock (specified pulse): 100 g's, 6 ±1 ms, ½ sine, 3 axes.

Acceleration: 15 G in any axis.

Seal: Hermetic.

Maximum altitude rating: 80,000 feet.

PHYSICAL REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating socket: MIL-DTL-12883/40-06, MIL-DTL-12883/40-12, MIL-DTL-12883/40-18, or MIL-DTL-12883/40-24. (CAUTION: Consideration should be given to ambient temperature and current requirements when using wire barrels size 20.)

Terminations: See figure 1.


Terminal strength: 3 pounds pull.

Weight: 3.0 ounces maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.

Marking: See MIL-PRF-83726. In addition, relays shall be marked with the ESDS identifier as specified in MIL-STD-1285.

Part or Identifying Number (PIN): Consists of the prefix M83726/35-, a four-digit dash number (time delay expressed in milliseconds), and a suffix letter (P for plug-in, S for solder lug):

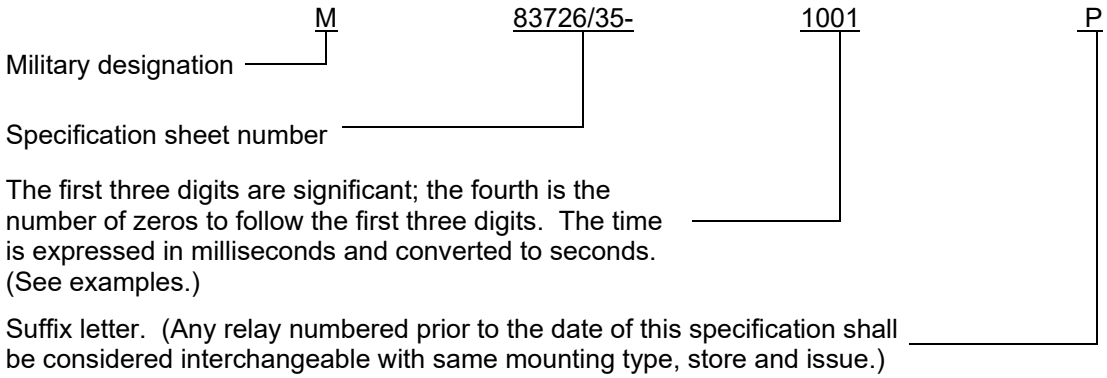

Examples:
M83726/35-1001P – 1 second time delay, plug-in.
M83726/35-9002S – 90 second time delay, solder lug.

NOTE: Time delay relays within the 0.1 second to 600 second delay range are available.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-83726, this document references the following:

MIL-DTL-12883/40	MIL-STD-202-214	MIL-STD-461	MIL-STD-704
MIL-STD-1285	ASTM-B488	SAE-AMS2422	SAE-AMS3332

Custodian activities:
Army- CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2024-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:30Z
Check the source to verify that this is the current version before use.