PERFORMANCE SPECIFICATION SHEET

CAPACITOR, CERAMIC, MULTILAYER, HIGH VOLTAGE,
600 V DC, ESTABLISHED RELIABILITY, STYLE HVR07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-49467.

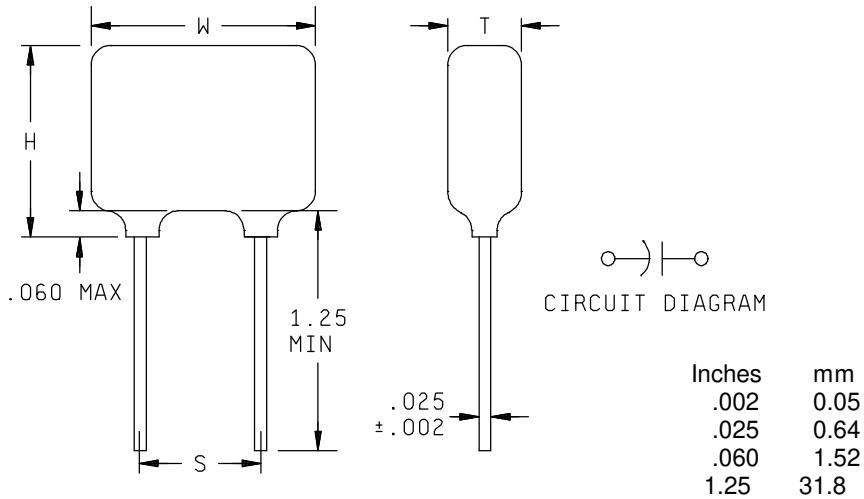

Inches	mm
.002	0.05
.025	0.64
.060	1.52
1.25	31.8

Case code	Dimensions (metric equivalents are in parentheses)			
	W max	H max	T max	S ± .030 (0.76)
A	.250 (6.35)	.220 (5.59)	.200 (5.08)	.170 (4.32)
B	.320 (8.13)	.280 (7.11)	.250 (6.35)	.220 (5.59)
C	.370 (9.40)	.300 (7.62)	.250 (6.35)	.275 (6.98)
D	.470 (11.94)	.400 (10.16)	.270 (6.86)	.375 (9.52)
E	.570 (14.48)	.500 (12.70)	.270 (6.86)	.475 (12.06)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Capacitor style HVR07.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Conformally coated, molded, or encapsulated.

Lead material: In accordance with MIL-PRF-49467.

Capacitance value: See table I.

Capacitance tolerance: J = ±5 percent, K = ±10 percent, M = ±20 percent. See table I.

Operating temperature range: -55°C to +125°C.

Voltage rating: 600 V dc.

Failure rate level: M (1.0 percent), P (0.1 percent), R (.01 percent), S (.001 percent).

Dielectric types: BP and BR in accordance with MIL-PRF-49467.

Temperature coefficient: 0 ± 30 ppm/°C (BP), ±15 percent (BR).

Voltage-temperature limits: In accordance with MIL-PRF-49467.

Symbol	Capacitance change with reference to +25°C	
	Steps A through D of voltage-temperature limit cycle table of MIL-PRF-49467. Bias = 0 volt.	Steps E through G of voltage-temperature limit cycle table of MIL-PRF-49467. 100% rated voltage.
BP BR	0 ± 30 ppm/°C ±15%	0 ± 30ppm/°C +15, -40%

Dissipation factor (25°C): 2.5 percent maximum (BR characteristic) or 0.1 percent maximum (BP characteristic), measured under the same conditions as capacitance.

Resistance to soldering heat: In accordance with MIL-PRF-49467.

Partial discharge (corona): Not applicable.

Radiographic inspection (molded and encapsulated case types only): In accordance with MIL-PRF-49467.

Marking: In accordance with MIL-PRF-49467.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

PIN 1/	Capacitance	Capacitance tolerance	Characteristic	Case code
	pF			
M49467P07100--	10	J,K	BP	A
M49467P07120--	12	J,K	BP	A
M49467P07150--	15	J,K	BP	A
M49467P07180--	18	J,K	BP	A
M49467P07220--	22	J,K	BP	A
M49467P07270--	27	J,K	BP	A
M49467P07330--	33	J,K	BP	A
M49467P07390--	39	J,K	BP	A
M49467P07470--	47	J,K	BP	A
M49467P07560--	56	J,K	BP	A
M49467P07680--	68	J,K	BP	A
M49467P07820--	82	J,K	BP	A
M49467P07101--	100	J,K	BP	A
M49467R07101--	100	K,M	BR	A
M49467P07121--	120	J,K	BP	A
M49467R07121--	120	K,M	BR	A
M49467P07151--	150	J,K	BP	A
M49467R07151--	150	K,M	BR	A
M49467P07181--	180	J,K	BP	A
M49467R07181--	180	K,M	BR	A
M49467P07221--	220	J,K	BP	A
M49467R07221--	220	K,M	BR	A
M49467P07271--	270	J,K	BP	A
M49467R07271--	270	K,M	BR	A
M49467P07331--	330	J,K	BP	A
M49467R07331--	330	K,M	BR	A
M49467P07391--	390	J,K	BP	A
M49467R07391--	390	K,M	BR	A
M49467P07471--	470	J,K	BP	A
M49467R07471--	470	K,M	BR	A
M49467P07561--	560	J,K	BP	A
M49467R07561--	560	K,M	BR	A
M49467P07681--	680	J,K	BP	A
M49467R07681--	680	K,M	BR	A
M49467P07821--	820	J,K	BP	A
M49467R07821--	820	K,M	BR	A
M49467P07102--	1,000	J,K	BP	A
M49467R07102--	1,000	K,M	BR	A
M49467P07122--	1,200	J,K	BP	A
M49467R07122--	1,200	K,M	BR	A
M49467P07152--	1,500	J,K	BP	A
M49467R07152--	1,500	K,M	BR	A
M49467P07182--	1,800	J,K	BP	A
M49467R07182--	1,800	K,M	BR	A
M49467P07222--	2,200	J,K	BP	A
M49467R07222--	2,200	K,M	BR	A
M49467P07272--	2,700	J,K	BP	A
M49467R07272--	2,700	K,M	BR	A

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

PIN 1/	Capacitance	Capacitance tolerance	Characteristic	Case code
	pF			
M49467P07332--	3,300	J,K	BP	A
M49467R07332--	3,300	K,M	BR	A
M49467P07392--	3,900	J,K	BP	A
M49467R07392--	3,900	K,M	BR	A
M49467P07472--	4,700	J,K	BP	A
M49467R07472--	4,700	K,M	BR	A
M49467P07562--	5,600	J,K	BP	A
M49467R07562--	5,600	K,M	BR	A
M49467P07682--	6,800	J,K	BP	B
M49467R07682--	6,800	K,M	BR	A
M49467P07822--	8,200	J,K	BP	B
M49467R07822--	8,200	K,M	BR	A
	µF			
M49467P07103--	.01	J,K	BP	B
M49467R07103--	.01	K,M	BR	A
M49467P07123--	.012	J,K	BP	B
M49467R07123--	.012	K,M	BR	A
M49467P07153--	.015	J,K	BP	C
M49467R07153--	.015	K,M	BR	A
M49467P07183--	.018	J,K	BP	D
M49467R07183--	.018	K,M	BR	A
M49467P07223--	.022	J,K	BP	D
M49467R07223--	.022	K,M	BR	A
M49467P07273--	.027	J,K	BP	D
M49467R07273--	.027	K,M	BR	A
M49467P07333--	.033	J,K	BP	D
M49467R07333--	.033	K,M	BR	B
M49467P07393--	.039	J,K	BP	D
M49467R07393--	.039	K,M	BR	B
M49467P07473--	.047	J,K	BP	E
M49467R07473--	.047	K,M	BR	B
M49467P07563--	.056	J,K	BP	E
M49467R07563--	.056	K,M	BR	B
M49467P07683--	.068	J,K	BP	E
M49467R07683--	.068	K,M	BR	B
M49467R07823--	.082	K,M	BR	B
M49467R07104--	.10	K,M	BR	C
M49467R07124--	.12	K,M	BR	D
M49467R07154--	.15	K,M	BR	D
M49467R07184--	.18	K,M	BR	D
M49467R07224--	.22	K,M	BR	D
M49467R07274--	.27	K,M	BR	D
M49467R07334--	.33	K.M	BR	E
M49467R07394--	.39	K,M	BR	E
M49467R07474--	.47	K.M	BR	E

1/ The complete PIN shall include additional letter symbols to indicate the capacitance tolerance and failure rate level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

APPLICATION NOTES:

Additional encapsulation is necessary in applications where the possibility of a voltage breakdown between the leads of the capacitor, or between the capacitor and another potential, could occur.

Heat sinks on each lead or adequate preheating is required when these capacitors are installed in or removed from circuits by soldering iron.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AT, AV, ME, MI
Navy - MC
Air Force - 19, 99
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-1910)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.