MIL-STD-1286C

9 September 1980

SUPERSEDING

MIL-STD-1286B

29 June 1979

# MILITARY STANDARD

# TRANSFORMERS, INDUCTORS, AND COILS,

# SELECTION AND USE OF

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

09 SEP 1980
DEPARTMENT OF DEFENSE
Washington, DC 20301

Transformers, Inductors, and Coils,
Selection and Use of

MIL-STD-1286C

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U. S. Army Electronics Command, ATTN: DELET-DP, Fort Monmouth, NJ 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## FOREWORD

This standard provides a listing of transformers, inductors, and coils, selected as standard parts for use in the design of military equipment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

CONTENTS

| Paragraph | | | Page |
|---|---|---|---|
| | 1. | SCOPE | 1 |
| | 1.1 | Scope | 1 |
| | 1.2 | Purpose of standard | 1 |
| | 2. | REFERENCED DOCUMENTS | 2 |
| | 2.1 | Issues of documents | 2 |
| | 3. | DEFINITIONS | 3 |
| | 4. | GENERAL REQUIREMENTS | 4 |
| | 4.1 | Selection criteria | 4 |
| | 4.1.1 | Detail requirements | 4 |
| | 4.1.2 | Procurement information | 4 |
| | 4.2 | Conflict of requirements | 4 |
| | 4.3 | Criteria for inclusion in this standard | 4 |
| | 4.4 | Documentation of items not in this standard | 4 |
| | 5. | DETAILED REQUIREMENTS | 5 |
| | 6. | GENERAL APPLICATION INFORMATION | 6 |
| | 6.1 | General | 6 |
| | 6.2 | Transformer types | 6 |
| | 6.3 | Inductor types | 6 |
| | 6.4 | Coil types | 6 |
| | 7. | SUPPLEMENTAL INFORMATION | 11 |
| | 7.1 | Metric equivalents | 11 |
| | 7.2 | International standardization agreement | 11 |

SECTIONS

| Section | | | |
|---|---|---|---|
| | 100 | TRANSFORMERS | 100.1 |
| | 101 | Transformers, Power | 101.1 |
| | 102 | Transformers, Audio Frequency | 102.1 |
| | 103 | Transformers, Pulse, Low Power | 103.1 |
| | 200 | INDUCTORS | 200.1 |
| | 201 | Inductors, Audio Frequency | 201.1 |
| | 202 | Inductors, Power | 202.1 |
| | 300 | COILS, RADIOFREQUENCY | 300.1 |
| | 301 | Coils, Radiofrequency, Variable, Unshielded (Iron Core) | 301.1 |
| | 302 | Coils, Radiofrequency, Variable, Unshielded (Ferrite Core) | 302.1 |
| | 400 | COILS, FIXED, RADIOFREQUENCY, ESTABLISHED RELIABILITY | 400.1 |
| | 401 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Phenolic Core-Iron Sleeve) | 401.1 |
| | 402 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Iron Core-Iron Sleeve) | 402.1 |
| | 403 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Ferrite Core-Ferrite Sleeve) | 403.1 |
| | 404 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Phenolic Core) | 404.1 |
| | 405 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Powdered Iron Core) | 405.1 |
| | 406 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Ferrite Core) | 406.1 |
| | 500 | INDUCTORS, CHIP, FIXED OR VARIABLE | 500.1 |
| | 501 | Inductors, Chip, Fixed | 501.1 |
| | 502 | Inductors, Chip, Variable | 502.1 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

# 1. SCOPE

1.1 Scope. This standard establishes requirements for the selection of transformers, inductors, and coils, shown in detail in sections 100, 200, 300, 400, and 500, for use in new design. Included are the following:

a. Selected standard transformers, inductors, and coils chosen jointly by the Departments of the Army, the Navy, and the Air Force for use in the design and manufacture of military equipment under the jurisdiction of the Department of Defense.
b. Guides for the choice and application of transformers, inductors, and coils for use in military equipment.

Complete detailed requirements for transformers, inductors, and coils listed in this standard are covered in the applicable specification sheets or Military Standard sheets (see 4.2). (The complete part number or type designation, and the number of the applicable specification sheet or Military Standard sheet, should be referenced in procurement documents for the transformers, inductors, and coils.) When it has been determined that circuit requirements cannot be met by items listed in this standard or where none of the types required are listed, the design engineer shall select an existing item or have one designed that is in accordance with the applicable procurement specification listed in 2.1 of this standard, and as approved by the cognizant military activity.

1.2 Purpose of standard. The purpose of this standard is to:

a. Provide the equipment designer with a list of transformers, inductors, and coils that are considered to be the most desirable for military applications.
b. Control and minimize the variety of transformers, inductors, and coils used in military equipment in order to facilitate logistic support of the equipment in the field.
c. Establish criteria pertinent to the choice, application, and use of transformers, inductors, and coils in military equipment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

Military

| | | |
|---|---|---|
| MIL-T-27 | - | Transformers and Inductors (Audio, Power, and High-Power Pulse), General Specification For. |
| MIL-C-15305 | - | Coils, Fixed and Variable, Radiofrequency, General Specification For. |
| MIL-T-21038 | - | Transformers, Pulse, Low Power, General Specification For. |
| MIL-C-39010 | - | Coils, Fixed, Radiofrequency, Molded, Established Reliability, General Specification For. |
| MIL-I-83446 | - | Inductors, Chip, Fixed or Variable, General Specification For. |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 3. DEFINITIONS

3.1 The meaning of terms used in this standard are in accordance with MIL-T-27, MIL-C-15305, MIL-T-21038, MIL-C-39010, and MIL-I-83446.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 4. GENERAL REQUIREMENTS

4.1 Selection criteria. The selection of a transformer, inductor, or coil over another for a particular system and usage, depends upon many factors. These factors include function, construction, circuit application, operating temperature, altitude, type of mounting, environmental conditions, size and weight, life expectancy, and reliability. All factors are important and this document has been limited to units which will minimize the designer's necessity to completely evaluate each factor separately.

4.1.1 Detail requirements. After the preliminary selection of a transformer, inductor, or coil has been made, the appropriate specifications and Military Standard drawings should be examined to verify that the item is capable of performing satisfactorily in the intended application and that parameters important to the new application are controlled to the degree necessary.

4.1.2 Procurement information. Procurement documents for items selected from this standard should reference the applicable specification sheet or Military Standard drawings, the complete part number, style or type designation, and the procurement specification. Do not use this standard for procurement.

4.2 Conflict of requirements. After selection of a particular transformer, inductor, or coil from this document, the design engineer should refer to the applicable specification sheet or Military Standard sheet for any technical conflicts. In the event of a conflict between the technical requirements described in this standard and those of the applicable specification sheet or Military Standard sheet, the latter shall govern.

4.3 Criteria for inclusion in this standard. The criteria for the inclusion of transformers, inductors, and coils in this standard are as follows:

a. The transformer, inductor, or coil shall be the best type available for general use in military equipment.
b. Transformers, inductors, and coils shall be covered by military specifications (see 2.1).
c. Transformers, inductors, and coils shall be listed on a qualified products list.

4.4 Documentation of items not in this standard. When a designer cannot find an item listed in this standard that will meet the performance requirements of the application, it will be necessary to select an item in existence that will meet the requirements of the application or if there is none, it will be necessary to have a new item designed. Documentation of such items shall be adequate for the Government to reprocure the item from the same source of supply and from an alternate source of supply should the need arise.

(In this instance, "alternate source of supply" is to be interpreted to mean a facility having equivalent technical and manufacturing capability currently engaged in the manufacture of similar devices, as the original source.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 5. DETAILED REQUIREMENTS

5.1 The detailed requirements for the standard transformer, inductor, and coil types are contained in the applicable specification, and in the applicable section of this standard.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 6. GENERAL APPLICATION INFORMATION

6.1 General. The application information in this standard is designed to help the engineer select the transformer, inductor, or coil he will specify. As with other types of components, the most important thing a user must decide is which transformer, inductor, or coil will be the best for use in the military equipment he is designing. Proper selection in its broadest sense is the first step in building reliable equipment. To select properly the transformer, inductor, or coil to be used, the user must know as much as possible about the types from which he can choose. He should know their advantages and disadvantages, their behavior under various environmental conditions, their construction, and their effect on circuits and the effect of circuits on them. He should know the failure modes. He should also have an intimate working knowledge of the applicable military specification.

6.2 Transformer types. This standard covers power transformers (section 101), audio frequency transformers (section 102), and low power pulse transformers (section 103). Tables I and II provide a selection guide for power transformers and audio frequency transformers.

6.3 Inductor types. This standard covers audio frequency inductors (section 201), power inductors (section 202), and chip inductors (section 500). Tables III, IV, and V provide a selection guide for audio frequency inductors, power inductors, and chip inductors, respectively.

6.4 Coil types. This standard covers radiofrequency coils (sections 300 and 400). Tables VI and VII provide a selection guide for radiofrequency coils.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Power transformers (see section 101).

| Applicable MIL-T-27 specification sheet | Primary voltage (volts rms) | Secondary 1/2/ voltage (volts rms) | Secondary current 2/ (amperes rms) | Volt-ampere rating |
|---|---|---|---|---|
| 60 HERTZ TRANSFORMERS | | | | |
| 127 | 100 | 21.2, 21.2, 7.78 CT | .1, .1, .225 | 1.75 |
| 104 | 105, 115, 125 | 2.5 | 3 | 7.5 |
| 35 | 105, 115, 125 | 6.3 | 2 | 12.6 |
| 106 | 105, 115, 125 | 5 | 3 | 15 |
| 34, 105 | 105, 115, 125 | 2.5 | 10 | 25 |
| 107 | 105, 115, 125 | 6.3 | 5 | 31.5 |
| 12, 110 | 105, 115, 125 | 5 | 10 | 50 |
| 108 | 105, 115, 125 | 6.3 | 10 | 63 |
| 109 | 105, 115, 125 | 6.3 | 20 | 126 |
| 18 | 115 | 48 | 12 | 5.76 |
| 181 | 115 | 6.3 CT, 450 CT | 2, 30 mA | 26.1 |
| 254 | 115 | 9.7, 9.7 | 2.6, 1.7 | 42 |
| 19 | 115 | 6.3, 52 CT | 3, 1 | 52 |
| 140 | 115 | 50 | 2 | 100 |
| 109 | 115 | 230 | .65 | 126 |
| 400 HERTZ TRANSFORMERS | | | | |
| 82 | 26 | 3.8 CT | .002 | .008 |
| 177 | 26 | 18 | 1 | 18 |
| 180 | 57.5, 99.7, 115 | 12.6, 12.6 CT | 2, 2 | 51 |
| 221 | 107 | 49 CT, 5.3, 10 | .01, 1.63, .6 | 37 |
| 220 | 107 | 49 CT, 6.35 | .01, .01 | 100 |
| 223 | 107 | 49 CT, 5.55, 8.45 | .01, 2.86, 16.4 | 125 |
| 223 | 107 | 49 CT, 5.57 | .01, 22.5 | 130 |
| 222 | 107 | 49 CT, 5.68 | .01, 27.8 | 160 |
| 224 | 107 | 49 CT, 5.76, 8.24 | .01, 30, 2.14 | 214 |
| 131 | 108, 120, 132 | 66 | 1.8 | 123 |
| 73 | 115 | 3, 3 | 6 mA, 6 mA | .036 |
| 225 | 115 | 37 CT | .015 | .6 |
| 37, 39, 48, 49 | 115 | 6 CT to 300 CT | .25 to .005 | 1.5 |
| 227 | 115 | 13.1, 11.7 | .1, .05 | 1.9 |
| 39, 40, 50, 51 | 115 | 6 CT to 300 CT | .5 to .01 | 3 |
| 118 | 115 | 40 CT | .078 | 3.12 |
| 41, 42, 52, 53 | 115 | 6 CT to 300 CT | 1.0 to .02 | 6 |
| 43, 54 | 115 | 6 CT to 300 CT | 1.5 to .03 | 9 |
| 13, 15 | 115 | 26 | .5 | 13 |
| 44, 45, 55, 61 | 115 | 6 CT to 300 CT | 2.667 to .053 | 16 |
| 46, 47, 56, 62 | 115 | 6 CT to 300 CT | 4.167 to .083 | 25 |
| 100 | 115 | 92, 5 | 20 mA, 5 | 27 |
| 80 | 115 | 12, 46 CT | .3, 1 | 49.6 |
| 57, 63 | 115 | 6 CT to 300 CT | 8.33 to .167 | 50 |
| 77 | 115 | 115 | .45 | 57 |
| 58, 64 | 115 | 10 CT to 300 CT | 7.5 to .25 | 75 |
| 59, 65 | 115 | 12 CT to 300 CT | 8.33 to .33 | 100 |
| 60, 66 | 115 | 26 CT to 300 CT | 9.62 to .83 | 250 |
| 256 | 115 | 129.5 | 3.2 | 350 |
| 134 | 120 | 28.6 | .385 | 12 |
| 210 | 250 | 1 | .5 | .5 |
| 211 | 250 | 30 | .5 | 15 |
| 212 | 250 | 250, 25 | .2, .01 | 50 |

1/ CT indicates center-tap.
2/ Where a range is given, the specification covers two or more parts.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE II. Audio frequency transformers (see section 102).

| Applicable MIL-T-27 specification sheet | Power 1/ rating (milliwatts) | Frequency response (hertz) | Primary 1/ impedance range (ohms) | Secondary 1/ impedance range (ohms) |
|---|---|---|---|---|
| 197 | 4 to 10,000 | 30 to 20,000 | 20 to 30K | 16 to 80K |
| 166 | 3 to 250 | 50 to 10,000 | 82 to 20K | 8 to 1M |
| 67 | 500 | 60 to 10,000 | 250 to 10K | 4 to 10K |
| 68 | 500 | 100 to 10,000 | 250 to 10K | 4 to 25K |
| 78 | 631 | 200 to 15,000 | 4K | 600 |
| 69 | 500 | 200 to 20,000 | 250 to 25K | 4 to 25K |
| 165 | 10 to 250 | 200 to 20,000 | 50 to 100K | 3.2 to 250K |
| 70 | 60, 150 | 200 to 50,000 | 600 to 100K | 4 to 10K |
| 1 | 2 watts | 250 to 500 | 4K | 8 |
| 2 | 2 watts | 250 to 500 | 4K | 8 |
| 170 | 1 | 300 to 3400 | 600 | 1200 |
| 116 | 18 dBm | 300 to 3500 | 600 | 600 |
| 277 | 1 | 300 to 3000 | 150 | 150 |
| 200 | 30 | 300 to 10,000 | 30K | 50 |
| 172 | 25 to 500 | 300 to 20,000 | 80 to 200K | 3.2 to 12K |
| 167 | 5, 100 | ↓ | 50 to 50K | 3.2 to 90K |
| 96 | 100 | ↓ | 1.2K | 3.2 |
| 76 | 25, 50, 100 | ↓ | 1K to 200K | 50 to 12K |
| 72 | 10, 50 | 300 to 100,000 | 600 to 100K | 60 to 10K |
| 71 | 10, 30 | 300 to 100,000 | 600 to 100K | 4 to 25K |
| 173 | 40, 75, 80 | 300 to 250,000 | 1K to 25K | 12 to 8K |
| 103 | 50 to 500 | 400 to 10,000 | 80 to 30K | 32 to 12K |
| 144 | 60 to 600 | 400 to 100,000 | 80 to 20K | 3.2 to 10K |
| 97 | 125 | 400 to 100,000 | 2K | 8K |
| 125 | .001 | 10,000 to 20,000 | 15 | 100K |

1/ Where a range is given, the specification covers two or more parts.

TABLE III. Audio inductors (see section 202).

| Applicable MIL-T-27 specification sheet | Inductance range (Henries) | DC current (milliamperes) | DC resistance (ohms) |
|---|---|---|---|
| 142 | .01 mH to 2 mH @ 1 kHz | 70 to 5 | 2.5 to 500 |
| 146 | 1 mH to 100 mH @ 1 kHz | 60 to 6 | 1.4 to 132 |
| 124 | 5 mH | 28 | 7 |
| 145 1/ | .006 H to 150 H | 100 to 1.5 | .5 to 15.6K |
| 205 | .007 H to 35 H @ 1 kHz, 500 Hz | 250 to 3 | .6 to 3.2K |
| 111, 112 | 10 mH @ 400 Hz | .05 | .5 |
| 147 | .01 H to 60 H @ 500 Hz, 400 Hz | 400 to 4 | .3 to 1.67K |
| 161 | .05 H to 5 H @ 1 kHz | 25 to 3 | 27 to 2.50K |
| 163 | .1 H to 100 H @ 400 Hz | 55 to 1.1 | 14 to 8.50K |
| 164 | .15 H to 60 H | 12 to .2 | 33 to 5.16K |
| 162 | 2.0/.5 H to 600/150 H 2/ @ 60 Hz | --- | 21 to 5.72K |
| 175 | 1/.25 H to 2500/652 H 2/ @ 60 Hz | 0 | 5 to 13K |

1/ Variable audio inductor.
2/ The first entry indicates a series connection, the second entry indicates a parallel (split) connection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Power inductors (see section 201).

| Applicable MIL-T-27 specification sheet | Inductance range (Henries) | DC current (amperes) | DC resistance (ohms) |
|---|---|---|---|
| 119 | 25 µH @ 20 kHz | 35 | .004 |
| 84 | 40 µH @ 20 kHz | 1.5 | .045 |
| 191 | 40 µH min @ 16 kHz<br>60 µH max | 4.8 | |
| 86 | 50 µH @ 10 kHz | .5 | .25 |
| 135 | 60 µH @ 10 kHz | 3 | .025 |
| 229 | 60 µH @ 10 kHz | 6 | .025 |
| 137 | 67.5 µH min @ 2.4 kHz<br>80.25 µH max | 2.7 | .045 |
| 88 | 72 µH @ 10 kHz | 1 | .3 |
| 120 | 120 µH @ 2.4 kHz | 1.5 | .0584 |
| 190 | 250 µH @ 20 kHz | .75 | 2 |
| 85 | 374 µH min @ 10 kHz<br>506 µH max | 1.0 | .07 |
| 89 | 450 µH @ 400 Hz | .5 | .2 |
| 123 | 1 mH @ 20 kHz | 3 | .124 |
| 261 | 1.35 mH @ 800 Hz | 3.85 | .2 |
| 189 | 1.5 mH @ 16 kHz | 1.5 | 1.6 |
| 259 | 2.2 mH @ 800 Hz | 2.35 | .15 |
| 98 | 3.9 mH @ 1 kHz | 2.0 | .41 |
| 160 | 1 H @ 60 Hz | .200 | 69 |
| 179 | 1 H @ 60 Hz | .325 | 44 |
| 209 | 16 H/4H 1/ | .08/.160 1/ | 324.5/385 1/ |

1/ The first entry indicates series connection, the second entry indicates parallel (split) connection.

TABLE V. Chip inductors (see section 500).

CHIP INDUCTORS, FIXED (SECTION 501)

| Applicable MIL-I-83446 specification sheet | Inductance range (µH) ±10% tolerance | | Q range | | Self resonant frequency range (MHz) | | Maximum current range (mA) | | Maximum operating temperature |
|---|---|---|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max | Min | Max | |
| 5 | .01 | 10 | 42 | 60 | 33 | 2000 | 87 | 750 | 125°C |
| 8 | .01 | 56 | 30 | 60 | 8.5 | 2000 | 33 | 750 | 125°C |
| 10 | .01 | 1000 | 30 | 75 | 1.7 | 2000 | 25 | 1000 | 125°C |
| 11 | .10 | 10,000 | 85 | 115 | .70 | 600 | 21 | 1000 | 125°C |

CHIP INDUCTORS, VARIABLE (SECTION 502)

| Applicable MIL-I-83446 specification sheet | Inductance range (µH) | | Q range | | Self resonant frequency range (MHz) | | Maximum current range (mA) | | Maximum operating temperature |
|---|---|---|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max | Min | Max | |
| 7 | .018 | 68 | 19 | 52 | 7 | 1200 | 32 | 750 | 125°C |
| 9 | .018 | 120 | 22 | 55 | 3 | 1200 | 22 | 750 | 125°C |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE VI. Coils, radiofrequency, variable (see section 300).

| Applicable MIL-C-15305 MS sheet number | Inductance 1/ range (µH) | | Q range | | Self resonant frequency range (MHz) | | Current range (mA) | | Core | Maximum operating temperature |
|---|---|---|---|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max | Min | Max | | |
| 53229 | .020 | 8.2 | 25 | 50 | 20 | 1000 | 25 | 50 | Iron | 105°C |
| 53230 | 5.5 | 1 MH | 20 | 30 | 1.1 | 34 | 11 | 57 | Ferrite | 105°C |

TABLE VII. Coils, fixed, radiofrequency, established reliability (see section 400).

| Applicable MIL-C-39010 specification sheet | Inducatance range (µH) | | Inductance tolerance (±%) | Q range | | Self resonant frequency range (MHz) | | Current range (mA) | | Core | Maximum operating temperature |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | Min | Max | | Min | Max | Min | Max | Min | Max | | |
| 1 | .10 | .82 | 10 | 40 | 50 | 180 | 250 | 370 | 1790 | Phenolic | 105°C |
| 2 | 1.00 | 12.0 | 10 | 44 | 55 | 44 | 140 | 200 | 1070 | Iron | 105°C |
| 3 | 15.00 | 1000 | 10 | 18 | 60 | .11 | 49 | 11 | 315 | Ferrite | 105°C |
| 4 | .15 | 2.7 | 10, 20 | 30 | 55 | 120 | 510 | 460 | 2900 | Phenolic | 125°C |
| 5 | 3.30 | 27.0 | 10 | 30 | 65 | 22 | 70 | 205 | 945 | Powdered iron | 105°C |
| 6 | .15 | 4.7 | 10, 20 | 33 | 50 | 90 | 525 | 260 | 2450 | Phenolic | 125°C |
| 7 | 5.6 | 33 | 10 | 45 | 75 | 19 | 60 | 165 | 495 | Powdered iron | 105°C |
| 8 | .10 | 1.00 | 10 | 25 | 40 | 230 | 680 | 385 | 1350 | Phenolic | 125°C |
| 9 | 1.2 | 27 | 10 | 25 | 50 | 20 | 150 | 135 | 590 | Iron | 105°C |
| 10 | 33 | 1000 | 10 | 30 | 50 | 3.4 | 24 | 28 | 130 | Ferrite | 105°C |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## 7. SUPPLEMENTAL INFORMATION

7.1 Metric equivalents. The metric equivalents (to the nearest .01 mm) which are provided in the individual sections are for general information only are based upon 1 inch = 25.4 mm.

7.2 International standardization agreement. Certain provisions of the specifications referenced in this standard are the subject of international standardization agreement (NEPR No. 20). When amendment, revision, or cancellation of these specifications is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - MI
Navy - EC, OS
Air Force - 17, 85, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0575)



Source: https://assist.dla.mil -- Do 26-10-26T07:43Z
Check the source to verify that this i version before use.

SECTION 100

TRANSFORMERS

1. Scope. This section covers audio, power, and low-power pulse transformers for use in electronic and communication equipment, as follows:

| Section | | Applicable specification |
|---|---|---|
| 101 | Transformers, Power - - - - - - - - - - - - - | MIL-T-27 |
| 102 | Transformers, Audio Frequency - - - - - - - - | MIL-T-27 |
| 103 | Transformers, Pulse, Low Power- - - - - - - - | MIL-T-21038 |

2. Identification.

2.1 Type designation. The type designation is used for describing certain characteristics of the transformers covered in MIL-T-27 and MIL-T-21038 and is shown in figures 100-1 and 100-2.

2.2 Part number. The part number is used for identifying a discrete transformer. (Example: M27/177-01 or M21038/8-001.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

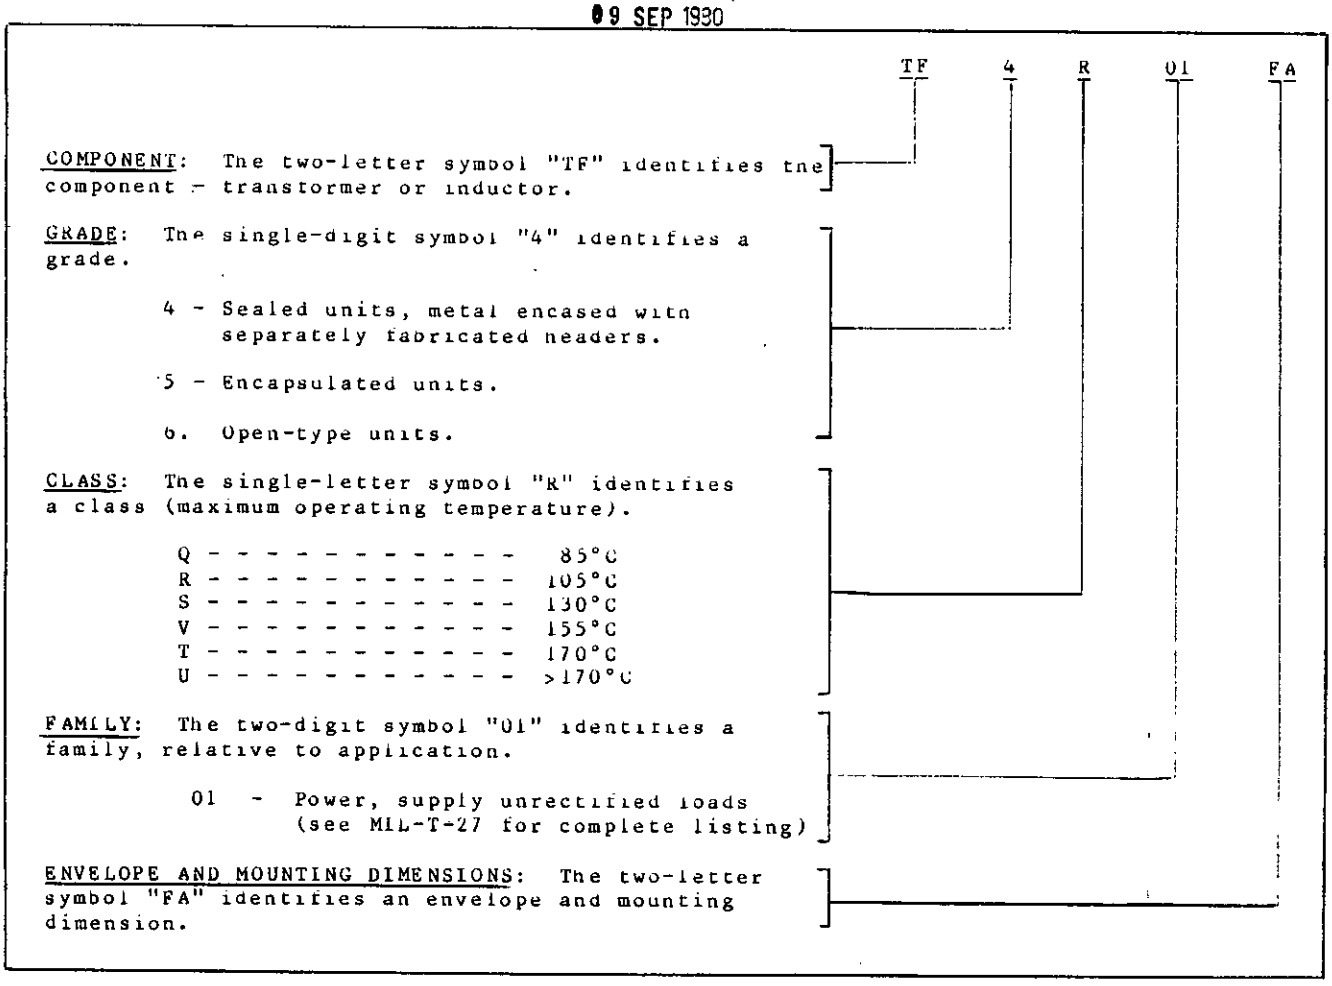



FIGURE 100-1. Type designation example (MIL-T-27).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

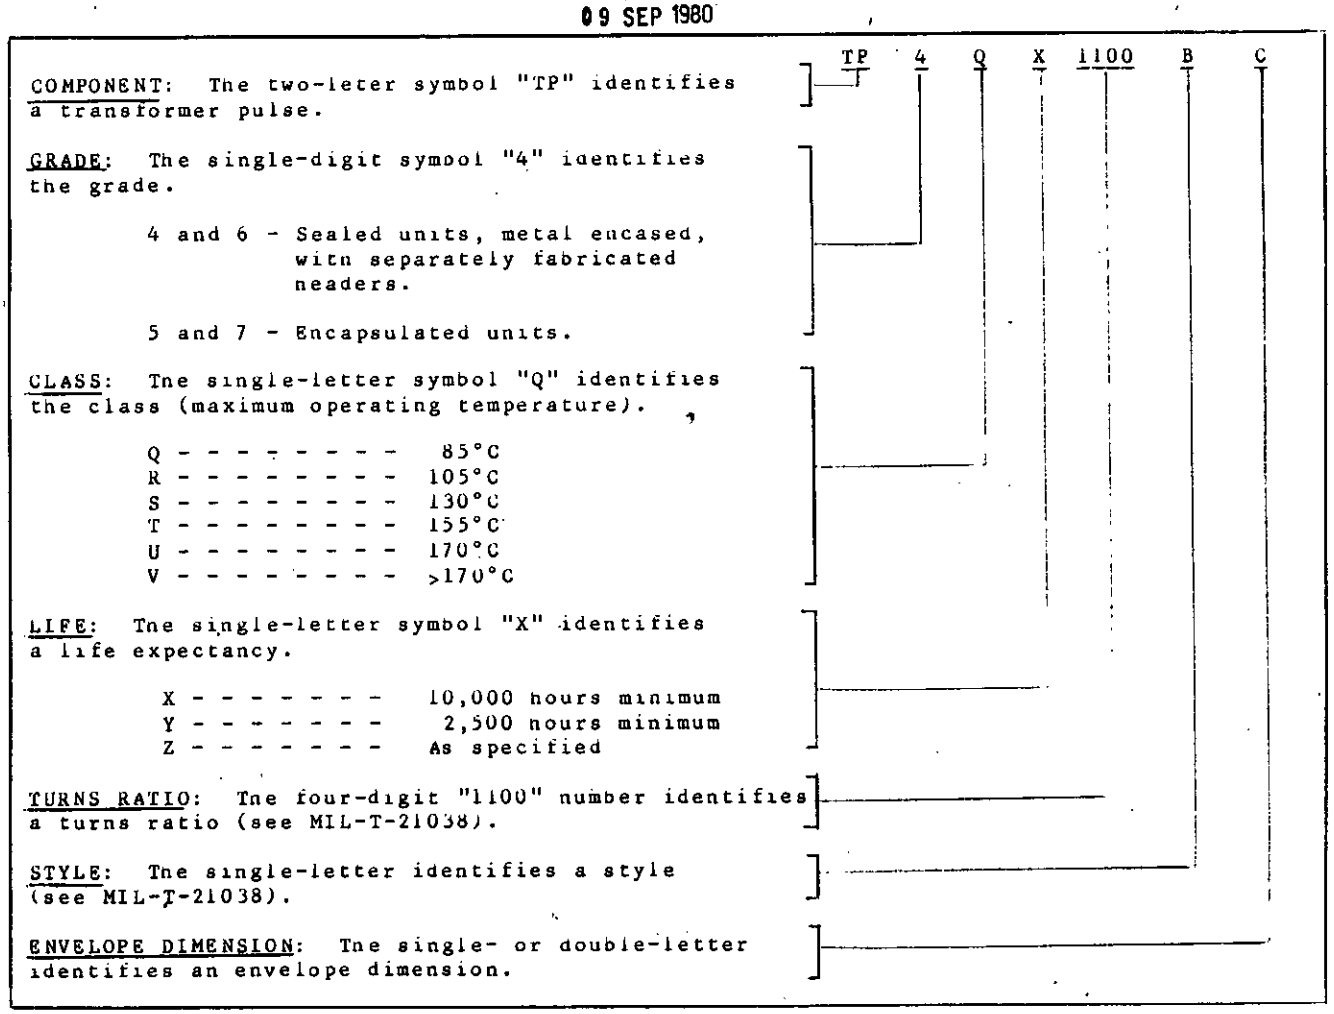



FIGURE 100-2. Type designation example (MIL-T-21038).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/12 -01 | 105/115/125 60 Hz (1-2-3-4) | 5 (5-6) | 10 | 175 (1-4) 1000 (5-6) | 50 | 4 | 105°C | See MIL-T-27/12 |
| MIL-T-27/13 -01 | 115 400 Hz (1-2) | 26 (3-4) | .5 | 180 (1-2) 40 (3-4) | 13 | 5 | 155°C | See MIL-T-27/13 |
| MIL-T-27/15 -01 | 115 400 Hz (1-2) | 26 (3-4) | .5 | 180 (1-2) 40 (3-4) | 13 | 4 | 155°C | See MIL-T-27/15 |
| MIL-T-27/16 -01 | 115 60 Hz (1-2) | 230 (3-4) | .05 | 180 (1-2) 360 (3-4) | 160 | 4 | 155°C | See MIL-T-27/16 |
| MIL-T-27/18 -01 | 115 60 Hz (1-2) | 48 CT (3-5) | .12 | 357 (1-2) 357 (3-5) | 5.76 | 5 | 130°C | See MIL-T-27/18 |
| MIL-T-27/19 -01 | 115 60 Hz (1-2) | 52 CT (3-5) | 1.0 | 357 (1-2) 357 (3-5) | 52 | 5 | 130°C | See MIL-T-27/19 |
| MIL-T-27/26 -01 | 115 400 Hz (1-2) | 57.5 (3-4) | 52 mA | 325 (1-2) 325 (1-2) | 3 | 5 | 170°C | See MIL-T-27/26 |
| MIL-T-27/34 -01 | 105/115/125 60 Hz (1-2-3-4) | 2.5 (5-6) | 10 | 175 (1-4) 6300 (5-6) | 25 | 4 | 105°C | See MIL-T-27/34 |
| MIL-T-27/35 -01 | 105/115/125 60 Hz (1-2-3-4) | 6.3 (5-6) | 2 | 175 (1-4) 1000 (5-6) | 12.6 | 4 | 105°C | See MIL-T-27/35 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/37 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT (3-5) | 0.250 | 325 | 1.5 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | (1-2) | 6.3 CT | 0.238 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.214 | | | | | C - .47 in. max |
| -04 (A-B) | | 7.5 | 0.200 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.188 | | | | | F and G -.600 in. max |
| -06 (A-B) | | 9 | 0.167 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.150 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.136 | | | | | |
| -09 (A-B) | | 12 | 0.125 | | | | | |
| -10 (A-B) | | 12.6 | 0.119 | | | | | |
| -11 (A-B) | | 13 | 0.115 | | | | | |
| -12 (A-B) | | 15 | 0.100 | | | | | |
| -13 (A-B) | | 16 | 0.094 | | | | | |
| -14 (A-B) | | 18 | 0.083 | | | | | |
| -15 (A-B) | | 20 | 0.075 | | | | | |
| -16 (A-B) | | 22 | 0.068 | | | | | |
| -17 (A-B) | | 24 | 0.063 | | | | | |
| -18 (A-B) | | 26 | 0.058 | | | | | |
| -19 (A-B) | | 28 | 0.053 | | | | | |
| -20 (A-B) | | 30 | 0.050 | | | | | |
| -21 (A-B) | | 33 | 0.045 | | | | | |
| -22 (A-B) | | 36 | 0.042 | | | | | |
| -23 (A-B) | | 39 | 0.038 | | | | | |
| -24 (A-B) | | 43 | 0.035 | | | | | |
| -25 (A-B) | | 47 | 0.032 | | | | | |
| -26 (A-B) | | 51 | 0.029 | | | | | |
| -27 (A-B) | | 56 | 0.027 | | | | | |
| -28 (A-B) | | 62 | 0.024 | | | | | |
| -29 (A-B) | | 68 | 0.022 | | | | | |
| -30 (A-B) | | 75 | 0.020 | | | | | |
| -31 (A-B) | | 82 | 0.018 | | | | | |
| -32 (A-B) | | 91 | 0.016 | | | | | |
| -33 (A-B) | | 100 | 0.015 | | | | | |
| -34 (A-B) | | 110 | 0.014 | | | | | |
| -35 (A-B) | | 115 | 0.013 | | | | | |
| -36 (A-B) | | 120 | 0.0125 | | | | | |
| -37 (A-B) | | 130 | 0.0115 | | | | | |
| -38 (A-B) | | 150 | 0.010 | | | | | |
| -39 (A-B) | | 180 | 0.0085 | | | | | |
| -40 (A-B) | | 200 | 0.0075 | 440 | | | | |
| -41 (A-B) | | 220 | 0.007 | 440 | | | | |
| -42 (A-B) | | 240 | 0.006 | 440 | | | | |
| -43 (A-B) | | 270 | 0.0055 | 580 | | | | |
| -44 (A-B) | | 300 | 0.005 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/38 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.250 | 325 | 1.5 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 CT | 0.238 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.214 | | | | | C - .59 in. max |
| -04 (A-B) | | 7.5 | 0.200 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.188 | | | | | F and G -.600 in. |
| -06 (A-B) | | 9 | 0.167 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.150 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.136 | | | | | |
| -09 (A-B) | | 12 | 0.125 | | | | | |
| -10 (A-B) | | 12.6 | 0.119 | | | | | |
| -11 (A-B) | | 13 | 0.115 | | | | | |
| -12 (A-B) | | 15 | 0.100 | | | | | |
| -13 (A-B) | | 16 | 0.094 | | | | | |
| -14 (A-B) | | 18 | 0.083 | | | | | |
| -15 (A-B) | | 20 | 0.075 | | | | | |
| -16 (A-B) | | 22 | 0.068 | | | | | |
| -17 (A-B) | | 24 | 0.063 | | | | | |
| -18 (A-B) | | 26 | 0.058 | | | | | |
| -19 (A-B) | | 28 | 0.053 | | | | | |
| -20 (A-B) | | 30 | 0.050 | | | | | |
| -21 (A-B) | | 33 | 0.045 | | | | | |
| -22 (A-B) | | 36 | 0.042 | | | | | |
| -23 (A-B) | | 39 | 0.038 | | | | | |
| -24 (A-B) | | 43 | 0.035 | | | | | |
| -25 (A-B) | | 47 | 0.032 | | | | | |
| -26 (A-B) | | 51 | 0.029 | | | | | |
| -27 (A-B) | | 56 | 0.027 | | | | | |
| -28 (A-B) | | 62 | 0.024 | | | | | |
| -29 (A-B) | | 68 | 0.022 | | | | | |
| -30 (A-B) | | 75 | 0.020 | | | | | |
| -31 (A-B) | | 82 | 0.018 | | | | | |
| -32 (A-B) | | 91 | 0.016 | | | | | |
| -33 (A-B) | | 100 | 0.015 | | | | | |
| -34 (A-B) | | 110 | 0.014 | | | | | |
| -35 (A-B) | | 115 | 0.013 | | | | | |
| -36 (A-B) | | 120 | 0.0125 | | | | | |
| -37 (A-B) | | 130 | 0.0115 | | | | | |
| -38 (A-B) | | 150 | 0.010 | | | | | |
| -39 (A-B) | | 180 | 0.0085 | | | | | |
| -40 (A-B) | | 200 | 0.0075 | 440 | | | | |
| -41 (A-B) | | 220 | 0.007 | 440 | | | | |
| -42 (A-B) | | 240 | 0.006 | 440 | | | | |
| -43 (A-B) | | 270 | 0.0055 | 580 | | | | |
| -44 (A-B) | | 300 | 0.005 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/39 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.500 | 325 | 3.0 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 CT | 0.476 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.429 | | | | | C - .59 in. max |
| -04 (A-B) | | 7.5 | 0.400 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.375 | | | | | F and G -.600 in. |
| -06 (A-B) | | 9 | 0.333 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.300 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.273 | | | | | |
| -09 (A-B) | | 12 | 0.250 | | | | | |
| -10 (A-B) | | 12.6 | 0.238 | | | | | |
| -11 (A-B) | | 13 | 0.231 | | | | | |
| -12 (A-B) | | 15 | 0.200 | | | | | |
| -13 (A-B) | | 16 | 0.188 | | | | | |
| -14 (A-B) | | 18 | 0.167 | | | | | |
| -15 (A-B) | | 20 | 0.150 | | | | | |
| -16 (A-B) | | 22 | 0.136 | | | | | |
| -17 (A-B) | | 24 | 0.125 | | | | | |
| -18 (A-B) | | 26 | 0.115 | | | | | |
| -19 (A-B) | | 28 | 0.107 | | | | | |
| -20 (A-B) | | 30 | 0.100 | | | | | |
| -21 (A-B) | | 33 | 0.091 | | | | | |
| -22 (A-B) | | 36 | 0.083 | | | | | |
| -23 (A-B) | | 39 | 0.077 | | | | | |
| -24 (A-B) | | 43 | 0.070 | | | | | |
| -25 (A-B) | | 47 | 0.064 | | | | | |
| -26 (A-B) | | 51 | 0.059 | | | | | |
| -27 (A-B) | | 56 | 0.054 | | | | | |
| -28 (A-B) | | 62 | 0.048 | | | | | |
| -29 (A-B) | | 68 | 0.044 | | | | | |
| -30 (A-B) | | 75 | 0.040 | | | | | |
| -31 (A-B) | | 82 | 0.037 | | | | | |
| -32 (A-B) | | 91 | 0.033 | | | | | |
| -33 (A-B) | | 100 | 0.030 | | | | | |
| -34 (A-B) | | 110 | 0.027 | | | | | |
| -35 (A-B) | | 115 | 0.026 | | | | | |
| -36 (A-B) | | 120 | 0.025 | | | | | |
| -37 (A-B) | | 130 | 0.023 | | | | | |
| -38 (A-B) | | 150 | 0.020 | | | | | |
| -39 (A-B) | | 180 | 0.017 | | | | | |
| -40 (A-B) | | 200 | 0.015 | 440 | | | | |
| -41 (A-B) | | 220 | 0.014 | 440 | | | | |
| -42 (A-B) | | 240 | 0.013 | 440 | | | | |
| -43 (A-B) | | 270 | 0.011 | 580 | | | | |
| -44 (A-B) | | 300 | 0.010 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/40 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.500 | 325 | 3.0 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 0.476 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.429 | | | | | C - .78 in. max |
| -04 (A-B) | | 7.5 | 0.400 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.375 | | | | | F and G - .600 in. max |
| -06 (A-B) | | 9 | 0.333 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.300 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.273 | | | | | |
| -09 (A-B) | | 12 | 0.250 | | | | | |
| -10 (A-B) | | 12.6 | 0.238 | | | | | |
| -11 (A-B) | | 13 | 0.231 | | | | | |
| -12 (A-B) | | 15 | 0.200 | | | | | |
| -13 (A-B) | | 16 | 0.188 | | | | | |
| -14 (A-B) | | 18 | 0.167 | | | | | |
| -15 (A-B) | | 20 | 0.150 | | | | | |
| -16 (A-B) | | 22 | 0.136 | | | | | |
| -17 (A-B) | | 24 | 0.125 | | | | | |
| -18 (A-B) | | 26 | 0.115 | | | | | |
| -19 (A-B) | | 28 | 0.107 | | | | | |
| -20 (A-B) | | 30 | 0.100 | | | | | |
| -21 (A-B) | | 33 | 0.091 | | | | | |
| -22 (A-B) | | 36 | 0.083 | | | | | |
| -23 (A-B) | | 39 | 0.077 | | | | | |
| -24 (A-B) | | 43 | 0.070 | | | | | |
| -25 (A-B) | | 47 | 0.064 | | | | | |
| -26 (A-B) | | 51 | 0.059 | | | | | |
| -27 (A-B) | | 56 | 0.054 | | | | | |
| -28 (A-B) | | 62 | 0.048 | | | | | |
| -29 (A-B) | | 68 | 0.044 | | | | | |
| -30 (A-B) | | 75 | 0.040 | | | | | |
| -31 (A-B) | | 82 | 0.037 | | | | | |
| -32 (A-B) | | 91 | 0.033 | | | | | |
| -33 (A-B) | | 100 | 0.030 | | | | | |
| -34 (A-B) | | 110 | 0.027 | | | | | |
| -35 (A-B) | | 115 | 0.026 | | | | | |
| -36 (A-B) | | 120 | 0.025 | | | | | |
| -37 (A-B) | | 130 | 0.023 | | | | | |
| -38 (A-B) | | 150 | 0.020 | | | | | |
| -39 (A-B) | | 180 | 0.017 | | | | | |
| -40 (A-B) | | 200 | 0.015 | 440 | | | | |
| -41 (A-B) | | 220 | 0.014 | 440 | | | | |
| -42 (A-B) | | 240 | 0.013 | 440 | | | | |
| -43 (A-B) | | 270 | 0.011 | 580 | | | | |
| -44 (A-B) | | 300 | 0.010 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/41 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.000 | 325 | 6 | S | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 0.953 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.857 | | | | | C - .78 in. max |
| -04 (A-B) | | 7.5 | 0.800 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.750 | | | | | F and G - .600 in. |
| -06 (A-B) | | 9 | 0.667 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.600 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.545 | | | | | |
| -09 (A-B) | | 12 | 0.500 | | | | | |
| -10 (A-B) | | 12.6 | 0.476 | | | | | |
| -11 (A-B) | | 13 | 0.462 | | | | | |
| -12 (A-B) | | 15 | 0.400 | | | | | |
| -13 (A-B) | | 16 | 0.375 | | | | | |
| -14 (A-B) | | 18 | 0.333 | | | | | |
| -15 (A-B) | | 20 | 0.300 | | | | | |
| -16 (A-B) | | 22 | 0.272 | | | | | |
| -17 (A-B) | | 24 | 0.250 | | | | | |
| -18 (A-B) | | 26 | 0.230 | | | | | |
| -19 (A-B) | | 28 | 0.214 | | | | | |
| -20 (A-B) | | 30 | 0.200 | | | | | |
| -21 (A-B) | | 33 | 0.182 | | | | | |
| -22 (A-B) | | 36 | 0.167 | | | | | |
| -23 (A-B) | | 39 | 0.154 | | | | | |
| -24 (A-B) | | 43 | 0.140 | | | | | |
| -25 (A-B) | | 47 | 0.128 | | | | | |
| -26 (A-B) | | 51 | 0.118 | | | | | |
| -27 (A-B) | | 56 | 0.107 | | | | | |
| -28 (A-B) | | 62 | 0.097 | | | | | |
| -29 (A-B) | | 68 | 0.088 | | | | | |
| -30 (A-B) | | 75 | 0.080 | | | | | |
| -31 (A-B) | | 82 | 0.073 | | | | | |
| -32 (A-B) | | 91 | 0.066 | | | | | |
| -33 (A-B) | | 100 | 0.060 | | | | | |
| -34 (A-B) | | 110 | 0.055 | | | | | |
| -35 (A-B) | | 115 | 0.052 | | | | | |
| -36 (A-B) | | 120 | 0.050 | | | | | |
| -37 (A-B) | | 130 | 0.046 | | | | | |
| -38 (A-B) | | 150 | 0.040 | | | | | |
| -39 (A-B) | | 180 | 0.033 | | | | | |
| -40 (A-B) | | 200 | 0.030 | 440 | | | | |
| -41 (A-B) | | 220 | 0.027 | 440 | | | | |
| -42 (A-B) | | 240 | 0.025 | 440 | | | | |
| -43 (A-B) | | 270 | 0.022 | 580 | | | | |
| -44 (A-B) | | 300 | 0.020 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/42 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.000 | 325 | 6 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 0.953 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 0.857 | | | | | C - 1.03 in. max |
| -04 (A-B) | | 7.5 | 0.800 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 0.750 | | | | | F and G - .600 in. |
| -06 (A-B) | | 9 | 0.667 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.600 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.545 | | | | | |
| -09 (A-B) | | 12 | 0.500 | | | | | |
| -10 (A-B) | | 12.6 | 0.476 | | | | | |
| -11 (A-B) | | 13 | 0.462 | | | | | |
| -12 (A-B) | | 15 | 0.400 | | | | | |
| -13 (A-B) | | 16 | 0.375 | | | | | |
| -14 (A-B) | | 18 | 0.333 | | | | | |
| -15 (A-B) | | 20 | 0.300 | | | | | |
| -16 (A-B) | | 22 | 0.272 | | | | | |
| -17 (A-B) | | 24 | 0.250 | | | | | |
| -18 (A-B) | | 26 | 0.230 | | | | | |
| -19 (A-B) | | 28 | 0.214 | | | | | |
| -20 (A-B) | | 30 | 0.200 | | | | | |
| -21 (A-B) | | 33 | 0.182 | | | | | |
| -22 (A-B) | | 36 | 0.167 | | | | | |
| -23 (A-B) | | 39 | 0.154 | | | | | |
| -24 (A-B) | | 43 | 0.140 | | | | | |
| -25 (A-B) | | 47 | 0.128 | | | | | |
| -26 (A-B) | | 51 | 0.118 | | | | | |
| -27 (A-B) | | 56 | 0.107 | | | | | |
| -28 (A-B) | | 62 | 0.097 | | | | | |
| -29 (A-B) | | 68 | 0.088 | | | | | |
| -30 (A-B) | | 75 | 0.080 | | | | | |
| -31 (A-B) | | 82 | 0.073 | | | | | |
| -32 (A-B) | | 91 | 0.066 | | | | | |
| -33 (A-B) | | 100 | 0.060 | | | | | |
| -34 (A-B) | | 110 | 0.055 | | | | | |
| -35 (A-B) | | 115 | 0.052 | | | | | |
| -36 (A-B) | | 120 | 0.050 | | | | | |
| -37 (A-B) | | 130 | 0.046 | | | | | |
| -38 (A-B) | | 150 | 0.040 | | | | | |
| -39 (A-B) | | 180 | 0.033 | | | | | |
| -40 (A-B) | | 200 | 0.030 | 440 | | | | |
| -41 (A-B) | | 220 | 0.027 | 440 | | | | |
| -42 (A-B) | | 240 | 0.025 | 440 | | | | |
| -43 (A-B) | | 270 | 0.022 | 580 | | | | |
| -44 (A-B) | | 300 | 0.020 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/43 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.500 | 325 | 9 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 1.430 | | | | | A and B - 1.09 in. max |
| -03 (A-B) | | 7 | 1.286 | | | | | C - 1.03 in. max |
| -04 (A-B) | | 7.5 | 1.200 | | | | | D and E - .800 in. |
| -05 (A-B) | | 8 | 1.125 | | | | | F and G - .600 in. |
| -06 (A-B) | | 9 | 1.000 | | | | | H - .75 in. dia |
| -07 (A-B) | | 10 | 0.900 | | | | | J - .138 |
| -08 (A-B) | | 11 | 0.818 | | | | | |
| -09 (A-B) | | 12 | 0.750 | | | | | |
| -10 (A-B) | | 12.6 | 0.715 | | | | | |
| -11 (A-B) | | 13 | 0.692 | | | | | |
| -12 (A-B) | | 15 | 0.600 | | | | | |
| -13 (A-B) | | 16 | 0.563 | | | | | |
| -14 (A-B) | | 18 | 0.500 | | | | | |
| -15 (A-B) | | 20 | 0.450 | | | | | |
| -16 (A-B) | | 22 | 0.409 | | | | | |
| -17 (A-B) | | 24 | 0.375 | | | | | |
| -18 (A-B) | | 26 | 0.346 | | | | | |
| -19 (A-B) | | 28 | 0.321 | | | | | |
| -20 (A-B) | | 30 | 0.300 | | | | | |
| -21 (A-B) | | 33 | 0.273 | | | | | |
| -22 (A-B) | | 36 | 0.250 | | | | | |
| -23 (A-B) | | 39 | 0.231 | | | | | |
| -24 (A-B) | | 43 | 0.209 | | | | | |
| -25 (A-B) | | 47 | 0.191 | | | | | |
| -26 (A-B) | | 51 | 0.176 | | | | | |
| -27 (A-B) | | 56 | 0.161 | | | | | |
| -28 (A-B) | | 62 | 0.145 | | | | | |
| -29 (A-B) | | 68 | 0.132 | | | | | |
| -30 (A-B) | | 75 | 0.120 | | | | | |
| -31 (A-B) | | 82 | 0.110 | | | | | |
| -32 (A-B) | | 91 | 0.099 | | | | | |
| -33 (A-B) | | 100 | 0.090 | | | | | |
| -34 (A-B) | | 110 | 0.082 | | | | | |
| -35 (A-B) | | 115 | 0.078 | | | | | |
| -36 (A-B) | | 120 | 0.075 | | | | | |
| -37 (A-B) | | 130 | 0.069 | | | | | |
| -38 (A-B) | | 150 | 0.060 | | | | | |
| -39 (A-B) | | 180 | 0.050 | | | | | |
| -40 (A-B) | | 200 | 0.045 | 440 | | | | |
| -41 (A-B) | | 220 | 0.041 | 440 | | | | |
| -42 (A-B) | | 240 | 0.038 | 440 | | | | |
| -43 (A-B) | | 270 | 0.033 | 580 | | | | |
| -44 (A-B) | | 300 | 0.030 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/44 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 2.667 | 325 | 16 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 2.540 | | | | | A and B - 1.40 in. max |
| -03 (A-B) | | 7 | 2.286 | | | | | C - .97 in. max |
| -04 (A-B) | | 7.5 | 2.133 | | | | | D and E - 1.100 in. |
| -05 (A-B) | | 8 | 2.000 | | | | | F and G - .900 in. |
| -06 (A-B) | | 9 | 1.778 | | | | | H - 1.00 in. dia |
| -07 (A-B) | | 10 | 1.600 | | | | | J - .164 |
| -08 (A-B) | | 11 | 1.455 | | | | | |
| -09 (A-B) | | 12 | 1.333 | | | | | |
| -10 (A-B) | | 12.6 | 1.270 | | | | | |
| -11 (A-B) | | 13 | 1.231 | | | | | |
| -12 (A-B) | | 15 | 1.067 | | | | | |
| -13 (A-B) | | 16 | 1.000 | | | | | |
| -14 (A-B) | | 18 | 0.889 | | | | | |
| -15 (A-B) | | 20 | 0.800 | | | | | |
| -16 (A-B) | | 22 | 0.727 | | | | | |
| -17 (A-B) | | 24 | 0.667 | | | | | |
| -18 (A-B) | | 26 | 0.615 | | | | | |
| -19 (A-B) | | 28 | 0.571 | | | | | |
| -20 (A-B) | | 30 | 0.533 | | | | | |
| -21 (A-B) | | 33 | 0.485 | | | | | |
| -22 (A-B) | | 36 | 0.444 | | | | | |
| -23 (A-B) | | 39 | 0.410 | | | | | |
| -24 (A-B) | | 43 | 0.372 | | | | | |
| -25 (A-B) | | 47 | 0.340 | | | | | |
| -26 (A-B) | | 51 | 0.314 | | | | | |
| -27 (A-B) | | 56 | 0.286 | | | | | |
| -28 (A-B) | | 62 | 0.258 | | | | | |
| -29 (A-B) | | 68 | 0.236 | | | | | |
| -30 (A-B) | | 75 | 0.213 | | | | | |
| -31 (A-B) | | 82 | 0.195 | | | | | |
| -32 (A-B) | | 91 | 0.176 | | | | | |
| -33 (A-B) | | 100 | 0.160 | | | | | |
| -34 (A-B) | | 110 | 0.145 | | | | | |
| -35 (A-B) | | 115 | 0.139 | | | | | |
| -36 (A-B) | | 120 | 0.133 | | | | | |
| -37 (A-B) | | 130 | 0.123 | | | | | |
| -38 (A-B) | | 150 | 0.106 | | | | | |
| -39 (A-B) | | 180 | 0.089 | | | | | |
| -40 (A-B) | | 200 | 0.080 | 440 | | | | |
| -41 (A-B) | | 220 | 0.073 | 440 | | | | |
| -42 (A-B) | | 240 | 0.067 | 440 | | | | |
| -43 (A-B) | | 270 | 0.059 | 580 | | | | |
| -44 (A-B) | | 300 | 0.053 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/45 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 2.607 | 325 | 16 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 2.540 | | | | | A and B - 1.40 in. max |
| -03 (A-B) | | 7 | 2.286 | | | | | C - .97 in. max |
| -04 (A-B) | | 7.5 | 2.133 | | | | | D and E - 1.100 in. |
| -05 (A-B) | | 8 | 2.000 | | | | | F and G - .900 in. |
| -06 (A-B) | | 9 | 1.778 | | | | | H - 1.00 in. dia |
| -07 (A-B) | | 10 | 1.600 | | | | | J - .164 |
| -08 (A-B) | | 11 | 1.455 | | | | | |
| -09 (A-B) | | 12 | 1.333 | | | | | |
| -10 (A-B) | | 12.6 | 1.270 | | | | | |
| -11 (A-B) | | 13 | 1.231 | | | | | |
| -12 (A-B) | | 15 | 1.067 | | | | | |
| -13 (A-B) | | 16 | 1.000 | | | | | |
| -14 (A-B) | | 18 | 0.889 | | | | | |
| -15 (A-B) | | 20 | 0.800 | | | | | |
| -16 (A-B) | | 22 | 0.727 | | | | | |
| -17 (A-B) | | 24 | 0.667 | | | | | |
| -18 (A-B) | | 26 | 0.615 | | | | | |
| -19 (A-B) | | 28 | 0.571 | | | | | |
| -20 (A-B) | | 30 | 0.533 | | | | | |
| -21 (A-B) | | 33 | 0.485 | | | | | |
| -22 (A-B) | | 36 | 0.444 | | | | | |
| -23 (A-B) | | 39 | 0.410 | | | | | |
| -24 (A-B) | | 43 | 0.372 | | | | | |
| -25 (A-B) | | 47 | 0.340 | | | | | |
| -26 (A-B) | | 51 | 0.314 | | | | | |
| -27 (A-B) | | 56 | 0.286 | | | | | |
| -28 (A-B) | | 62 | 0.258 | | | | | |
| -29 (A-B) | | 68 | 0.236 | | | | | |
| -30 (A-B) | | 75 | 0.213 | | | | | |
| -31 (A-B) | | 82 | 0.195 | | | | | |
| -32 (A-B) | | 91 | 0.176 | | | | | |
| -33 (A-B) | | 100 | 0.160 | | | | | |
| -34 (A-B) | | 110 | 0.145 | | | | | |
| -35 (A-B) | | 115 | 0.139 | | | | | |
| -36 (A-B) | | 120 | 0.133 | | | | | |
| -37 (A-B) | | 130 | 0.123 | | | | | |
| -38 (A-B) | | 150 | 0.106 | | | | | |
| -39 (A-B) | | 180 | 0.089 | | | | | |
| -40 (A-B) | | 200 | 0.080 | 440 | | | | |
| -41 (A-B) | | 220 | 0.073 | 440 | | | | |
| -42 (A-B) | | 240 | 0.067 | 440 | | | | |
| -43 (A-B) | | 270 | 0.059 | 580 | | | | |
| -44 (A-B) | | 300 | 0.053 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/46 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 4.167 | 325 | 25 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 3.968 | | | | | A and B - 1.40 in. max |
| -03 (A-B) | | 7 | 3.571 | | | | | C - 1.20 in. max |
| -04 (A-B) | | 7.5 | 3.333 | | | | | D and E - 1.100 in. |
| -05 (A-B) | | 8 | 3.125 | | | | | F and G - .900 in. |
| -06 (A-B) | | 9 | 2.778 | | | | | H - 1.00 in. dia |
| -07 (A-B) | | 10 | 2.500 | | | | | J - .164 |
| -08 (A-B) | | 11 | 2.273 | | | | | |
| -09 (A-B) | | 12 | 2.083 | | | | | |
| -10 (A-B) | | 12.6 | 1.984 | | | | | |
| -11 (A-B) | | 13 | 1.923 | | | | | |
| -12 (A-B) | | 15 | 1.667 | | | | | |
| -13 (A-B) | | 16 | 1.563 | | | | | |
| -14 (A-B) | | 18 | 1.389 | | | | | |
| -15 (A-B) | | 20 | 1.250 | | | | | |
| -16 (A-B) | | 22 | 1.136 | | | | | |
| -17 (A-B) | | 24 | 1.042 | | | | | |
| -18 (A-B) | | 26 | 0.962 | | | | | |
| -19 (A-B) | | 28 | 0.893 | | | | | |
| -20 (A-B) | | 30 | 0.833 | | | | | |
| -21 (A-B) | | 33 | 0.758 | | | | | |
| -22 (A-B) | | 36 | 0.694 | | | | | |
| -23 (A-B) | | 39 | 0.641 | | | | | |
| -24 (A-B) | | 43 | 0.581 | | | | | |
| -25 (A-B) | | 47 | 0.532 | | | | | |
| -26 (A-B) | | 51 | 0.490 | | | | | |
| -27 (A-B) | | 56 | 0.446 | | | | | |
| -28 (A-B) | | 62 | 0.403 | | | | | |
| -29 (A-B) | | 68 | 0.367 | | | | | |
| -30 (A-B) | | 75 | 0.333 | | | | | |
| -31 (A-B) | | 82 | 0.305 | | | | | |
| -32 (A-B) | | 91 | 0.275 | | | | | |
| -33 (A-B) | | 100 | 0.250 | | | | | |
| -34 (A-B) | | 110 | 0.227 | | | | | |
| -35 (A-B) | | 115 | 0.218 | | | | | |
| -36 (A-B) | | 120 | 0.208 | | | | | |
| -37 (A-B) | | 130 | 0.192 | | | | | |
| -38 (A-B) | | 150 | 0.166 | | | | | |
| -39 (A-B) | | 180 | 0.139 | | | | | |
| -40 (A-B) | | 200 | 0.125 | 440 | | | | |
| -41 (A-B) | | 220 | 0.113 | 440 | | | | |
| -42 (A-B) | | 240 | 0.104 | 440 | | | | |
| -43 (A-B) | | 270 | 0.093 | 580 | | | | |
| -44 (A-B) | | 300 | 0.083 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/47 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 4.167 | 325 | 25 | 5 | 130°C | See figure 101-1 |
| -02 (A-B) | | 6.3 | 3.968 | | | | | A and B - 1.40 in. max |
| -03 (A-B) | | 7 | 3.571 | | | | | C - 1.20 in. max |
| -04 (A-B) | | 7.5 | 3.333 | | | | | D and E - 1.100 in. |
| -05 (A-B) | | 8 | 3.125 | | | | | F and G - .900 in. |
| -06 (A-B) | | 9 | 2.778 | | | | | H - 1.00 in. dia |
| -07 (A-B) | | 10 | 2.500 | | | | | J - .164 |
| -08 (A-B) | | 11 | 2.273 | | | | | |
| -09 (A-B) | | 12 | 2.083 | | | | | |
| -10 (A-B) | | 12.6 | 1.984 | | | | | |
| -11 (A-B) | | 13 | 1.923 | | | | | |
| -12 (A-B) | | 15 | 1.667 | | | | | |
| -13 (A-B) | | 16 | 1.563 | | | | | |
| -14 (A-B) | | 18 | 1.389 | | | | | |
| -15 (A-B) | | 20 | 1.250 | | | | | |
| -16 (A-B) | | 22 | 1.136 | | | | | |
| -17 (A-B) | | 24 | 1.042 | | | | | |
| -18 (A-B) | | 26 | 0.962 | | | | | |
| -19 (A-B) | | 28 | 0.893 | | | | | |
| -20 (A-B) | | 30 | 0.833 | | | | | |
| -21 (A-B) | | 33 | 0.758 | | | | | |
| -22 (A-B) | | 36 | 0.694 | | | | | |
| -23 (A-B) | | 39 | 0.641 | | | | | |
| -24 (A-B) | | 43 | 0.581 | | | | | |
| -25 (A-B) | | 47 | 0.532 | | | | | |
| -26 (A-B) | | 51 | 0.490 | | | | | |
| -27 (A-B) | | 56 | 0.446 | | | | | |
| -28 (A-B) | | 62 | 0.403 | | | | | |
| -29 (A-B) | | 68 | 0.367 | | | | | |
| -30 (A-B) | | 75 | 0.333 | | | | | |
| -31 (A-B) | | 82 | 0.305 | | | | | |
| -32 (A-B) | | 91 | 0.275 | | | | | |
| -33 (A-B) | | 100 | 0.250 | | | | | |
| -34 (A-B) | | 110 | 0.227 | | | | | |
| -35 (A-B) | | 115 | 0.218 | | | | | |
| -36 (A-B) | | 120 | 0.208 | | | | | |
| -37 (A-B) | | 130 | 0.192 | | | | | |
| -38 (A-B) | | 150 | 0.166 | | | | | |
| -39 (A-B) | | 180 | 0.139 | | | | | |
| -40 (A-B) | | 200 | 0.125 | 440 | | | | |
| -41 (A-B) | | 220 | 0.113 | 440 | | | | |
| -42 (A-B) | | 240 | 0.104 | 440 | | | | |
| -43 (A-B) | | 270 | 0.093 | 580 | | | | |
| -44 (A-B) | | 300 | 0.083 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and das.a no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/48 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.250 | 325 | 1.5 | 5 | 130°C | See figure 101-2 |
| -02 (A-B) | | 6.3 | 0.238 | | | | | A - 1.000 in. |
| -03 (A-B) | | 7 | 0.214 | | | | | B - .469 in. |
| -04 (A-B) | | 7.5 | 0.200 | | | | | C - .750 in. |
| -05 (A-B) | | 8 | 0.188 | | | | | D - .312 in. max |
| -06 (A-B) | | 9 | 0.167 | | | | | E - .138-32UNC-2A |
| -07 (A-B) | | 10 | 0.150 | | | | | |
| -08 (A-B) | | 11 | 0.136 | | | | | |
| -09 (A-B) | | 12 | 0.125 | | | | | |
| -10 (A-B) | | 12.6 | 0.119 | | | | | |
| -11 (A-B) | | 13 | 0.115 | | | | | |
| -12 (A-B) | | 15 | 0.100 | | | | | |
| -13 (A-B) | | 16 | 0.094 | | | | | |
| -14 (A-B) | | 18 | 0.083 | | | | | |
| -15 (A-B) | | 20 | 0.075 | | | | | |
| -16 (A-B) | | 22 | 0.068 | | | | | |
| -17 (A-B) | | 24 | 0.063 | | | | | |
| -18 (A-B) | | 26 | 0.058 | | | | | |
| -19 (A-B) | | 28 | 0.053 | | | | | |
| -20 (A-B) | | 30 | 0.050 | | | | | |
| -21 (A-B) | | 33 | 0.045 | | | | | |
| -22 (A-B) | | 36 | 0.042 | | | | | |
| -23 (A-B) | | 39 | 0.038 | | | | | |
| -24 (A-B) | | 43 | 0.035 | | | | | |
| -25 (A-B) | | 47 | 0.032 | | | | | |
| -26 (A-B) | | 51 | 0.029 | | | | | |
| -27 (A-B) | | 56 | 0.027 | | | | | |
| -28 (A-B) | | 62 | 0.024 | | | | | |
| -29 (A-B) | | 68 | 0.022 | | | | | |
| -30 (A-B) | | 75 | 0.020 | | | | | |
| -31 (A-B) | | 82 | 0.018 | | | | | |
| -32 (A-B) | | 91 | 0.016 | | | | | |
| -33 (A-B) | | 100 | 0.015 | | | | | |
| -34 (A-B) | | 110 | 0.014 | | | | | |
| -35 (A-B) | | 115 | 0.013 | | | | | |
| -36 (A-B) | | 120 | 0.0125 | | | | | |
| -37 (A-B) | | 130 | 0.0115 | | | | | |
| -38 (A-B) | | 150 | 0.010 | | | | | |
| -39 (A-B) | | 180 | 0.0085 | | | | | |
| -40 (A-B) | | 200 | 0.0075 | 440 | | | | |
| -41 (A-B) | | 220 | 0.007 | 440 | | | | |
| -42 (A-B) | | 240 | 0.006 | 440 | | | | |
| -43 (A-B) | | 270 | 0.0055 | 580 | | | | |
| -44 (A-B) | | 300 | 0.005 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/49 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.250 | 325 | 1.5 | 4 | 130°C | See figure 101-2 |
| -02 (A-B) | | 6.3 | 0.238 | | | | | A - 1.000 in. |
| -03 (A-B) | | 7 | 0.214 | | | | | B - .594 in. |
| -04 (A-B) | | 7.5 | 0.200 | | | | | C - .750 in. |
| -05 (A-B) | | 8 | 0.188 | | | | | D - .312 in. max |
| -06 (A-B) | | 9 | 0.167 | | | | | E - .138-32UNC-2A |
| -07 (A-B) | | 10 | 0.150 | | | | | |
| -08 (A-B) | | 11 | 0.136 | | | | | |
| -09 (A-B) | | 12 | 0.125 | | | | | |
| -10 (A-B) | | 12.6 | 0.119 | | | | | |
| -11 (A-B) | | 13 | 0.115 | | | | | |
| -12 (A-B) | | 15 | 0.100 | | | | | |
| -13 (A-B) | | 16 | 0.094 | | | | | |
| -14 (A-B) | | 18 | 0.083 | | | | | |
| -15 (A-B) | | 20 | 0.075 | | | | | |
| -16 (A-B) | | 22 | 0.068 | | | | | |
| -17 (A-B) | | 24 | 0.063 | | | | | |
| -18 (A-B) | | 26 | 0.058 | | | | | |
| -19 (A-B) | | 28 | 0.053 | | | | | |
| -20 (A-B) | | 30 | 0.050 | | | | | |
| -21 (A-B) | | 33 | 0.045 | | | | | |
| -22 (A-B) | | 36 | 0.042 | | | | | |
| -23 (A-B) | | 39 | 0.038 | | | | | |
| -24 (A-B) | | 43 | 0.035 | | | | | |
| -25 (A-B) | | 47 | 0.032 | | | | | |
| -26 (A-B) | | 51 | 0.029 | | | | | |
| -27 (A-B) | | 56 | 0.027 | | | | | |
| -28 (A-B) | | 62 | 0.024 | | | | | |
| -29 (A-B) | | 68 | 0.022 | | | | | |
| -30 (A-B) | | 75 | 0.020 | | | | | |
| -31 (A-B) | | 82 | 0.018 | | | | | |
| -32 (A-B) | | 91 | 0.016 | | | | | |
| -33 (A-B) | | 100 | 0.015 | | | | | |
| -34 (A-B) | | 110 | 0.014 | | | | | |
| -35 (A-B) | | 115 | 0.013 | | | | | |
| -36 (A-B) | | 120 | 0.0125 | | | | | |
| -37 (A-B) | | 130 | 0.0115 | | | | | |
| -38 (A-B) | | 150 | 0.010 | | | | | |
| -39 (A-B) | | 180 | 0.0085 | | | | | |
| -40 (A-B) | | 200 | 0.0075 | 440 | | | | |
| -41 (A-B) | | 220 | 0.007 | 440 | | | | |
| -42 (A-B) | | 240 | 0.006 | 440 | | | | |
| -43 (A-B) | | 270 | 0.0055 | 580 | | | | |
| -44 (A-B) | | 300 | 0.005 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/50 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.500 | 325 | 3.0 | 4 | 130°C | See figure 101-2 |
| -02 (A-B) | | 6.3 | 0.476 | | | | | A - 1.000 in. |
| -03 (A-B) | | 7 | 0.429 | | | | | B - .594 in. |
| -04 (A-B) | | 7.5 | 0.400 | | | | | C - .750 in. |
| -05 (A-B) | | 8 | 0.375 | | | | | D - .312 in. max |
| -06 (A-B) | | 9 | 0.333 | | | | | E - .138-32 UNC-2A |
| -07 (A-B) | | 10 | 0.300 | | | | | |
| -08 (A-B) | | 11 | 0.273 | | | | | |
| -09 (A-B) | | 12 | 0.250 | | | | | |
| -10 (A-B) | | 12.6 | 0.238 | | | | | |
| -11 (A-B) | | 13 | 0.231 | | | | | |
| -12 (A-B) | | 15 | 0.200 | | | | | |
| -13 (A-B) | | 16 | 0.188 | | | | | |
| -14 (A-B) | | 18 | 0.167 | | | | | |
| -15 (A-B) | | 20 | 0.150 | | | | | |
| -16 (A-B) | | 22 | 0.136 | | | | | |
| -17 (A-B) | | 24 | 0.125 | | | | | |
| -18 (A-B) | | 26 | 0.115 | | | | | |
| -19 (A-B) | | 28 | 0.107 | | | | | |
| -20 (A-B) | | 30 | 0.100 | | | | | |
| -21 (A-B) | | 33 | 0.091 | | | | | |
| -22 (A-B) | | 36 | 0.083 | | | | | |
| -23 (A-B) | | 39 | 0.077 | | | | | |
| -24 (A-B) | | 43 | 0.070 | | | | | |
| -25 (A-B) | | 47 | 0.064 | | | | | |
| -26 (A-B) | | 51 | 0.059 | | | | | |
| -27 (A-B) | | 56 | 0.054 | | | | | |
| -28 (A-B) | | 62 | 0.048 | | | | | |
| -29 (A-B) | | 68 | 0.044 | | | | | |
| -30 (A-B) | | 75 | 0.040 | | | | | |
| -31 (A-B) | | 82 | 0.037 | | | | | |
| -32 (A-B) | | 91 | 0.033 | | | | | |
| -33 (A-B) | | 100 | 0.030 | | | | | |
| -34 (A-B) | | 110 | 0.027 | | | | | |
| -35 (A-B) | | 115 | 0.026 | | | | | |
| -36 (A-B) | | 120 | 0.025 | | | | | |
| -37 (A-B) | | 130 | 0.023 | | | | | |
| -38 (A-B) | | 150 | 0.020 | | | | | |
| -39 (A-B) | | 180 | 0.017 | | | | | |
| -40 (A-B) | | 200 | 0.015 | 440 | | | | |
| -41 (A-B) | | 220 | 0.014 | 440 | | | | |
| -42 (A-B) | | 240 | 0.013 | 440 | | | | |
| -43 (A-B) | | 270 | 0.011 | 580 | | | | |
| -44 (A-B) | | 300 | 0.010 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/51 | | | | | | | | |
| -01 (A-B) | 115, 400 Hz | 6 CT | 0.500 | 325 | 3.0 | 4 | 130°C | See figure 101-2 |
| -02 (A-B) | | 6.3 | 0.476 | | | | | A - 1.000 in. |
| -03 (A-B) | | 7 | 0.429 | | | | | B - .812 in. |
| -04 (A-B) | | 7.5 | 0.400 | | | | | C - .750 in. |
| -05 (A-B) | | 8 | 0.375 | | | | | D - .312 in. max |
| -06 (A-B) | | 9 | 0.333 | | | | | E - .138-32 UNC-2A |
| -07 (A-B) | | 10 | 0.300 | | | | | |
| -08 (A-B) | | 11 | 0.273 | | | | | |
| -09 (A-B) | | 12 | 0.250 | | | | | |
| -10 (A-B) | | 12.6 | 0.238 | | | | | |
| -11 (A-B) | | 13 | 0.231 | | | | | |
| -12 (A-B) | | 15 | 0.200 | | | | | |
| -13 (A-B) | | 16 | 0.188 | | | | | |
| -14 (A-B) | | 18 | 0.167 | | | | | |
| -15 (A-B) | | 20 | 0.150 | | | | | |
| -16 (A-B) | | 22 | 0.136 | | | | | |
| -17 (A-B) | | 24 | 0.125 | | | | | |
| -18 (A-B) | | 26 | 0.115 | | | | | |
| -19 (A-B) | | 28 | 0.107 | | | | | |
| -20 (A-B) | | 30 | 0.100 | | | | | |
| -21 (A-B) | | 33 | 0.091 | | | | | |
| -22 (A-B) | | 36 | 0.083 | | | | | |
| -23 (A-B) | | 39 | 0.077 | | | | | |
| -24 (A-B) | | 43 | 0.070 | | | | | |
| -25 (A-B) | | 47 | 0.064 | | | | | |
| -26 (A-B) | | 51 | 0.059 | | | | | |
| -27 (A-B) | | 56 | 0.054 | | | | | |
| -28 (A-B) | | 62 | 0.048 | | | | | |
| -29 (A-B) | | 68 | 0.044 | | | | | |
| -30 (A-B) | | 75 | 0.040 | | | | | |
| -31 (A-B) | | 82 | 0.037 | | | | | |
| -32 (A-B) | | 91 | 0.033 | | | | | |
| -33 (A-B) | | 100 | 0.030 | | | | | |
| -34 (A-B) | | 110 | 0.027 | | | | | |
| -35 (A-B) | | 115 | 0.026 | | | | | |
| -36 (A-B) | | 120 | 0.025 | | | | | |
| -37 (A-B) | | 130 | 0.023 | | | | | |
| -38 (A-B) | | 150 | 0.020 | | | | | |
| -39 (A-B) | | 180 | 0.017 | | | | | |
| -40 (A-B) | | 200 | 0.015 | 440 | | | | |
| -41 (A-B) | | 220 | 0.014 | 440 | | | | |
| -42 (A-B) | | 240 | 0.013 | 440 | | | | |
| -43 (A-B) | | 270 | 0.011 | 580 | | | | |
| -44 (A-B) | | 300 | 0.010 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/52 | | | | | | | | See figure 101-2 |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.000 | 325 | 6 | 4 | 130°C | A - 1.000 in. |
| -02 (A-B) | | 6.3 | 0.953 | | | | | B - .812 in. |
| -03 (A-B) | | 7 | 0.857 | | | | | C - .750 in. |
| -04 (A-B) | | 7.5 | 0.800 | | | | | D - .312 in. max |
| -05 (A-B) | | 8 | 0.750 | | | | | E - .138-32 UNC-2A |
| -06 (A-B) | | 9 | 0.667 | | | | | |
| -07 (A-B) | | 10 | 0.600 | | | | | |
| -08 (A-B) | | 11 | 0.545 | | | | | |
| -09 (A-B) | | 12 | 0.500 | | | | | |
| -10 (A-B) | | 12.6 | 0.476 | | | | | |
| -11 (A-B) | | 13 | 0.462 | | | | | |
| -12 (A-B) | | 15 | 0.400 | | | | | |
| -13 (A-B) | | 16 | 0.375 | | | | | |
| -14 (A-B) | | 18 | 0.333 | | | | | |
| -15 (A-B) | | 20 | 0.300 | | | | | |
| -16 (A-B) | | 22 | 0.272 | | | | | |
| -17 (A-B) | | 24 | 0.250 | | | | | |
| -18 (A-B) | | 26 | 0.230 | | | | | |
| -19 (A-B) | | 28 | 0.214 | | | | | |
| -20 (A-B) | | 30 | 0.200 | | | | | |
| -21 (A-B) | | 33 | 0.182 | | | | | |
| -22 (A-B) | | 36 | 0.167 | | | | | |
| -23 (A-B) | | 39 | 0.154 | | | | | |
| -24 (A-B) | | 43 | 0.140 | | | | | |
| -25 (A-B) | | 47 | 0.128 | | | | | |
| -26 (A-B) | | 51 | 0.118 | | | | | |
| -27 (A-B) | | 56 | 0.107 | | | | | |
| -28 (A-B) | | 62 | 0.097 | | | | | |
| -29 (A-B) | | 68 | 0.088 | | | | | |
| -30 (A-B) | | 75 | 0.080 | | | | | |
| -31 (A-B) | | 82 | 0.073 | | | | | |
| -32 (A-B) | | 91 | 0.066 | | | | | |
| -33 (A-B) | | 100 | 0.060 | | | | | |
| -34 (A-B) | | 110 | 0.055 | | | | | |
| -35 (A-B) | | 115 | 0.052 | | | | | |
| -36 (A-B) | | 120 | 0.050 | | | | | |
| -37 (A-B) | | 130 | 0.046 | | | | | |
| -38 (A-B) | | 150 | 0.040 | | | | | |
| -39 (A-B) | | 180 | 0.033 | | | | | |
| -40 (A-B) | | 200 | 0.030 | 440 | | | | |
| -41 (A-B) | | 220 | 0.027 | 440 | | | | |
| -42 (A-B) | | 240 | 0.025 | 440 | | | | |
| -43 (A-B) | | 270 | 0.022 | 580 | | | | |
| -44 (A-B) | | 300 | 0.020 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/53 | | | | | | | | See figure 101-2 |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.000 | 325 | 6 | 4 | 130°C | A - 1.000 in. |
| -02 (A-B) | | 6.3 | 0.953 | | | | | B - 1.062 in. |
| -03 (A-B) | | 7 | 0.857 | | | | | C - .750 in. |
| -04 (A-B) | | 7.5 | 0.800 | | | | | D - .312 in. max |
| -05 (A-B) | | 8 | 0.750 | | | | | E - .138-32 UNC-2A |
| -06 (A-B) | | 9 | 0.667 | | | | | |
| -07 (A-B) | | 10 | 0.600 | | | | | |
| -08 (A-B) | | 11 | 0.545 | | | | | |
| -09 (A-B) | | 12 | 0.500 | | | | | |
| -10 (A-B) | | 12.6 | 0.476 | | | | | |
| -11 (A-B) | | 13 | 0.462 | | | | | |
| -12 (A-B) | | 15 | 0.400 | | | | | |
| -13 (A-B) | | 16 | 0.375 | | | | | |
| -14 (A-B) | | 18 | 0.333 | | | | | |
| -15 (A-B) | | 20 | 0.300 | | | | | |
| -16 (A-B) | | 22 | 0.272 | | | | | |
| -17 (A-B) | | 24 | 0.250 | | | | | |
| -18 (A-B) | | 26 | 0.230 | | | | | |
| -19 (A-B) | | 28 | 0.214 | | | | | |
| -20 (A-B) | | 30 | 0.200 | | | | | |
| -21 (A-B) | | 33 | 0.182 | | | | | |
| -22 (A-B) | | 36 | 0.167 | | | | | |
| -23 (A-B) | | 39 | 0.154 | | | | | |
| -24 (A-B) | | 43 | 0.140 | | | | | |
| -25 (A-B) | | 47 | 0.128 | | | | | |
| -26 (A-B) | | 51 | 0.118 | | | | | |
| -27 (A-B) | | 56 | 0.107 | | | | | |
| -28 (A-B) | | 62 | 0.097 | | | | | |
| -29 (A-B) | | 68 | 0.088 | | | | | |
| -30 (A-B) | | 75 | 0.080 | | | | | |
| -31 (A-B) | | 82 | 0.073 | | | | | |
| -32 (A-B) | | 91 | 0.066 | | | | | |
| -33 (A-B) | | 100 | 0.060 | | | | | |
| -34 (A-B) | | 110 | 0.055 | | | | | |
| -35 (A-B) | | 115 | 0.052 | | | | | |
| -36 (A-B) | | 120 | 0.050 | | | | | |
| -37 (A-B) | | 130 | 0.046 | | | | | |
| -38 (A-B) | | 150 | 0.040 | | | | | |
| -39 (A-B) | | 180 | 0.033 | | | | | |
| -40 (A-B) | | 200 | 0.030 | 440 | | | | |
| -41 (A-B) | | 220 | 0.027 | 440 | | | | |
| -42 (A-B) | | 240 | 0.025 | 440 | | | | |
| -43 (A-B) | | 270 | 0.022 | 580 | | | | |
| -44 (A-B) | | 300 | 0.020 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/54 | | | | | | | | See figure 101-2 |
| -01 (A-B) | 115, 400 Hz | 6 CT | 1.500 | 325 | 9 | 4 | 130°C | A - 1.000 in. |
| -02 (A-B) | | 6.3 | 1.430 | | | | | B - 1.062 in. |
| -03 (A-B) | | 7 | 1.286 | | | | | C - .750 in. |
| -04 (A-B) | | 7.5 | 1.200 | | | | | D - .312 in. max |
| -05 (A-B) | | 8 | 1.125 | | | | | E - .138-32 UNC-2A |
| -06 (A-B) | | 9 | 1.000 | | | | | |
| -07 (A-B) | | 10 | 0.900 | | | | | |
| -08 (A-B) | | 11 | 0.818 | | | | | |
| -09 (A-B) | | 12 | 0.750 | | | | | |
| -10 (A-B) | | 12.6 | 0.715 | | | | | |
| -11 (A-B) | | 13 | 0.692 | | | | | |
| -12 (A-B) | | 15 | 0.600 | | | | | |
| -13 (A-B) | | 16 | 0.563 | | | | | |
| -14 (A-B) | | 18 | 0.500 | | | | | |
| -15 (A-B) | | 20 | 0.450 | | | | | |
| -16 (A-B) | | 22 | 0.409 | | | | | |
| -17 (A-B) | | 24 | 0.375 | | | | | |
| -18 (A-B) | | 26 | 0.346 | | | | | |
| -19 (A-B) | | 28 | 0.321 | | | | | |
| -20 (A-B) | | 30 | 0.300 | | | | | |
| -21 (A-B) | | 33 | 0.273 | | | | | |
| -22 (A-B) | | 36 | 0.250 | | | | | |
| -23 (A-B) | | 39 | 0.231 | | | | | |
| -24 (A-B) | | 43 | 0.209 | | | | | |
| -25 (A-B) | | 47 | 0.191 | | | | | |
| -26 (A-B) | | 51 | 0.176 | | | | | |
| -27 (A-B) | | 56 | 0.161 | | | | | |
| -28 (A-B) | | 62 | 0.145 | | | | | |
| -29 (A-B) | | 68 | 0.132 | | | | | |
| -30 (A-B) | | 75 | 0.120 | | | | | |
| -31 (A-B) | | 82 | 0.110 | | | | | |
| -32 (A-B) | | 91 | 0.099 | | | | | |
| -33 (A-B) | | 100 | 0.090 | | | | | |
| -34 (A-B) | | 110 | 0.082 | | | | | |
| -35 (A-B) | | 115 | 0.078 | | | | | |
| -36 (A-B) | | 120 | 0.075 | | | | | |
| -37 (A-B) | | 130 | 0.069 | | | | | |
| -38 (A-B) | | 150 | 0.060 | | | | | |
| -39 (A-B) | | 180 | 0.050 | | | | | |
| -40 (A-B) | | 200 | 0.045 | 440 | | | | |
| -41 (A-B) | | 220 | 0.041 | 440 | | | | |
| -42 (A-B) | | 240 | 0.038 | 440 | | | | |
| -43 (A-B) | | 270 | 0.033 | 580 | | | | |
| -44 (A-B) | | 300 | 0.030 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/55 | | | | | | | | See figure 101-2 |
| -01 | 115, 400 Hz | 6 CT | 2.667 | 325 | 16 | 4 | 130°C | A - 1.375 in. |
| -02 | | 6.3 | 2.540 | | | | | B - 1.125 in |
| -03 | | 7 | 2.286 | | | | | C - 1.000 in. |
| -04 | | 7.5 | 2.133 | | | | | D - .312 in. max |
| -05 | | 8 | 2.000 | | | | | E - .164-32 UNC-2A |
| -06 | | 9 | 1.778 | | | | | |
| -07 | | 10 | 1.600 | | | | | |
| -08 | | 11 | 1.455 | | | | | |
| -09 | | 12 | 1.333 | | | | | |
| -10 | | 12.6 | 1.270 | | | | | |
| -11 | | 13 | 1.231 | | | | | |
| -12 | | 15 | 1.067 | | | | | |
| -13 | | 16 | 1.000 | | | | | |
| -14 | | 18 | 0.889 | | | | | |
| -15 | | 20 | 0.800 | | | | | |
| -16 | | 22 | 0.727 | | | | | |
| -17 | | 24 | 0.667 | | | | | |
| -18 | | 26 | 0.615 | | | | | |
| -19 | | 28 | 0.571 | | | | | |
| -20 | | 30 | 0.533 | | | | | |
| -21 | | 33 | 0.485 | | | | | |
| -22 | | 36 | 0.444 | | | | | |
| -23 | | 39 | 0.410 | | | | | |
| -24 | | 43 | 0.372 | | | | | |
| -25 | | 47 | 0.340 | | | | | |
| -26 | | 51 | 0.314 | | | | | |
| -27 | | 56 | 0.286 | | | | | |
| -28 | | 62 | 0.258 | | | | | |
| -29 | | 68 | 0.236 | | | | | |
| -30 | | 75 | 0.213 | | | | | |
| -31 | | 82 | 0.195 | | | | | |
| -32 | | 91 | 0.176 | | | | | |
| -33 | | 100 | 0.160 | | | | | |
| -34 | | 110 | 0.145 | | | | | |
| -35 | | 115 | 0.139 | | | | | |
| -36 | | 120 | 0.133 | | | | | |
| -37 | | 130 | 0.123 | | | | | |
| -38 | | 150 | 0.106 | | | | | |
| -39 | | 180 | 0.089 | | | | | |
| -40 | | 200 | 0.080 | 440 | | | | |
| -41 | | 220 | 0.073 | 440 | | | | |
| -42 | | 240 | 0.067 | 440 | | | | |
| -43 | | 270 | 0.059 | 580 | | | | |
| -44 | | 300 | 0.053 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/56 | | | | | | | | See figure 101-2 |
| -01 | 115, 400 Hz | 6 CT | 4.167 | 325 | 25 | 4 | 130°C | A - 1.375 in. |
| -02 | | 6.3 | 3.968 | | | | | B - 1.375 in. |
| -03 | | 7 | 3.571 | | | | | C - 1.000 in. |
| -04 | | 7.5 | 3.333 | | | | | D - .312 in. max |
| -05 | | 8 | 3.125 | | | | | E - .164-32 UNC-2A |
| -06 | | 9 | 2.778 | | | | | |
| -07 | | 10 | 2.500 | | | | | |
| -08 | | 11 | 2.273 | | | | | |
| -09 | | 12 | 2.083 | | | | | |
| -10 | | 12.6 | 1.984 | | | | | |
| -11 | | 13 | 1.923 | | | | | |
| -12 | | 15 | 1.667 | | | | | |
| -13 | | 16 | 1.563 | | | | | |
| -14 | | 18 | 1.389 | | | | | |
| -15 | | 20 | 1.250 | | | | | |
| -16 | | 22 | 1.136 | | | | | |
| -17 | | 24 | 1.042 | | | | | |
| -18 | | 26 | 0.962 | | | | | |
| -19 | | 28 | 0.893 | | | | | |
| -20 | | 30 | 0.833 | | | | | |
| -21 | | 33 | 0.758 | | | | | |
| -22 | | 36 | 0.694 | | | | | |
| -23 | | 39 | 0.641 | | | | | |
| -24 | | 43 | 0.581 | | | | | |
| -25 | | 47 | 0.532 | | | | | |
| -26 | | 51 | 0.490 | | | | | |
| -27 | | 56 | 0.446 | | | | | |
| -28 | | 62 | 0.403 | | | | | |
| -29 | | 68 | 0.367 | | | | | |
| -30 | | 75 | 0.333 | | | | | |
| -31 | | 82 | 0.305 | | | | | |
| -32 | | 91 | 0.275 | | | | | |
| -33 | | 100 | 0.250 | | | | | |
| -34 | | 110 | 0.227 | | | | | |
| -35 | | 115 | 0.218 | | | | | |
| -36 | | 120 | 0.208 | | | | | |
| -37 | | 130 | 0.192 | | | | | |
| -38 | | 150 | 0.166 | | | | | |
| -39 | | 180 | 0.139 | | | | | |
| -40 | | 200 | 0.125 | 440 | | | | |
| -41 | | 220 | 0.113 | 440 | | | | |
| -42 | | 240 | 0.104 | 440 | | | | |
| -43 | | 270 | 0.093 | 580 | | | | |
| -44 | | 300 | 0.083 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS; POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/57 | | | | | | | | See figure 101-4 |
| -01 | 115, 400 Hz | 6 CT | 8.333 | 325 | 50 | 4 | 130°C | A - 2.000 in. |
| -02 | | 6.3 | 7.937 | | | | | B - 1.500 in. |
| -03 | | 7 | 7.143 | | | | | E - .138-32 UNC-2A |
| -04 | | 7.5 | 6.667 | | | | | |
| -05 | | 8 | 6.250 | | | | | |
| -06 | | 9 | 5.556 | | | | | |
| -07 | | 10 | 5.000 | | | | | |
| -08 | | 11 | 4.545 | | | | | |
| -09 | | 12 | 4.167 | | | | | |
| -10 | | 12.6 | 3.968 | | | | | |
| -11 | | 13 | 3.846 | | | | | |
| -12 | | 15 | 3.333 | | | | | |
| -13 | | 16 | 3.125 | | | | | |
| -14 | | 18 | 2.778 | | | | | |
| -15 | | 20 | 2.500 | | | | | |
| -16 | | 22 | 2.273 | | | | | |
| -17 | | 24 | 2.083 | | | | | |
| -18 | | 26 | 1.923 | | | | | |
| -19 | | 28 | 1.786 | | | | | |
| -20 | | 30 | 1.667 | | | | | |
| -21 | | 33 | 1.515 | | | | | |
| -22 | | 36 | 1.389 | | | | | |
| -23 | | 39 | 1.282 | | | | | |
| -24 | | 43 | 1.163 | | | | | |
| -25 | | 47 | 1.064 | | | | | |
| -26 | | 51 | 0.980 | | | | | |
| -27 | | 56 | 0.893 | | | | | |
| -28 | | 62 | 0.806 | | | | | |
| -29 | | 68 | 0.735 | | | | | |
| -30 | | 75 | 0.667 | | | | | |
| -31 | | 82 | 0.610 | | | | | |
| -32 | | 91 | 0.549 | | | | | |
| -33 | | 100 | 0.500 | | | | | |
| -34 | | 110 | 0.455 | | | | | |
| -35 | | 115 | 0.435 | | | | | |
| -36 | | 120 | 0.417 | | | | | |
| -37 | | 130 | 0.385 | | | | | |
| -38 | | 150 | 0.333 | | | | | |
| -39 | | 180 | 0.278 | | | | | |
| -40 | | 200 | 0.250 | 440 | | | | |
| -41 | | 220 | 0.227 | 440 | | | | |
| -42 | | 240 | 0.208 | 440 | | | | |
| -43 | | 270 | 0.185 | 580 | | | | |
| -44 | | 300 | 0.167 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/58 | | | | | | | | See figure 101-4 |
| -01 | 115, 400 Hz | 10 CT | 7.50 | 325 | 50 | 4 | 130°C | A - 2.000 in. |
| -02 | ↓ | 11 | 6.82 | ↓ | ↓ | ↓ | ↓ | B - 1.750 in. |
| -03 | ↓ | 12 | 6.25 | ↓ | ↓ | ↓ | ↓ | E - .138-32 UNC-2A |
| -04 | ↓ | 12.6 | 5.95 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -05 | ↓ | 13 | 5.77 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -06 | ↓ | 15 | 5.00 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -07 | ↓ | 16 | 4.69 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -08 | ↓ | 18 | 4.17 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -09 | ↓ | 20 | 3.75 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -10 | ↓ | 22 | 3.41 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -11 | ↓ | 24 | 3.13 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -12 | ↓ | 26 | 2.89 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -13 | ↓ | 28 | 2.68 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -14 | ↓ | 30 | 2.50 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -15 | ↓ | 33 | 2.27 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -16 | ↓ | 36 | 2.08 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -17 | ↓ | 39 | 1.92 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -18 | ↓ | 43 | 1.74 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -19 | ↓ | 47 | 1.60 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -20 | ↓ | 51 | 1.47 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -21 | ↓ | 56 | 1.34 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -22 | ↓ | 62 | 1.21 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -23 | ↓ | 68 | 1.10 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -24 | ↓ | 75 | 1.00 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -25 | ↓ | 82 | 1.92 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -26 | ↓ | 91 | 0.82 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -27 | ↓ | 100 | 0.75 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -28 | ↓ | 110 | 0.68 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -29 | ↓ | 115 | 0.65 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -30 | ↓ | 120 | 0.63 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -31 | ↓ | 130 | 0.58 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -32 | ↓ | 150 | 0.50 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -33 | ↓ | 180 | 0.42 | ↓ | ↓ | ↓ | ↓ | ↓ |
| -34 | ↓ | 200 | 0.38 | 440 | ↓ | ↓ | ↓ | ↓ |
| -35 | ↓ | 220 | 0.34 | 440 | ↓ | ↓ | ↓ | ↓ |
| -36 | ↓ | 240 | 0.31 | 440 | ↓ | ↓ | ↓ | ↓ |
| -37 | ↓ | 270 | 0.28 | 580 | ↓ | ↓ | ↓ | ↓ |
| -38 | ↓ | 300 | 0.25 | 580 | ↓ | ↓ | ↓ | ↓ |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/59 | | | | | | | | See figure 101-4 |
| -01 | 115, 400 Hz | 12 CT | 8.33 | 325 | 100 | 4 | 130°C | A - 2.250 in. |
| -02 | | 12.6 | 7.94 | | | | | B - 2.000 in. |
| -03 | | 13 | 7.69 | | | | | E - .138-32 UNC-2A |
| -04 | | 15 | 6.67 | | | | | |
| -05 | | 16 | 6.25 | | | | | |
| -06 | | 18 | 5.56 | | | | | |
| -07 | | 20 | 5.00 | | | | | |
| -08 | | 22 | 4.55 | | | | | |
| -09 | | 24 | 4.17 | | | | | |
| -10 | | 26 | 3.85 | | | | | |
| -11 | | 28 | 3.57 | | | | | |
| -12 | | 30 | 3.33 | | | | | |
| -13 | | 33 | 3.03 | | | | | |
| -14 | | 36 | 2.78 | | | | | |
| -15 | | 39 | 2.56 | | | | | |
| -16 | | 43 | 2.33 | | | | | |
| -17 | | 47 | 2.13 | | | | | |
| -18 | | 51 | 1.96 | | | | | |
| -19 | | 56 | 1.79 | | | | | |
| -20 | | 62 | 1.61 | | | | | |
| -21 | | 68 | 1.47 | | | | | |
| -22 | | 75 | 1.33 | | | | | |
| -23 | | 82 | 1.22 | | | | | |
| -24 | | 91 | 1.10 | | | | | |
| -25 | | 100 | 1.00 | | | | | |
| -26 | | 110 | 0.91 | | | | | |
| -27 | | 115 | 0.87 | | | | | |
| -28 | | 120 | 0.83 | | | | | |
| -29 | | 130 | 0.77 | | | | | |
| -30 | | 150 | 0.67 | | | | | |
| -31 | | 180 | 0.56 | | | | | |
| -32 | | 200 | 0.50 | 440 | | | | |
| -33 | | 220 | 0.45 | 440 | | | | |
| -34 | | 240 | 0.42 | 440 | | | | |
| -35 | | 270 | 0.37 | 580 | | | | |
| -36 | | 300 | 0.33 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/60 | | | | | | | | See figure 101-3 |
| -01 | 115, 400 Hz | 26 CT | 9.62 | 325 | 250 | 4 | 130°C | A - 2.875 in. |
| -02 | | 28 | 8.93 | | | | | B - 2.000 in. |
| -03 | | 30 | 8.33 | | | | | E - .138-32 UNC-2A |
| -04 | | 33 | 7.58 | | | | | (less terminal S) |
| -05 | | 36 | 6.94 | | | | | |
| -06 | | 39 | 6.41 | | | | | |
| -07 | | 43 | 5.81 | | | | | |
| -08 | | 47 | 5.32 | | | | | |
| -09 | | 51 | 4.90 | | | | | |
| -10 | | 56 | 4.46 | | | | | |
| -11 | | 62 | 4.03 | | | | | |
| -12 | | 68 | 3.68 | | | | | |
| -13 | | 75 | 3.33 | | | | | |
| -14 | | 82 | 3.05 | | | | | |
| -15 | | 91 | 2.75 | | | | | |
| -16 | | 100 | 2.50 | | | | | |
| -17 | | 110 | 2.27 | | | | | |
| -18 | | 115 | 2.17 | | | | | |
| -19 | | 120 | 2.08 | | | | | |
| -20 | | 130 | 1.92 | | | | | |
| -21 | | 150 | 1.66 | | | | | |
| -22 | | 180 | 1.39 | | | | | |
| -23 | | 200 | 1.25 | 440 | | | | |
| -24 | | 220 | 1.14 | 440 | | | | |
| -25 | | 240 | 1.04 | 440 | | | | |
| -26 | | 270 | 0.93 | 580 | | | | |
| -27 | | 300 | 0.83 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/61 | | | | | | | | See figure 101-2 |
| -01 | 115, 400 Hz | 6 CT | 2.667 | 325 | 16 | 4 | 130°C | A - 1.375 in. |
| -02 | | 6.3 | 2.540 | | | | | B - 1.125 in. |
| -03 | | 7 | 2.286 | | | | | E - .164-32 UNC-2A |
| -04 | | 7.5 | 2.133 | | | | | |
| -05 | | 8 | 2.000 | | | | | |
| -06 | | 9 | 1.778 | | | | | |
| -07 | | 10 | 1.600 | | | | | |
| -08 | | 11 | 1.455 | | | | | |
| -09 | | 12 | 1.333 | | | | | |
| -10 | | 12.6 | 1.270 | | | | | |
| -11 | | 13 | 1.231 | | | | | |
| -12 | | 15 | 1.067 | | | | | |
| -13 | | 16 | 1.000 | | | | | |
| -14 | | 18 | 0.889 | | | | | |
| -15 | | 20 | 0.800 | | | | | |
| -16 | | 22 | 0.727 | | | | | |
| -17 | | 24 | 0.667 | | | | | |
| -18 | | 26 | 0.615 | | | | | |
| -19 | | 28 | 0.571 | | | | | |
| -20 | | 30 | 0.533 | | | | | |
| -21 | | 33 | 0.485 | | | | | |
| -22 | | 36 | 0.444 | | | | | |
| -23 | | 39 | 0.410 | | | | | |
| -24 | | 43 | 0.372 | | | | | |
| -25 | | 47 | 0.340 | | | | | |
| -26 | | 51 | 0.314 | | | | | |
| -27 | | 56 | 0.286 | | | | | |
| -28 | | 62 | 0.258 | | | | | |
| -29 | | 68 | 0.236 | | | | | |
| -30 | | 75 | 0.213 | | | | | |
| -31 | | 82 | 0.195 | | | | | |
| -32 | | 91 | 0.176 | | | | | |
| -33 | | 100 | 0.160 | | | | | |
| -34 | | 110 | 0.145 | | | | | |
| -35 | | 115 | 0.139 | | | | | |
| -36 | | 120 | 0.133 | | | | | |
| -37 | | 130 | 0.123 | | | | | |
| -38 | | 150 | 0.106 | | | | | |
| -39 | | 180 | 0.089 | | | | | |
| -40 | | 200 | 0.080 | 440 | | | | |
| -41 | | 220 | 0.073 | 440 | | | | |
| -42 | | 240 | 0.067 | 440 | | | | |
| -43 | | 270 | 0.059 | 580 | | | | |
| -44 | | 300 | 0.053 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/62 | | | | | | | | See figure 101-2 |
| -01 | 115, 400 Hz | 6 CT | 4.167 | 325 | 25 | 4 | 130°C | A - 1.375 in. |
| -02 | | 6.3 | 3.968 | | | | | B - 1.375 in. |
| -03 | | 7 | 3.571 | | | | | E - .164-32 UNC-2A |
| -04 | | 7.5 | 3.333 | | | | | |
| -05 | | 8 | 3.125 | | | | | |
| -06 | | 9 | 2.778 | | | | | |
| -07 | | 10 | 2.500 | | | | | |
| -08 | | 11 | 2.273 | | | | | |
| -09 | | 12 | 2.083 | | | | | |
| -10 | | 12.6 | 1.984 | | | | | |
| -11 | | 13 | 1.923 | | | | | |
| -12 | | 15 | 1.667 | | | | | |
| -13 | | 16 | 1.563 | | | | | |
| -14 | | 18 | 1.389 | | | | | |
| -15 | | 20 | 1.250 | | | | | |
| -16 | | 22 | 1.136 | | | | | |
| -17 | | 24 | 1.042 | | | | | |
| -18 | | 26 | 0.962 | | | | | |
| -19 | | 28 | 0.893 | | | | | |
| -20 | | 30 | 0.833 | | | | | |
| -21 | | 33 | 0.758 | | | | | |
| -22 | | 36 | 0.694 | | | | | |
| -23 | | 39 | 0.641 | | | | | |
| -24 | | 43 | 0.581 | | | | | |
| -25 | | 47 | 0.532 | | | | | |
| -26 | | 51 | 0.490 | | | | | |
| -27 | | 56 | 0.446 | | | | | |
| -28 | | 62 | 0.403 | | | | | |
| -29 | | 68 | 0.367 | | | | | |
| -30 | | 75 | 0.333 | | | | | |
| -31 | | 82 | 0.305 | | | | | |
| -32 | | 91 | 0.275 | | | | | |
| -33 | | 100 | 0.250 | | | | | |
| -34 | | 110 | 0.227 | | | | | |
| -35 | | 115 | 0.218 | | | | | |
| -36 | | 120 | 0.208 | | | | | |
| -37 | | 130 | 0.192 | | | | | |
| -38 | | 150 | 0.166 | | | | | |
| -39 | | 180 | 0.139 | | | | | |
| -40 | | 200 | 0.125 | 440 | | | | |
| -41 | | 220 | 0.113 | 440 | | | | |
| -42 | | 240 | 0.104 | 440 | | | | |
| -43 | | 270 | 0.093 | 580 | | | | |
| -44 | | 300 | 0.083 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/63 | | | | | | | | |
| -01 | 115, 400 Hz | 6 CT | 8.333 | 325 | 50 | 4 | 130°C | See figure 101-4 |
| -02 | | 6.3 | 7.937 | | | | | A - 2.000 in. |
| -03 | | 7 | 7.143 | | | | | B - 1.500 in. |
| -04 | | 7.5 | 6.667 | | | | | |
| -05 | | 8 | 6.250 | | | | | |
| -06 | | 9 | 5.556 | | | | | |
| -07 | | 10 | 5.000 | | | | | |
| -08 | | 11 | 4.545 | | | | | |
| -09 | | 12 | 4.167 | | | | | |
| -10 | | 12.6 | 3.968 | | | | | |
| -11 | | 13 | 3.846 | | | | | |
| -12 | | 15 | 3.333 | | | | | |
| -13 | | 16 | 3.125 | | | | | |
| -14 | | 18 | 2.778 | | | | | |
| -15 | | 20 | 2.500 | | | | | |
| -16 | | 22 | 2.273 | | | | | |
| -17 | | 24 | 2.083 | | | | | |
| -18 | | 26 | 1.923 | | | | | |
| -19 | | 28 | 1.786 | | | | | |
| -20 | | 30 | 1.667 | | | | | |
| -21 | | 33 | 1.515 | | | | | |
| -22 | | 36 | 1.389 | | | | | |
| -23 | | 39 | 1.282 | | | | | |
| -24 | | 43 | 1.163 | | | | | |
| -25 | | 47 | 1.064 | | | | | |
| -26 | | 51 | 0.980 | | | | | |
| -27 | | 56 | 0.893 | | | | | |
| -28 | | 62 | 0.806 | | | | | |
| -29 | | 68 | 0.735 | | | | | |
| -30 | | 75 | 0.667 | | | | | |
| -31 | | 82 | 0.610 | | | | | |
| -32 | | 91 | 0.549 | | | | | |
| -33 | | 100 | 0.500 | | | | | |
| -34 | | 110 | 0.455 | | | | | |
| -35 | | 115 | 0.435 | | | | | |
| -36 | | 120 | 0.417 | | | | | |
| -37 | | 130 | 0.385 | | | | | |
| -38 | | 150 | 0.333 | | | | | |
| -39 | | 180 | 0.278 | | | | | |
| -40 | | 200 | 0.250 | 440 | | | | |
| -41 | | 220 | 0.227 | 440 | | | | |
| -42 | | 240 | 0.208 | 440 | | | | |
| -43 | | 270 | 0.185 | 580 | | | | |
| -44 | | 300 | 0.167 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/64 | | | | | | | | See figure 101-4 |
| -01 | 115, 400 Hz | 10 CT | 7.50 | 325 | 75 | 4 | 130°C | A - 2.000 in. |
| -02 | | 11 | 6.82 | | | | | B - 1.750 in. |
| -03 | | 12 | 6.25 | | | | | |
| -04 | | 12.6 | 5.95 | | | | | |
| -05 | | 13 | 5.77 | | | | | |
| -06 | | 15 | 5.00 | | | | | |
| -07 | | 16 | 4.69 | | | | | |
| -08 | | 18 | 4.17 | | | | | |
| -09 | | 20 | 3.75 | | | | | |
| -10 | | 22 | 3.41 | | | | | |
| -11 | | 24 | 3.13 | | | | | |
| -12 | | 26 | 2.89 | | | | | |
| -13 | | 28 | 2.68 | | | | | |
| -14 | | 30 | 2.50 | | | | | |
| -15 | | 33 | 2.27 | | | | | |
| -16 | | 36 | 2.08 | | | | | |
| -17 | | 39 | 1.92 | | | | | |
| -18 | | 43 | 1.74 | | | | | |
| -19 | | 47 | 1.60 | | | | | |
| -20 | | 51 | 1.47 | | | | | |
| -21 | | 56 | 1.34 | | | | | |
| -22 | | 62 | 1.21 | | | | | |
| -23 | | 68 | 1.10 | | | | | |
| -24 | | 75 | 1.00 | | | | | |
| -25 | | 82 | 0.92 | | | | | |
| -26 | | 91 | 0.82 | | | | | |
| -27 | | 100 | 0.75 | | | | | |
| -28 | | 110 | 0.68 | | | | | |
| -29 | | 115 | 0.65 | | | | | |
| -30 | | 120 | 0.63 | | | | | |
| -31 | | 130 | 0.58 | | | | | |
| -32 | | 150 | 0.50 | | | | | |
| -33 | | 180 | 0.42 | | | | | |
| -34 | | 200 | 0.38 | 440 | | | | |
| -35 | | 220 | 0.34 | 440 | | | | |
| -36 | | 240 | 0.31 | 440 | | | | |
| -37 | | 270 | 0.28 | 580 | | | | |
| -38 | | 300 | 0.25 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/65 | | | | | | | | See figure 101-4 |
| -01 | 115, 400 Hz | 12 CT | 8.33 | 325 | 100 | 4 | 130°C | A - 2.250 in. |
| -02 | | 12.6 | 7.94 | | | | | B - 2.000 in. |
| -03 | | 13 | 7.69 | | | | | |
| -04 | | 15 | 6.67 | | | | | |
| -05 | | 16 | 6.25 | | | | | |
| -06 | | 18 | 5.56 | | | | | |
| -07 | | 20 | 5.00 | | | | | |
| -08 | | 22 | 4.55 | | | | | |
| -09 | | 24 | 4.17 | | | | | |
| -10 | | 26 | 3.85 | | | | | |
| -11 | | 28 | 3.57 | | | | | |
| -12 | | 30 | 3.33 | | | | | |
| -13 | | 33 | 3.03 | | | | | |
| -14 | | 36 | 2.78 | | | | | |
| -15 | | 39 | 2.56 | | | | | |
| -16 | | 43 | 2.33 | | | | | |
| -17 | | 47 | 2.13 | | | | | |
| -18 | | 51 | 1.96 | | | | | |
| -19 | | 56 | 1.79 | | | | | |
| -20 | | 62 | 1.61 | | | | | |
| -21 | | 68 | 1.47 | | | | | |
| -22 | | 75 | 1.33 | | | | | |
| -23 | | 82 | 1.22 | | | | | |
| -24 | | 91 | 1.10 | | | | | |
| -25 | | 100 | 1.00 | | | | | |
| -26 | | 110 | 0.91 | | | | | |
| -27 | | 115 | 0.87 | | | | | |
| -28 | | 120 | 0.83 | | | | | |
| -29 | | 130 | 0.77 | | | | | |
| -30 | | 150 | 0.67 | | | | | |
| -31 | | 180 | 0.56 | | | | | |
| -32 | | 200 | 0.50 | 440 | | | | |
| -33 | | 220 | 0.45 | 440 | | | | |
| -34 | | 240 | 0.42 | 440 | | | | |
| -35 | | 270 | 0.37 | 580 | | | | |
| -36 | | 300 | 0.33 | 580 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/66 | | | | | | | | See figure 101-3 |
| -01 | 115, 400 Hz | 26 CT | 9.62 | 325 | 250 | 4 | 130°C | A - 2.875 in. |
| -02 | | 28 | 8.93 | | | | | B - 2.000 in. |
| -03 | | 30 | 8.33 | | | | | |
| -04 | | 33 | 7.58 | | | | | |
| -05 | | 36 | 6.94 | | | | | |
| -06 | | 39 | 6.41 | | | | | |
| -07 | | 43 | 5.81 | | | | | |
| -08 | | 47 | 5.32 | | | | | |
| -09 | | 51 | 4.90 | | | | | |
| -10 | | 56 | 4.46 | | | | | |
| -11 | | 62 | 4.03 | | | | | |
| -12 | | 68 | 3.68 | | | | | |
| -13 | | 75 | 3.33 | | | | | |
| -14 | | 82 | 3.05 | | | | | |
| -15 | | 91 | 2.75 | | | | | |
| -16 | | 100 | 2.50 | | | | | |
| -17 | | 110 | 2.27 | | | | | |
| -18 | | 115 | 2.17 | | | | | |
| -19 | | 120 | 2.08 | | | | | |
| -20 | | 130 | 1.92 | | | | | |
| -21 | | 150 | 1.66 | | | | | |
| -22 | | 180 | 1.39 | | | | | |
| -23 | | 200 | 1.25 | 440 | | | | |
| -24 | | 220 | 1.14 | 440 | | | | |
| -25 | | 240 | 1.04 | 440 | | | | |
| -26 | | 270 | 0.93 | 580 | | | | |
| -27 | | 300 | 0.83 | 580 | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/73 -01 | 115 400 Hz (1-2) | 3 (3-4) 3 (5-6) | 6 mA (3-4) 6 mA (6-6) | 185 | .036 SH | 4 | 105°C | See MIL-T-27/73 |
| MIL-T-27/77 -01 | 115 400 Hz (1-2) | 115 (3-4) | .45 (3-4) | 326 (1-2) 326 (3-4) | 56.9 | 5 | 170°C | See MIL-T-27/77 |
| MIL-T-27/80 -01 | 115 400 Hz (1-2) | 12 (3-4) 46 CT (5-7) | .3 (3-4) 1 (5-7) | 525 (1-2) 525 (3-4)(5-7) | 49.6 | 5 | 105°C | See MIL-T-27/80 |
| MIL-T-27/82 -01 | 26 400 Hz (1-2) | 3.8 CT (3-5) | .002 | 50 (1-2) 50 (1-2) | .008 | 5 | 155°C | See MIL-T-27/82 |
| MIL-T-27/100 -01 | 115 400 Hz (1-2) | 92 (3-4) 5 (5-6) | 20 mA (3-4) 5 (5-6) | 175(1-2) (5-6) 350 (3-4) | 27 | 5 | 155°C | See MIL-T-27/100 |
| MIL-T-27/104 -01 | 105/115/125 60 Hz (1-2-3-4) | 2.5 (5-6) | 3 | 175 (1-4) 1000 (5-6) | 7.5 | 4 | 105°C | See MIL-T-27/104 |
| MIL-T-27/105 -01 | 105/115/125 60 Hz (1-2-3-4) | 2.5 (5-6) | 10 | 175 (1-4) 1000 (5-6) | 25 | 4 | 105°C | See MIL-T-27/105 |
| MIL-T-27/106 -01 | 105/115/125 60 Hz (1-2-3-4) | 5 (5-6) | 3 | 175 (1-4) 1000 (5-6) | 15 | 4 | 105°C | See MIL-T-27/106 |
| MIL-T-27/107 -01 | 105/115/125 60 Hz (1-2-3-4) | 6.3 (5-6) | 5 | 175 (1-4) 1000 (5-6) | 18 | 4 | 105°C | See MIL-T-27/107 |
| MIL-T-27/108 -01 | 105/115/125 60 Hz (1-2-3-4) | 6.3 (5-6) | 10 | 175 (1-4) 1000 (5-6) | 63 | 4 | 105°C | See MIL-T-27/108 |
| MIL-T-27/109 -01 | 105/115/125 60 Hz (1-2-3-4) | 6.3 (5-6) | 20 | 175 (1-4) 1000 (5-6) | 126 | 4 | 105°C | See MIL-T-27/109 |
| MIL-T-27/110 -01 | 105/115/125 60 Hz (1-2-3-4) | 5 (5-6) | 10 | 175 (1-4) 6300 (5-6) | 50 | 4 | 105°C | See MIL-T-27/110 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/118 -01 | 115 400 Hz (1-2) | 40 CT (3-5) | .078 | 165 (1-2) 57 (3-5) | 3.12 | 5 | 130°C | See MIL-T-27/118 |
| MIL-T-27/127 -01 | 100 60 Hz (1-2) | 42.4 CT (3-5) 7.78 (6-7) | 100 mA (3-5) .225 (6-7) | 175 (1-2) 37 (3-5) 14 (6-7) | 1.75 | 5 | 130°C | See MIL-T-27/127 |
| MIL-T-27/131 -01 | 108/120/132 400 Hz (1-2-3-4) | 66 CT (5-7) | 1.8 | 350 (1-4) 350 (5-7) | 123 | 4 | 170°C | See MIL-T-27/131 |
| MIL-T-27/134 -01 | 120 400 Hz (1-2) | 28.6 (3-4) | .385 | 250 | 12 | 5 | 155°C | See MIL-T-27/134 |
| MIL-T-27/140 -01 | 115 60 Hz (1-2) | 50 (3-4) | 2 | 357 | 100 | 4 | 130°C | See MIL-T-27/140 |
| MIL-T-27/153 -01 | 115,220 50/60 Hz (1-2-3) | 6.3 CT (4-6) | 2 | 535 (1-3) 1070 (4-6) | 12.6 | 4 | 130°C | See MIL-T-27/153 |
| MIL-T-27/155 -01 | 115 50/60 Hz (1-2) | 20 CT (3-5) | .6 | 535 | 12 | 4 | 130°C | See MIL-T-27/155 |
| MIL-T-27/177 -01 | 26 400 Hz (1-2) | 18 (3-4) | 1 | 161 (1-2) 161 (3-4) | 18 | 4 | 105°C | See MIL-T-27/177 |
| MIL-T-27/180 -01 | 57.5/99.7/115 400 Hz (1-2-3-4) | 12.6 (5-6) 12.6 CT (7-9) | 2 (5-6) 2 (7-9) | 535 * | 51 | 4 | 130°C | See MIL-T-27/180 |
| MIL-T-27/181 -01 | 115 60 Hz (1-2) | 6.3 CT (3-5) 450 CT (6-8) | 30 mA (6-8) 2 (3-5) | 535 | 26.1 | 4 | 130°C | See MIL-T-27/181 |
| MIL-T-27/210 -01 | 250 400 Hz (1-2) | 1 (4-5) | .5 | 250 | .5 SH | 5 | 170°C | See MIL-T-27/210 |
| MIL-T-27/211 -01 | 250 400 Hz (1-2) | 30 (4-5) | .5 | 250 | 15 SH | 5 | 170°C | See MIL-T-27/211 |
| MIL-T-27/212 -01 | 250 400 Hz (1-2) | 250 (4-5) 25 (6-7) | .2 (4-5) .01 (6-7) | 250 | 50 SH | 5 | 170°C | See MIL-T-27/212 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary voltage (volts rms) | Secondary voltage (volts rms) | Secondary current (amperes rms) | Maximum working voltage (volts) | VA rating | Grade | Maximum operating temp. | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/220 -01 | 107 400 Hz (1-2) | 49 CT (3-5) 6.35 (6-7) | .01 (3-5) 15.9 (6-7) | 120 | 100 | 5 | 170°C | See MIL-T-27/220 |
| MIL-T-27/221 -01 | 107 400 Hz (1-2) | 49 CT (3-5) 5.3 (6-7) 10 (7-8) | .01 (3-5) 1.63 (6-7) .60 (7-8) | 120 | 37 | 5 | 170°C | See MIL-T-27/221 |
| MIL-T-27/222 -01 | 107 400 Hz (1-2) | 49 CT (3-5) 5.68 (6-7) | .01 (3-5) 27.8 (6-7) | 120 | 160 | 5 | 170°C | See MIL-T-27/222 |
| MIL-T-27/223 -01 | 107 400 Hz (1-2) | 49 CT (3-5) 5.57 (6-7) | .01 (3-5) 22.5 (6-7) | 120 | 125 | 5 | 170°C | See MIL-T-27/223 |
| -02 | 107 400 Hz (1-2) | 49 CT (3-5) 5.55 (6-7) 8.45 (7-8) | .01 (3-5) 2.86 (6-7) 16.4 (7-8) | 120 | 130 | 5 | 170°C | |
| MIL-T-27/224 -01 | 107 400 Hz (1-2) | 49 CT (3-5) 5.76 (6-7) 8.24 (7-8) | .01 (3-5) 30 (6-7) 2.14 (7-8) | 120 | 214 | 5 | 170°C | See MIL-T-27/224 |
| MIL-T-27/225 -01 | 115 400 Hz (1-2) | 37 CT (3-5) | .015 | 120 | .6 | 5 | 170°C | See MIL-T-27/225 |
| MIL-T-27/227 -01 | 115 400 Hz (1-2) | 13.1 (3-4) 11.7 (5-6) | .1 (3-4) .05 (5-6) | 115 | 1.9 | 5 | 170°C | See MIL-T-27/227 |
| MIL-T-27/254 -01 | 115 60 Hz (1-2) | 9.7 (3-4) 9.7 (5-6) | 2.6 (3-4) 1.7 (5-6) | 200 (1-2) 50 (3-6) | 42 | 4 | 130°C | See MIL-T-27/254 |
| MIL-T-27/256 -01 | 115 400 Hz (1-3) | 129.5 (4-5) | 3.2 | 130 | 350 | 5 | 170°C | See MIL-T-27/256 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


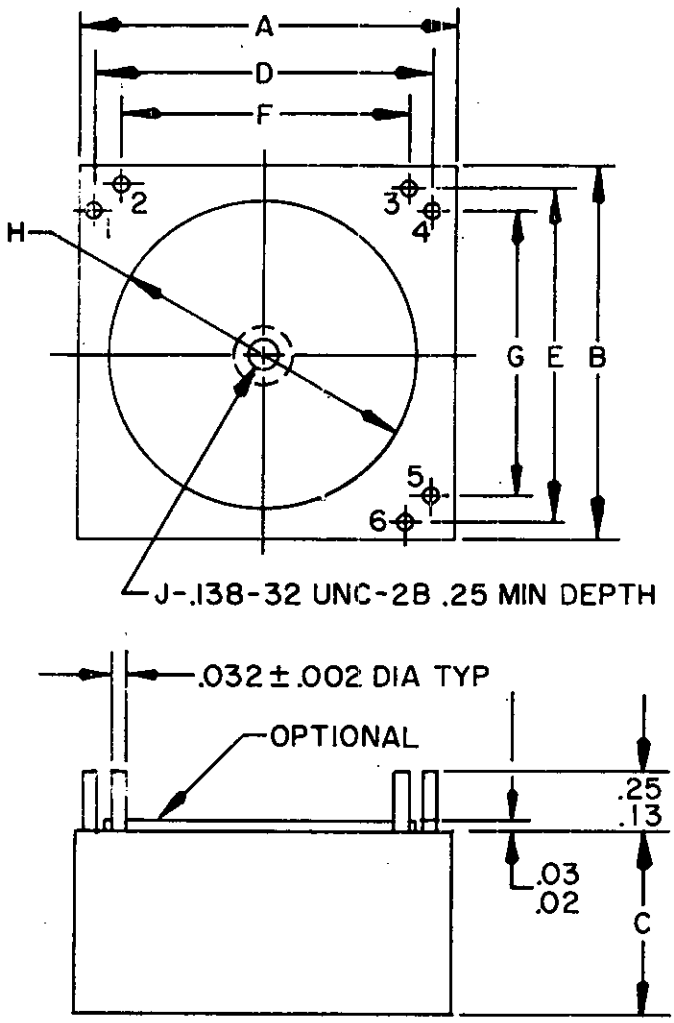



FIGURE 101-1. Outline configuration for MIL-T-27/37 thru 27/47



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers

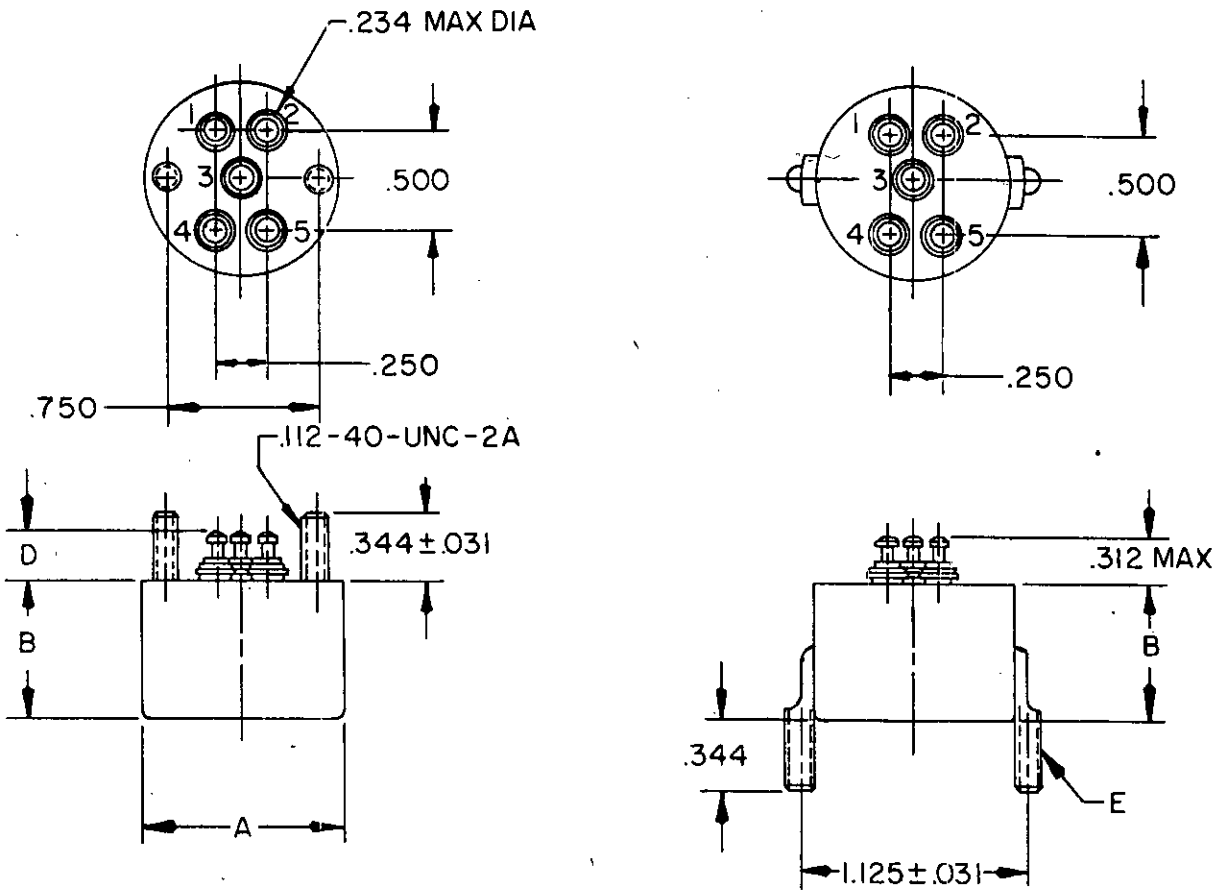


Configuration A

Configuration B

FIGURE 101-2. Outline configurations for MIL-T-27/48 thru /56, /61 and /62.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers

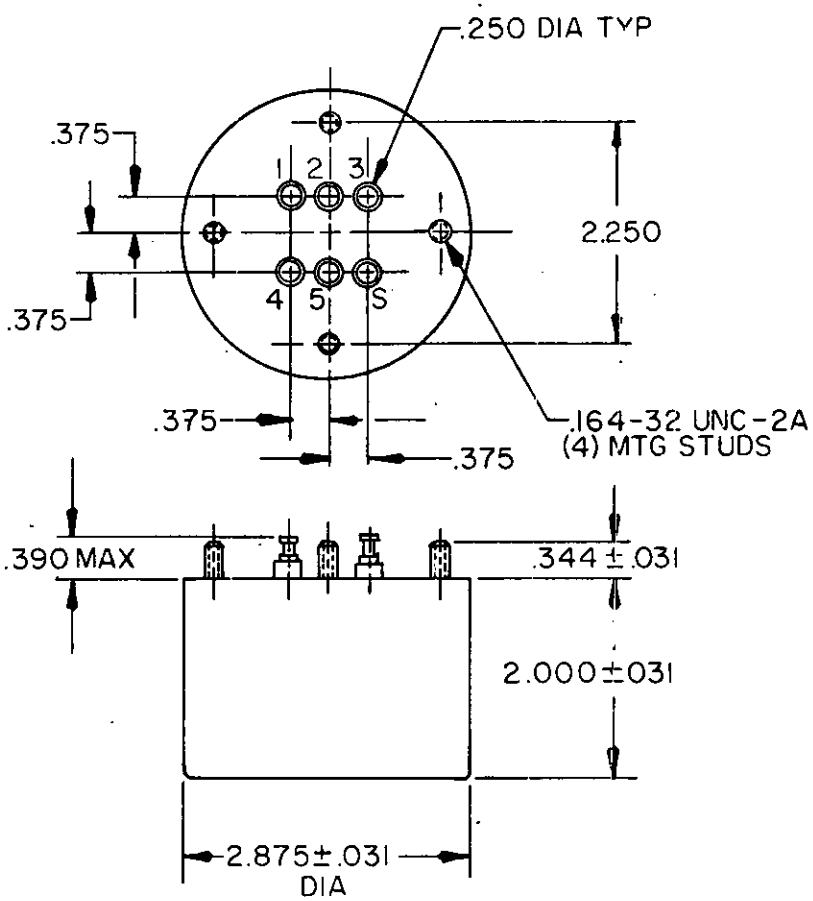



FIGURE 101-3. Outline configuration for MIL-T-27/60 and /66.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers - Continued

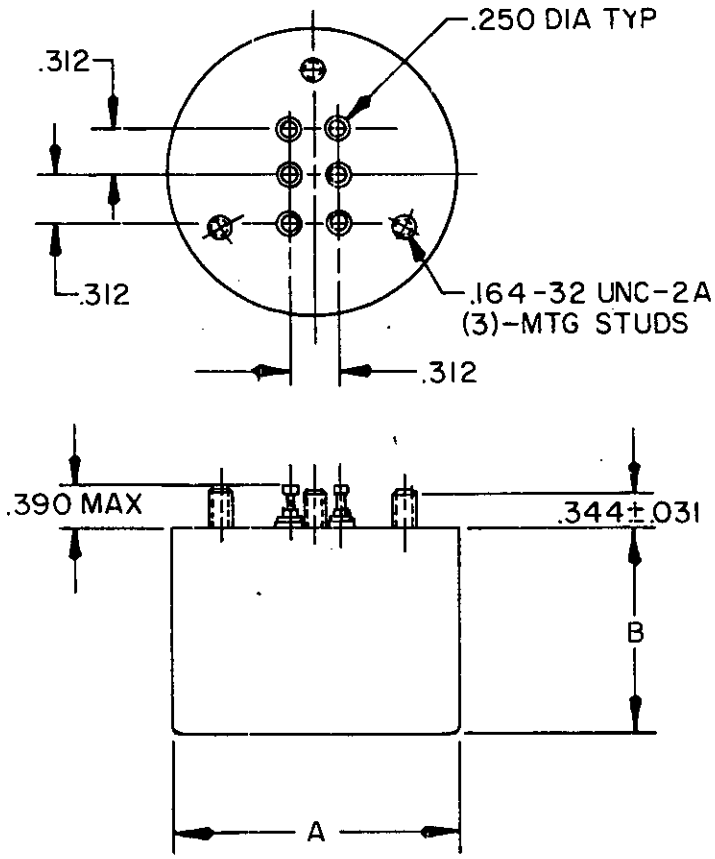




FIGURE 101-4. Outline configuration for MIL-T-27/57 thru /59, /63, /64 and /65.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

## TRANSFORMERS, AUDIO FREQUENCY

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/1 -01, -02 | 4K | 8 | 2W at 1 kHz | +2 dB (over frequency range 250 to 5000 Hz) | 4 | 105°C, 130°C | |
| MIL-T-27/2 -01, -02 | 600 | 8 | 2W at 1 kHz | +2 dB (250 to 5000 Hz) | 4 | 105°C, 130°C | |
| MIL-T-27/67-01 | 10K CT | 10K CT | 500 at 60 Hz | +1 dB (60 Hz to 10 kHz) | 5 | 130°C | |
| MIL-T-27/67-02 | 10K CT | 600 CT | | | | | |
| MIL-T-27/67-03 | 10K CT | 4 | | | | | |
| MIL-T-27/67-04 | 1.5K CT | 15 | | | | | |
| MIL-T-27/67-05 | 1K CT | 600 CT | | | | | |
| MIL-T-27/67-06 | 1K CT | 4 | | | | | |
| MIL-T-27/67-07 | 600 CT | 600 CT | | | | | |
| MIL-T-27/67-08 | 600 CT | 60 CT | | | | | |
| MIL-T-27/67-09 | 600 CT | 15 | | | | | |
| MIL-T-27/67-10 | 600 CT | 4 | | | | | |
| MIL-T-27/67-11 | 250 CT | 600 CT | | | | | |

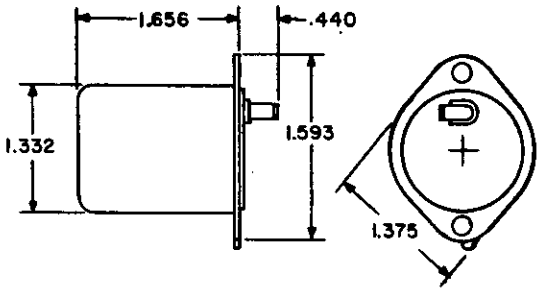

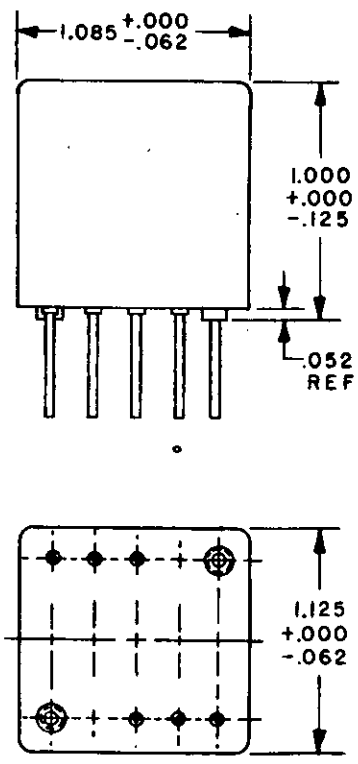





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/68-01 | 10K CT | 10K CT | 500 at 100 Hz | ±1 dB (100 Hz to 8 kHz) | 5 | 130°C | |
| MIL-T-27/68-02 | 10K CT | 600 CT | | ±1 dB (100 Hz to 10 kHz) | | | |
| MIL-T-27/68-03 | 10K CT | 4 | | | | | |
| MIL-T-27/68-04 | 1.5K CT | 15 | | | | | |
| MIL-T-27/68-05 | 1K CT | 600 CT | | | | | |
| MIL-T-27/68-06 | 1K CT | 4 | | | | | |
| MIL-T-27/68-07 | 600 CT | 25K CT | | | | | |
| MIL-T-27/68-08 | 600 CT | 600 CT | | | | | |
| MIL-T-27/68-09 | 600 CT | 60 | | | | | |
| MIL-T-27/68-10 | 600 CT | 15 | | | | | |
| MIL-T-27/68-11 | 600 CT | 4 | | | | | |
| MIL-T-27/68-12 | 250 CT | 600 CT | | | | | |

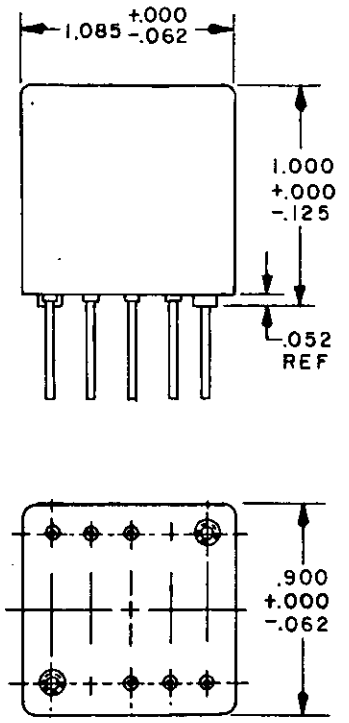







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/69-01 | 25K CT | 1K CT | 500 at 200 Hz | ±1 dB (200 Hz to 20 kHz) | 5 | 130°C | |
| MIL-T-27/69-02 | 10K CT | 10K CT | | | | | |
| MIL-T-27/69-03 | 10K CT | 1.5K CT | | | | | |
| MIL-T-27/69-04 | 10K CT | 600 CT | | | | | |
| MIL-T-27/69-05 | 10K CT | 4 | | | | | |
| MIL-T-27/69-06 | 4K CT | 10K CT | | | | | |
| MIL-T-27/69-07 | 1.5K CT | 15 | | | | | |
| MIL-T-27/69-08 | 1K CT | 600 CT | | | | | |
| MIL-T-27/69-09 | 1K CT | 4 | | | | | |
| MIL-T-27/69-10 | 600 CT | 25K CT | | | | | |
| MIL-T-27/69-11 | 600 CT | 600 CT | | | | | |
| MIL-T-27/69-12 | 600 CT | 60 | | | | | |
| MIL-T-27/69-13 | 600 CT | 15 | | | | | |
| MIL-T-27/69-14 | 600 CT | 4 | | | | | |
| MIL-T-27/69-15 | 250 CT | 600 CT | | | | | |
| MIL-T-27/70-01 | 100K CT | 1K CT | 60 at 200 Hz | ±1 dB (200 Hz to 15 kHz) | | | |
| MIL-T-27/70-02 | 25K CT | 1K CT | 150 at 200 Hz | ±1 dB (200 Hz to 50 kHz) | | | |
| MIL-T-27/70-03 | 10K CT | 10K CT | | | | | |
| MIL-T-27/70-04 | 10K CT | 1.5K CT | | | | | |
| MIL-T-27/70-05 | 10K CT | 600 CT | | | | | |
| MIL-T-27/70-06 | 4K CT | 10K CT | | | | | |
| MIL-T-27/70-07 | 1K CT | 600 CT | | | | | |
| MIL-T-27/70-08 | 1K CT | 4 | | | | | |
| MIL-T-27/70-09 | 600 CT | 25K CT | | | | | |
| MIL-T-27/70-10 | 600 CT | 600 CT | | | | | |
| MIL-T-27/70-11 | 600 CT | 60 | | | | | |
| MIL-T-27/70-12 | 600 CT | 4 | | | | | |

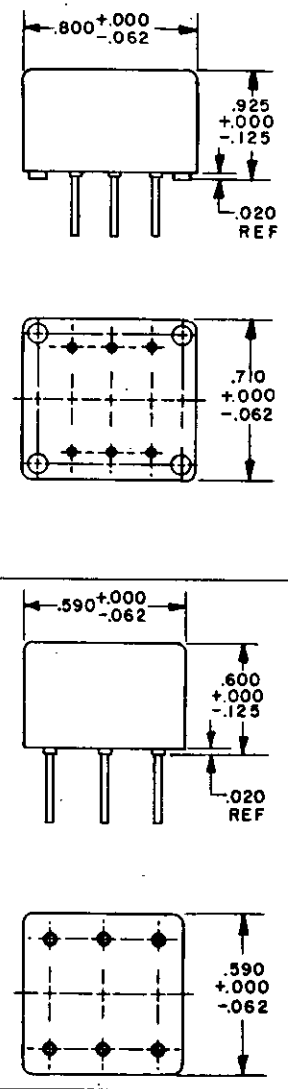







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.





| Part no. and dasn no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/71-01 | 100K CT | 1K CT | 10 at 300 Hz | ±2 dB (300 Hz to 20 kHz) | 5 | 130°C | |
| MIL-T-27/71-02 | 25K CT | 1K CT | 10 at 300 Hz | ±2 dB (300 Hz to 20 kHz) | | | |
| MIL-T-27/71-03 | 10K CT | 10K CT | 30 at 300 Hz | ±1 dB (300 Hz to 100 kHz) | | | |
| MIL-T-27/71-04 | 10K CT | 1.5K CT | | | | | |
| MIL-T-27/71-05 | 10K CT | 600 CT | | | | | |
| MIL-T-27/71-06 | 4K CT | 10K CT | | | | | |
| MIL-T-27/71-07 | 1K CT | 600 CT | | | | | |
| MIL-T-27/71-08 | 1K CT | 4 | | | | | |
| MIL-T-27/71-09 | 600 CT | 25K CT | | | | | |
| MIL-T-27/71-10 | 600 CT | 600 CT | | | | | |
| MIL-T-27/71-11 | 600 CT | 60 | | | | | |
| MIL-T-27/71-12 | 600 CT | 4 | | | | | |
| MIL-T-27/72-01 | 100K CT | 1K CT | 10 at 300 Hz | ±2 dB (300 Hz to 40 kHz) | | | |
| MIL-T-27/72-02 | 25K CT | 1K CT | 50 at 300 Hz | ±2 dB (300 Hz to 100 kHz) | | | |
| MIL-T-27/72-03 | 25K CT | 600 CT | | | | | |
| MIL-T-27/72-04 | 10K CT | 10K CT | | | | | |
| MIL-T-27/72-05 | 10K CT | 1.5K CT | | | | | |
| MIL-T-27/72-06 | 10K CT | 600 CT | | | | | |
| MIL-T-27/72-07 | 1K CT | 600 CT | | | | | |
| MIL-T-27/72-08 | 600 CT | 600 CT | | | | | |
| MIL-T-27/72-09 | 600 CT | 60 CT | | | | | |

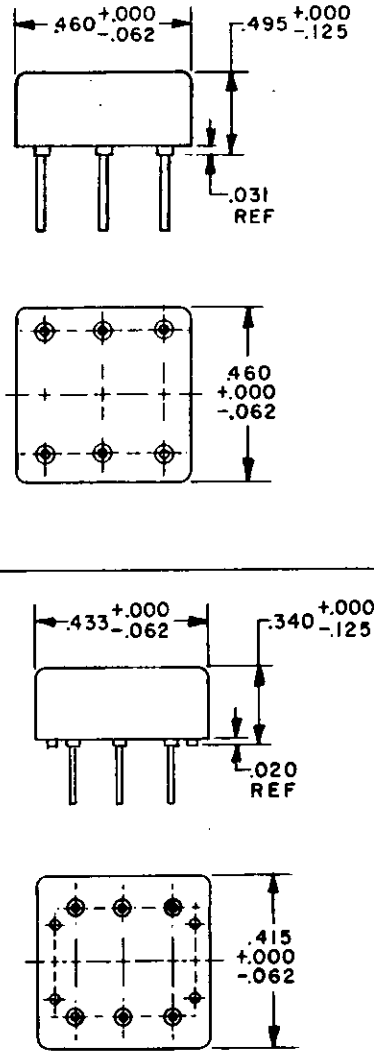






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

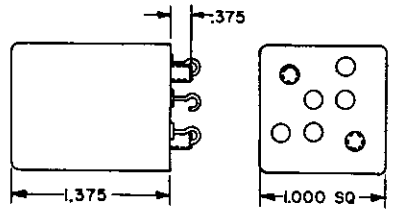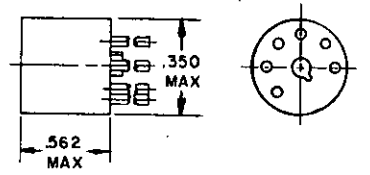

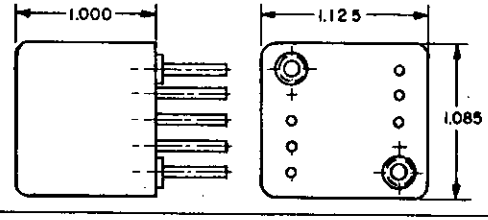
| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/74-01 | 100K | 50K CT | 10 | ±2 dB (100 Hz to 10 kHz) | 4 | 105°C |  |
| MIL-T-27/76-01 1/ | 200K CT | 1K CT | 25 to 1 kHz | ±3 dB (300 Hz to 20 kHz) | 5 | 105°C |  |
| MIL-T-27/76-02 | 20K CT<br>30K CT | 800 CT<br>1.2K CT | 50 at 1 kHz | | | | |
| MIL-T-27/76-03 | 10K CT<br>12K CT | 10K CT<br>12K CT | 100 at 1 kHz | | | | |
| MIL-T-27/76-04 | 10K<br>12K | 2K<br>2.5K | | | | | |
| MIL-T-27/76-05 | 10K CT<br>12K CT | 2K split<br>2.4K split | | | | | |
| MIL-T-27/76-06 | 10K CT<br>12K CT | 1.5K CT<br>1.8K CT | | | | | |
| MIL-T-27/76-07 | 1K CT<br>1200 CT | 50<br>60 | | | | | |
| MIL-T-27/78-01 | 4K CT | 600 CT | .631 | ±2 dB (200 Hz to 15 kHz) | 5 | 105°C |  |
| MIL-T-27/79-01 | 10K CT | 600 CT | 6 W (200 Hz to 10 kHz)<br>.25 W (60 Hz to 200 Hz) | ±1 dB (60 Hz to 10 kHz) | 5 | 130°C |  |

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

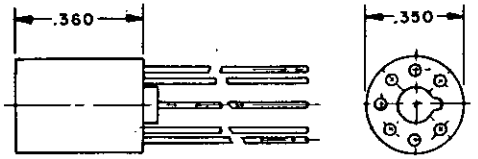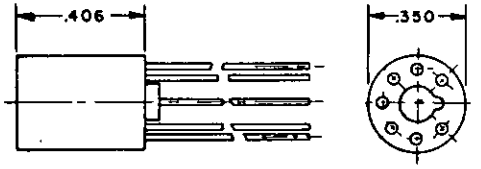
| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/96-01 | 1200 | 3.2 | 100 | ±3 dB (300 Hz to 20 kHz) | 5 | 105°C |   |
| MIL-T-27/97-01 | 2K CT | 8K | 125 | ±3 dB (400 Hz to 100 kHz) | | |   |
| MIL-T-27/103-01 | 10K CT 1/<br>12K CT | 10K CT 1/<br>12K CT | 100 at 1 kHz | ±3 dB (400 Hz to 100 kHz) | | |   |
| MIL-T-27/103-02 | 20K CT<br>30K CT | 800 CT<br>1.2K CT | 50 at 1 kHz | | | | |
| MIL-T-27/103-03 | 10K CT<br>12.5K CT | 2K split<br>2.5K split | 100 at 1 kHz | | | | |
| MIL-T-27/103-04 | 10K CT<br>12K CT | 2K CT<br>2.4K CT | | | | | |
| MIL-T-27/103-05 | 10K CT<br>12.5K CT | 1.2K CT<br>1.5K CT | | | | | |
| MIL-T-27/103-06 | 10K CT<br>12K CT | 500 CT<br>600 CT | | | | | |
| MIL-T-27/103-07 | 2K CT<br>2.5K CT | 8K split<br>10K split | | | | | |
| MIL-T-27/103-08 | 1.5K CT | 600 CT | 500 at 1 kHz | | | | |
| MIL-T-27/103-09 | 1K CT<br>1.2K CT | 50 CT<br>60 CT | | | | | |
| MIL-T-27/103-10 | 500 CT | 600 CT | | | | | |
| MIL-T-27/103-11 | 500 CT<br>600 CT | 50 CT<br>60 CT | | | | | |
| MIL-T-27/103-12 | 400 CT<br>500 CT | 400 split<br>500 split | | | | | |
| MIL-T-27/103-13 | 400 CT<br>500 CT | 40 split<br>50 split | | | | | |
| MIL-T-27/103-14 | 300 CT | 600 CT | | | | | |
| MIL-T-27/103-15 | 80 CT<br>100 CT | 32 split<br>40 split | | | | | |


1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/116-01 | 600 | 600 | +18 dBm max<br>-400 dBm min | ±.3 dB (300 Hz to 3500 Hz) | 5 | 85°C | |
| MIL-T-27/125-01 | 15 CT | 100K | .001 | ±3 dB (10 kHz to 20 kHz) | 5 | 130°C | |
| MIL-T-27/144-01 | 80 CT | 32 split | 600 at 1 kHz | ±3 dB (300 Hz to 100 kHz) | 5 | 105°C | |
| MIL-T-27/144-02 | 300 CT | 600 | | | | | |
| MIL-T-27/144-03 | 400 CT | 40 split | | | | | |
| MIL-T-27/144-04 | 400 CT | 400 split | | | | | |
| MIL-T-27/144-05 | 400 CT | 4K CT | | | | | |
| MIL-T-27/144-06 | 500 | 50 | | | | | |
| MIL-T-27/144-07 | 500 CT | 600 | | | | | |
| MIL-T-27/144-08 | 600 CT | 600 CT | | | | | |
| MIL-T-27/144-09 | 900 CT | 600 | | | | | |
| MIL-T-27/144-10 | 1K | 50 | | | | | |
| MIL-T-27/144-11 | 1.2K | 3.2 | | | | | |
| MIL-T-27/144-12 | 1.5K CT | 600 | | | | | |
| MIL-T-27/144-13 | 2K CT | 2K split | | | | | |
| MIL-T-27/144-14 | 2K CT | 8K split | 125 at 1 kHz | | | | |
| MIL-T-27/144-15 | 10K | 500 CT | | | | | |
| MIL-T-27/144-16 | 10K | 1.2K CT | | | | | |
| MIL-T-27/144-17 | 10K CT | 1.5K CT | | | | | |
| MIL-T-27/144-18 | 10K CT | 2K split | | | | | |
| MIL-T-27/144-19 | 10K CT | 2K CT | | | | | |
| MIL-T-27/144-20 | 10K CT | 10K CT | | | | | |
| MIL-T-27/144-21 | 20K | 800 | 60 at 1 kHz | | | | |
| MIL-T-27/144-22 | 20K CT | 800 CT | 60 at 1 kHz | | | | |

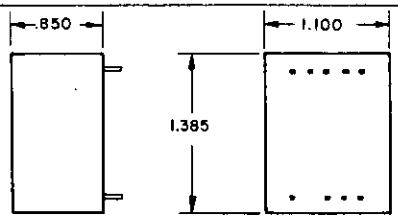

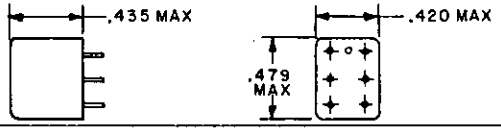








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

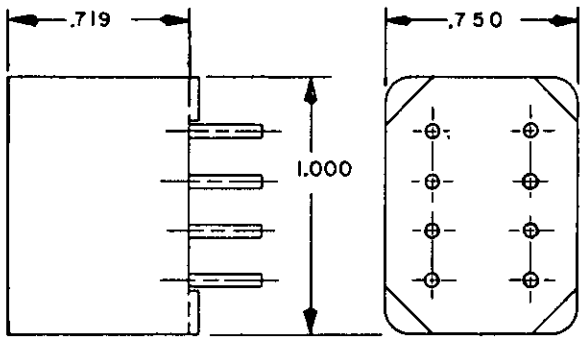
| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/165-01 | 50 CT<br>100 CT | 32 split<br>40 split | 250 at 1 kHz | ±3 dB (200 Hz to 20 kHz) | 5 | 105°C | |
| MIL-T-27/165-02 | 200 | 250K | 10 at 1 kHz | | | | |
| MIL-T-27/165-03 | 400 CT<br>500 CT | 40 split<br>50 split | 250 at 1 kHz | | | | |
| MIL-T-27/165-04 | 400 CT<br>500 CT | 120 split<br>150 split | | | | | |
| MIL-T-27/165-05 | 400 CT<br>500 CT | 400 split<br>500 split | | | | | |
| MIL-T-27/165-06 | 500 CT | 3.2 | | | | | |
| MIL-T-27/165-07 | 600 CT | 600 split | | | | | |
| MIL-T-27/165-08 | 600 split | 10K CT | | | | | |
| MIL-T-27/165-09 | 2K CT<br>4K CT | 8<br>16 | | | | | |
| MIL-T-27/165-10 | 2.5K CT | 2.5K split | | | | | |
| MIL-T-27/165-11 | 10K<br>25K | 200<br>500 | 200 at 1 kHz | | | | |
| MIL-T-27/165-12 | 10K | 2K CT | | | | | |
| MIL-T-27/165-13 | 10K CT<br>12K CT | 10K split<br>12K split | | | | | |
| MIL-T-27/165-14 | 10K | 90K | 100 at 1 kHz | | | | |
| MIL-T-27/165-15 | 20K<br>30K | 800<br>1200 | 200 at 1 kHz | | | | |
| MIL-T-27/165-16 | 30 K | 50 | 200 at 1 kHz | | | | |
| MIL-T-27/165-17 | 50K CT | 600 split | 250 at 1 kHz | | | | |
| MIL-T-27/165-18 | 100K | 60 | 250 at 1 kHz | | | | |






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/166-01 | 82 | 135K | 63 at 1 kHz | ±2 dB (250 Hz to 8000 Hz) | 4 | 105°C | |
| MIL-T-27/166-02 | 50,200 CT, 500 CT | 50K | 3 at 1 kHz | ±2 dB (50 Hz to 10 kHz) | | | |
| MIL-T-27/166-03 | 50,200 CT, 500 CT | 50K CT | 3 at 1 kHz | ±2 dB (50 Hz to 10 kHz) | | | |
| MIL-T-27/166-04 | 500 split | 150 split | 250 at 100 Hz; 1 W at 200 Hz | ±2 dB (100 Hz to 20 kHz) | | | |
| MIL-T-27/166-05 | 500 split | 500 split | 250 at 100 Hz; 1 W at 200 Hz | ±2 dB (100 Hz to 20 kHz) | | | |
| MIL-T-27/166-06 | 600 split | 600 CT | 6.3 at 1 kHz | ±2 dB (50 Hz to 10 kHz) | | | |
| MIL-T-27/166-07 | 600 split | 2K split | 31 at 1 kHz | ±2 dB (50 Hz to 20 kHz) | | | |
| MIL-T-27/166-08 | 600 split | 1M | 10 at 1 kHz | ±4 dB (200 Hz to 3 kHz) | | | |
| MIL-T-27/166-09 | 1.5K CT | 500 split | 100 at 1 kHz | ±2 dB (100 Hz to 10 kHz) | | | |
| MIL-T-27/166-10 | 2K CT<br>4K CT | 8<br>16 | | | | | |
| MIL-T-27/166-11 | 10K CT | 500 split | | | | | |
| MIL-T-27/166-12 | 10K split | 2K split | | | | | |
| MIL-T-27/166-13 | 10K split | 4K split | | | | | |
| MIL-T-27/166-14 | 10K | 1M | 10 at 1 kHz | ±4 dB (200 Hz 3 kHz) | | | |
| MIL-T-27/166-15 | 15K | 60K | 4 at 1 kHz | ±2 dB (50 Hz to 10 kHz) | | | |
| MIL-T-27/166-16 | 15K | 60K | 25 at 1 kHz | ±2 dB (200 Hz to 10 kHz) | | | |
| MIL-T-27/166-17 | 15K | 95K CT | 3 at 1 kHz | ±2 dB (50 Hz to 10 kHz) | | | |
| MIL-T-27/166-18 | 15K | 95K split | 12 at 1 kHz | ±2 dB (200 Hz to 10 kHz) | | | |
| MIL-T-27/166-19 | 20K CT | 600 split | 125 at 1 kHz | ±2 dB (200 Hz to 10 kHz) | | | |

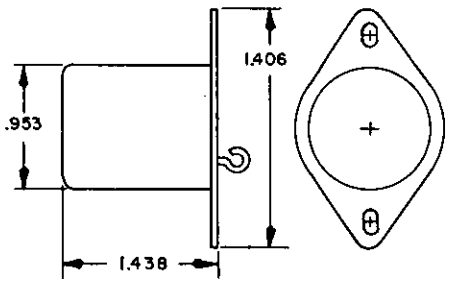




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/167-01 1/ | 10K<br>25K | 200<br>500 | 100 at 1 kHz | ±3 dB (300 Hz to 20 kHz) | 5 | 105°C | |
| MIL-T-27/167-02 | 50<br>200 | 62.5K<br>250K | 5 at 1 kHz | | | | |
| MIL-T-27/167-03 | 100 split | 100 split | 100 at 1 kHz | | | | |
| MIL-T-27/167-04 | 500 split<br>600 split | 12.8 split<br>16 split | | | | | |
| MIL-T-27/167-05 | 500<br>600 | 50<br>60 | | | | | |
| MIL-T-27/167-06 | 500 split<br>600 split | 50 split<br>60 split | | | | | |
| MIL-T-27/167-07 | 500 CT | 600 CT | | | | | |
| MIL-T-27/167-08 | 500 split | 600 split | | | | | |
| MIL-T-27/167-09 | 600 CT | 600 split | | | | | |
| MIL-T-27/167-10 | 600 CT | 2K split | | | | | |
| MIL-T-27/167-11 | 600 | 600 CT and 600 CT | 25 at 1 kHz | | | | |
| MIL-T-27/167-12 | 600 split | 8K CT | 50 at 1 kHz | | | | |
| MIL-T-27/167-13 | 800 split<br>1200 split | 20K split<br>30K split | 50 at 1 kHz | | | | |
| MIL-T-27/167-14 | 1K<br>1.5K | 50<br>60 | 100 at 1 kHz | | | | |
| MIL-T-27/167-15 | 1K split<br>1200 split | 200 split<br>240 split | | | | | |
| MIL-T-27/167-16 | 1200<br>1500 | 3.2<br>4.0 | | | | | |
| MIL-T-27/167-17 | 1.5K CT | 600 CT | | | | | |
| MIL-T-27/167-18 | 4K CT | 600 split | | | | | |
| MIL-T-27/167-19 | 4K split<br>5K split | 12.8 split<br>16 split | | | | | |
| MIL-T-27/167-20 | 10K | 3.2 | | | | | |
| MIL-T-27/167-21 | 8K split<br>10K split | 12.8 split<br>16 split | | | | | |
| MIL-T-27/167-22 | 10K | 16 | | | | | |

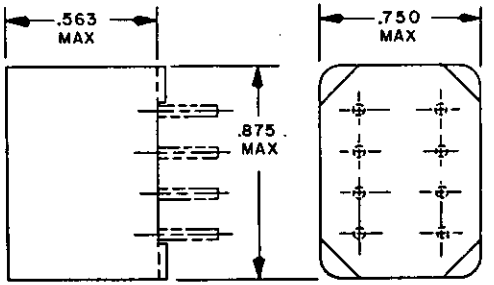


1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.




| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/167-23 1/ | 10K CT<br>12K CT | 3.2<br>4.0 | 100 at 1 kHz | +3 dB (300 Hz to 20 kHz) | 5 | 105°C | See figure for MIL-T-27/167-01 thru -22 on page 102.10 |
| MIL-T-27/167-24 | 10K split<br>25K split | 200 split<br>500 split | | | | | |
| MIL-T-27/167-25 | 10K CT<br>25K CT | 200 CT<br>500 CT | | | | | |
| MIL-T-27/167-26 | 10K<br>12K | 500 CT<br>600 CT | | | | | |
| MIL-T-27/167-27 | 10K split<br>12K split | 500 split<br>600 split | | | | | |
| MIL-T-27/167-28 | 10K CT | 2K CT | | | | | |
| MIL-T-27/167-29 | 10K CT<br>12K CT | 1500 CT<br>1800 CT | | | | | |
| MIL-T-27/167-30 | 10K CT<br>12K CT | 10K CT<br>12K CT | | | | | |
| MIL-T-27/167-31 | 10K split<br>12K split | 10K split<br>12K split | | | | | |
| MIL-T-27/167-32 | 10K | 90K | 30 at 1 kHz | | | | |
| MIL-T-27/167-33 | 20K<br>30K | 800<br>1200 | 100 at 1 kHz | | | | |
| MIL-T-27/167-34 | 20K CT<br>30K CT | 800 CT<br>1200 CT | | | | | |
| MIL-T-27/167-35 | 30K | 50 | | | | | |
| MIL-T-27/167-36 | 40K CT<br>50K CT | 400 split<br>500 split | | | | | |
| MIL-T-27/167-37 | 40K split<br>50K split | 400 split<br>500 split | | | | | |
| MIL-T-27/167-38 | 100K | 60 | | | | | |
| MIL-T-27/167-39 | 100K CT<br>200K CT | 100 split<br>200 split | 5 at 1 kHz | | | | |
| MIL-T-27/167-40 | 200K | 1K | | | | | |
| MIL-T-27/167-41 | 200K CT | 1K CT | | | | | |
| MIL-T-27/167-42 | 200K CT | 1K split | | | | | |

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.



MIL-STD-1286C
9 SEP 1950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.
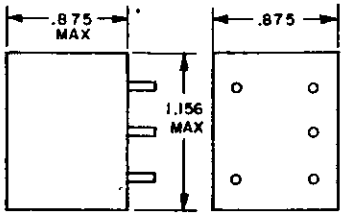
| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/169-01 | 600 | 600 | -4 dBm | ±1 dB (300 Hz to 3.4 kHz) | 5 | 105°C |   |
| MIL-T-27/170-01 | 600 | 1200 | 1 | ±1 dB (300 Hz to 3.4 kHz) | | |   |
| 1/ MIL-T-27/172-01 | 80 CT<br>100 CT | 32 split<br>40 split | 500 at 1 kHz | +3 dB (300 Hz to 20 kHz) | | |   |
| MIL-T-27/172-02 | 120 CT<br>150 CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-03 | 150 CT<br>200 CT | 12<br>16 | | | | | |
| MIL-T-27/172-04 | 300 CT<br>400 CT | 12<br>16 | | | | | |
| MIL-T-27/172-05 | 300 CT | 600 | | | | | |
| MIL-T-27/172-06 | 320 CT<br>400 CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-07 | 400 CT<br>500 CT | 40 split<br>50 split | | | | | |
| MIL-T-27/172-08 | 400 CT<br>500 CT | 120 split<br>150 split | | | | | |
| MIL-T-27/172-09 | 400 CT<br>500 CT | 400 split<br>500 split | | | | | |
| MIL-T-27/172-10 | 400 CT<br>500 CT | 4K CT<br>5K CT | | | | | |
| MIL-T-27/172-11 | 500<br>600 | 50<br>60 | 100 at 1 kHz | | | | |
| MIL-T-27/172-12 | 500 CT | 600 | 500 at 1 kHz | | | | |
| MIL-T-27/172-13 | 600 | 3.2 | 100 at 1 kHz | | | | |

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/172-14 1/ | 600 CT<br>800 CT | 12<br>16 | 500 at 1 kHz | +3 dB (300 Hz to 20 kHz) | 5 | 105°C | See figure for MIL-T-27/172-01 thru -13 on page 102.12 |
| MIL-T-27/172-15 | 640 CT<br>800 CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-16 | 800 CT<br>1K CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-17 | 800 CT<br>1.07K CT | 12<br>16 | | | | | |
| MIL-T-27/172-18 | 900 CT | 600 | | | | | |
| MIL-T-27/172-19 | 1K<br>1.2K | 50<br>60 | 100 at 1 kHz | | | | |
| MIL-T-27/172-20 | 1K CT<br>1.25K CT | 10K split<br>20K split | 100 at 1 kHz | | | | |
| MIL-T-27/172-21 | 1K CT<br>1.33K CT | 12<br>16 | 500 at 1 kHz | | | | |
| MIL-T-27/172-22 | 1.06K CT<br>1.33K CT | 3.2<br>4.0 | 500 at 1 kHz | | | | |
| MIL-T-27/172-23 | 1.2K | 3.2 | 100 at 1 kHz | | | | |
| MIL-T-27/172-24 | 1.5K CT<br>2K CT | 12<br>16 | 500 at 1 kHz | | | | |
| MIL-T-27/172-25 | 1.5K CT | 600 | | | | | |
| MIL-T-27/172-26 | 1.6K CT<br>2K CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-27 | 2K CT<br>2.5K CT | 2K split<br>2.5K split | 100 at 1 kHz | | | | |
| MIL-T-27/172-28 | 2K CT<br>2.5K CT | 8K split<br>10K split | | | | | |
| MIL-T-27/172-29 | 7.5K CT<br>10K CT | 12<br>16 | | | | | |
| MIL-T-27/172-30 | 8K CT<br>10K CT | 3.2<br>4.0 | | | | | |
| MIL-T-27/172-31 | 10K | 3.2 | | | | | |
| MIL-T-27/172-32 | 10K<br>12K | 500 CT<br>600 CT | | | | | |
| MIL-T-27/172-33 | 10K<br>12.5K | 1.2K CT<br>1.5K CT | | | | | |
| MIL-T-27/172-34 | 10K CT<br>12K CT | 1.5K CT<br>1.8K CT | | | | | |

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/172-35 1/ | 10K CT<br>12K CT | 2K split<br>2.4K split | 100 at 1 kHz | ±3 dB (300 Hz to 20 kHz) | 5 | 105°C | See figure for MIL-T-27/172-01 thru -13 on page 102.12 |
| MIL-T-27/172-36 | 10K<br>12.5K | 2K split<br>2.5K split | | | | | |
| MIL-T-27/172-37 | 10K CT<br>12K CT | 10K CT<br>12K CT | | | | | |
| MIL-T-27/172-38 | 20K<br>30K | 800<br>1.2K | 50 at 1 kHz | | | | |
| MIL-T-27/172-39 | 20K CT<br>30K CT | 800 CT<br>1.2K CT | | | | | |
| MIL-T-27/172-40 | 20K CT<br>30K CT | 1K split<br>1.5K split | | | | | |
| MIL-T-27/172-41 | 40K CT<br>50K CT | 400 split<br>500 split | | | | | |
| MIL-T-27/172-42 | 40K CT<br>50K CT | 4K CT<br>5K CT | | | | | |
| MIL-T-27/172-43 | 200K | 1K | 25 at 1 kHz | | | | |
| MIL-T-27/172-44 | 200K | 1K CT | 25 at 1 kHz | | | | |
| MIL-T-27/173-01 | 25K CT | 1K split | 40 at 1 kHz | ±3 dB (300 Hz to 250 kHz) | | |  |
| MIL-T-27/173-02 | 1.5K | 600 | 75 at 1 kHz | | | | |
| MIL-T-27/173-03 | 150 | 12 | 80 at 1 kHz | | | | |
| MIL-T-27/173-04 | 300 | 600 | | | | | |
| MIL-T-27/173-05 | 400 | 400 | | | | | |
| MIL-T-27/173-06 | 500 | 50 | | | | | |
| MIL-T-27/173-07 | 600 | 600 | | | | | |
| MIL-T-27/173-08 | 1K | 1K | | | | | |
| MIL-T-27/173-09 | 2K | 8K | 75 at 1 kHz | | | | |
| MIL-T-27/173-10 | 10K | 500 | | | | | |
| MIL-T-27/173-11 | 10K | 1.2K | | | | | |
| MIL-T-27/173-12 | 10K | 2K | | | | | |
| MIL-T-27/173-13 | 10K | 10K | | | | | |


1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Primary impedance (ohms) | Secondary impedance (ohms) | Maximum primary power level (mW) | Frequency response | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/197-01 1/ | 15K | 80K split | 200 at 1 kHz | ±2 dB (100 Hz to 20 kHz) | 4 | 105°C | |
| MIL-T-27/197-02 | 15K split | 80K split | 15 at 1 kHz | ±2 dB (30 Hz to 20 kHz) | | | |
| MIL-T-27/197-03 | 250 CT<br>500 CT | 50K CT<br>100K CT | 4 at 1 kHz | ±2 dB (100 Hz to 20 kHz) | | | |
| MIL-T-27/197-04 | 15K | 500 CT,<br>200 CT,<br>125, 50 | 200 at 1 kHz | ±2 dB (50 Hz to 20 kHz) | | | |
| MIL-T-27/197-05 | 30K split | 500 CT,<br>200 CT,<br>125, 50 | 80 at 1 kHz | ±2 dB (30 Hz to 20 kHz) | | | |
| MIL-T-27/197-06 | 500 CT | 500 split | 1 W at 1 kHz | ±2 dB (40 Hz to 20 kHz) | | | |
| MIL-T-27/197-07 | 10K split | 2K split | | | | | |
| MIL-T-27/197-08 | 500 CT | 16 split | | | | | |
| MIL-T-27/197-09 | 200 CT | 400 split | | | | | |
| MIL-T-27/197-10 | 48 CT | 16, 8, 4 | 5 W at 1 kHz | | | | |
| MIL-T-27/197-11 | 20 CT | 16, 8, 4 | 10 W at 1 kHz | ±2 dB (75 Hz to 20 kHz) | | | |
| MIL-T-27/200-01 | 30K | 50 | 30 at 1 kHz | ±2 dB (300 Hz to 10 kHz) | | | |
| MIL-T-27/277-01 | 150 CT | 150 CT | 1 at 1 kHz | ±3 dB (300 Hz to 3 kHz) | 5 | 105°C | |

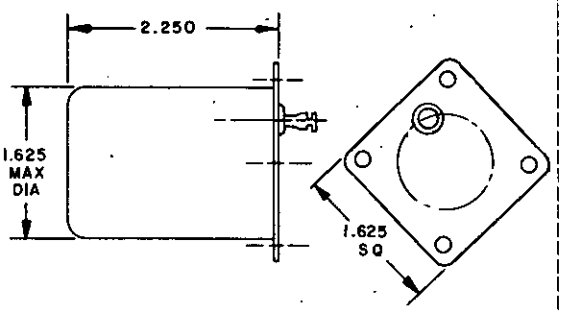

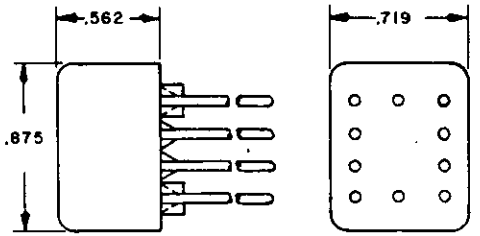
1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.


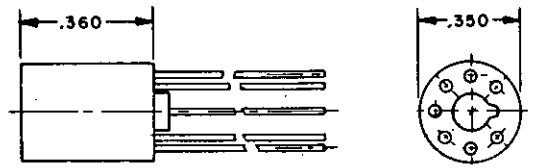




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 103

TRANSFORMERS, PULSE, LOW POWER

| Specification sheet and dash nos. | Impedance (ohms) | | Current (mA) | | Voltage peak | | | DCR ±20% (ohms) | | Turns ratio | Pulse duration ( s) | Pulse rise time ( s) | Pulse repetition frequency (kHz) | Inductance (mH) | Nominal dimensions (excluding terminals) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Source | Load | 1-2 | 3-4 | 1-2 | 3-4 | 5-6 | 1-2 | 3-4 | | | | | | | |
| MIL-T-21038/1 -001 | 10 | 18 | 50 | 300 | 30 ±3 | 5.1 ±.5 | 31 ±3 | 9.5 | .39 | 5.5: .95 | 17 ± 2 | 1 | 18 to 30 | --- | .250 x .229 x .229 |  |
| MIL-T-21038/2 -001 | --- | --- | --- | --- | 3 | 4.7 | --- | 32 | 40 | 1:1 | 60 | 0.8 | 100 | 200 min at 1 V, 1 kHz | .425 x .416 x .372 |   |

| Specification sheet and dash nos. | DCR (ohms) | | | Blocking oscillator pulse | | Coupling circuit characteristic | | | | Frequency response ±2 dB | Turns ratio | Nominal dimensions (excluding terminals) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Pulse width ( s) | Rise time ( s) | Pulse width ( s) | Volts out | Rise time ( s) | Impedance in, out (ohms) | | | | |
| | 1-2 | 3-4 | 5-6 | | | | | | | kHz Mhz | | | |
| MIL-T-21038/8 -001 | 3 | 3.5 | 4 | .05 | .022 | .05 | 17 | .01 | 250 | 260 to 34 | 1:1:1 | .375 x .375 d |  |
| -002 | 5.5 | 6.5 | 7 | .10 | .024 | .10 | 19 | .01 | 250 | 220 to 34 | 1:1:1 | | |
| MIL-T-21038/9 -005 | 28 | 31 | 33 | 3 | .10 | 3 | 26 | .07 | 500 | 12.6 to 5.65 | 1:1:1 | |  |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 200

INDUCTORS


1. Scope. This section covers audio and power inductors for use in electronic equipment to induce inductance into a circuit.


| Section | | Applicable Specification |
|---|---|---|
| 201 | Inductors, Audio Frequency - - - - - - | MIL-T-27 |
| 202 | Inductors, Power - - - - - - - - - - - | MIL-T-27 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/111-01 | 10 (1-2) | 0.50 (1-2) | 1 Vrms 0.4 kHz | 0.5 (1-2) | 4 | 171°C | |
| MIL-T-27/112-01 | 10 (1-2) | .05 (1-2) | 1 Vrms .4 kHz | 0.5 (1-2) | 5 | 171°C | |
| MIL-T-27/124-01 | 5 (1-2) | 28 (1-2) | 1 Vrms 1 kHz | 7 (1-2) | 5 | 130°C | |
| MIL-T-27/142-01 | .01 | (mA) 70 | 1 Vrms 1 kHz | 2.5 | 5 | 105°C | |
| MIL-T-27/142-02 | .02 | 50 | | 5.1 | | | |
| MIL-T-27/142-03 | .05 | 30 | | 12.0 | | | |
| MIL-T-27/142-04 | .10 | 22 | | 22.0 | | | |
| MIL-T-27/142-05 | .50 | 10 | | 122.0 | | | |
| MIL-T-27/142-06 | 1.00 | 7 | | 250.0 | | | |
| MIL-T-27/142-07 | 2.00 | 5 | | 500.0 | | | |

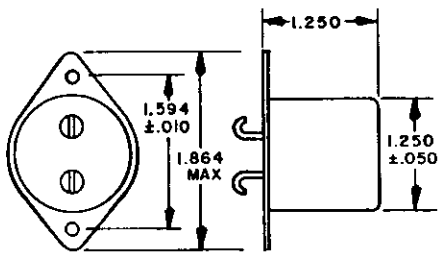




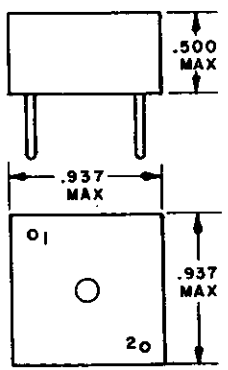


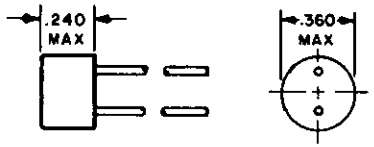



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance range | | | Voltage (Vrms) | DC current (mA) | DCR ±20% (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|---|
| | Min H | Mean H | Max H | | | | | | |
| MIL-T-27/145-01 | 0.002 | 0.006 | 0.02 | 0.5 | 100 | 0.5 | 4 | 105°C | |
| MIL-T-27/145-02 | 0.005 | 0.015 | 0.05 | 0.5 | 60 | 1.4 | | | |
| MIL-T-27/145-03 | 0.011 | 0.040 | 0.11 | 0.5 | 40 | 3.6 | | | |
| MIL-T-27/145-04 | 0.03 | 0.10 | 0.3 | 1 | 30 | 8.6 | | | |
| MIL-T-27/145-05 | 0.07 | 0.25 | 0.7 | 1 | 20 | 22 | | | |
| MIL-T-27/145-06 | 0.2 | 0.6 | 2 | 1 | 15 | 55 | | | |
| MIL-T-27/145-07 | 0.5 | 1.5 | 5 | 5 | 10 | 141 | | | |
| MIL-T-27/145-08 | 1.1 | 4 | 11 | 7 | 7 | 360 | | | |
| MIL-T-27/145-09 | 3 | 10 | 30 | 7 | 5 | 950 | | | |
| MIL-T-27/145-10 | 7 | 25 | 70 | 10 | 3.5 | 2220 | | | |
| MIL-T-27/145-11 | 20 | 60 | 200 | 10 | 2 | 5550 | | | |
| MIL-T-27/145-12 | 50 | 150 | 500 | 10 | 1.5 | 15.6 K | | | |

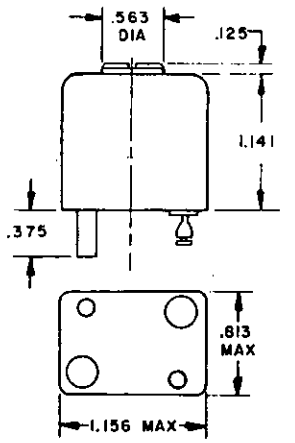


| Part no. and dash no. | Inductance (max) (mH) ±2% | DC current (max) (mA) | DCR (max) at 25°C (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|
| MIL-T-27/146-01 | 1 | 60 | 1.4 | 5 | 105°C | |
| MIL-T-27/146-02 | 5 | 28 | 7 | | | |
| MIL-T-27/146-03 | 10 | 20 | 11 | | | |
| MIL-T-27/146-04 | 25 | 13 | 38 | | | |
| MIL-T-27/146-05 | 50 | 9 | 75 | | | |
| MIL-T-27/146-06 | 100 | 6 | 132 | | | |









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance (H) (1-2) | DC current mA (1-2) | Quality factor (min) | DCR +20% (ohms) (1-2) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/147-01 | 0.010 | 400 | 180 at 3 kHz | 0.30 | 4 | 105°C | |
| MIL-T-27/147-02 | 0.030 | 250 | 180 at 3 kHz | 0.90 | | | |
| MIL-T-27/147-03 | 0.070 | 170 | 200 at 3 kHz | 2.2 | | | |
| MIL-T-27/147-04 | 0.12 | 120 | 200 at 3 kHz | 3.6 | | | |
| MIL-T-27/147-05 | 0.50 | 60 | 200 at 3 kHz | 16 | | | |
| MIL-T-27/147-06 | 1.0 | 40 | 190 at 3 kHz | 28 | | | |
| MIL-T-27/147-07 | 2.0 | 30 | 165 at 2 kHz | 64 | | | |
| MIL-T-27/147-08 | 3.5 | 22 | 135 at 1.5 kHz | 101 | | | |
| MIL-T-27/147-09 | 7.5 | 16 | 110 at 1 kHz | 230 | | | |
| MIL-T-27/147-10 | 12 | 11 | 100 at 1 kHz | 373 | | | |
| MIL-T-27/147-11 | 18 | 9.0 | 85 at 700 Hz | 463 | | | |
| MIL-T-27/147-12 | 25 | 8.0 | 75 at 700 Hz | 680 | | | |
| MIL-T-27/147-13 | 40 | 6.0 | 65 at 400 Hz | 1075 | | | |
| MIL-T-27/147-14 | 60 | 4.0 | 65 at 400 Hz | 1670 | | | |

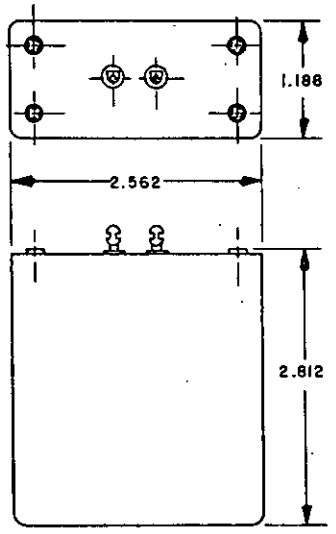








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance ±1% (H) (1-2) | DC current (max) (mA) (1-2) | Quality factor (min) | DCR ±20% at 25°C (ohms) (1-2) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/161-01 | 0.05 | 25 | 70 at 15 kHz | 27 | 5 | 105°C | |
| MIL-T-27/161-02 | 0.10 | 18 | 70 at 15 kHz | 51 | | | |
| MIL-T-27/161-03 | 0.25 | 11 | 65 at 15 kHz | 136 | | | |
| MIL-T-27/161-04 | 0.50 | 8 | 65 at 10 kHz | 243 | | | |
| MIL-T-27/161-05 | 0.75 | 7 | 60 at 10 kHz | 355 | | | |
| MIL-T-27/161-06 | 1.0 | 6 | 55 at 10 kHz | 500 | | | |
| MIL-T-27/161-07 | 1.2 | 5 | 55 at 10 kHz | 560 | | | |
| MIL-T-27/161-08 | 2.0 | 4 | 43 at 5 kHz | 870 | | | |
| MIL-T-27/161-09 | 3.0 | 3.5 | 40 at 5 kHz | 1340 | | | |
| MIL-T-27/161-10 | 5.0 | 3 | 33 at 5 kHz | 2500 | | | |

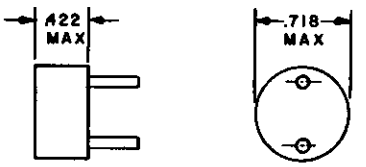



| Part no. and dash no. | Inductance ±2% (H) (1-4) | Voltage (V) (1-4) | Quality factor at 1 V (min) | DCR ±20% (ohms) (1-4) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/162-01 | 2.0/0.5 | 1.0/0.5 at 60 Hz | 24 at 150 Hz | 21 | 4 | 130°C | |
| MIL-T-27/162-02 | 16/4.0 | | 23 at 150 Hz | 143 | | | |
| MIL-T-27/162-03 | 40/10 | | 23 at 100 Hz | 368 | | | |
| MIL-T-27/162-04 | 300/75 | | 23.5 at 100 Hz | 3700 | | | |
| MIL-T-27/162-05 | 600/150 | | 23.5 at 100 Hz | 5720 | | | |

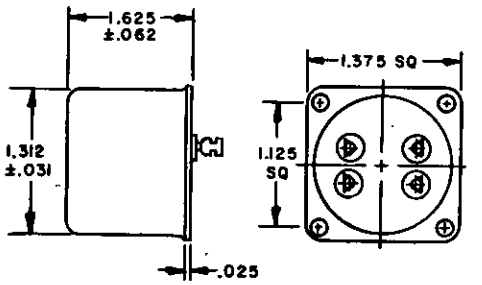





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance ±1% (H) (1-2) | Current (max) (mA) (1-2) | Voltage | Quality factor at 1 V (min) | DCR (max) (ohms) (1-2) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|---|
| MIL-T-27/163-01 | 0.1 | 60 | 1 at 400 Hz | 210 at 3 kHz | 4.2 | 5 | 105°C | |
| MIL-T-27/163-02 | 0.5 | 25 | | 185 at 3 kHz | 23 | | | |
| MIL-T-27/163-03 | 1.0 | 18 | | 185 at 3 kHz | 43 | | | |
| MIL-T-27/163-04 | 2.0 | 12 | | 140 at 2 kHz | 92 | | | |
| MIL-T-27/163-05 | 5.0 | 8 | | 120 at 1.5 kHz | 240 | | | |
| MIL-T-27/163-06 | 10.0 | 6 | | 95 at 1 kHz | 440 | | | |

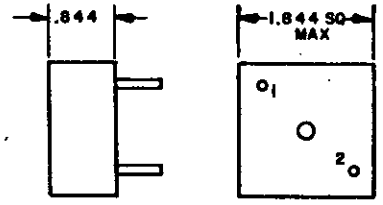


| Part no. and dash no. | Inductance (H) | DC current (mA) (max) | DCR at 25°C ±20% (ohms) | Frequency range (Hz) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/164-01 | .15 | 12 | 33 | 2,000 | 5 | 105°C | |
| MIL-T-27/164-02 | .25 | 9 | 55 | 2,000 | | | |
| MIL-T-27/164-03 | .40 | 7 | 90 | 2,000 | | | |
| MIL-T-27/164-04 | .70 | 5 | 135 | 2,000 | | | |
| MIL-T-27/164-05 | 1.4 | 3 | 210 | 15,000 | | | |
| MIL-T-27/164-06 | 2.5 | 1 | 210 | 800 | | | |
| MIL-T-27/164-07 | 4.0 | .7 | 340 | 800 | | | |
| MIL-T-27/164-08 | 6.0 | .6 | 530 | 800 | | | |
| MIL-T-27/164-09 | 10 | .5 | 850 | 800 | | | |
| MIL-T-27/164-10 | 25 | .3 | 2,300 | 800 | | | |
| MIL-T-27/164-11 | 60 | .2 | 5,160 | 800 | | | |

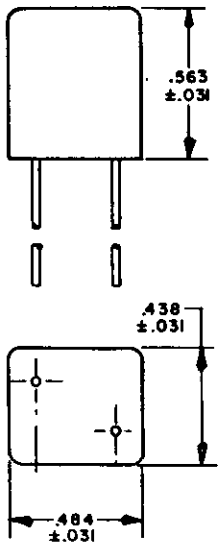







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


| Part no. and dash no. | Inductance (H) | | DC current (amperes) | DCR (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| | Series connected | Parallel connected | | | | | |
| MIL-T-27/175-01 | 1.0 | .25 | 0 | 5 | 4 | 105°C | |
| MIL-T-27/175-02 | 10 | 2.5 | | 50 | | | |
| MIL-T-27/175-03 | 20 | 5 | | 82 | | | |
| MIL-T-27/175-04 | 200 | 50 | | 820 | | | |
| MIL-T-27/175-05 | 400 | 100 | | 2100 | | | |
| MIL-T-27/175-06 | 2500 | 652 | | 13K | | | |

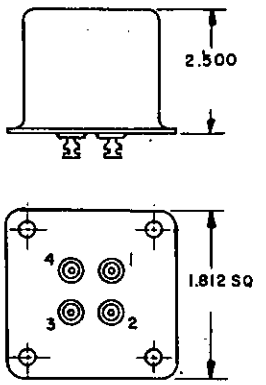




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.





| Part no. and dash no. | Inductance (H) | DC current (mA) | DCR (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|
| MIL-T-27/205-01 | .007 | 250 | .6 | 4 | 105°C | |
| MIL-T-27/205-02 | .012 | 200 | 1.1 | | | |
| MIL-T-27/205-03 | .020 | 150 | 1.6 | | | |
| MIL-T-27/205-04 | .030 | 125 | 2.5 | | | |
| MIL-T-27/205-05 | .050 | 100 | 3.9 | | | |
| MIL-T-27/205-06 | .070 | 80 | 5.7 | | | |
| MIL-T-27/205-07 | .120 | 60 | 9.1 | | | |
| MIL-T-27/205-08 | .2 | 50 | 16 | | | |
| MIL-T-27/205-09 | .3 | 40 | 25 | | | |
| MIL-T-27/205-10 | .5 | 30 | 39 | | | |
| MIL-T-27/205-11 | .7 | 25 | 58 | | | |
| MIL-T-27/205-12 | 1.0 | 20 | 84 | | | |
| MIL-T-27/205-13 | 1.5 | 17 | 130 | | | |
| MIL-T-27/205-14 | 2.5 | 13 | 215 | | | |
| MIL-T-27/205-15 | 4.0 | 10 | 335 | | | |
| MIL-T-27/205-16 | 6.0 | 9 | 510 | | | |
| MIL-T-27/205-17 | 10 | 7 | 840 | | | |
| MIL-T-27/205-18 | 15 | 5 | 1350 | | | |
| MIL-T-27/205-19 | 22 | 4 | 1960 | | | |
| MIL-T-27/205-20 | 35 | 3 | 3200 | | | |

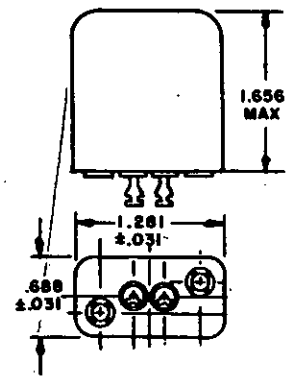








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

| Part no. and dash no. | Inductance ($\mu$H) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/84-01 | .04 mH | 1.5 | 1 Vrms 20 kHz | .045 | S | 130°C |   |
| MIL-T-27/85-01 | 374 min 506 max | 1 | 1 Vrms 10 kHz | .070 | S | 130°C |   |
| MIL-T-27/86-01 | 50 min | .5 | .2 Vrms 10 kHz | .25 | S | 130°C |   |
| MIL-T-27/88-01 | 72 min | 1.0 | .1 Vrms 10 kHz | .3 | S | 130°C |   |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.
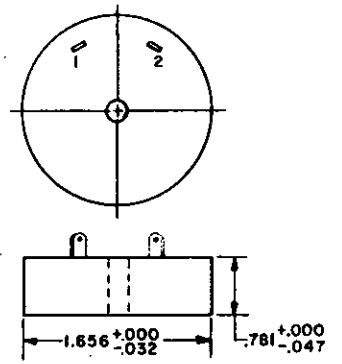
| Part no. and dash no. | Inductance (μH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/89-01 | 450 +50 (1-2)<br>450 +50 (3-4) | .5(1-2)<br>.5(3-4) | .565 Vrms 400 Hz (1-2), (3-4) | .2(1-2)<br>.2(3-4) | 5 | 155°C |  |
| MIL-T-27/98-01 | 3.9 mH<br>1.5 mH | 0<br>2.0 | 1.0 Vrms<br>1.0 kHz | 0.41 | 5 | 155°C |  |








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 202



INDUCTORS, POWER

| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/114-01 | 110, (1-5) | 12 mA (1-5) | 1 Vrms 1000 Hz | 3.26 (1-5) | 5 | 85°C |   |
| MIL-T-27/119-01 | 25 µH min | 35 | 1 Vrms 20 kHz | .004 | 5 | 130°C |   |
| MIL-T-27/120-01 | 120 µH | 1.5 | 1.5 Vrms 2.4 kHz | .0584 | 5 | 130°C |   |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.




SECTION 202
INDUCTORS, POWER
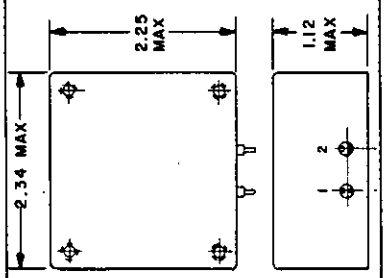
| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/123-01 | 1 | 3 | 1 Vrms 20 kHz | .124 | 5 | 130°C |   |
| MIL-T-27/135-01 | 60 µH min | 3 | 1 Vrms 10 kHz | .025 | 5 | 170°C |   |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

INDUCTORS, POWER
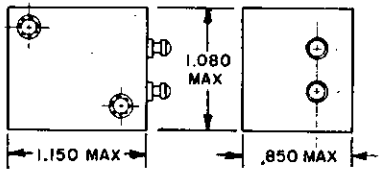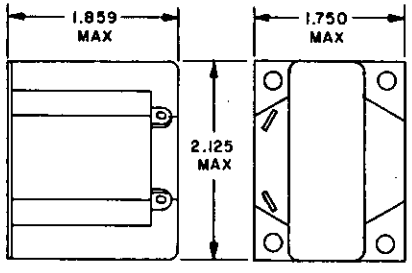
| Part no. and dash no. | Inductance (H) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/137-01 | 67.5 µH min<br>86.25 µH max<br><br>48.5 µH min | 2.7<br><br>4.05 | 6.2 Vrms<br>2.4 kHz | .045 | 5 | 130°C |  |
| MIL-T-27/149-01 | 1.5 min | 45 mA | 10 Vrms<br>60 Hz | 225 | 5 | 130°C |  |
| MIL-T-27/160 | 1.0 min | 100 mA | 10 Vrms<br>60 Hz | 69 | 5 | 130°C |  |








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.




SECTION 202

INDUCTORS, POWER
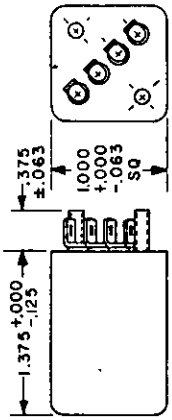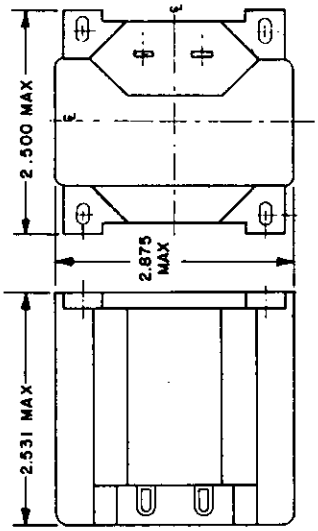
| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/171 | (Connected (Series) 9 to 45 (parallel) 2.25 to 11.25 | (Connected (Series) .75 to .035 (parallel) 1.5 to .07 | (Series) (Parallel) 3 Vrms 60 Hz | 0.52 (1-2) 0.68 (3-4) | 4 | 130°C |   |
| MIL-T-27/179 | 1H | 325 mA | 10 Vrms 60 Hz | 44 | 5 | 130°C |   |
| MIL-T-27/189-01 | 1.5 mH | 1.5 | 30 Vrms 16 kHz | 1.6 | 5 | 130°C |   |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.
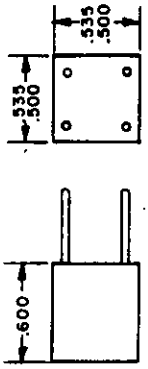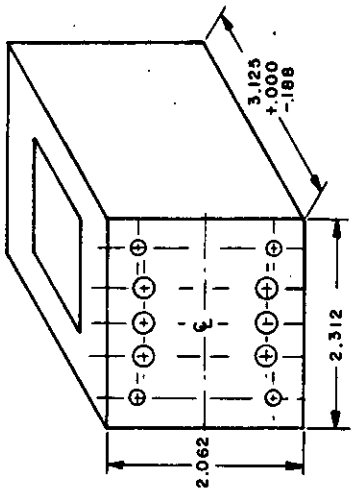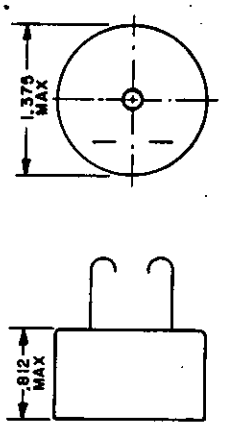
| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/190-01 | 25 min | .75 | 12.5 Vrms 20 kHz | 2 | 5 | 130°C |   |
| MIL-T-27/209-01 | Series 16H<br>Parallel 4H | Series .08<br>Parallel .160 | Series 250 Vrms 120 Hz<br>Parallel 125 Vrms 120 Hz | 324.5 (1-2)<br>385 (3-4) | 4 | 105°C |   |
| MIL-T-27/229-01 | 60μH | 6 | 10 Vrms 10 kHz | .025 | 5 | 170°C |   |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 202
INDUCTORS, POWER
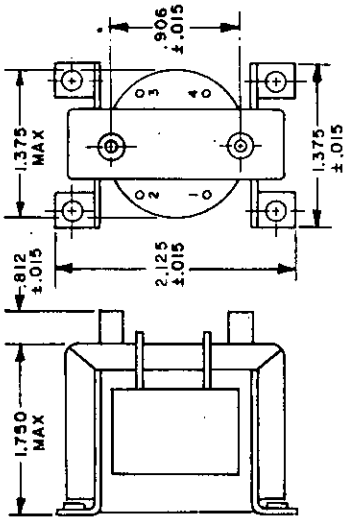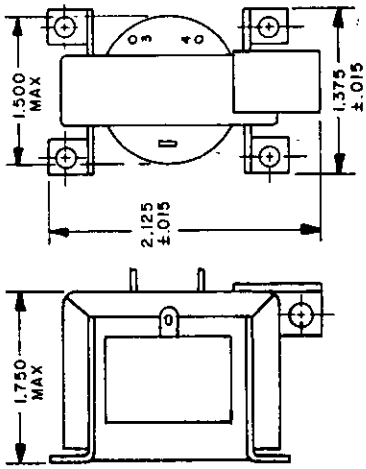
| Part no. and dash no. | Inductance (mH) | DC current (amperes) | Voltage | DCR (max) (ohms) | Grade | Maximum operating temperature | Figure and dimensions |
|---|---|---|---|---|---|---|---|
| MIL-T-27/259-01 | 2.2 min | 2.35 | 26 Vrms 800 Hz | .15 | 5 | 170°C |  |
| MIL-T-27/261-01 | 1.35 mH | 3.85 | 26 Vrms 800 Hz | .2 | 5 | 170°C |  |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 300

COILS, RADIOFREQUENCY

1. Scope. This section covers radiofrequency coils, fixed and variable, for use as simple inductive elements in radiofrequency circuits, as follows:

| Section | | Applicable specification |
|---|---|---|
| 301 | Coils, Radiofrequency, Variable, Unshielded (Iron Core) - - - | MIL-C-15305 |
| 302 | Coils, Radiofrequency, Variable, Unshielded (Ferrite Core) - | MIL-C-15305 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

2. Identification.

2.1 Type designation. The type designation is used to describe certain characteristics of the rf coils covered by MIL-C-15305 as shown in figure 300-1.

2.2 Part number. The part number is comprised of the basic military standard number and applicable dash number which specifies the coil.

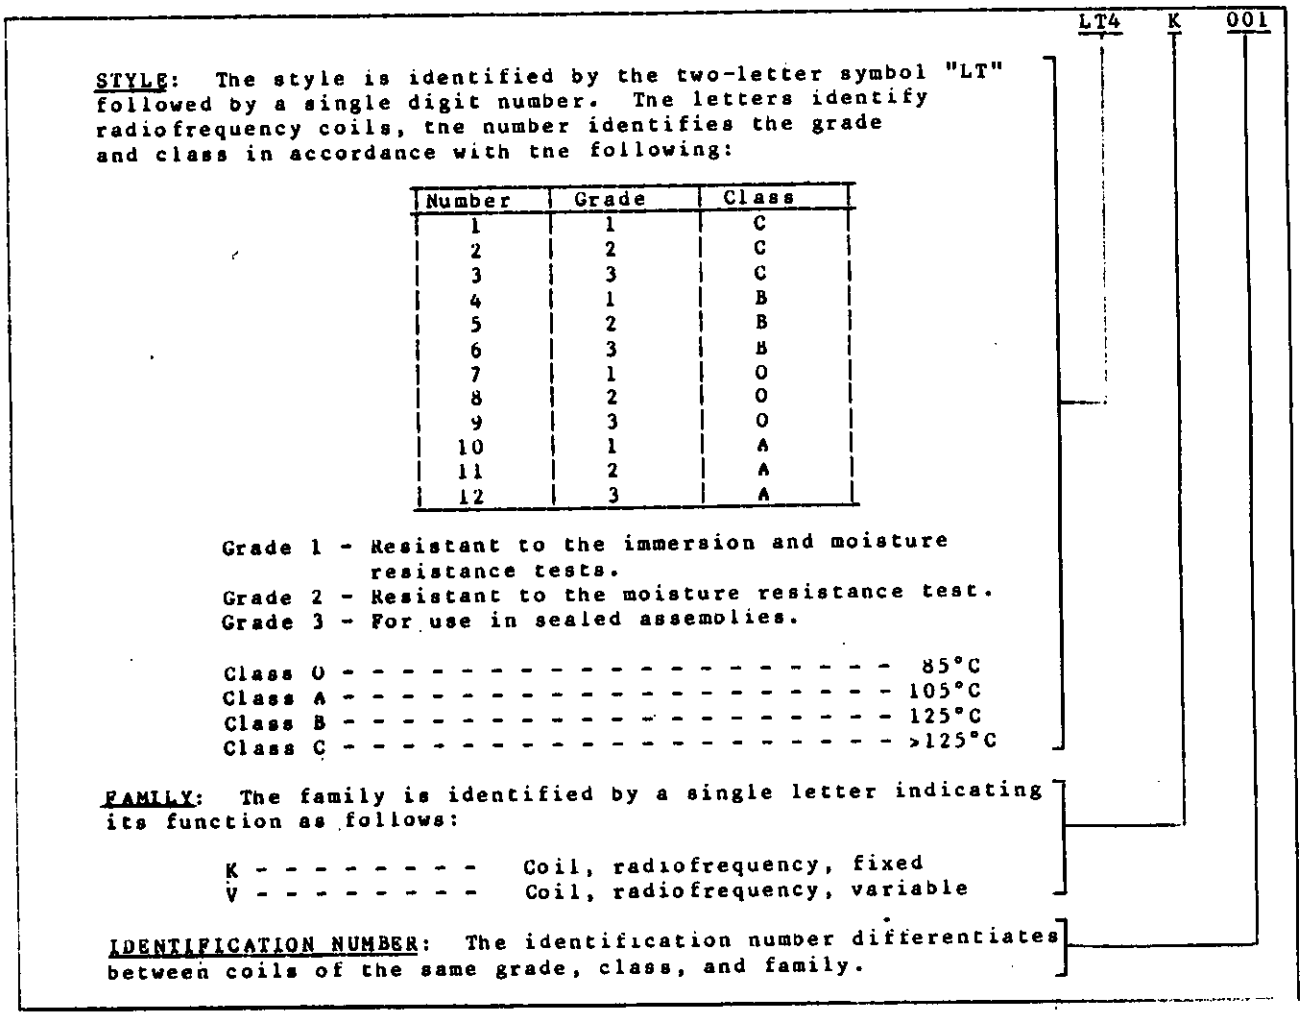


| Number | Grade | Class |
|---|---|---|
| 1 | 1 | C |
| 2 | 2 | C |
| 3 | 3 | C |
| 4 | 1 | B |
| 5 | 2 | B |
| 6 | 3 | B |
| 7 | 1 | O |
| 8 | 2 | O |
| 9 | 3 | O |
| 10 | 1 | A |
| 11 | 2 | A |
| 12 | 3 | A |

FIGURE 300-1. Type designation example (MIL-C-15305).




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 301

COILS, RADIOFREQUENCY, VARIABLE, UNSHIELDED (IRON CORE)

STYLE LT11, GRADE 2, CLASS A

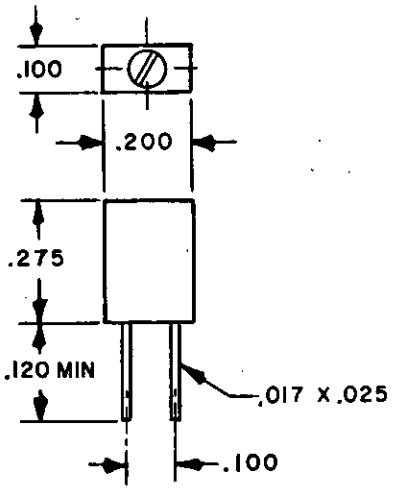


| INCHES | MM |
|---|---|
| .017 | .43 |
| .025 | .64 |
| .100 | 2.54 |
| .120 | 3.05 |
| .200 | 5.08 |
| .275 | 6.98 |

| MS part no. | Type designation | Inductance L max (µH) | Inductance L min (µH) | Test frequency (MHz) | Q min at L max | Rated current max (mA) DC |
|---|---|---|---|---|---|---|
| MS53229-1 | LT11V001 | .025 | .020 | 200 | 50 | 250 |
| MS53229-2 | LT11V002 | .051 | .035 | 100 | 40 | 250 |
| MS53229-3 | LT11V003 | .076 | .055 | 100 | 40 | 250 |
| MS53229-4 | LT11V004 | .10 | .07 | 25 | 30 | 250 |
| MS53229-5 | LT11V005 | .15 | .11 | 25 | 30 | 200 |
| MS53229-6 | LT11V006 | .22 | .16 | 25 | 30 | 180 |
| MS53229-7 | LT11V007 | .27 | .19 | 25 | 30 | 180 |
| MS53229-8 | LT11V008 | .33 | .24 | 25 | 30 | 140 |
| MS53229-9 | LT11V009 | .47 | .34 | 25 | 30 | 100 |
| MS53229-10 | LT11V0010 | .56 | .40 | 25 | 30 | 100 |
| MS53229-11 | LT11V0011 | .68 | .50 | 25 | 30 | 100 |
| MS53229-12 | LT11V0012 | .82 | .59 | 25 | 30 | 100 |
| MS53229-13 | LT11V0013 | 1.0 | .50 | 7.9 | 25 | 125 |
| MS53229-14 | LT11V0014 | 1.5 | 1.0 | 7.9 | 25 | 100 |
| MS53229-15 | LT11V0015 | 2.2 | 1.2 | 7.9 | 25 | 80 |
| MS53229-16 | LT11V0016 | 2.7 | 1.95 | 7.9 | 25 | 75 |
| MS53229-17 | LT11V0017 | 3.3 | 2.2 | 7.9 | 25 | 65 |
| MS53229-18 | LT11V0018 | 4.7 | 2.5 | 7.9 | 25 | 60 |
| MS53229-19 | LT11V0019 | 5.8 | 2.9 | 7.9 | 25 | 58 |
| MS53229-20 | LT11V0020 | 6.8 | 3.4 | 7.9 | 25 | 55 |
| MS53229-21 | LT11V0021 | 8.2 | 4.6 | 7.9 | 25 | 50 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 302

COILS, RADIOFREQUENCY, VARIABLE, UNSHIELDED (FERRITE CORE)

STYLE LT11, GRADE 2, CLASS A

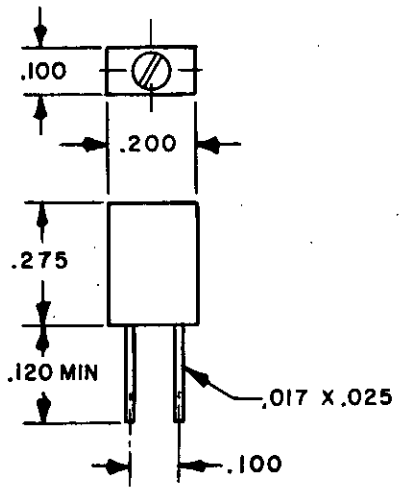


| INCHES | MM |
|---|---|
| .017 | .43 |
| .025 | .64 |
| .100 | 2.54 |
| .120 | 3.05 |
| .200 | 5.08 |
| .275 | 6.98 |

| MS part no. | Type designation | Inductance L max (µH) | Inductance L min (µH) | Test frequency (MHz) | Q min at L max | Rated current max (mA) DC |
|---|---|---|---|---|---|---|
| MS53230-1 | LT11V022 | 10.0 | 5.5 | 2.5 | 25 | 57 |
| MS53230-2 | LT11V023 | 13.0 | 6.5 | 2.5 | 25 | 53 |
| MS53230-3 | LT11V024 | 16.0 | 8.0 | 2.5 | 30 | 50 |
| MS53230-4 | LT11V025 | 20.0 | 10.0 | 2.5 | 30 | 43 |
| MS53230-5 | LT11V026 | 22.0 | 11.0 | 2.5 | 30 | 43 |
| MS53230-6 | LT11V027 | 30.0 | 15.0 | 2.5 | 30 | 40 |
| MS53230-7 | LT11V028 | 36.0 | 18.0 | 2.5 | 30 | 40 |
| MS53230-8 | LT11V029 | 47.0 | 24.0 | 2.5 | 30 | 39 |
| MS53230-9 | LT11V030 | 56.0 | 28.0 | 2.5 | 30 | 35 |
| MS53230-10 | LT11V031 | 68.0 | 34.0 | 2.5 | 30 | 30 |
| MS53230-11 | LT11V032 | 75.0 | 38.0 | 2.5 | 30 | 30 |
| MS53230-12 | LT11V033 | 86.0 | 43.0 | 2.5 | 30 | 28 |
| MS53230-13 | LT11V034 | 100.0 | 50.0 | .79 | 28 | 27 |
| MS53230-14 | LT11V035 | 120.0 | 60.0 | .79 | 25 | 25 |
| MS53230-15 | LT11V036 | 470.0 | 240.0 | .79 | 20 | 16 |
| MS53230-16 | LT11V037 | 680.0 | 340.0 | .79 | 20 | 15 |
| MS53230-17 | LT11V038 | 1 mH | .5 mH | .79 | 20 | 11 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 400

COILS, FIXED, RADIOFREQUENCY, ESTABLISHED RELIABILITY

1. Scope. This section covers radiofrequency, molded coils which have a specified reliability for use in equipment where reliability, long life, and continuity of operation are necessary, as follows:

| Section | | Applicable specification |
|---|---|---|
| 401 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Phenolic Core-Iron Sleeve)- - - - - - | MIL-C-39010 |
| 402 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Iron Core-Iron Sleeve)- - - - - - - - | MIL-C-39010 |
| 403 | Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Ferrite Core-Ferrite Sleeve) - - - - | MIL-C-39010 |
| 404 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Phenolic Core) - - - - - | MIL-C-39010 |
| 405 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Powdered Iron Core)- - - | MIL-C-39010 |
| 406 | Coils, Fixed, Radiofrequency, Molded, Established Reliability (Ferrite Core)- - - - - - | MIL-C-39010 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

2. Identification.

2.1 Part number. The part number is comprised of the "M" number plus the applicable modifiers describing certain characteristics of the coils covered by MIL-C-39010 as shown in figure 400-1.

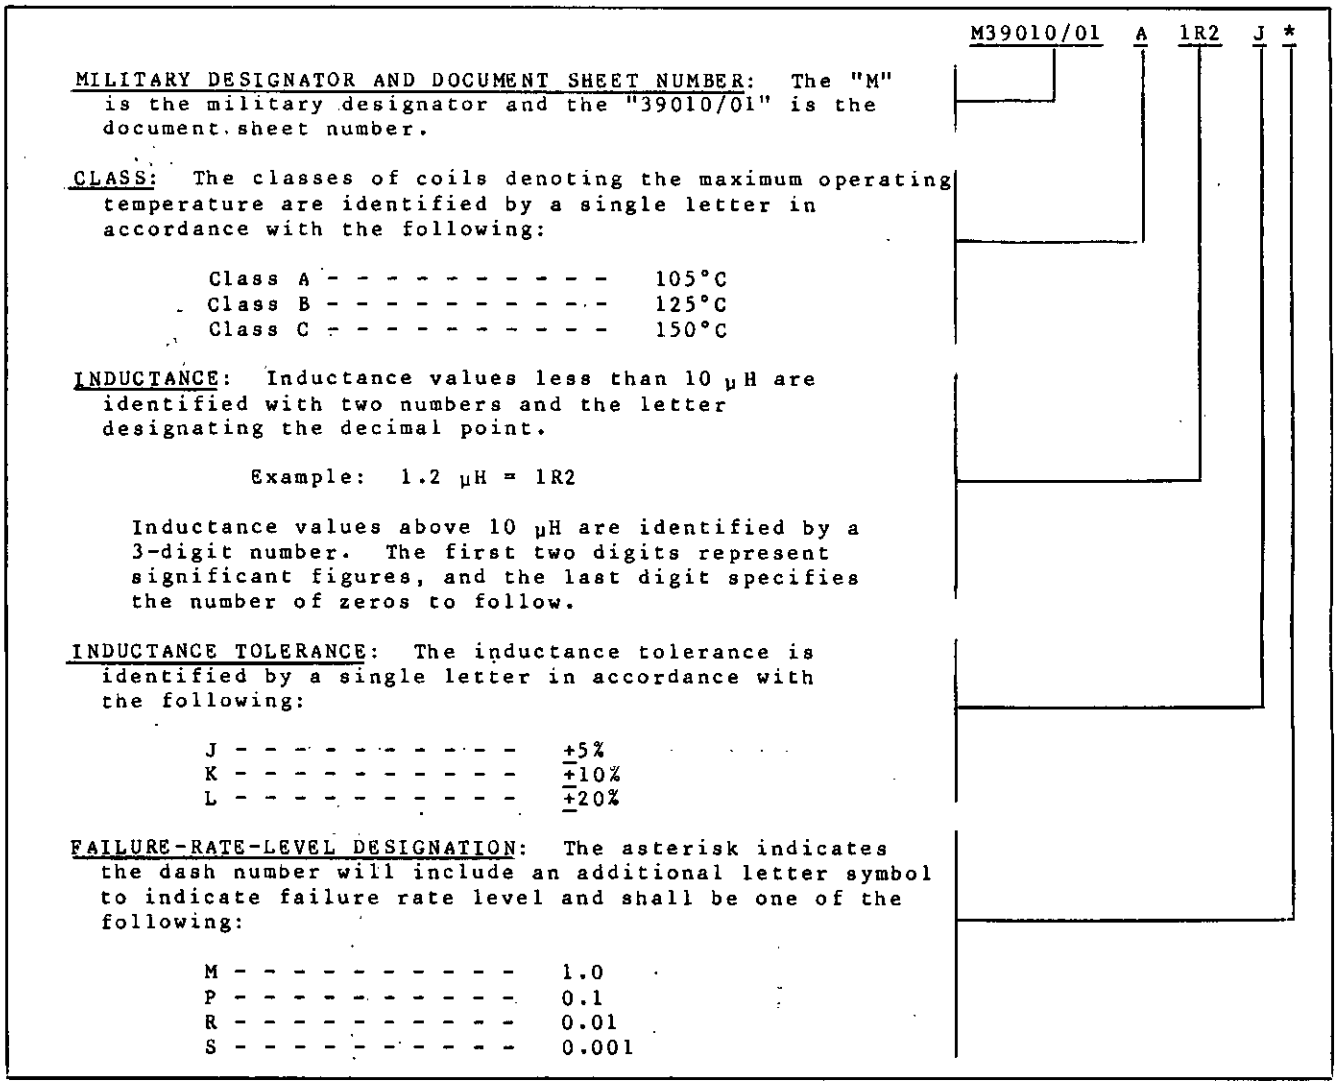



FIGURE 400-1. Part number example (MIL-C-39010).




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 401

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE,
MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (PHENOLIC CORE-IRON SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/1)

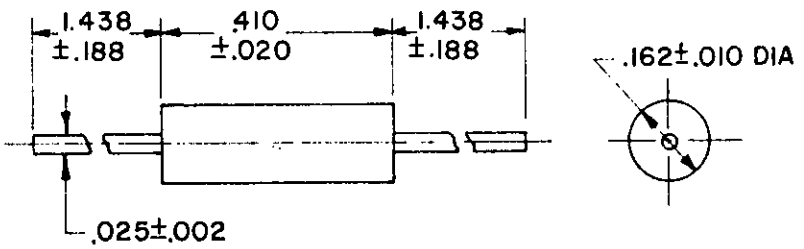


| INCHES | MM |
|---|---|
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .162 | 4.11 |
| .188 | 4.78 |
| .410 | 10.41 |
| 1.438 | 36.53 |

| Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|
| M39010/01– | μH | | MHz | mA |
| AR10K * | .10 | 50 | 25 | 1790 |
| AR12K * | .12 | 50 | 25 | 1530 |
| AR15K * | .15 | 50 | 25 | 1470 |
| AR18K * | .18 | 50 | 25 | 1300 |
| AR22K * | .22 | 49 | 25 | 1100 |
| AR27K * | .27 | 47 | 25 | 853 |
| AR33K * | .33 | 46 | 25 | 780 |
| AR39K * | .39 | 44 | 25 | 670 |
| AR47K * | .47 | 44 | 25 | 565 |
| AR56K * | .56 | 43 | 25 | 490 |
| AR68K * | .68 | 42 | 25 | 420 |
| AR82K * | .82 | 40 | 25 | 370 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 402

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE,
MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (IRON CORE-IRON SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/2)

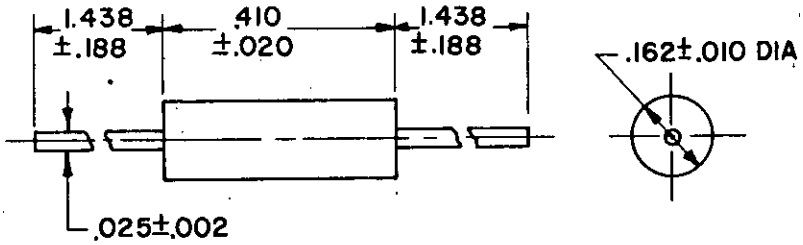


| INCHES | MM |
|---|---|
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .162 | 4.11 |
| .188 | 4.78 |
| .410 | 10.41 |
| 1.438 | 36.53 |

| Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|
| M39010/02- | μH | | MHz | mA |
| A1R0K * | 1.00 | 44 | 25.0 | 1070 |
| A1R2K * | 1.20 | 44 | 7.9 | 895 |
| A1R5K * | 1.50 | 44 | 7.9 | 815 |
| A1R8K * | 1.80 | 44 | 7.9 | 755 |
| A2R2K * | 2.20 | 44 | 7.9 | 650 |
| A2R7K * | 2.70 | 44 | 7.9 | 535 |
| A3R3K * | 3.30 | 44 | 7.9 | 480 |
| A3R9K * | 3.90 | 44 | 7.9 | 450 |
| A4R7K * | 4.70 | 44 | 7.9 | 380 |
| A5R6K * | 5.60 | 44 | 7.9 | 335 |
| A6R8K * | 6.80 | 50 | 7.9 | 280 |
| A8R2K * | 8.20 | 50 | 7.9 | 245 |
| A100K * | 10.0 | 50 | 7.9 | 220 |
| A120K * | 12.0 | 55 | 2.5 | 200 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 403

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE,
MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (FERRITE CORE-FERRITE SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/3)

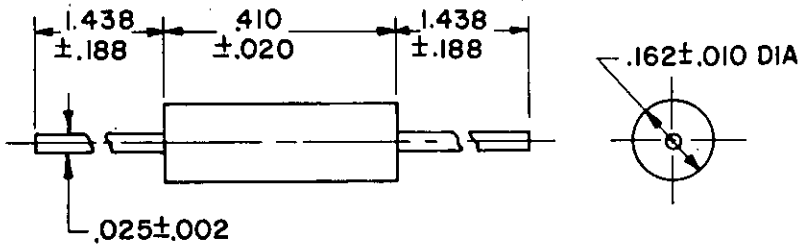


| INCHES | MM |
|---|---|
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .162 | 4.11 |
| .188 | 4.78 |
| .410 | 10.41 |
| 1.438 | 36.53 |

| Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current | Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|---|---|---|---|---|
| M39010/03- | μH | | MHz | mA | M39010/03- | μH | | MHz | mA |
| A150K * | 15 | 45 | 2.5 | 315.0 | A122K * | 1,200 | 45 | .25 | 60.0 |
| A180K * | 18 | 45 | 2.5 | 300.0 | A152K * | 1,500 | 45 | .25 | 55.0 |
| A220K * | 22 | 45 | 2.5 | 290.0 | A182K * | 1,800 | 45 | .25 | 50.0 |
| A270K * | 27 | 45 | 2.5 | 260.0 | A222K * | 2,200 | 45 | .25 | 50.0 |
| A330K * | 33 | 45 | 2.5 | 240.0 | A272K * | 2,700 | 45 | .25 | 40.0 |
| A390K * | 39 | 50 | 2.5 | 205.0 | A332K * | 3,300 | 45 | .25 | 40.0 |
| A470K * | 47 | 50 | 2.5 | 195.0 | A392K * | 3,900 | 45 | .25 | 35.0 |
| A560K * | 56 | 50 | 2.5 | 190.0 | A472K * | 4,700 | 45 | .25 | 31.0 |
| A680K * | 68 | 50 | 2.5 | 180.0 | A562K * | 5,600 | 44 | .25 | 28.0 |
| A820K * | 82 | 50 | 2.5 | 170.0 | A682K * | 6,800 | 40 | .25 | 27.0 |
| A101K * | 100 | 50 | 2.5 | 160.0 | A822K * | 8,200 | 40 | .25 | 26.0 |
| A121K * | 120 | 55 | .79 | 150.0 | A103K * | 10,000 | 40 | .25 | 24.0 |
| A151K * | 150 | 55 | .79 | 140.0 | A123K * | 12,000 | 30 | .079 | 23.0 |
| A181K * | 180 | 55 | .79 | 135.0 | A153K * | 15,000 | 30 | .079 | 22.0 |
| A221K * | 220 | 55 | .79 | 125.0 | A183K * | 18,000 | 30 | .079 | 21.0 |
| A271K * | 270 | 55 | .79 | 115.0 | A223K * | 22,000 | 27 | .079 | 17.0 |
| A331K * | 330 | 55 | .79 | 110.0 | A273K * | 27,000 | 27 | .079 | 16.0 |
| A391K * | 390 | 60 | .79 | 105.0 | A333K * | 33,000 | 27 | .079 | 15.0 |
| A471K * | 470 | 60 | .79 | 92.0 | A393K * | 39,000 | 27 | .079 | 15.0 |
| A561K * | 560 | 60 | .79 | 90.0 | A473K * | 47,000 | 23 | .079 | 13.0 |
| A681K * | 680 | 60 | .79 | 80.0 | A563K * | 56,000 | 23 | .079 | 13.0 |
| A821K * | 820 | 60 | .79 | 80.0 | A683K * | 68,000 | 23 | .079 | 12.0 |
| A102K * | 1,000 | 60 | .79 | 70.0 | A823K * | 82,000 | 21 | .079 | 11.0 |
| | | | | | A104K * | 100,000 | 18 | .079 | 11.0 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/4)

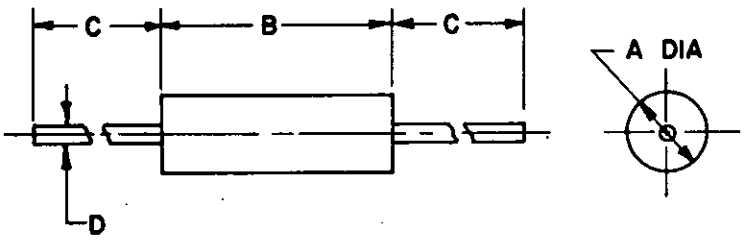


| INCHES | MM |
|---|---|
| .0015 | 0.04 |
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .031 | 0.79 |
| .095 | 2.41 |
| .156 | 3.96 |
| .188 | 4.78 |
| .250 | 6.35 |
| .375 | 9.53 |
| .438 | 11.13 |
| 1.438 | 36.53 |

| MIL-C-39010/ | A | Tol | B | Tol | C | Tol | D | Tol |
|---|---|---|---|---|---|---|---|---|
| 04 | .188 | ±.031 | .438 | ±.031 | 1.438 | ±.188 | .025 | ±.002 |
| 06 | .156 | ±.010 | .375 | ±.010 | 1.438 | ±.188 | .025 | ±.002 |
| 08 | .095 | ±.010 | .250 | ±.010 | 1.438 | ±.188 | .020 | ±.0015 |

| Part number | Inductance | Q Min | Test frequency | Rated dc current | Part number | Inductance | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|---|---|---|---|---|
| M39010/04- | µH | | MHz | mA | M39010/06- | µH | | MHz | mA |
| BR15L * | .15 ±20% | 55 | 25 | 2,900 | B1R2K * | 1.20 ±10% | 33 | 7.9 | 650 |
| BR22L * | .22 ±20% | 50 | 25 | 2,700 | B1R5K * | 1.50 ±10% | 33 | 7.9 | 600 |
| BR33L * | .33 ±20% | 50 | 25 | 2,000 | B1R8K * | 1.80 ±10% | 33 | 7.9 | 525 |
| BR47L * | .47 ±20% | 50 | 25 | 1,700 | B2R2K * | 2.20 ±10% | 33 | 7.9 | 435 |
| BR56K * | .56 ±10% | 50 | 25 | 1,450 | B2R7K * | 2.70 ±10% | 33 | 7.9 | 385 |
| BR68K * | .68 ±10% | 45 | 25 | 1,300 | B3R3K * | 3.30 ±10% | 33 | 7.9 | 300 |
| BR82K * | .82 ±10% | 40 | 25 | 1,100 | B3R9K * | 3.90 ±10% | 33 | 7.9 | 280 |
| B1R0K * | 1.00 ±10% | 40 | 25 | 930 | B4R7K * | 4.70 ±10% | 33 | 7.9 | 260 |
| B1R2K * | 1.20 ±10% | 30 | 7.9 | 785 | M39010/08- | | | | |
| B1R5K * | 1.50 ±10% | 30 | 7.9 | 720 | BR10K * | .10 ±10% | 40 | 25 | 1,350 |
| B1R8K * | 1.80 ±10% | 30 | 7.9 | 580 | BR12K * | .12 ±10% | 40 | 25 | 1,270 |
| B2R2K * | 2.20 ±10% | 30 | 7.9 | 505 | BR15K * | .15 ±10% | 38 | 25 | 1,200 |
| B2R7K * | 2.70 ±10% | 30 | 7.9 | 460 | BR18K * | .18 ±10% | 35 | 25 | 1,105 |
| M39010/06- | | | | | BR22K * | .22 ±10% | 33 | 25 | 1,025 |
| BR15L * | .15 ±20% | 50 | 25 | 2,450 | BR27K * | .27 ±10% | 33 | 25 | 960 |
| BR22L * | .22 ±20% | 50 | 25 | 1,810 | BR33 K * | .33 ±10% | 30 | 25 | 815 |
| BR33L * | .33 ±20% | 45 | 25 | 1,400 | BR39K * | .39 ±10% | 30 | 25 | 700 |
| BR47L * | .47 ±20% | 45 | 25 | 1,225 | BR47K * | .47 ±10% | 30 | 25 | 650 |
| BR56K * | .56 ±10% | 50 | 25 | 1,150 | BR56K * | .56 ±10% | 30 | 25 | 545 |
| BR68K * | .68 ±10% | 50 | 25 | 1,100 | BR68K * | .68 ±10% | 28 | 25 | 495 |
| BR82K * | .82 ±10% | 50 | 25 | 900 | BR82K * | .82 ±10% | 28 | 25 | 415 |
| B1R0K * | 1.00 ±10% | 50 | 25 | 785 | B1R0K * | 1.00 ±10% | 25 | 25 | 385 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 405

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY
(POWDERED IRON CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/5)

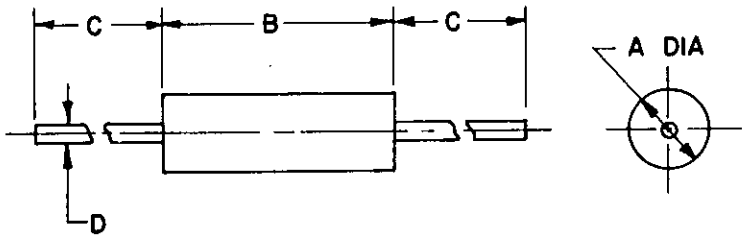


| INCHES | MM |
|---|---|
| .0015 | 0.04 |
| .002 | 0.05 |
| .010 | 0.25 |
| .020 | 0.51 |
| .025 | 0.64 |
| .031 | 0.79 |
| .095 | 2.41 |
| .156 | 3.96 |
| .188 | 4.78 |
| .250 | 6.35 |
| .375 | 9.53 |
| .438 | 11.13 |
| 1.438 | 36.53 |

| MIL-C-39010/ | A | Tol | B | Tol | C | Tol | D | Tol |
|---|---|---|---|---|---|---|---|---|
| 05 | .188 | ±.031 | .438 | ±.031 | 1.438 | ±.188 | .025 | ±.002 |
| 07 | .156 | ±.010 | .375 | ±.010 | 1.438 | ±.188 | .025 | ±.002 |
| 09 | .095 | ±.010 | .250 | ±.010 | 1.438 | ±.188 | .020 | ±.0015 |

| Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current | Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|---|---|---|---|---|
| M39010/05- | µH | | MHz | mA | M39010/09- | µH | | MHz | mA |
| A3R3K * | 3.30 | 30 | 7.9 | 945 | A1R2K * | 1.2 | 25 | 7.9 | 590 |
| A3R9K * | 3.90 | 30 | 7.9 | 870 | A1R5K * | 1.5 | 28 | 7.9 | 535 |
| A4R7K * | 4.70 | 30 | 7.9 | 745 | A1R8K * | 1.8 | 30 | 7.9 | 455 |
| A5R6K * | 5.60 | 30 | 7.9 | 645 | A2R2K * | 2.2 | 30 | 7.9 | 395 |
| A6R8K * | 6.80 | 30 | 7.9 | 560 | A2R7K * | 2.7 | 37 | 7.9 | 335 |
| A8R2K * | 8.20 | 30 | 7.9 | 520 | A3R3K * | 3.3 | 45 | 7.9 | 270 |
| A100K * | 10.0 | 30 | 7.9 | 440 | A3R9K * | 3.9 | 45 | 7.9 | 250 |
| A120K * | 12.0 | 50 | 2.5 | 335 | A4R7K * | 4.7 | 45 | 7.9 | 230 |
| A150K * | 15.0 | 55 | 2.5 | 310 | A5R6K * | 5.6 | 50 | 7.9 | 185 |
| A180K * | 18.0 | 60 | 2.5 | 245 | A6R8K * | 6.8 | 50 | 7.9 | 175 |
| A220K * | 22.0 | 60 | 2.5 | 230 | A8R2K * | 8.2 | 55 | 7.9 | 155 |
| A270K * | 27.0 | 65 | 2.5 | 205 | A100K * | 10.0 | 55 | 7.9 | 130 |
| M39010/07- | | | | | A120K * | 12.0 | 45 | 2.5 | 155 |
| A5R6K * | 5.6 | 45 | 7.9 | 495 | A150K * | 15.0 | 40 | 2.5 | 150 |
| A6R8K * | 6.8 | 50 | 7.9 | 395 | A180K * | 18.0 | 50 | 2.5 | 145 |
| A8R2K * | 8.2 | 50 | 7.9 | 360 | A220K * | 22.0 | 50 | 2.5 | 140 |
| A100K * | 10.0 | 55 | 7.9 | 290 | A270K * | 27.0 | 50 | 2.5 | 135 |
| A120K * | 12.0 | 65 | 2.5 | 265 | | | | | |
| A150K * | 15.0 | 65 | 2.5 | 240 | | | | | |
| A180K * | 18.0 | 75 | 2.5 | 185 | | | | | |
| A220K * | 22.0 | 75 | 2.5 | 175 | | | | | |
| A270K * | 27.0 | 60 | 2.5 | 170 | | | | | |
| A330K * | 33.0 | 65 | 2.5 | 165 | | | | | |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 406

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (FERRITE CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/10)

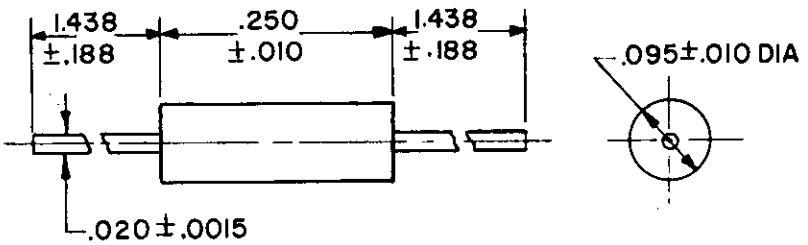


| INCHES | MM |
|---|---|
| .0015 | .038 |
| .010 | .25 |
| .020 | .51 |
| .095 | 2.41 |
| .100 | 4.78 |
| .250 | 6.35 |
| 1.438 | 36.53 |

| Part number | Inductance (±10%) | Q Min | Test frequency | Rated dc current |
|---|---|---|---|---|
| M39010/10- | μH | | MHz | mA |
| A330K * | 33 | 45 | 2.5 | 130 |
| A390K * | 39 | 45 | 2.5 | 125 |
| A470K * | 47 | 45 | 2.5 | 110 |
| A560K * | 56 | 45 | 2.5 | 100 |
| A680K * | 68 | 50 | 2.5 | 92 |
| A820K * | 82 | 50 | 2.5 | 88 |
| A101K * | 100 | 50 | 2.5 | 84 |
| A121K * | 120 | 30 | .79 | 66 |
| A151K * | 150 | 30 | .79 | 61 |
| A181K * | 180 | 30 | .79 | 57 |
| A221K * | 220 | 30 | .79 | 52 |
| A271K * | 270 | 30 | .79 | 47 |
| A331K * | 330 | 30 | .79 | 45 |
| A391K * | 390 | 30 | .79 | 40 |
| A471K * | 470 | 30 | .79 | 36 |
| A561K * | 560 | 30 | .79 | 35 |
| A681K * | 680 | 30 | .79 | 30 |
| A821K * | 820 | 30 | .79 | 29 |
| A102K * | 1000 | 30 | .79 | 28 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 500

INDUCTORS, CHIP, FIXED OR VARIABLE

1. Scope. This section covers fixed or variable chip inductors primarily intended for incorporation into hybrid microelectronic circuits.

| Section | | Applicable specification |
|---|---|---|
| 501 | Inductors, Chip, Fixed | MIL-I-83446 |
| 502 | Inductors, Chip, Variable | MIL-I-83446 |

2. Identification.


2.1 Part number. The part number is used for identifying a discrete chip inductor. (Example: M83446/5-26.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-I-83446/5, INDUCTORS, CHIP, FIXED

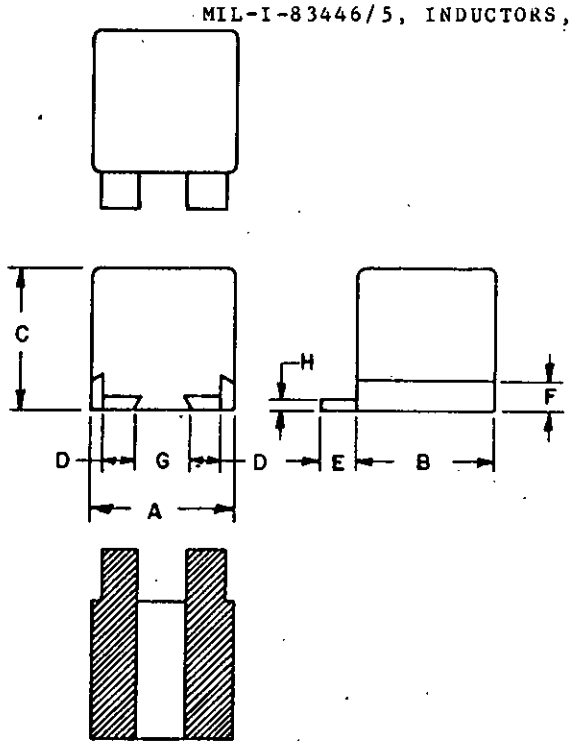


| | INCHES |
|---|---|
| A | .110 Max |
| B | .105 Max |
| C | .085 Max |
| D | .030 ±.005 |
| E | .040 ±.010 |
| F | .018 ±.005 |
| G | .038 ±.010 |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test votage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/5, INDUCTORS, CHIP, FIXED - Continued.


TABLE I. Electrical characteristics (initial).

| Part number M83446/5- | Inductance ±10% (μH) | Q (min) | Test frequency (MHz) | Self-resonant frequency (min)(MHz) | DC resistance (max) (ohms) | Current (max) (mA) |
|---|---|---|---|---|---|---|
| 1 | 0.010 | 60 | 150 | 2000 | 0.025 | 750 |
| 2 | 0.012 | ↓ | ↓ | 2000 | 0.025 | ↓ |
| 3 | 0.015 | ↓ | ↓ | 1800 | 0.040 | ↓ |
| 4 | 0.018 | ↓ | ↓ | 1500 | ↓ | ↓ |
| 5 | 0.022 | 51 | 100 | 1400 | ↓ | ↓ |
| 6 | 0.027 | 51 | ↓ | 1200 | ↓ | ↓ |
| 7 | 0.033 | 47 | ↓ | 1200 | 0.050 | 640 |
| 8 | 0.039 | ↓ | ↓ | 1200 | 0.070 | 600 |
| 9 | 0.047 | ↓ | ↓ | 1000 | 0.080 | 550 |
| 10 | 0.056 | ↓ | ↓ | 900 | 0.090 | 520 |
| 11 | 0.068 | ↓ | ↓ | 900 | 0.10 | 480 |
| 12 | 0.082 | ↓ | ↓ | 750 | 0.11 | 470 |
| 13 | 0.100 | ↓ | 50 | 700 | 0.11 | 470 |
| 14 | 0.120 | ↓ | ↓ | 600 | 0.11 | 470 |
| 15 | 0.150 | ↓ | ↓ | 500 | 0.12 | 450 |
| 16 | 0.180 | 51 | ↓ | 450 | 0.14 | 430 |
| 17 | 0.220 | ↓ | ↓ | 420 | 0.20 | 350 |
| 18 | 0.270 | ↓ | ↓ | 400 | 0.25 | 310 |
| 19 | 0.330 | ↓ | ↓ | 320 | 0.30 | 280 |
| 20 | 0.390 | 47 | ↓ | 270 | 0.45 | 240 |
| 21 | 0.047 | 47 | 25 | 250 | 0.50 | 230 |
| 22 | 0.560 | 52 | ↓ | 200 | 0.55 | 220 |
| 23 | 0.680 | ↓ | ↓ | 180 | 0.58 | 210 |
| 24 | 0.820 | ↓ | ↓ | 150 | 0.60 | 200 |
| 25 | 1.00 | ↓ | ↓ | 120 | 0.65 | 190 |
| 26 | 1.20 | 42 | 7.90 | 110 | 0.75 | 180 |
| 27 | 1.50 | 42 | ↓ | 100 | 1.1 | 160 |
| 28 | 1.80 | 48 | ↓ | 95 | 1.2 | 150 |
| 29 | 2.20 | ↓ | ↓ | 90 | 1.3 | 140 |
| 30 | 2.70 | ↓ | ↓ | 65 | 1.5 | 130 |
| 31 | 3.30 | ↓ | ↓ | 55 | 1.8 | 120 |
| 32 | 3.90 | ↓ | ↓ | 45 | 2.0 | 110 |
| 33 | 4.70 | ↓ | ↓ | 43 | 2.3 | 100 |
| 34 | 5.60 | ↓ | ↓ | 40 | 2.5 | 100 |
| 35 | 6.80 | 46 | ↓ | 38 | 2.6 | 98 |
| 36 | 8.20 | 46 | ↓ | 35 | 2.8 | 95 |
| 37 | 10.0 | 46 | ↓ | 33 | 3.3 | 87 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/8, INDUCTORS, CHIP, FIXED

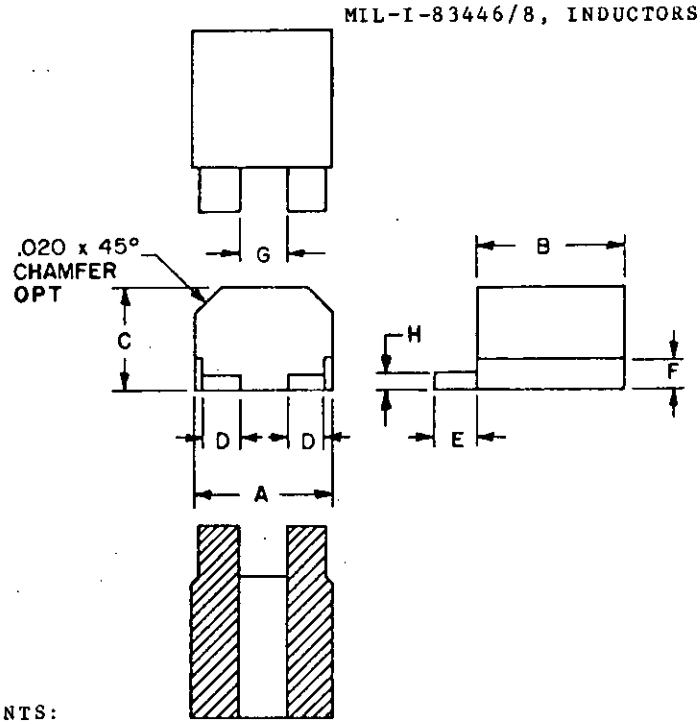


| | INCHES |
|---|---|
| A | .120 Max |
| B | .105 Max |
| C | .065 Max |
| D | .100 Max |
| E | .040 $^{+.015}_{-.010}$ |
| F | .018 ±.005 |
| G | .038 ±.010 |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/8, INDUCTORS, CHIP, FIXED - Continued.


TABLE II. Electrical characteristics (initial).

| Part number M83446/8- | Inductance ±10% (μH) | Q (min) | Test frequency (MHz) | Self-resonant frequency (min)(MHz) | DC resistance (max) (ohms) | Current (max) (mA) |
|---|---|---|---|---|---|---|
| 1 | 0.010 | 60 | 150 | 2000 | 0.025 | 750 |
| 2 | 0.012 | ↓ | ↓ | 2000 | 0.025 | ↓ |
| 3 | 0.015 | | | 1800 | 0.040 | |
| 4 | 0.018 | | | 1500 | ↓ | |
| 5 | 0.022 | 51 | 100 | 1400 | | |
| 6 | 0.027 | 51 | | 1200 | | |
| 7 | 0.033 | 47 | | 1100 | 0.05 | 640 |
| 8 | 0.039 | | | 1000 | 0.07 | 600 |
| 9 | 0.047 | | | 900 | 0.08 | 550 |
| 10 | 0.056 | | | 850 | 0.09 | 520 |
| 11 | 0.068 | | | 840 | 0.10 | 480 |
| 12 | 0.082 | | | 750 | 0.11 | 470 |
| 13 | 0.100 | | 50 | 580 | 0.11 | 470 |
| 14 | 0.120 | | | 240 | 0.11 | 470 |
| 15 | 0.150 | | | 230 | 0.12 | 450 |
| 16 | 0.180 | 51 | | | 0.14 | 430 |
| 17 | 0.220 | | | | 0.20 | 350 |
| 18 | 0.270 | | | | 0.25 | 310 |
| 19 | 0.330 | | | 200 | 0.30 | 280 |
| 20 | 0.390 | 47 | | 190 | 0.45 | 240 |
| 21 | 0.047 | 47 | 25 | 180 | 0.50 | 230 |
| 22 | 0.560 | 45 | | 170 | | |
| 23 | 0.680 | | | 160 | | |
| 24 | 0.820 | | | 150 | | |
| 25 | 1.00 | | | 130 | | |
| 26 | 1.20 | 36 | 7.90 | 120 | 0.60 | 200 |
| 27 | 1.50 | 36 | | 100 | 1.1 | 160 |
| 28 | 1.80 | 38 | | 90 | 1.1 | 160 |
| 29 | 2.20 | 38 | | 85 | 1.5 | 130 |
| 30 | 2.70 | 41 | | 80 | 1.7 | 125 |
| 31 | 3.30 | 42 | | 75 | 1.8 | 120 |
| 32 | 3.90 | 42 | | 65 | 2.0 | 110 |
| 33 | 4.70 | 41 | | 55 | 2.3 | 100 |
| 34 | 5.60 | 41 | | 45 | 2.6 | 98 |
| 35 | 6.80 | 36 | | 40 | 2.8 | 94 |
| 36 | 8.20 | | | 35 | 3.0 | 90 |
| 37 | 10.0 | | | 33 | 3.3 | 87 |
| 38 | 12.0 | | | 26 | 4.0 | 79 |
| 39 | 15.0 | 32 | 2.50 | 24 | 4.2 | 79 |
| 40 | 18.0 | | | 21 | 4.4 | 75 |
| 41 | 22.0 | | | 19 | 7.5 | 57 |
| 42 | 27.0 | | | 14 | 8.0 | 55 |
| 43 | 33.0 | 30 | | 12 | 13 | 45 |
| 44 | 39.0 | | | 10 | 17 | 38 |
| 45 | 47.0 | | | 9.0 | 19 | 36 |
| 46 | 56.0 | ↓ | ↓ | 8.5 | 23 | 33 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/10, INDUCTORS, CHIP, FIXED

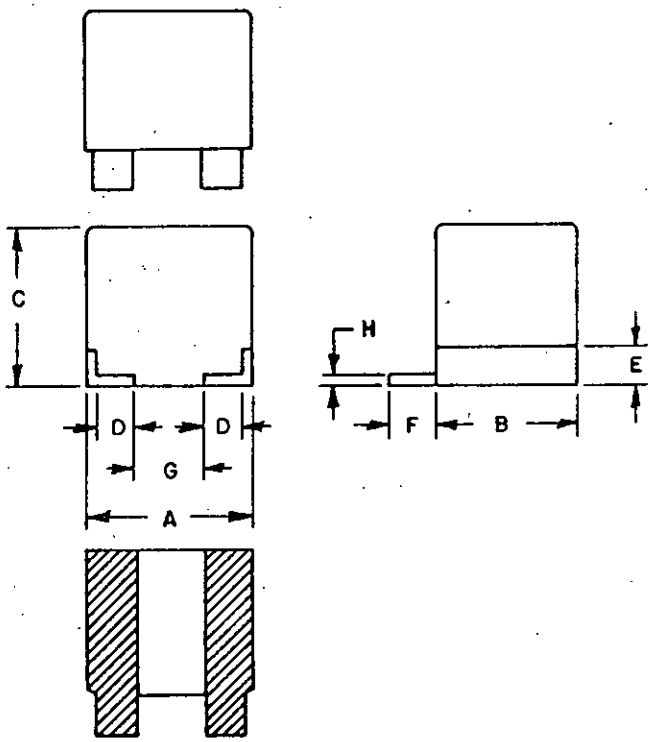


| | INCHES |
|---|---|
| A | .155 ±.008 |
| B | .125 ±.008 |
| C | .130 Max |
| D | .037 ±.003 |
| E | .020 ±.005 |
| F | .040 $^{+.015}_{-.010}$ |
| G | .073 Min |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table III.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/10, INDUCTORS, CHIP, FIXED - Continued.

TABLE III. Electrical characteristics (initial).


| Part number M83446/10- | Inductance ±10% (μH) | Q (min) | Test frequency (MHz) | Self-resonant frequency (min)(MHz) | DC resistance (max) (ohms) | Current (max) (mA) |
|---|---|---|---|---|---|---|
| 1 | 0.010 | 60 | 150 | 2000 | 0.04 | 1000 |
| 2 | 0.012 | 70 | ↓ | 1800 | ↓ | ↓ |
| 3 | 0.015 | 75 | | 1500 | | |
| 4 | 0.018 | 75 | | 1500 | | |
| 5 | 0.022 | 60 | 100 | 1300 | 0.05 | |
| 6 | 0.027 | ↓ | ↓ | 1300 | 0.05 | |
| 7 | 0.033 | | | 1000 | 0.05 | |
| 8 | 0.039 | | | 1000 | 0.06 | 900 |
| 9 | 0.047 | 65 | | 800 | 0.06 | 900 |
| 10 | 0.056 | ↓ | | 760 | 0.06 | 900 |
| 11 | 0.068 | | | 700 | 0.07 | 840 |
| 12 | 0.082 | | ↓ | 650 | ↓ | ↓ |
| 13 | 0.100 | | 50 | 570 | | |
| 14 | 0.120 | ↓ | ↓ | 520 | ↓ | ↓ |
| 15 | 0.150 | 75 | | 400 | 0.08 | 790 |
| 16 | 0.180 | 75 | | 360 | 0.08 | 790 |
| 17 | 0.220 | 70 | | 320 | 0.08 | 790 |
| 18 | 0.270 | | | 270 | 0.10 | 700 |
| 19 | 0.330 | ↓ | | 240 | 0.10 | 700 |
| 20 | 0.390 | | ↓ | 220 | 0.10 | 700 |
| 21 | 0.470 | | 25 | 190 | 0.14 | 590 |
| 22 | 0.560 | | ↓ | 170 | 0.19 | 510 |
| 23 | 0.680 | ↓ | | 160 | 0.26 | 430 |
| 24 | 0.820 | 75 | | 150 | 0.30 | 400 |
| 25 | 1.00 | 75 | ↓ | 130 | 0.34 | 380 |
| 26 | 1.20 | 65 | 7.9 | 120 | 0.45 | 330 |
| 27 | 1.50 | ↓ | ↓ | 110 | 0.57 | 290 |
| 28 | 1.80 | | | 100 | 0.72 | 260 |
| 29 | 2.20 | | | 80 | 0.9 | 230 |
| 30 | 2.70 | ↓ | | 60 | 1.1 | 210 |
| 31 | 3.30 | 60 | | 50 | 1.2 | 200 |
| 32 | 3.90 | 60 | | 45 | 1.4 | 180 |
| 33 | 4.70 | 60 | | 42 | 1.6 | 170 |
| 34 | 5.60 | 65 | | 40 | 1.8 | 160 |
| 35 | 6.80 | ↓ | | 37 | 2.4 | 140 |
| 36 | 8.20 | | | 34 | 3.0 | 130 |
| 37 | 10.0 | | ↓ | 29 | 3.5 | 120 |
| 38 | 12.0 | 60 | 2.5 | 27 | 3.6 | 118 |
| 39 | 15.0 | ↓ | ↓ | 22 | 3.7 | 115 |
| 40 | 18.0 | | | 17 | 3.8 | 114 |
| 41 | 22.0 | | | 16 | 3.9 | 113 |
| 42 | 27.0 | 65 | | 15 | 4 | 110 |
| 43 | 33.0 | 65 | | 14 | 5 | 100 |
| 44 | 39.0 | 65 | | 13 | 7 | 84 |
| 45 | 47.0 | 70 | | 12 | 8 | 79 |
| 46 | 56.0 | 70 | | 11 | 10 | 70 |
| 47 | 68.0 | 65 | | 10 | 11 | 67 |
| 48 | 82.0 | 60 | | 9 | 12 | 64 |
| 49 | 100. | 60 | ↓ | 8 | 13 | 62 |
| 50 | 120. | 40 | 0.79 | 7 | 14 | 59 |
| 51 | 150. | ↓ | ↓ | 6 | 16 | 56 |
| 52 | 180. | | | 5 | 18 | 52 |
| 53 | 220. | | | 4 | 24 | 45 |
| 54 | 270. | | | 3.3 | 25 | 44 |
| 55 | 330. | | | 3.1 | 29 | 41 |
| 56 | 390. | ↓ | | 2.9 | 32 | 39 |
| 57 | 470. | 35 | | 2.4 | 35 | 37 |
| 58 | 560. | 35 | | 2.1 | 45 | 33 |
| 59 | 680. | 35 | | 1.9 | 55 | 30 |
| 60 | 820. | 30 | | 1.8 | 70 | 26 |
| 61 | 1000. | 30 | ↓ | 1.7 | 80 | 25 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-I-83446/11, INDUCTORS, CHIP, FIXED

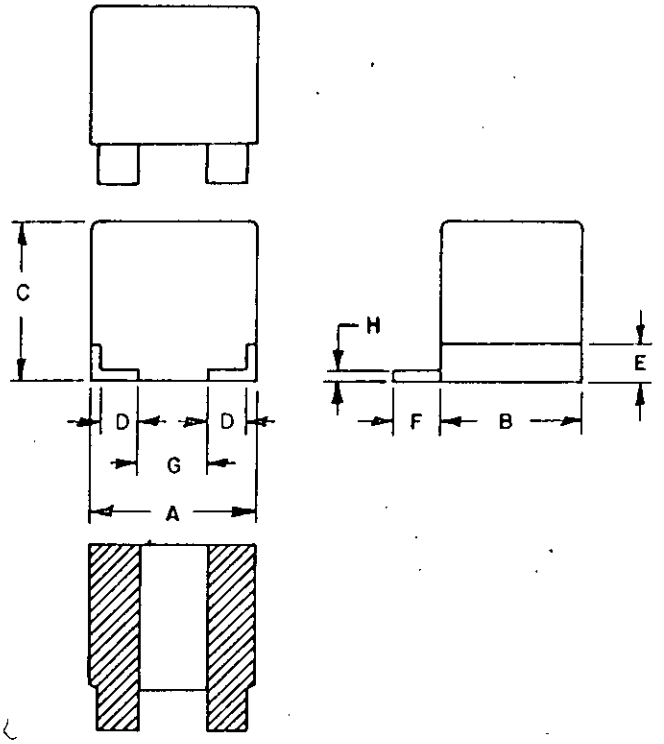


| | INCHES |
|---|---|
| A | .155 ±.008 |
| B | .125 ±.008 |
| C | .130 Max |
| D | .037 ±.003 |
| E | .020 ±.005 |
| F | .040 +.015 -.010 |
| G | .073 Min |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table IV.
Percent coupling = 3 percent maximum, mounted with the X-Y surfaces, side by side but not touching.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/11, INDUCTORS, CHIP, FIXED - Continued.

TABLE IV. Electrical characteristics (initial).


| Part number M83446/11- | Inductance ±10% (μH) | Q (min) | Test frequency (MHz) | Self-resonant frequency (min)(MHz) | DC resistance (max) (ohms) | Current (max) (mA) | Incremental current (max) (mA) |
|---|---|---|---|---|---|---|---|
| 1 | 0.10 | 90 | 25 | 600 | 0.03 | 1000 | 280 |
| 2 | 0.12 | ↓ | ↓ | 520 | 0.03 | ↓ | ↓ |
| 3 | 0.15 | | | 490 | 0.03 | | |
| 4 | 0.18 | | | 460 | 0.04 | | |
| 5 | 0.22 | | | 430 | 0.04 | | |
| 6 | 0.27 | 100 | | 370 | 0.04 | ↓ | ↓ |
| 7 | 0.33 | 105 | | 310 | 0.05 | 750 | 200 |
| 8 | 0.39 | 115 | | 280 | 0.05 | 750 | 200 |
| 9 | 0.47 | ↓ | | 260 | 0.05 | 750 | 200 |
| 10 | 0.56 | | | 240 | 0.06 | 700 | 190 |
| 11 | 0.68 | | | 200 | 0.06 | 700 | 190 |
| 12 | 0.82 | | | 185 | 0.06 | 700 | 190 |
| 13 | 1.0 | ↓ | ↓ | 175 | 0.09 | 650 | 170 |
| 14 | 1.2 | 90 | 7.9 | 150 | 0.09 | 650 | 170 |
| 15 | 1.5 | 100 | | 135 | 0.14 | 600 | 150 |
| 16 | 1.8 | ↓ | | 120 | 0.20 | 500 | 130 |
| 17 | 2.2 | | | 105 | 0.30 | 400 | 100 |
| 18 | 2.7 | | | 85 | 0.40 | 350 | 88 |
| 19 | 3.3 | ↓ | | 80 | 0.46 | 330 | 83 |
| 20 | 3.9 | 105 | | 64 | 0.52 | 310 | 78 |
| 21 | 4.7 | 115 | | 56 | 0.54 | 300 | 75 |
| 22 | 5.6 | | | 49 | 0.60 | 285 | 72 |
| 23 | 6.8 | | | 45 | 0.66 | 270 | 68 |
| 24 | 8.2 | | | 41 | 1.00 | 225 | 57 |
| 25 | 10. | ↓ | ↓ | 39 | 1.20 | 200 | 50 |
| 26 | 12. | 100 | 2.5 | 34 | 1.5 | 180 | 43 |
| 27 | 15. | 100 | | 30 | 1.8 | 170 | 41 |
| 28 | 18. | 100 | | 26 | 1.9 | 160 | 38 |
| 29 | 22. | 105 | | 23 | 2.1 | 150 | 36 |
| 30 | 27. | 110 | | 20 | 2.4 | 140 | 34 |
| 31 | 33. | 115 | | 18 | 2.7 | 130 | 32 |
| 32 | 39. | 115 | | 17 | 3.1 | 125 | 29 |
| 33 | 47. | 115 | | 16 | 3.2 | 125 | 29 |
| 34 | 56. | 110 | | 14 | 3.5 | 120 | 28 |
| 35 | 68. | ↓ | | 12 | 4.0 | 111 | 26 |
| 36 | 82. | | | 10 | 4.8 | 102 | 23 |
| 37 | 100. | ↓ | ↓ | 4.4 | 5.7 | 93 | 20 |
| 38 | 120. | 85 | 0.79 | 8.0 | 6.2 | 89 | 20 |
| 39 | 150. | ↓ | | 8.0 | 6.3 | 89 | 20 |
| 40 | 180. | | | 6.9 | 6.4 | 88 | 19 |
| 41 | 220. | ↓ | | 6.1 | 7.4 | 82 | 18 |
| 42 | 270 | | | 5.2 | 8.1 | 78 | 17 |
| 43 | 330 | 100 | | 4.6 | 8.8 | 75 | 16 |
| 44 | 390 | ↓ | | 4.0 | 9.7 | 72 | 16 |
| 45 | 470 | | | 3.6 | 10.0 | 69 | 15 |
| 46 | 560 | | | 2.8 | 11 | 66 | 14 |
| 47 | 680 | ↓ | | 2.3 | 12 | 64 | 13 |
| 48 | 820 | 95 | | 2.1 | 17 | 53 | 11 |
| 49 | 1000 | 95 | | 2.0 | 22 | 47 | 10 |
| 50 | 1200 | 75 | 0.25 | 1.7 | 24 | 45 | 9 |
| 51 | 1500 | ↓ | ↓ | 1.6 | 25 | 44 | 9 |
| 52 | 1800 | | | 1.5 | 27 | 43 | 9 |
| 53 | 2200 | | | 1.4 | 30 | 40 | 8 |
| 54 | 2700 | | | 1.3 | 34 | 38 | 8 |
| 55 | 3300 | | | 1.2 | 39 | 35 | 7.5 |
| 56 | 3900 | | | 1.1 | 56 | 29 | 5.5 |
| 57 | 4700 | | | 1.0 | 70 | 26 | 5.0 |
| 58 | 5600 | | | 0.90 | 80 | 25 | 5.0 |
| 59 | 6800 | | | 0.80 | 90 | 23 | 4.5 |
| 60 | 8200 | | | 0.70 | 100 | 22 | 4.5 |
| 61 | 10000 | ↓ | ↓ | 0.70 | 110 | 21 | 4.0 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-I-83446/7, INDUCTORS, CHIP, VARIABLE

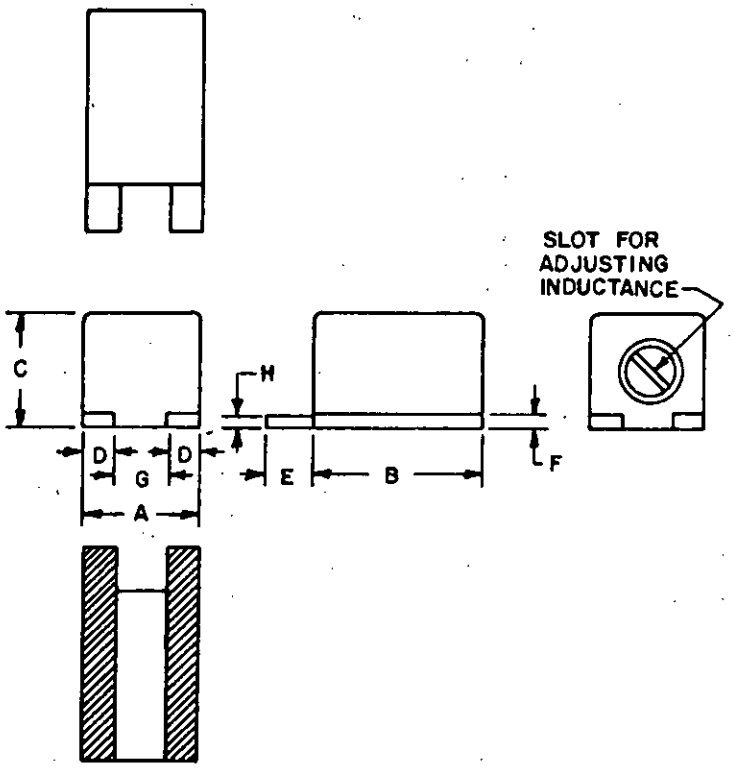


| | INCHES |
|---|---|
| A | .115 Max |
| B | .170 Max |
| C | .115 Max |
| D | .030 ±.005 |
| E | .040 $^{+.015}_{-.010}$ |
| F | .007 ±.003 |
| G | .038 ±.010 |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/7, INDUCTORS, CHIP, VARIABLE - Continued.


TABLE I. Electrical characteristics (initial).

| Part number M83446/7- | Inductance (µH) | | | Q (min) over L range | Test frequency (MHz) | Self-resonant frequency (min) (MHz) | DC resistance at 25°C (max) (ohms) | Current (max) (mA) | Incremental current (max) (mA) |
|---|---|---|---|---|---|---|---|---|---|
| | Min | Nom | Max | | | | | | |
| 1 | 0.016 | 0.018 | 0.019 | 52 | 150 | 1200 | 0.02 | 750 | --- |
| 2 | 0.019 | 0.022 | 0.024 | 55 | ↓ | 1100 | 0.02 | ↓ | --- |
| 3 | 0.024 | 0.027 | 0.030 | 55 | | 1000 | 0.03 | | --- |
| 4 | 0.029 | 0.033 | 0.037 | 52 | | 900 | 0.03 | | --- |
| 5 | 0.035 | 0.039 | 0.043 | 52 | | 750 | 0.03 | | --- |
| 6 | 0.042 | 0.047 | 0.052 | 52 | 100 | 660 | 0.04 | | --- |
| 7 | 0.049 | 0.056 | 0.062 | 55 | ↓ | 610 | 0.04 | | --- |
| 8 | 0.060 | 0.068 | 0.076 | 55 | | 550 | 0.05 | | --- |
| 9 | 0.072 | 0.082 | 0.092 | 55 | | 520 | 0.06 | 640 | --- |
| 10 | 0.090 | 0.100 | 0.110 | 50 | 50 | 490 | 0.07 | 600 | --- |
| 11 | 0.105 | 0.120 | 0.135 | 50 | ↓ | 460 | 0.07 | 600 | --- |
| 12 | 0.13 | 0.15 | 0.17 | 45 | | 430 | 0.10 | 480 | --- |
| 13 | 0.16 | 0.18 | 0.20 | ↓ | | 385 | 0.12 | 450 | --- |
| 14 | 0.19 | 0.22 | 0.25 | | | 330 | 0.15 | 400 | --- |
| 15 | 0.24 | 0.27 | 0.31 | | | 275 | 0.20 | 350 | --- |
| 16 | 0.29 | 0.33 | 0.37 | ↓ | | 240 | 0.25 | 300 | --- |
| 17 | 0.35 | 0.39 | 0.44 | 42 | | 210 | 0.35 | 260 | --- |
| 18 | 0.42 | 0.47 | 0.52 | 40 | 25 | 190 | 0.40 | 250 | --- |
| 19 | 0.50 | 0.56 | 0.62 | | ↓ | 165 | 0.50 | 230 | --- |
| 20 | 0.60 | 0.68 | 0.76 | | | 155 | 0.75 | 180 | --- |
| 21 | 0.73 | 0.82 | 0.92 | | | 145 | 0.90 | 160 | --- |
| 22 | 0.88 | 1.0 | 1.12 | | | 130 | 1.8 | 120 | --- |
| 23 | 1.05 | 1.2 | 1.35 | ↓ | | 120 | 1.9 | 115 | --- |
| 24 | 1.3 | 1.5 | 1.7 | 22 | 7.9 | 105 | 3.0 | 90 | --- |
| 25 | 1.5 | 1.8 | 2.0 | 22 | ↓ | 95 | 3.5 | 85 | --- |
| 26 | 1.9 | 2.2 | 2.5 | 19 | | 85 | 6.5 | 62 | --- |
| 27 | 2.4 | 2.7 | 3.0 | ↓ | | 80 | 7.0 | 60 | --- |
| 28 | 2.9 | 3.3 | 3.7 | | | 75 | 7.5 | 55 | --- |
| 29 | 3.5 | 3.9 | 4.3 | | | 70 | 10. | 50 | --- |
| 30 | 4.2 | 4.7 | 5.2 | ↓ | | 38 | 2.5 | 100 | --- |
| 31 | 5.0 | 5.6 | 6.2 | 22 | | 36 | 2.5 | 100 | --- |
| 32 | 6.0 | 6.8 | 7.5 | 22 | | 35 | 3.5 | 85 | --- |
| 33 | 7.3 | 8.2 | 9.1 | 21 | | 30 | 4.5 | 75 | --- |
| 34 | 8.8 | 10 | 11.2 | 21 | | 25 | 5.0 | 70 | --- |
| 35 | 10.6 | 12 | 13.4 | 21 | ↓ | 20 | 5.5 | 65 | --- |
| 36 | 13.2 | 15 | 16.8 | 22 | 2.5 | 18 | 6.5 | 60 | --- |
| 37 | 15.8 | 18 | 20.1 | ↓ | ↓ | 17 | 11.0 | 47 | --- |
| 38 | 19.4 | 22 | 24.6 | | | 16 | 12.0 | 45 | --- |
| 39 | 23.7 | 27 | 30.2 | | | 13 | 13.5 | 43 | --- |
| 40 | 29.1 | 33 | 36.9 | | | 11 | 14.0 | 42 | --- |
| 41 | 34.3 | 39 | 43.6 | | | 10 | 18 | 37 | 7.5 |
| 42 | 41.3 | 47 | 52.6 | | | 9 | 20 | 35 | 7.0 |
| 43 | 49.2 | 56 | 62.7 | | | 8 | 22 | 34 | 6.8 |
| 44 | 59.8 | 68 | 76.1 | ↓ | ↓ | 7 | 24 | 32 | 6.4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/9, INDUCTORS, CHIP, VARIABLE

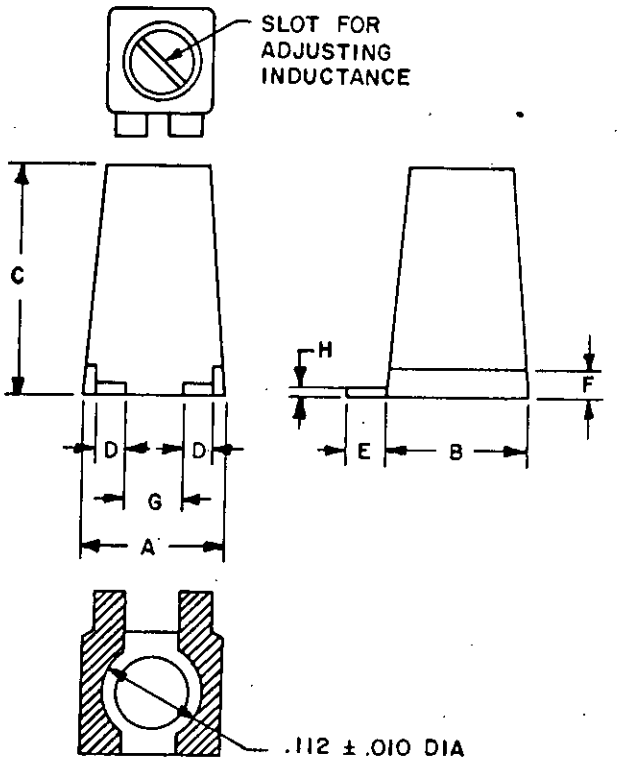


| | INCHES |
|---|---|
| A | .165 Max |
| B | .130 Max |
| C | .225 Max |
| D | .030 ±.010 |
| E | .040 $^{+.015}_{-.010}$ |
| F | .020 ±.005 |
| G | .073 Min |
| H | .005 ±.002 |

REQUIREMENTS:

Termination: Phosphor bronze base, tin-plated, welded internal connection.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-I-83446/9, INDUCTORS, CHIP, VARIABLE -Continued.

TABLE II. Electrical characteristics (initial).

| Part number M83446/9- | Inductance (μH) | | | Q (min) over L range | Test frequency (MHz) | Self-resonant frequency (min) (MHz) | DC resistance at 25°C (max) (ohms) | Current (max) (mA) | Incremental current (max) (mA) |
|---|---|---|---|---|---|---|---|---|---|
| | Min | Nom | Max | | | | | | |
| 1 | 0.015 | 0.018 | 0.021 | 50 | 150 | 1200 | 0.03 | 750 | --- |
| 2 | 0.018 | 0.022 | 0.026 | 55 | ↓ | 1100 | 0.03 | ↓ | --- |
| 3 | 0.022 | 0.027 | 0.032 | ↓ | | 1000 | 0.03 | | --- |
| 4 | 0.027 | 0.033 | 0.039 | | | 900 | 0.04 | | --- |
| 5 | 0.033 | 0.039 | 0.047 | | 100 | 750 | 0.04 | | --- |
| 6 | 0.039 | 0.047 | 0.056 | | ↓ | 660 | 0.04 | ↓ | --- |
| 7 | 0.047 | 0.056 | 0.068 | | | 610 | 0.05 | 700 | --- |
| 8 | 0.055 | 0.068 | 0.083 | | | 550 | 0.05 | 700 | --- |
| 9 | 0.067 | 0.082 | 0.099 | ↓ | | 520 | 0.06 | 645 | --- |
| 10 | 0.080 | 0.100 | 0.120 | | | 490 | 0.06 | 645 | --- |
| 11 | 0.096 | 0.120 | 0.144 | 50 | 50 | 460 | 0.07 | 600 | --- |
| 12 | 0.12 | 0.15 | 0.18 | ↓ | ↓ | 430 | 0.08 | 560 | --- |
| 13 | 0.14 | 0.18 | 0.22 | | | 385 | 0.09 | 525 | --- |
| 14 | 0.17 | 0.22 | 0.27 | | | 330 | 0.10 | 500 | --- |
| 15 | 0.21 | 0.27 | 0.33 | | | 300 | 0.15 | 400 | --- |
| 16 | 0.26 | 0.33 | 0.40 | ↓ | | 275 | 0.19 | 360 | --- |
| 17 | 0.32 | 0.39 | 0.47 | 40 | ↓ | 240 | 0.25 | 300 | --- |
| 18 | 0.37 | 0.47 | 0.57 | ↓ | 25 | 210 | 0.30 | 280 | --- |
| 19 | 0.46 | 0.56 | 0.68 | | ↓ | 190 | 0.40 | 250 | --- |
| 20 | 0.54 | 0.68 | 0.82 | | | 165 | 0.60 | 200 | --- |
| 21 | 0.68 | 0.82 | 1.00 | | | 155 | 0.70 | 180 | --- |
| 22 | 0.75 | 1.00 | 1.25 | | | 140 | 0.90 | 160 | --- |
| 23 | 0.90 | 1.20 | 1.50 | ↓ | | 125 | 1.1 | 150 | --- |
| 24 | 1.13 | 1.50 | 1.87 | 35 | 7.9 | 115 | 1.3 | 135 | --- |
| 25 | 1.35 | 1.80 | 2.25 | 35 | ↓ | 105 | 1.7 | 120 | --- |
| 26 | 1.65 | 2.20 | 2.75 | 35 | | 100 | 2.3 | 100 | --- |
| 27 | 2.02 | 2.70 | 3.37 | 25 | | 85 | 3.0 | 90 | --- |
| 28 | 2.48 | 3.30 | 4.12 | ↓ | | 75 | 3.9 | 80 | --- |
| 29 | 2.92 | 3.90 | 4.87 | | | 47 | 3.9 | 80 | --- |
| 30 | 3.52 | 4.70 | 5.88 | ↓ | | 30 | 3.9 | 80 | --- |
| 31 | 4.2 | 5.6 | 7.0 | 22 | | 24 | 4.0 | 75 | --- |
| 32 | 5.1 | 6.8 | 8.5 | ↓ | | 23 | 4.0 | 75 | --- |
| 33 | 6.1 | 8.2 | 10.2 | | | 22 | 4.5 | 72 | --- |
| 34 | 7.5 | 10.0 | 12.5 | | | 21 | 4.5 | 72 | --- |
| 35 | 9.0 | 12.0 | 15.0 | | | 17 | 5.0 | 70 | --- |
| 36 | 11.2 | 15.0 | 18.7 | | 2.5 | 15 | 6.0 | 65 | --- |
| 37 | 13.5 | 18.0 | 22.5 | | ↓ | 14 | 8.0 | 55 | --- |
| 38 | 16.5 | 22.0 | 27.5 | | | 13 | 10. | 50 | --- |
| 39 | 20.2 | 27.0 | 31.3 | | | 11 | 11. | 45 | --- |
| 40 | 24.7 | 33.0 | 41.2 | | | 10 | 13. | 43 | --- |
| 41 | 29.2 | 39.0 | 48.8 | | | 9 | 14. | 42 | --- |
| 42 | 35.2 | 47.0 | 58.8 | | | 8 | 15. | 40 | --- |
| 43 | 42.0 | 56.0 | 70.0 | | | 7 | 19. | 36 | --- |
| 44 | 51.0 | 68.0 | 85.0 | ↓ | | 6 | 24. | 32 | --- |
| 45 | 62.0 | 82.0 | 102.0 | 25 | | 5 | 31. | 28 | 5.6 |
| 46 | 75.0 | 100.0 | 125.0 | 25 | | 4 | 40. | 25 | 5.0 |
| 47 | 90.0 | 120.0 | 150.0 | 25 | ↓ | 3 | 50.0 | 22 | 4.4 |

☆U.S. GOVERNMENT PRINTING OFFICE: 1981-703-023/560



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY CARD**

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

CDR, US Army ERADCOM
ATTN: DELET-R-S
Fort MONMOUTH, NJ - 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-STD-1286C TRANSFORMERS, INDUCTORS, AND COILS, SELECTION AND USE OF

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

**DD FORM 1426** 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.