# MILITARY STANDARD

## TRUCKLOADING


## PROPULSION SECTION, (PHOENIX) IN CONTAINER CNU-159/E DOMESTIC UNIT LOAD

**MIL-STD-1320-118 (NAVY)**

20 APRIL 1973

### UNIT LOAD DATA

UNIT LOAD DRAWING ..... WR-53/638
DIMENSIONS ... 95 1/8 L x 46 5/16 W x 49 7/16 H
WEIGHT ..... 3380 LBS
CUBE ..... 126.0 CU FT
GROSS WEIGHT ONE CONTAINER ..... 835 LBS
DOT HAZARD CLASSIFICATION ... EXPLOSIVES A

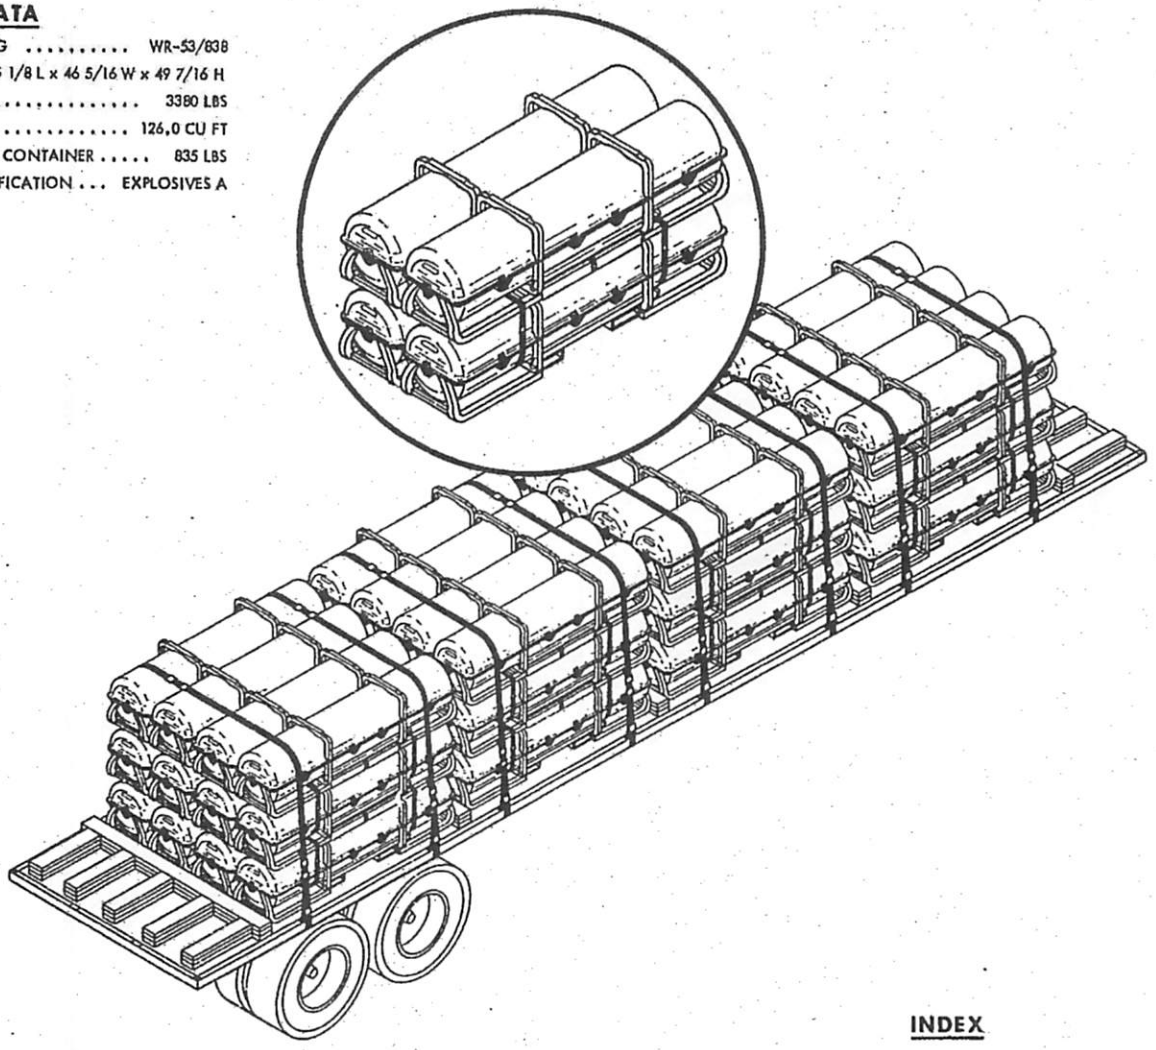

### INDEX


| ITEM | PAGE |
|---|---|
| GENERAL NOTES | 2 |
| FTL-40 TRAILER (FLATBED) | 3 |
| LTL-40 TRAILER (FLATBED) | 4 & 5 |
| STACKING AND STRAPPING | 6 |


NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC – 8140

**AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY**

M.S. Gray NWHL 3/26/73
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 4/3/73
SIGNATURE AIR SYSCOM BY DIRECTION DATE

ORIGINATOR Charles McBride 4/2/73
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY





Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:43Z
Check the source to verify that this is the current version before use.

# GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE PHOENIX PROPULSION SECTION WHEN IN CONTAINER CNU-159/E. THE CONTAINERS SHALL BE UNITIZED IN ACCORDANCE WITH WR-53/838.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS WITH THE TRAILER'S TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. WHEN REQUIRED BY THIS STANDARD, TWO ADDITIONAL CONTAINERS ARE STRAPPED TO A DOMESTIC UNIT LOAD. WHEN THE TRUCK TRANSPORTATION CYCLE IS COMPLETED, THE TOP TWO CONTAINERS ARE REMOVED BY CUTTING THE TOP STRAPS AND REMOVING THE RESTRAINER. THE LOOSE CONTAINERS ARE UNITIZED PER WR-53/838 FORMING A DOMESTIC ISSUE UNIT LOAD.
4. FOR STACKING AND STRAPPING PROCEDURE SECURING THE TWO CONTAINERS TO THE DOMESTIC ISSUE UNIT LOAD, SEE PAGE 6.
5. CHAINS AND STEEL STRAPS MAY BE USED INTERCHANGEABLY FOR TIE-DOWNS ON A 1 TO 1 BASIS.
6. STEEL STRAPS SHALL BE 2 X .050 AND APPLIED AS SPECIFIED BY THE LOAD STRAPPING REQUIREMENTS BELOW.
7. WHEN USING CHAIN, INSERT A PROTECTOR BOARD (LAMINATED DOUBLE 2 x 6) BETWEEN CHAIN AND LADING. SECURE CHAIN TO THE BOARD WITH FOUR 20d NAILS BY DRIVING THE NAIL THROUGH THE CHAIN INTO THE BOARD AND CLINCHING IT OVER THE CHAIN.
8. THE CHAINS AND LOAD BINDERS SHALL MEET THE FOLLOWING CONDITIONS:
   a. CHAIN AND FITTINGS SHALL BE 3/8 INCH AND LOAD BINDERS 3/8 INCH CAPACITY.
   b. CHAINS, FITTINGS, AND LOAD BINDERS SHALL HAVE MINIMUM SAFE WORKING LOAD OF 5000 LBS.
   c. LOAD BINDERS SHALL BE SAFETY WIRED WITH 16 GAUGE SOFT ANNEALED IRON WIRE OR SECURED USING THE END PIECE OF THE 3/8 CHAIN.
9. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVORD OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
10. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
11. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
12. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER, MM-L-751; NAILS, FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT; OR STRAPPING QQ-S-781, TYPE I, CLASS A.
13. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

# LOAD STRAPPING

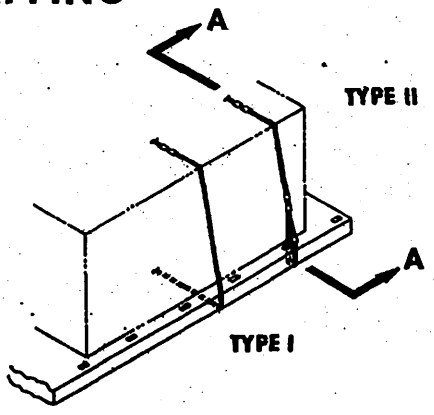

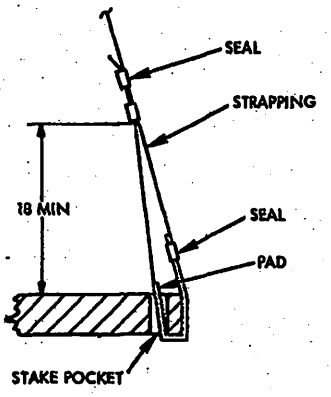
SECTION A-A

TIE-DOWN STRAPPING


THE FOLLOWING TWO METHODS OF TIE-DOWN STRAPPING ARE APPROVED FOR USE WITH THE SHIPMENT OF LOADS ON FLATBED TRAILERS. STEEL STRAPPING SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-S-781. STRAP JOINTS SHALL HAVE A MINIMUM TENSILE STRENGTH EQUAL TO 75 PER CENT OF THE STRAP STRENGTH. FOR EACH OF THE TYPES ILLUSTRATED ABOVE IT IS PREFERRED TO POSITION, TENSION AND DOUBLE CRIMP THE STRAP SEALS AT THE TOP OF THE LOAD, IF PRACTICABLE.

TYPE I - CONTINUOUS STRAPPING AROUND THE FLATBED AND THE LOAD.

TYPE II - THE STRAPPING IS SECURED TO THE STAKE POCKETS, ONE PIECE ON EACH SIDE OF THE TRAILER, AND IS BROUGHT UP OVER THE LOAD, TENSIONED, AND SEALED WITH TWO DOUBLE-CRIMPED SEALS ON THE TOP. METHOD OF SECURING STRAPPING TO STAKE POCKET IS SHOWN IN SECTION A-A. THE SHORT END IS ON THE INSIDE AND IS SECURED WITH TWO DOUBLE-CRIMPED SEALS AT A MINIMUM OF 18 INCHES ABOVE THE TRAILER BED. A STAKE POCKET PAD (A SHORT PIECE OF THE SAME STRAPPING 18 INCHES LONG) IS INSERTED BETWEEN THE MAIN STRAP AND THE STAKE POCKET AND IS SECURED TO THE MAIN STRAP WITH A SEAL AS SHOWN.



Source: https://assist.dla.mil -- Downloaded: 20260-26T07:43Z
Check the source to verify that this is the current version before use.

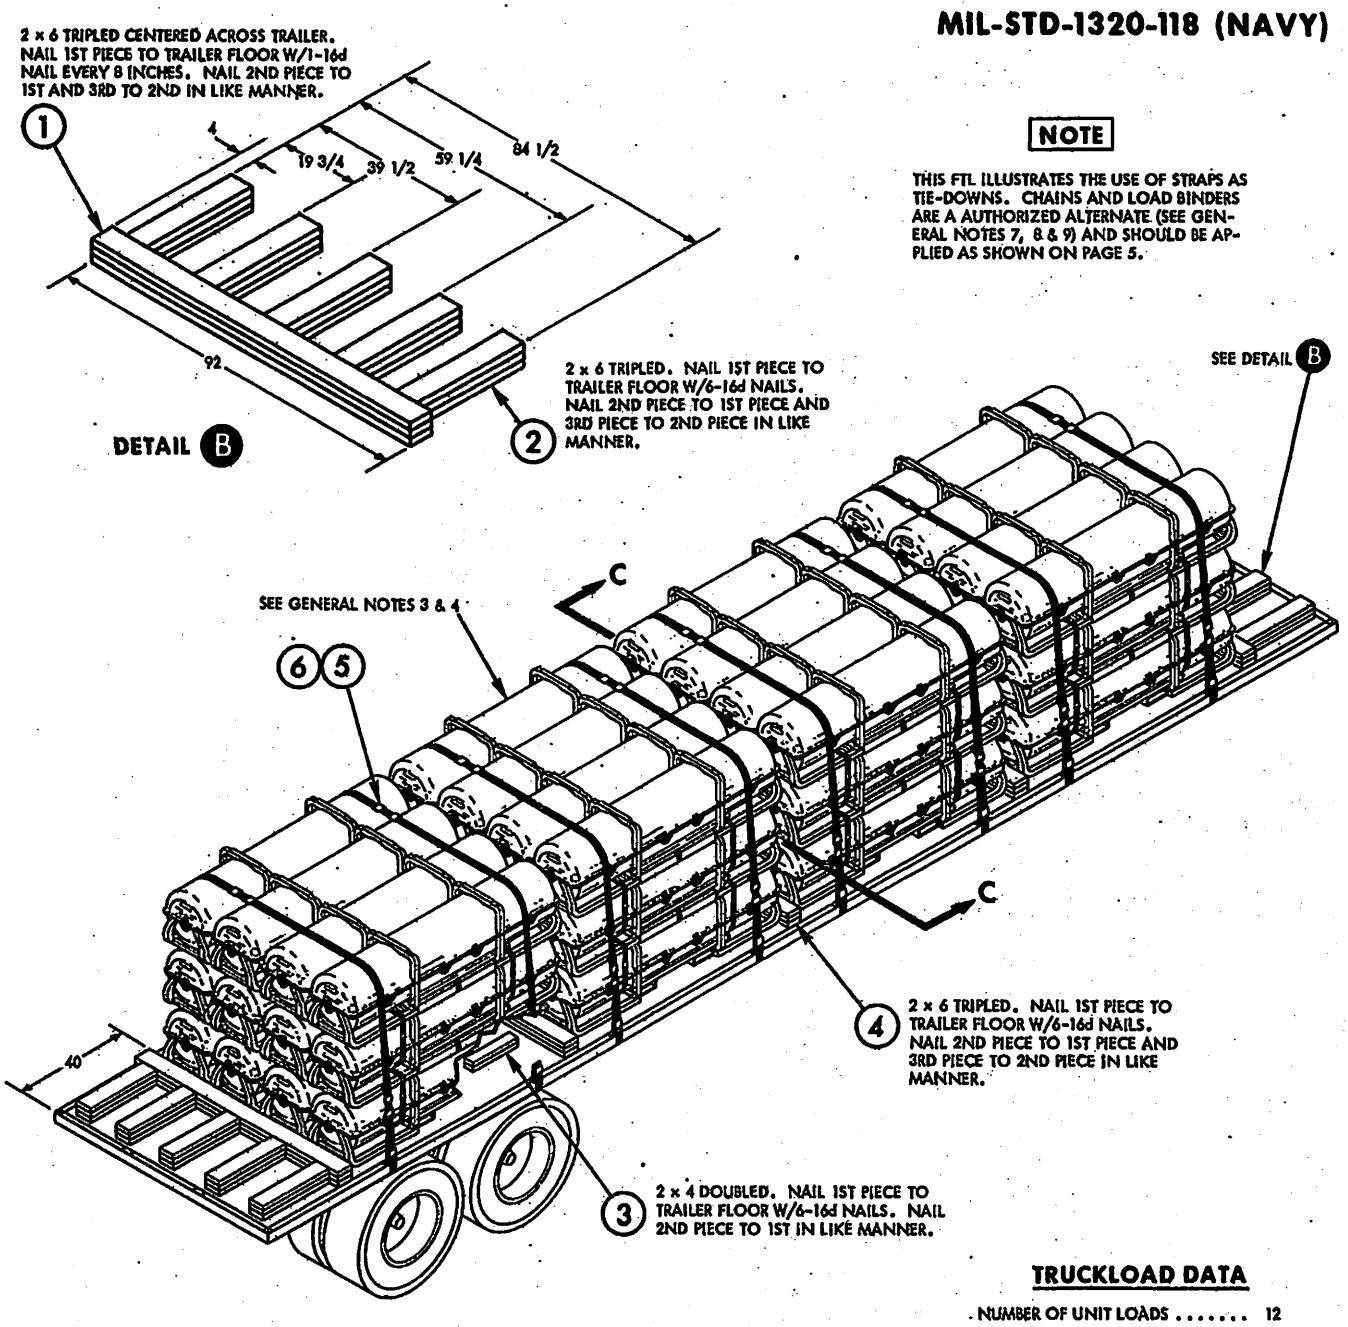



**NOTE**

THIS FTL ILLUSTRATES THE USE OF STRAPS AS TIE-DOWNS. CHAINS AND LOAD BINDERS ARE A AUTHORIZED ALTERNATE (SEE GENERAL NOTES 7, 8 & 9) AND SHOULD BE APPLIED AS SHOWN ON PAGE 5.

## TRUCKLOAD DATA

NUMBER OF UNIT LOADS ..... 12
NUMBER OF CONTAINERS..... 48
WEIGHT ..... 40,560 LBS

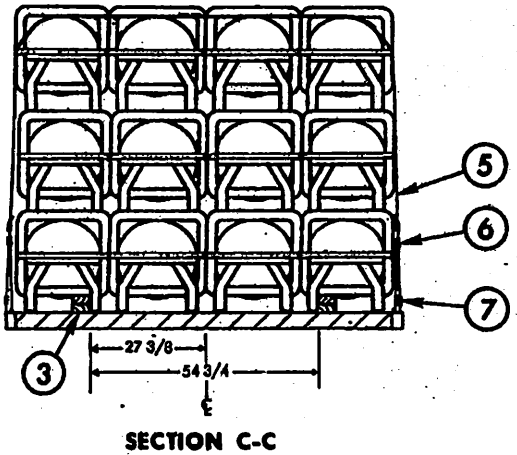


SECTION C-C

| PIECE NO. | DESCRIPTION | SIZE | NO.PCS REQD | NAIL TO | NUMBER NAILS | SIZE |
|---|---|---|---|---|---|---|
| 7 | STAKE POCKET PAD | 2 x .050 x 18 STEEL STRAP | 16 | - | - | - |
| 6 | SEAL | FOR 2" STRAP | 64 | - | - | - |
| 5 | STRAP | 2 x .050 LENGTH TO SUIT | 8 | - | - | - |
| 4 | SEPARATOR | 2 x 6 x 92 | 9 | SEE FIELD NOTE | | |
| 3 | SLEEPER | 2 x 4 x 20 | 32 | SEE FIELD NOTE | | |
| 2 | BACKUP CLEAT | 2 x 6 x 30 | 30 | SEE DETAIL B | | |
| 1 | CROSS MEMBER | 2 x 6 x 92 | 6 | SEE DETAIL B | | |

LIST OF MATERIALS AND NAILING DATA




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

# LTL 40 FT TRAILER (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED FROM TABLE I AND POSITION THE UNIT LOADS ACCORDINGLY.


**TABLE I**

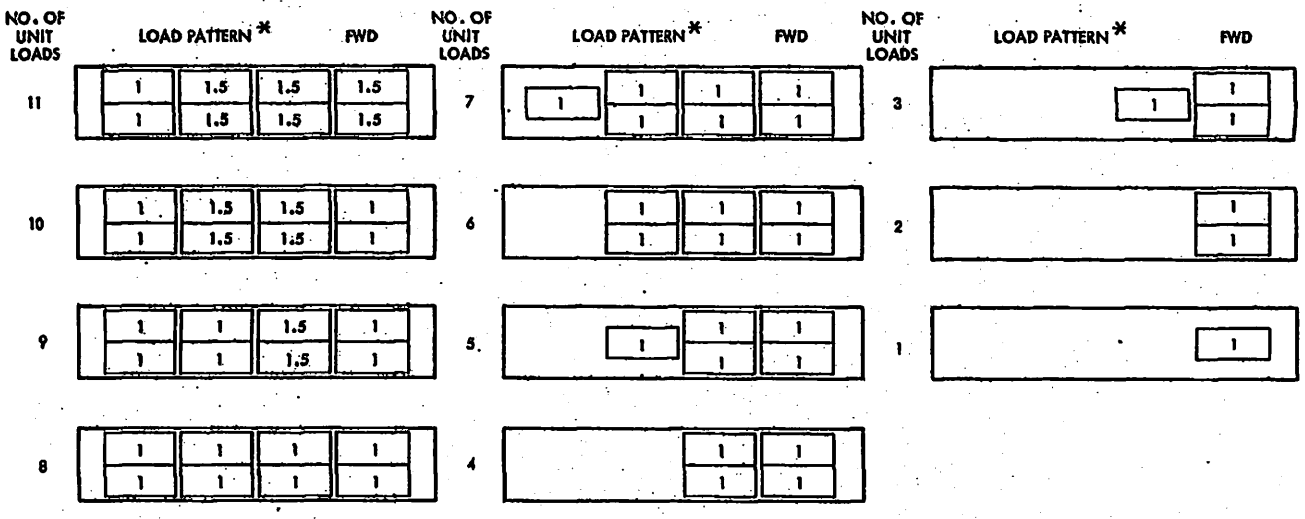


* LOAD PATTERN IS THE FLOOR PLAN FOR THE LOAD. THE NUMBER IN THE BLOCKS IS THE NUMBER OF LAYERS OF UNIT LOADS IN THE STACK. THE NUMBER 1.5 INDICATES THAT THE STACK IS 1.5 UNIT LOADS HIGH (OR THREE CONTAINERS HIGH - SEE GENERAL NOTES 3 & 4, PAGE 2).

2. WHEN THE LOAD PLAN REQUIRES THE STACK TO BE 1.5 UNIT LOADS HIGH (THREE CONTAINERS HIGH), THEY SHALL BE STRAPPED TOGETHER AS SHOWN ON PAGE 6. BLOCK, BRACE AND TIE-DOWN AS SPECIFIED ON PAGE 3.
3. THE LTL SHOWN ON PAGE 5 IS FOR SEVEN UNIT LOADS AND SHOWS THE CORRECT BLOCKING, BRACING AND USE OF TIEDOWNS FOR A LOAD OF THIS QUANITY.
4. ACTUAL SHIPPING REQUIREMENTS WILL DETERMINE THE NUMBER OF UNIT LOADS TO BE SHIPPED. THE LOAD PATTERN, BLOCKING, BRACING AND TIE-DOWNS SHALL BE IN ACCORDANCE WITH THE APPROPRIATE PARTS OF THIS MILITARY STANDARD AND THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).


2 X 6 TRIPLED CENTERED ACROSS TRAILER. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

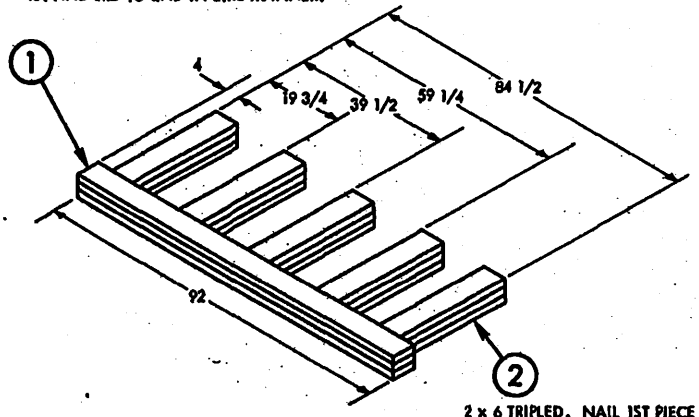


2 x 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST PIECE AND 3RD PIECE TO 2ND PIECE IN LIKE MANNER.

**DETAIL D**

END BLOCKING
1 REQUIRED

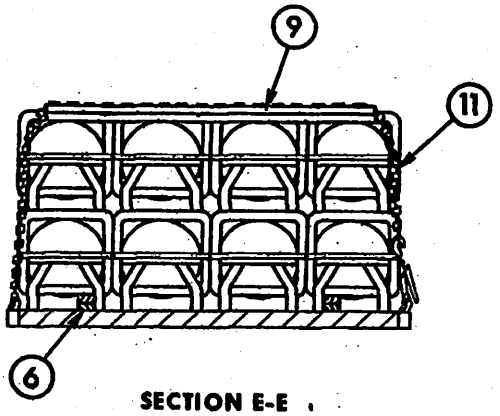



**SECTION E-E**



Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:43Z
Check the source to verify that this is the current version before use.

2 x 6 TRIPLED CENTERED ACROSS TRAILER. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

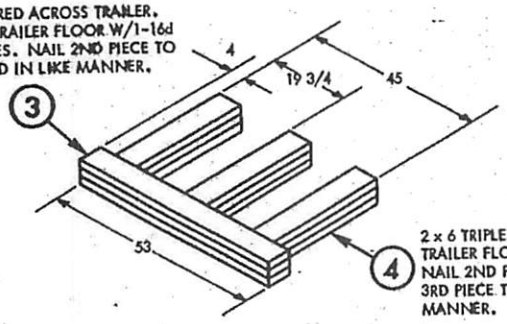



2 x 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST PIECE AND 3RD PIECE TO 2ND PIECE IN LIKE MANNER.

**NOTE**

THIS LTL ILLUSTRATES THE USE OF CHAINS AS TIE-DOWNS. STEEL STRAPS ARE A AUTHORIZED ALTERNATE (SEE GENERAL NOTES 5 & 6) AND SHALL BE APPLIED AS SHOWN ON PAGE 3.

**DETAIL F**

REAR BLOCKING
1 REQUIRED

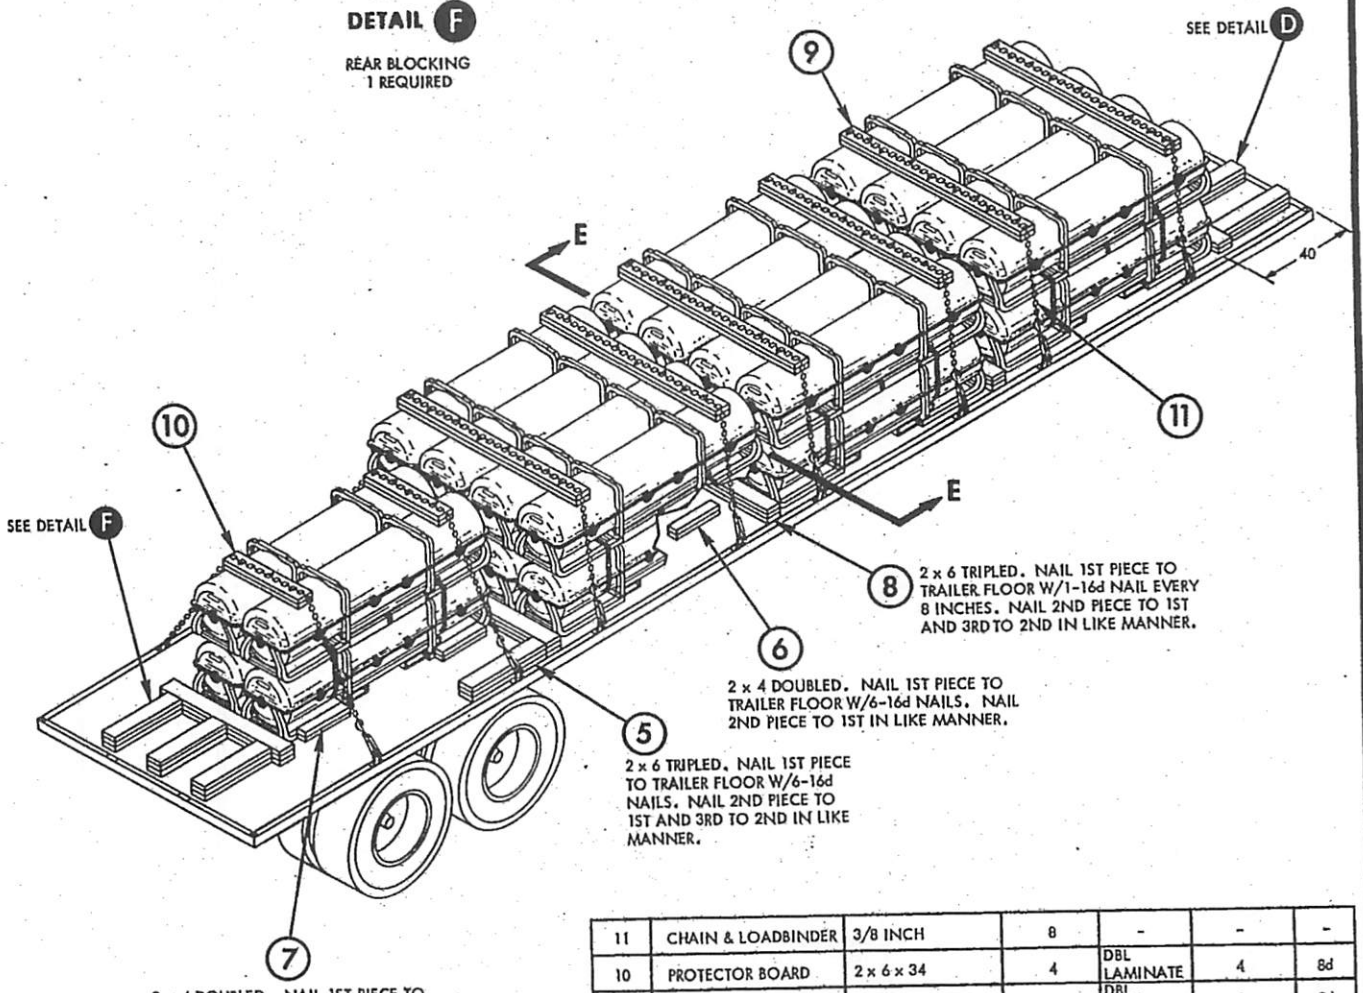


2 x 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

2 x 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

2 x 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

2 x 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

LIST OF MATERIALS AND NAILING DATA


| PIECE NO. | DESCRIPTION | SIZE | NO.PCS REQD | NAIL TO | NAILS NUMBER | NAILS SIZE |
|---|---|---|---|---|---|---|
| 11 | CHAIN & LOADBINDER | 3/8 INCH | 8 | - | - | - |
| 10 | PROTECTOR BOARD | 2 x 6 x 34 | 4 | DBL LAMINATE | 4 | 8d |
| 9 | PROTECTOR BOARD | 2 x 6 x 80 | 12 | DBL LAMINATE | 6 | 8d |
| 8 | SEPARATOR | 2 x 6 x 92 | 9 | SEE FIELD NOTE | | |
| 7 | SLEEPER | 2 x 4 x 20 | 8 | SEE FIELD NOTE | | |
| 6 | SLEEPER | 2 x 4 x 20 | 24 | SEE FIELD NOTE | | |
| 5 | BACKUP CLEAT | 2 x 6 x 36 | 6 | SEE FIELD NOTE | | |
| 4 | BACKUP CLEAT | 2 x 6 x 30 | 9 | SEE DETAIL F | | |
| 3 | CROSSMEMBER | 2 x 6 x 53 | 3 | SEE DETAIL F | | |
| 2 | BACKUP CLEAT | 2 x 6 x 30 | 15 | SEE DETAIL D | | |
| 1 | CROSSMEMBER | 2 x 6 x 92 | 3 | SEE DETAIL D | | |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


# STACKING AND STRAPPING

1. POSITION TWO (2) CONTAINERS ON TOP OF UNIT LOAD OF CONTAINERS USING CARE TO ALIGN STACKING BANDS. (SEE DETAIL H AND MAIN VIEW.)
2. POSITION STRAPPING (ITEM 1) UNDER THE BODY OF THE CENTER LAYER OF CONTAINERS AND OVER SKIDS OF TOP TWO CONTAINERS. TENSION AND DOUBLE CRIMP SEAL (ITEM 3).
3. PARTIALEY ASSEMBLE RESTRAINER (DETAIL G) AS SHOWN. INSERT RESTRAINER SPACERS THROUGH FORK LIFT POCKETS IN TOP TWO CONTAINERS. ASSEMBLE REMAINING PIECE (ITEM 5). STRAP ITEM 5 TOGETHER WITH STRAPPING (ITEM 2) THREADING STRAP BETWEEN LAYERS OF CONTAINERS. TENSION STRAPPING AND DOUBLE CRIMP SEAL (ITEM 4).

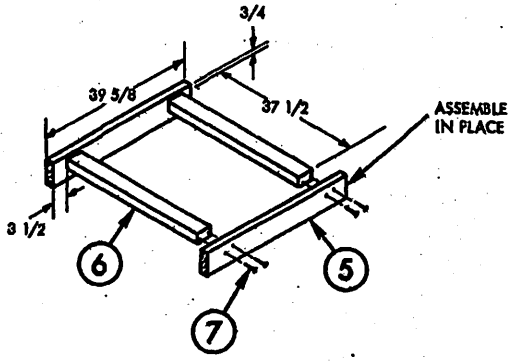


DETAIL G
RESTRAINER
1 REQUIRED

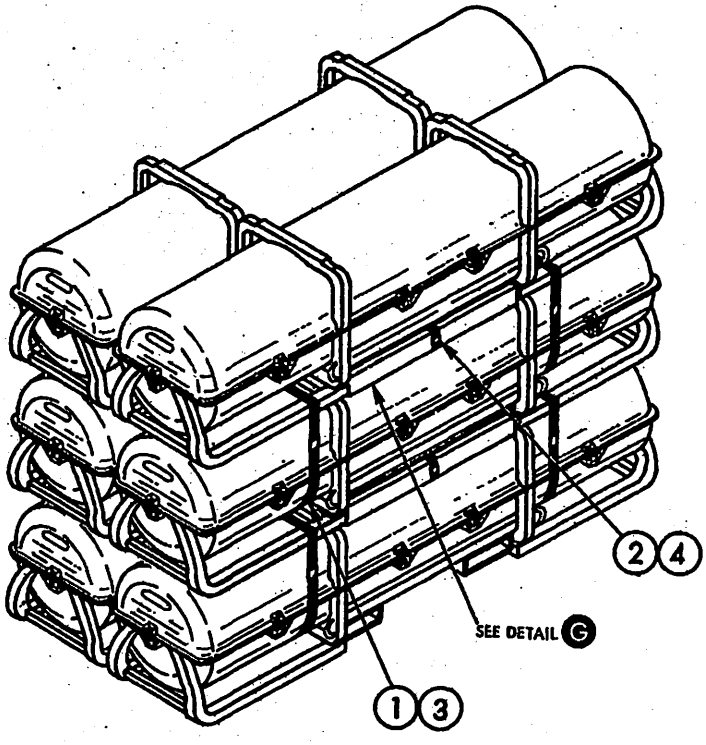

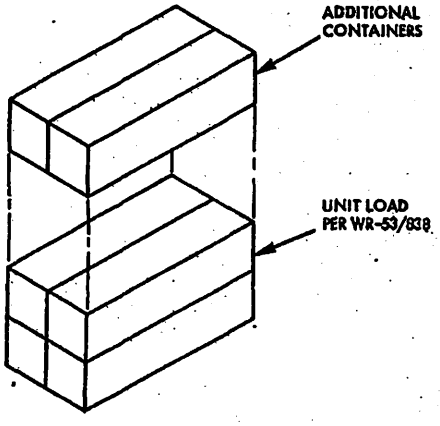
DETAIL H

| REQ. | ITEM | DESCRIPTION | DIMENSIONS |
|---|---|---|---|
| 8 | 7 | NAIL | 10d |
| 2 | 6 | RESTRAINER SPACER | 2 x 4 x 39 1/8 |
| 2 | 5 | RESTRAINER | 2 x 6 x 39 5/8 |
| 1 | 4 | SEAL | 3/4 x 22 GA.MIN. |
| 2 | 3 | SEAL | 1 1/4 x 22 GA.MIN |
| 1 | 2 | STRAPPING | 3/4 x .035 X x 9 FT. 6 |
| 2 | 1 | STRAPPING | 1 1/4 x .035 X x 12 FT. 6 |

LIST OF MATERIALS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.