MILITARY STANDARD

FUSES, FUSEHOLDERS, AND ASSOCIATED HARDWARE, SELECTION AND USE OF

TO ALL HOLDERS OF MIL-STD-1360A:

1. THE FOLLOWING PAGES OF MIL-STD-1360A HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
5	22 August 1983	5	26 Sep 1979
6	22 August 1983	6	26 Sep 1979
9	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
10	22 August 1983	10	26 Sep 1979
11	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
12	22 August 1983	12	26 Sep 1979
13	22 August 1983	13	26 Sep 1979
14	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
104.3	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
104.4	22 August 1983	104.4	26 Sep 1979
202.1	22 August 1983	202.1	26 Sep 1979
202.2	22 August 1983	202.2	26 Sep 1979
202.3	22 August 1983	202.3	26 Sep 1979
202.4	22 August 1983	202.4	26 Sep 1979
202.5	22 August 1983	202.5	26 Sep 1979
202.6	22 August 1983	202.6	26 Sep 1979
202.7	22 August 1983	202.7	26 Sep 1979
202.8	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
202.9	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
202.10	22 August 1983	202.10	26 Sep 1979
202.11	22 August 1983	202.11	26 Sep 1979
202.12	22 August 1983	202.12	26 Sep 1979
202.13	22 August 1983	202.13	26 Sep 1979
202.14	22 August 1983	202.14	26 Sep 1979
202.23	26 Sep 1979	(REPRINTED WITHOUT CHANGE)	26 Sep 1979
202.24	22 August 1983	202.24	26 Sep 1979
202.25	22 August 1983	202.25	26 Sep 1979

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

2. THE FOLLOWING PAGES ARE TO BE ADDED:

NEW PAGE	DATE
5a	22 August 1983
6a	22 August 1983
10a	22 August 1983
12a	22 August 1983
13a	22 August 1983
202.7a	22 August 1983
202.12a	22 August 1983
202.14a	22 August 1983

3. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

4. Holders of MIL-STD-1360A will verify that page changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Custodians:
Army - ER
Navy - SH
Air Force - 85
Review activities:
Army - ME, AR, MI
Navy - EC, AS
Air Force - 11, 17, 99
DLA - ES
User activities:
Army - AT, AV
Navy - YD, MC

Preparing activity:
Navy - SH
(Project 5920-0391)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

MILITARY (Continued)

MIL-F-19207/11 - Fuseholder, Extractor Post Type, Blown Fuse Nonindicating, Type FHN20G.
MIL-F-19207/16 - Fuseholders, Extractor Post Type, Nonindicating, Types FHN26G1, FHN26G2 and FHN26W.
MIL-F-19207/17 - Fuseholders, Extractor Post Type, Nonindicating, Type FHN28WB.
MIL-F-19207/18 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL29G.
MIL-F-19207/19 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL30G.
MIL-F-19207/20 - Fuseholders, Extractor Post Type, Nonindicating, Types FHN31G1 and FHN31G2.
MIL-F-19207/21 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL32W.
MIL-F-19207/22 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL33W.
MIL-F-19207/23 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL34W.
MIL-F-19207/24 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL35W.
MIL-F-19207/25 - Fuseholders, Extractor Post Type, Nonindicating, Type FHN41WB.
MIL-F-19207/26 - Fuseholders, Extractor Post Type, Nonindicating, Type FHN42W.
MIL-F-19207/28 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL44G.
MIL-F-19207/29 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL45G.
MIL-F-19207/30 - Fuseholders, Extractor Post Type, Nonindicating, Type FHN46WB.
MIL-F-19207/31 - Fuseholders, Extractor Post Type, Nonindicating, Type FHN47WB.
MIL-F-19207/32 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL48U.
MIL-F-19207/33 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL49U.
MIL-F-19207/36 - Fuseholders, Extractor Post Type, Nonindicating, R.F. Shielded Type FHN55W.
MIL-F-19207/38 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL57G.
MIL-F-19207/39 - Fuseholders, Extractor Post Type, Blown Fuse Indicating, Type FHL58G.
MIL-F-21346 - Fuseholders, Block, Plug and Shroud Type, and Associated Fuse Clips General Specification for.
MIL-F-21346/1 - Fuse, Clip, Electrical Styles FC21, FC22, FC23 and FC25.
MIL-F-21346/2 - Fuse, Clip, Electrical Styles FC40 and FC41.
MIL-F-21346/3 - Fuseholders, Block Type Styles FH20, FH21, FH22, FH23, FH24, FH25, FH30, FH31, and FH32.

Supersedes page 5 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

MILITARY (Continued)

MIL-F-21346/4 - Fuseholder, Block Type Styles FH26, FH27, FH28 and FH29.
MIL-F-21346/5 - Fuseholder, Block Type Style FH33.
MIL-F-21346/6 - Fuseholder, Block Type Styles FH40, FH41, FH42, FH43, FH44, FH45, FH46, FH47, FH50 and FH51.
MIL-R-22513 - Retainers, Fuse, Electrical, For Open-Type Fuseholders General Specification for.
MIL-R-22513/1 - Retainer, Fuse, Type II, Class F.
MIL-R-22513/2 - Retainer, Fuse, Type II, Class K.
MIL-R-22513/3 - Retainer, Fuse, Type III.
MIL-F-23419 - Fuses, Instrument Type, General Specification for.
MIL-F-23419/1 - Fuses, Instrument Type, Style FM01 (Indicating).
MIL-F-23419/2 - Fuses, Instrument Type, Style FM02 (Indicating).
MIL-F-23419/4 - Fuses, Instrument Type, Style FM04 (Nonindicating).
MIL-F-23419/7 - Fuses, Instrument Type, Style FM07 (Subminiature-High Performance).
MIL-F-23419/8 - Fuses, Instrument Type, Style FM08 (Subminiature-High Performance).
MIL-F-23419/9 - Fuses, Instrument Type, Style FM09 (Nonindicating).

STANDARDS

MILITARY

MIL-STD-704 - Electric Power, Aircraft, Characteristics and Utilization of.
MS24000 - Fuse Holder, Block-Type, 1-, 2-, and 3-Pole, 1- to 30-Ampere, Aircraft.
MS24001 - Fuse Holder, Block-Type, 1-, 2-, and 3-Pole, 35- to 60-Ampere, Aircraft.
MS28934 - Fuseholder, DC, 500 Ampere Maximum, Bolt Down Type, Aircraft.
MS28936 - Fuse, DC, Limiter Type, Enclosed Link, Aircraft.
MS28937 - Fuse, Limiter Type, Enclosed Link, 5-60 Amp, Aircraft.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

3. DEFINITIONS

3.1 A list of terms commonly used in fuse engineering practice and generally accepted by the electrical and electronic industries are as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

(a) Ambient temperature. The temperature of the air or liquid surrounding any object, neglecting small localized variations.
(b) Characteristic. The overload interruption time, normally expressed in percent of overload and time in seconds, minutes or hours.

Characteristic A - Normal (normal interrupting capacity).
Characteristic B - Time delay.
Characteristic C - Normal (very high interrupting capacity).

(c) Current limiter. A current limiter has the capability to safely interrupt all available currents within its interrupting capacity and within its current limiting range limits the current to a value less than the specified maximum peak let thru current.
(d) Current rating. The designated rms (root mean square) alternating current or direct current which the fuse will carry continuously.
(e) Interrupting capacity. Specifies the maximum value of current which the fuse is capable of interrupting (without physical damage) under short circuit conditions, for a specified voltage rating and frequency.
(f) Resistance. Cold resistance is the ohmic value as measured between the terminals of the fuse at 10 percent or less of the rated current.
(g) Temperature derating. The effect of ambient temperature on fuse rating.
(h) Voltage rating. The maximum voltage at which the fuse is designed to operate for a specified interrupting capacity.

4. GENERAL REQUIREMENTS

4.1 Choice of fuses, fuseholders and associated hardware. The equipment designer should consider the following characteristics and parameters in choosing the most suitable fuses and fuseholders:

(a) Application (type of fuse).
(b) Type of circuit interruption.
(c) Requirements for interrupt indication.
(d) Electrical data.
(e) Type of terminals.
(f) Shock, vibration and environmental capabilities.
(g) Mechancial data and safety features.
(h) Panel layout.
(i) Quality.
(j) Economics.

4.1.1 Acquisition information. After a preliminary selection of the desired fuse, fuseholder, or associated hardware has been made, reference should be made to the applicable specification and qualified products list. Acquisition documents shall reference the applicable specification sheet or MS sheet, and the complete part number, style or type designation.

Source: https://assist.dla.mil -- Downloaded: 2020-02640-26T07:45Z
Check the source to verify that this is the current version before use.

4.2 Conflict of requirements. After selection of a particular fuse, fuseholder, or associated hardware from this document, the design engineer should refer to the applicable specification sheet or MS sheet for any technical conflicts. In the event of a conflict between the technical requirements described in this standard and those of the applicable specification sheet or MS sheet, the latter shall govern.

4.3 Criteria for inclusion in this standard. The criteria for the inclusion of fuses, fuseholders, and associated hardware in this standard are as follows:

(a) The fuse, fuseholder, and associated hardware shall be the best type available for general use in military equipment.
(b) Fuses, fuseholders, and associated hardware shall be covered by federal or military specifications (see 2.1).

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for standard fuse, fuseholders, and associated hardware are contained in the applicable specification, and in the applicable section of this standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

7. NUMERICAL INDEX OF FUSES, FUSEHOLDERS, AND ASSOCIATED HARDWARE - Continued

Section number	Description	Applicable specification
	Fuse, Cartridge, Class G, J, K9, K5, K1, and L.	
103.1	Fuse, Cartridge, Class G, Fiber Body, Current-Limiting	W-F-1814/1
103.2	Fuse, Cartridge, Class G, Fiber Body, Current-Limiting	W-F-1814/2
103.3	Fuse, Cartridge, Class G, Fiber Body, Current-Limiting	W-F-1814/3
103.4	Fuse, Cartridge, Class G, Fiber Body, Current-Limiting	W-F-1814/4
103.5	Fuse, Cartridge, Class J, Fiber Body, Current-Limiting	W-F-1814/5
103.6	Fuse, Cartridge, Class J, Fiber Body, Current-Limiting	W-F-1814/6
103.7	Fuse, Cartridge, Class J, Fiber Body, Current-Limiting	W-F-1814/7
103.8	Fuse, Cartridge, Class J, Fiber Body, Current-Limiting	W-F-1814/8
103.9	Fuse, Cartridge, Class J. Fiber Body, Current-Limiting	W-F-1814/9
103.10	Fuse, Cartridge, Class J, Fiber Body, Current-Limiting	W-F-1814/10
103.11	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/11
103.12	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/12
103.13	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/13
103.14	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/14
103.15	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/15
103.16	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/16
103.17	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/17
103.18	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/18
103.19	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/19
103.20	Fuse, Cartridge, Class K9, Fiber Body Noncurrent-Limiting	W-F-1814/20
103.21	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/21
103.22	Fuse, Cartridge, Class K9, Fiber Body, Noncurrent-Limiting	W-F-1814/22
103.23	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/23
103.24	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/24
103.25	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/25
103.26	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/26
103.27	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/27
103.28	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/28
103.29	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/29
103.30	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/30
103.31	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/31
103.32	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/32
103.33	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/33
103.34	Fuse, Cartridge, Class K5, Fiber Body, Noncurrent-Limiting	W-F-1814/34
103.35	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/35
103.36	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/36
103.37	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/37
103.38	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/38
103.39	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/39
103.40	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/40
103.41	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/41
103.42	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/42
103.43	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/43
103.44	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/44
103.45	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/45
103.46	Fuse, Cartridge, Class K1, Fiber Body, Noncurrent-Limiting	W-F-1814/46
103.47	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/47
103.48	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/48
103.49	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/49
103.50	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/50
103.51	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/51
103.52	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/52
103.53	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/53
103.54	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/54
103.55	Fuse, Cartridge, Class L, Fiber Body, Current-Limiting	W-F-1814/55
	Fuse Style Instrument and Electronic "FM"	
104.1	Fuse, Style FM01, Pin Type Indicating	MIL-F-23419/1
104.2	Fuse, Style FM02, Indicating	MIL-F-23419/2
104.3	Fuse, Style FM04, Nonindicating	MIL-F-23419/4
104.4	Fuse, Style FM07, Subminiature-High Performance	MIL-F-23419/7
104.5	Fuse, Style FM08, Subminiature-High Performance	MIL-F-23419/8
104.6	Fuse, Style FM09, Nonindicating	MIL-F-23419/9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

7. NUMERICAL INDEX OF FUSES, FUSEHOLDERS, AND ASSOCIATED HARDWARE - Continued

Section number	Description	Applicable specification
	Fuses, Aircraft Current Limiter	
105.1	Fuse, Aircraft DC limiter, MS28937	MIL-F-5372
	Fuseholders, Block Type and Extractor Post Type (Class 200)	
201.1	Fuseholder, Meter Mounted, Style FH20AM	MIL-F-21346/3
201.2	Fuseholder, Solder Lug Terminals, Style FH21	MIL-F-21346/3
201.3	Fuseholder, Screw Terminals, Style FH22	MIL-F-21346/3
201.4	Fuseholder, Solder Lug Terminals, Style FH23	MIL-F-21346/3
201.5	Fuseholder, Screw Terminals, Style FH25	MIL-F-21346/3
201.6	Fuseholder, Solder Lug Terminals, Style FH30AM	MIL-F-21346/3
201.7	Fuseholder, Solder Lug Terminals, Style FH31AM	MIL-F-21346/3
201.8	Fuseholder, Wire Lug Terminals, Style FH32AM	MIL-F-21346/3
201.9	Fuseholder, Solder Lug Terminals, Style FH26	MIL-F-21346/4
201.10	Fuseholder, Locking and Ejector Spring, Style FH27	MIL-F-21346/4
201.11	Fuseholder, Solder Lug Terminals, Style FH28	MIL-F-21346/4
201.12	Fuseholder, Locking and Ejector Spring, Style FH29	MIL-F-21346/4
201.13	Fuseholder, Wire Lug Terminals, Style FH33AM	MIL-F-21346/5
201.14	Fuseholder, Front Connected, Style FH40	MIL-F-21346/6
201.15	Fuseholder, Back Connected, Style FH41	MIL-F-21346/6
201.16	Fuseholder, Front Connected, Style FH42	MIL-F-21346/6
201.17	Fuseholder, Back Connected, Style FH43	MIL-F-21346/6
201.18	Fuseholder, Front Connected, Style FH44	MIL-F-21346/6
201.19	Fuseholder, Back Connected, Style FH45	MIL-F-21346/6
201.20	Fuseholder, Front Connected, Style FH46	MIL-F-21346/6
201.21	Fuseholder, Back Connected, Style FH47	MIL-F-21346/6
201.22	Fuseholder, Front Connected, Style FH50	MIL-F-21346/6
201.23	Fuseholder, Back Connected, Style FH51	MIL-F-21346/6
201.24	Fuseholder, Aircraft Limiter, MS24000	MIL-F-5373
201.25	Fuseholder, Aircraft Limiter, MS24001	MIL-F-5373
202.1	Fuseholder, Two Pole Indicating, Style FHL10U	MIL-F-19207/1
202.2	Fuseholder, Single Pole Indicating, Style FHL11U	MIL-F-19207/2
202.3	Fuseholder, Single Pole Indicating, Style FHL12U	MIL-F-19207/3
202.4	Fuseholder, Single Pole Indicating, Style FHL13G	MIL-F-19207/4
202.5	Fuseholder, Single Pole Indicating, Style FHL14G	MIL-F-19207/5
202.6	Fuseholder, Single Pole Indicating, Style FHL17G	MIL-F-19207/8
202.7	Fuseholder, Single Pole Indicating, Style FHL18G	MIL-F-19207/9
202.7a	Fuseholder, Single Pole Nonindicating, Style FHN20G	MIL-F-19207/11
202.8	Fuseholder, Single Pole Nonindicating, Style FHN26G	MIL-F-19207/16
202.9	Fuseholder, Single Pole Nonindicating, Style FHN28WB	MIL-F-19207/17
202.10	Fuseholder, Two Pole Indicating, Style FHL29G	MIL-F-19207/18
202.11	Fuseholder, Single Pole Indicating, Style FHL30G	MIL-F-19207/19
202.12	Fuseholder, Single Pole Nonindicating, Style FHN31G	MIL-F-19207/20
202.12a	Fuseholder, Single Pole Indicating, Style FHL32W	MIL-F-19207/21
202.13	Fuseholder, Two Pole Indicating, Style FHL33W	MIL-F-19207/22

Supersedes page 10 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

7. NUMERICAL INDEX OF FUSES, FUSEHOLDERS, AND ASSOCIATED HARDWARE - Continued

Section number	Description	Applicable specification
202.14	Fuseholder, Two Pole Indicating, Style FHL34W	MIL-F-19207/23
202.14a	Fuseholder, Single Pole Indicating, Style FHL35W	MIL-F-19207/24
202.15	Fuseholder, Single Pole Nonindicating, Style FHN41WB	MIL-F-19207/25
202.16	Fuseholder, Single Pole Nonindicating, Style FHN42W	MIL-F-19207/26
202.17	Fuseholder, Single Pole Indicating, Style FHL44G	MIL-F-19207/28
202.18	Fuseholder, Single Pole Indicating, Style FHL45G	MIL-F-19207/29
202.19	Fuseholder, Three Pole Nonindicating, Style FHN46WB	MIL-F-19207/30
202.20	Fuseholder, Three Pole Nonindicating, Style FHN47WB	MIL-F-19207/31
202.21	Fuseholder, Single Pole Indicating, Style FHL48U	MIL-F-19207/32
202.22	Fuseholder, Single Pole Indicating, Style FHL49U	MIL-F-19207/33
202.23	Fuseholder, R.F. Shielded, Style FHN55W	MIL-F-19207/36
202.24	Fuseholder, Extractor Post Type, Blown Fuse Indicating, Style FHL57G	MIL-F-19207/38
202.25	Fuseholder, Extractor Post Type, Blown Fuse Indicating, Style FHL58G	MIL-F-19207/39

Supersedes page 10 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

7. NUMERICAL INDEX OF FUSE, FUSEHOLDERS, AND ASSOCIATED HARDWARE - Continued

Section number	Description	Applicable specification
	Associated Hardware (Class 300)	
301.1	Fuse Clips, Ferrule Type (Plain)	MIL-F-21346/1
301.2	Fuse Clips, Ferrule Type, with Solder Terminal	MIL-F-21346/1
301.3	Fuse Clips, Ferrule Type, with Solder Lug Terminals and Ejector	MIL-F-21346/1
301.4	Fuse Clips, Blade Type, Front Terminals	MIL-F-21346/2
301.5	Fuse Clips, Blade Type, Rear Terminals	MIL-F-21346/2
302.	Fuse Retainers	MIL-R-22513
302.1	Retainer, Fuse, Type II, Class F	MIL-R-22513/1
302.2	Retainer, Fuse, Type II, Class K	MIL-R-22513/2
302.3	Retainer, Fuse, Type III	MIL-R-22513/3

Source: https://assist.dla.mil -- Downloaded: 2025-10-26T07:45Z
Check the source to verify that this is the current version before use.

8. CROSS REFERENCE FUSE TO FUSEHOLDER

Fuse specification	Fuse style	Fuseholder specification	Fuseholder and fuse clip style
MIL-F-15160/1	F01	MIL-F-19207/20	FHN31
		MIL-F-21346/1	FC21AN
		MIL-F-21346/1	FC22AN
		MIL-F-21346/3	FH20AM
		MIL-F-21346/3	FH21
MIL-F-15160/2	F02	MIL-F-19207/1	FHL10U
		MIL-F-19207/2	FHL11U
		MIL-F-19207/8	FHL17G
		MIL-F-19207/9	FHL18G
		MIL-F-19207/11	FHN20G
		MIL-F-19207/16	FHN26G
		MIL-F-19207/17	FHN28WB
		MIL-F-19207/18	FHL29G
		MIL-F-19207/19	FHL30G
		MIL-F-19207/21	FHL32W
		MIL-F-19207/22	FHL33W
		MIL-F-19207/30	FHN46WB
		MIL-F-19207/32	FHL48U
		MIL-F-19207/33	FHL49U
		MIL-F-19207/36	FHN55W
		MIL-F-21346/1	FC21AN
		MIL-F-21346/1	FC22AN
		MIL-F-21346/3	FH22
		MIL-F-21346/3	FH23
MIL-F-15160/3	F03	MIL-F-19207/1	FHL10U
		MIL-F-19207/2	FHL11U
		MIL-F-19207/8	FHL17G
		MIL-F-19207/9	FHL18G
		MIL-F-19207/11	FHN20G
		MIL-F-19207/16	FHN26G
		MIL-F-19207/17	FHN28WB
		MIL-F-19207/18	FHL29G
		MIL-F-19207/19	FHL30G
		MIL-F-19207/21	FHL32W
		MIL-F-19207/22	FHL33W
		MIL-F-19207/30	FHN46WB
		MIL-F-19207/32	FHL48U
		MIL-F-19207/33	FHL49U
		MIL-F-19207/36	FHN55W
		MIL-F-21346/1	FC21AN
		MIL-F-21346/1	FC22AN
		MIL-F-21346/3	FH22
		MIL-F-21346/3	FH23

Supersedes page 12 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

8. CROSS REFERENCE FUSE TO FUSEHOLDER - Continued

Fuse specification	Fuse style	Fuseholder specification	Fuseholder and fuse clip style
MIL-F-15160/9	F09	MIL-F-19207/3 MIL-F-19207/23 MIL-F-19207/24 MIL-F-19207/25 MIL-F-19207/31 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/3	FHL12U FHL34W FHL35W FHN41WB FHN47WB FC21CN FC22CN FC21CF FH25
MIL-F-15160/10	F10	MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/3	FC21CF FC21CN FC22CN FH25

Supersedes page 12 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-03-26T07:45Z
Check the source to verify that this is the current version before use.

8. CROSS REFERENCE FUSE TO FUSEHOLDER - Continued

Fuse specification	Fuse style	Fuseholder specification	Fuseholder and fuse clip style
MIL-F-15160/15	F15	MIL-F-19207/4 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/4 MIL-F-21346/4	FHL13G FC21DF FC21DN FC22DN FC25AN FH26 FH27
MIL-F-15160/16	F16	MIL-F-19207/5 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/4 MIL-F-21346/4	FHL14G FC21EF FC21EN FC22EN FC25BN FH28 FH29
MIL-F-15160/19	F19	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40A FC41A FH40 FH41
MIL-F-15160/20	F20	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40B FC41B FH42 FH43
MIL-F-15160/21	F21	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40C FC41C FH44 FH45
MIL-F-15160/22	F22	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40D FC41D FH46 FH47
MIL-F-15160/27	F27	MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/3	FC21CF FC21CN FC22CN FH30AM
MIL-F-15160/28	F28	MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/3	FC21CF FC21CN FC22CN FH31AM

Supersedes page 13 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

8. CROSS REFERENCE FUSE TO FUSEHOLDER - Continued

Fuse specification	Fuse style	Fuseholder specification	Fuseholder and fuse clip style
MIL-F-15160/29	F29	MIL-F-21346/1	FC21EF
		MIL-F-21346/1	FC21EN
		MIL-F-21346/1	FC22EN
		MIL-F-21346/1	FC25BN
		MIL-F-21346/3	FH32AM
MIL-F-15160/30	F30	MIL-F-21346/1	FC21EF
		MIL-F-21346/1	FC21EN
		MIL-F-21346/1	FC22EN
		MIL-F-21346/1	FC25BN
		MIL-F-21346/5	FH33AM
MIL-F-15160/60	F60	MIL-F-19207/3	FHL12U
		MIL-F-19207/23	FHL34W
		MIL-F-19207/24	FHL35W
		MIL-F-19207/25	FHN41WB
		MIL-F-19207/31	FHN47WB
		MIL-F-21346/1	FC21CF
		MIL-F-21346/1	FC21CN
		MIL-F-21346/1	FC22CN
		MIL-F-21346/3	FH25

Supersedes page 13 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.


8. CROSS REFERENCE FUSE TO FUSEHOLDER - Continued

Fuse specification	Fuse style	Fuseholder specification	Fuseholder and fuse clip style
MIL-F-15160/61	F61	MIL-F-19207/4 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/4 MIL-F-21346/4	FHL13G FC21DF FC21DN FC22DN FC25AN FH26 FH27
MIL-F-15160/62	F62	MIL-F-19207/5 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/1 MIL-F-21346/4 MIL-F-21346/4	FHL14G FC21EF FC21EN FC22EN FC25EN FH28 FH29
MIL-F-15160/63	F63	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40A FC41A FH40 FH41
MIL-F-15160/64	F64	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40B FC41B FH42 FH43
MIL-F-15160/65	F65	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40C FC41C FH44 FH45
MIL-F-15160/66	F66	MIL-F-21346/2 MIL-F-21346/2 MIL-F-21346/6 MIL-F-21346/6	FC40D FC41D FH46 FH47
MIL-F-15160/77	F77	MIL-F-19207/38 MIL-F-19207/39	FHL57G FHL58G

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 104.3

FUSE, STYLE FM04, NONINDICATING
MIL-F-23419/4

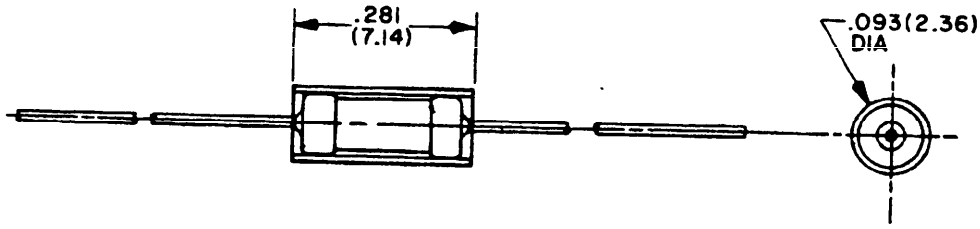


Type designation

Style	Characteristic	Maximum voltage	Current rating amperes
FM04	A	125V	1/8A
FM04		125V	1/4A
FM04		125V	3/8A
FM04		125V	1/2A
FM04		125V	3/4A
FM04		125V	1A
FM04		125V	1-1/2A
FM04		125V	2A
FM04		125V	3A
FM04		125V	4A
FM04		125V	5A
FM04		125V	7A
FM04		125V	10A
FM04	A	32V	15A

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]T07:45Z
Check the source to verify that this is the current version before use.

SECTION 104.4

FUSE, STYLE FM07, SUBMINIATURE - HIGH PERFORMANCE
MIL-F-23419/7

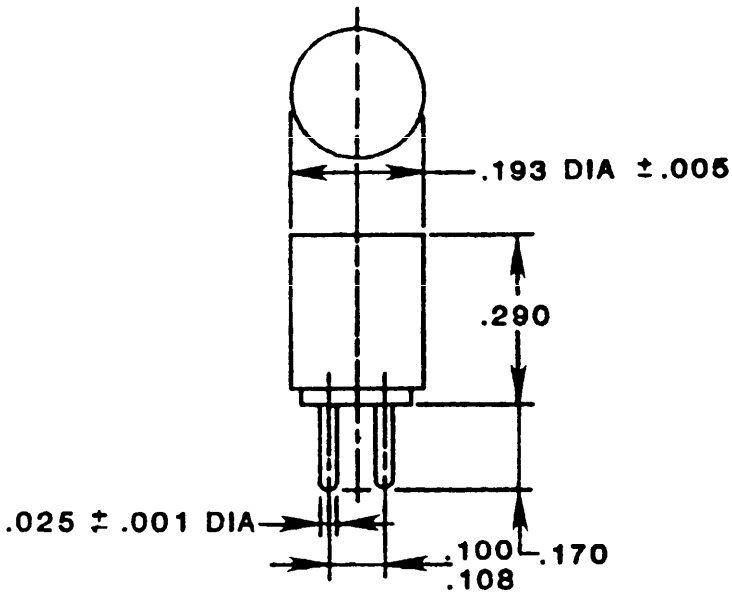

Type designation


Style	Characteristic	Maximum voltage	Current rating amperes
FM07	A	125V	1/500A
FM07	↑	125V	1/200A
FM07	↑	125V	1/100A
FM07	↑	125V	1/64A
FM07	↑	125V	1/32A
FM07	↑	125V	1/20A
FM07	↑	125V	1/16A
FM07	↑	125V	1/10A
FM07	↑	125V	1/8A
FM07	↑	125V	2/10A
FM07	↑	125V	1/4A
FM07	↑	125V	3/10A
FM07	↑	125V	4/10A
FM07	↑	125V	1/2A
FM07	↑	125V	6/10A
FM07	↑	125V	7/10A
FM07	↑	125V	3/4A
FM07	↑	125V	8/10A
FM07	↑	125V	1A
FM07	↑	125V	1-1/2A
FM07	↑	125V	2A
FM07	↑	125V	3A
FM07	↑	125V	4A
FM07	A	125V	5A

Supersedes page 104.4 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.1

FUSEHOLDERS, STYLE FHL10U, TWO POLE, INDICATING,
MIL-F-19207/1
(NEON)

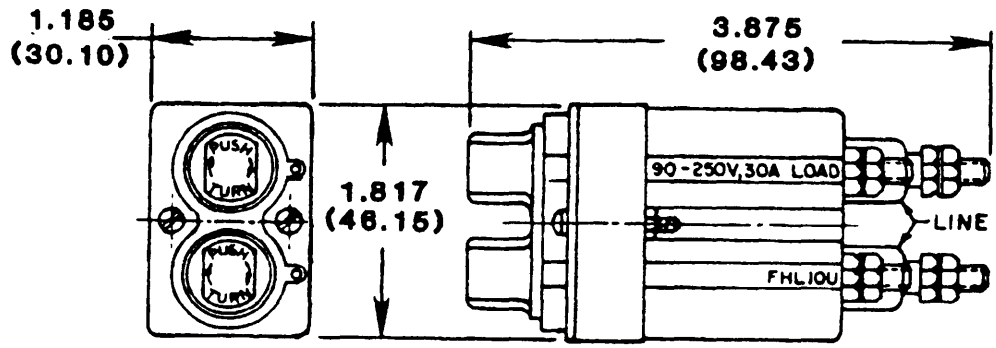


For ferrule type fuses (90 to 250 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.1 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.2

FUSEHOLDERS, STYLE FHL11U, SINGLE POLE INDICATING,
MIL-F-19207/2
(NEON)

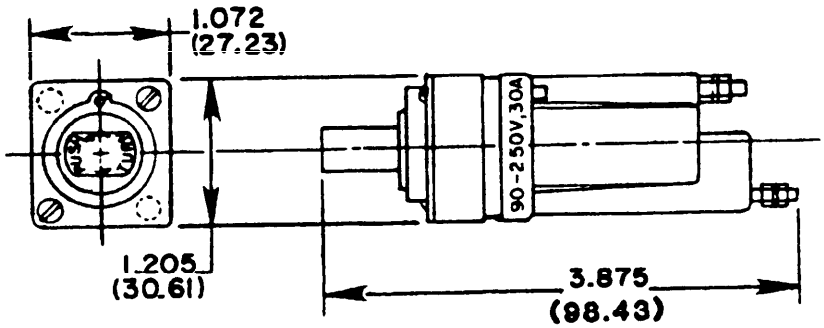


For ferrule type fuses (90 to 250 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.2 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.3

FUSEHOLDERS, STYLE FHL12U, SINGLE POLE INDICATING,
MIL-19207/3
(NEON)

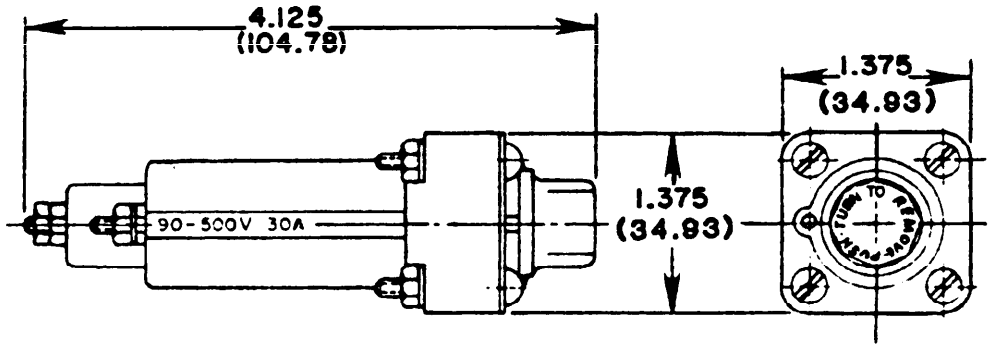


For ferrule type fuses (90 to 500 volts)
F09 and F60, MIL-F-15160/9 and /60

Supersedes page 202.3 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-02-07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.4

FUSEHOLDERS, STYLE FHL13G, SINGLE POLE INDICATING,
MIL-F-19207/4
(NEON)

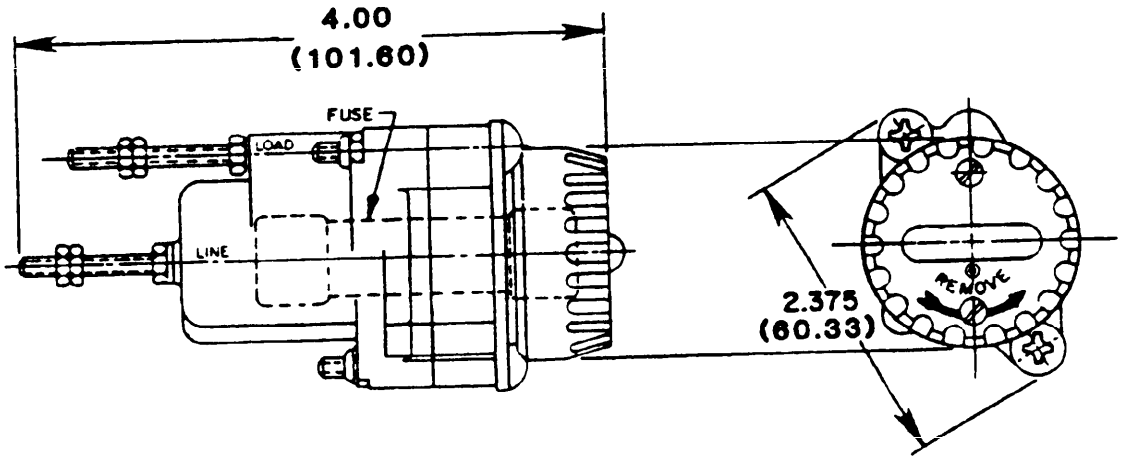


For ferrule type fuses (90 to 500 volts)
F15 and F61, MIL-F-15160/15 and /61

Supersedes page 202.4 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:45Z
Check the source to verify that this is the currentversion before use.

SECTION 202.5

FUSEHOLDER, STYLE FHL14G, SINGLE POLE INDICATING,
MIL-E-19207/5
(NEON)

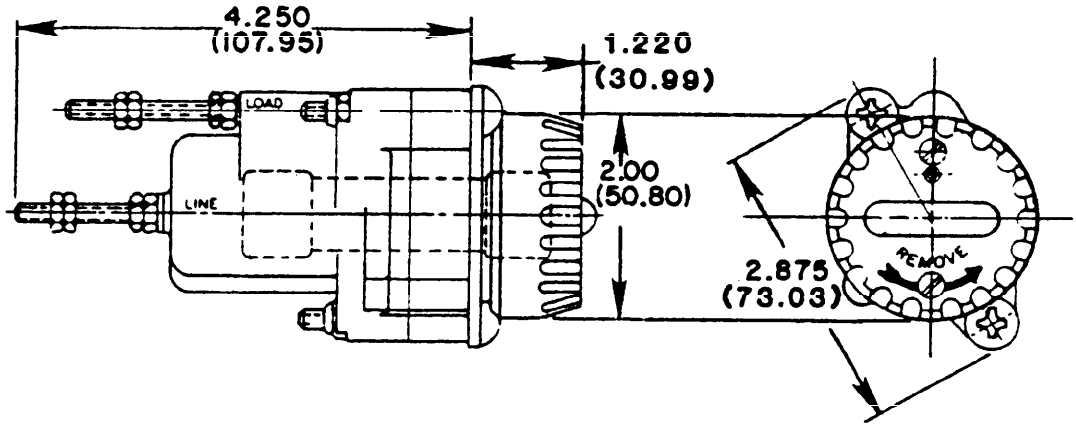


For ferrule type fuses (90 to 500 volts)
F16 and F62, MIL-F-15160/16 and /62

Supersedes page 202.5 of 26 September 1979.


Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.6

FUSEHOLDER, STYLE FHL17G, SINGLE POLE INDICATING,
MIL-F-19207/8
(NEON)

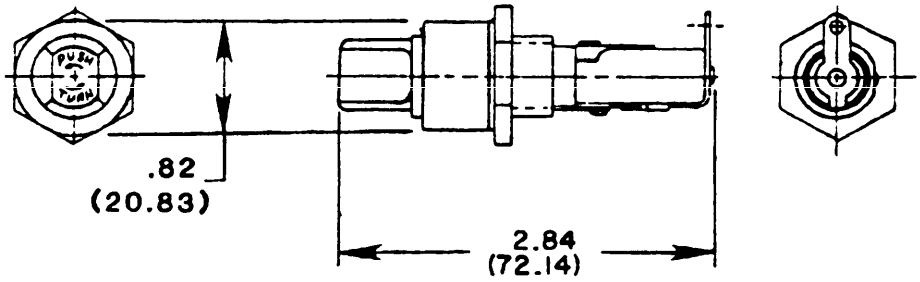

Type FHL17G1.

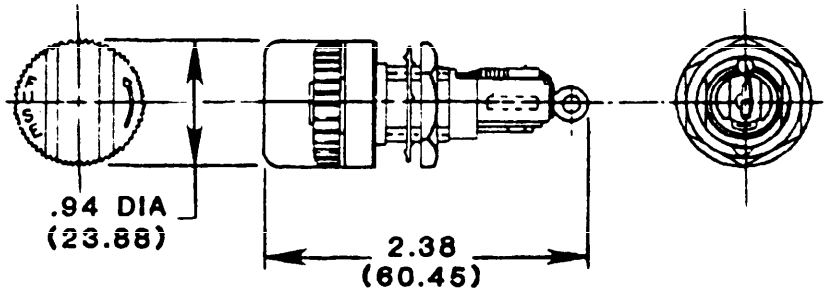

Type FHL17G2.


For ferrule type fuses (90 to 250 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.6 of 26 September 1979.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.7

FUSEHOLDERS, STYLE FHL18G, SINGLE POLE INDICATING,
MIL-F-19207/9
(INCANDESCENT)

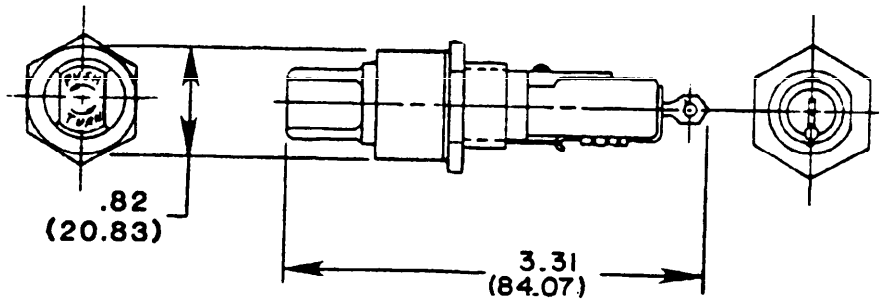

Type FHL18G1.

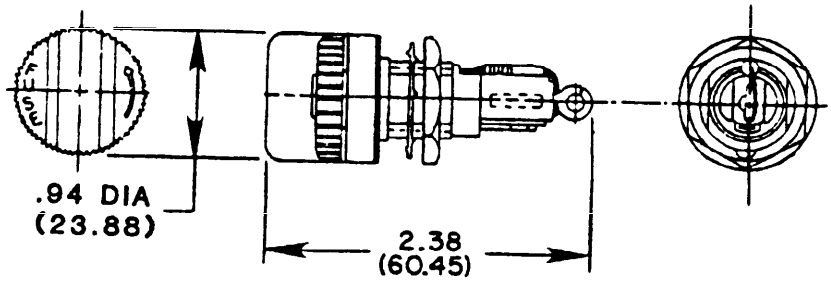

Type FHL18G2.


For ferrule type fuses (2.5 to 90 volts)
F02 and F03, MIL-F-15160/2 and /3
FM09, MIL-F-23419/9

Supersedes page 202.7 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.7a

FUSEHOLDERS, STYLE FHN20G, NONINDICATING,
MIL-F-19207/11

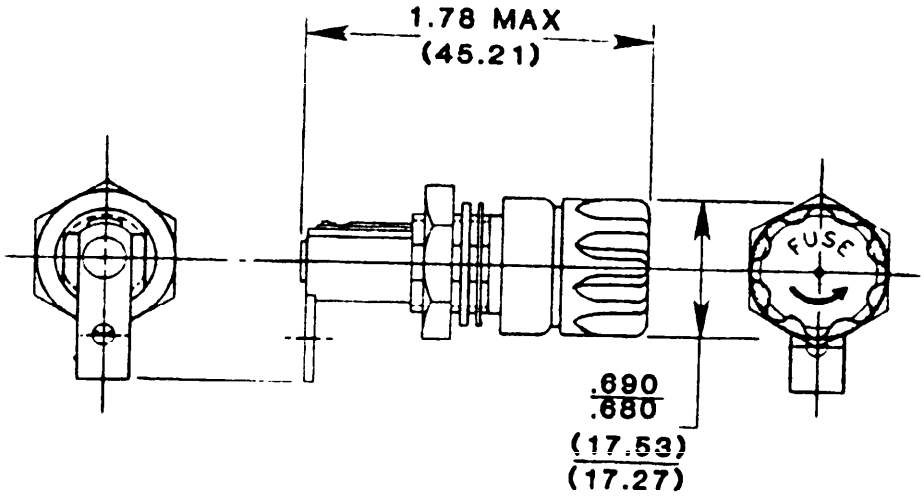


For ferrule type fuses (250 volts max)
F02 and F03, MIL-F-15160/2 and MIL-F-15160/3,
FM09, MIL-F-23419/9

NEW PAGE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.8

FUSEHOLDERS, STYLE FHN26G, SINGLE POLE NONINDICATING,
MIL-F-19207/16

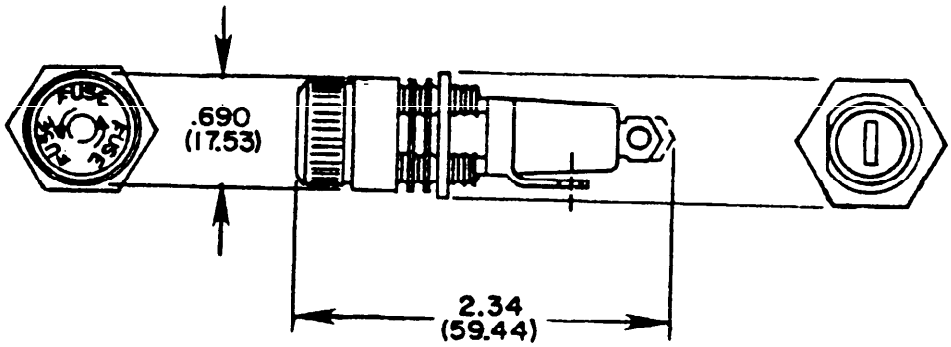

Type FHN26G1.

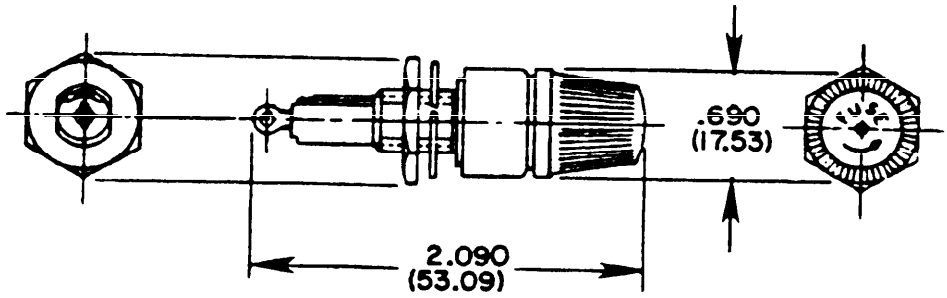

Type FHN26G2.


For ferrule type fuses (250 volts max)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.8 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.9

FUSEHOLDERS, STYLE FHN28WB, SINGLE POLE NONINDICATING,
MIL-F-19207/17

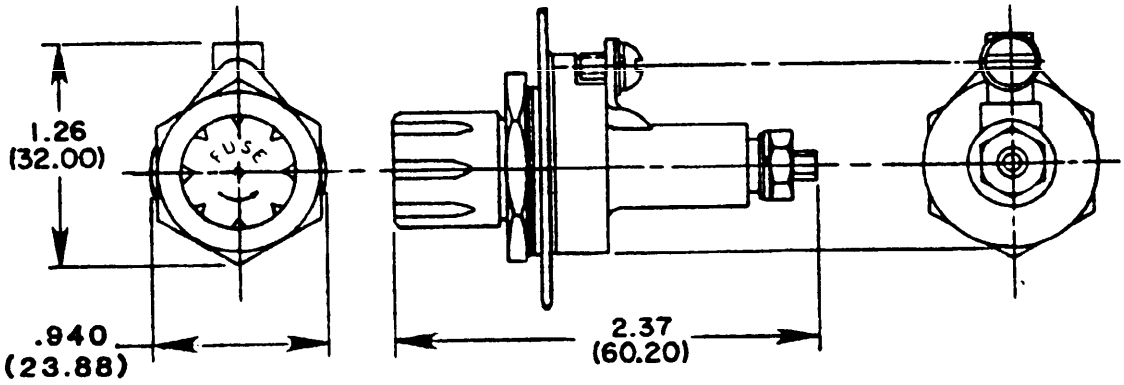


For ferrule type fuses (250 volts max)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.9 or 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.10

FUSEHOLDERS, STYLE FHL29G, TWO POLE INDICATING,
MIL-F-19207/18
(INCANDESCENT)

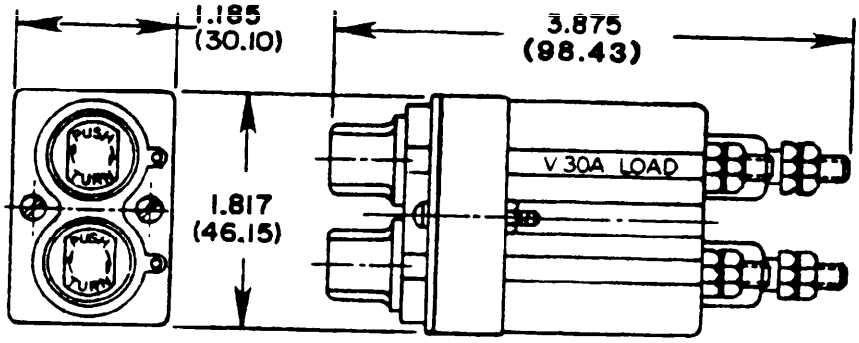


For ferrule type fuses (12 to 90 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.10 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.11

FUSEHOLDERS, STYLE FHL30G, SINGLE POLE INDICATING,
MIL-F-19207/19
(INCANDESCENT)

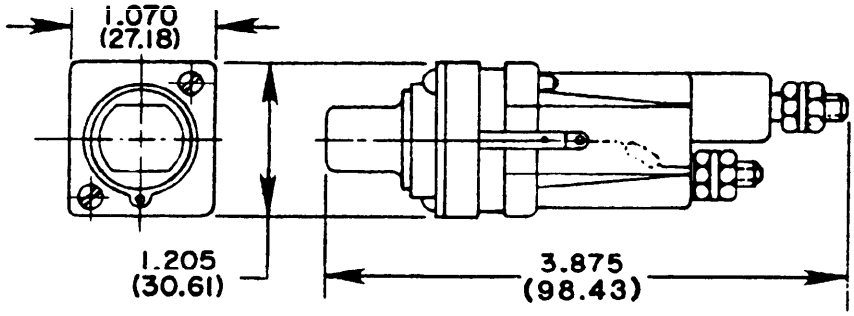


For ferrule type fuses (12 to 90 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.11 of 26 September 1979.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.12

FUSEHOLDERS, STYLE FHN31G, SINGLE POLE NONINDICATING,
MIL-F-19207/20

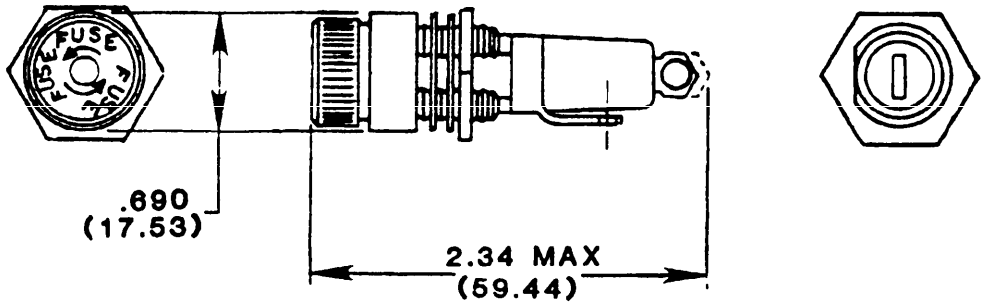

Type FHN31G1.

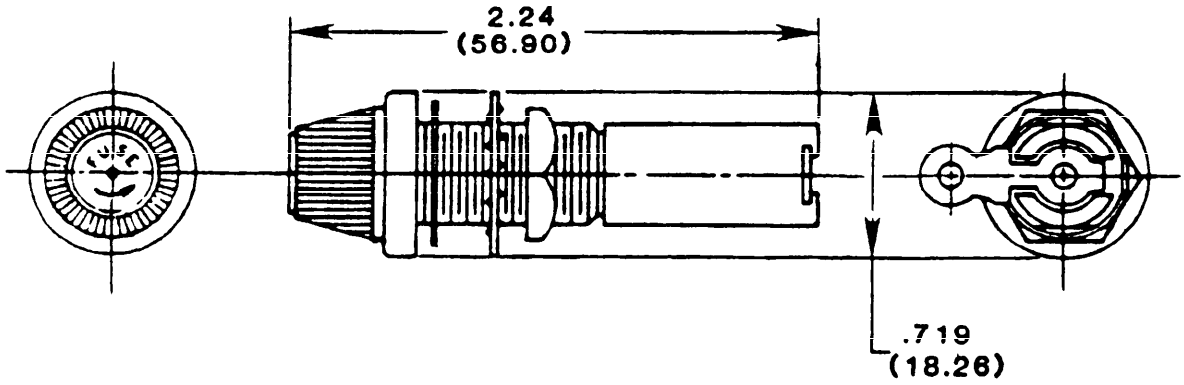


For ferrule type fuses (250 volts max)
F01, MIL-F-15160/1

Supersedes page 202.12 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.12a

FUSEHOLDERS, STYLE FHL32W, INDICATING,
MIL-F-19207/21
(NEON)

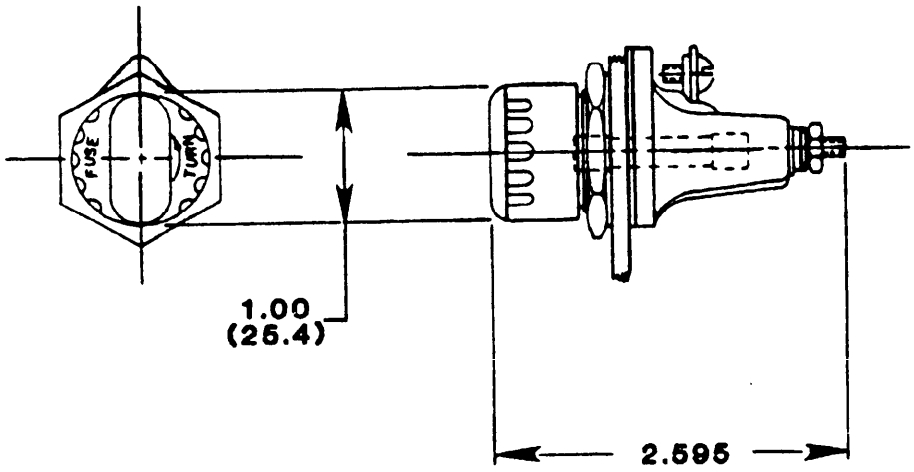


For ferrule type fuses (90 to 250 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.13

FUSEHOLDERS, STYLE FHL33W, TWO POLE INDICATING,
MIL-F-19207/22
(NEON)

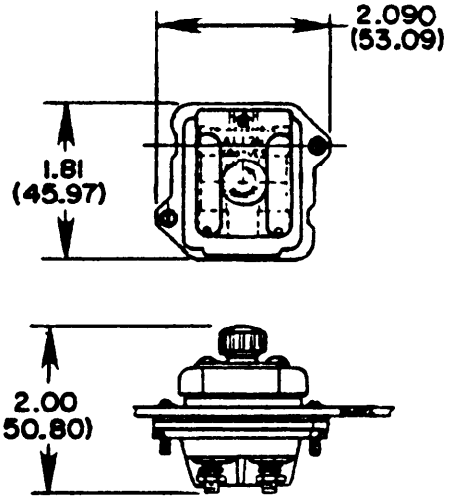


For ferrule type fuses (90 to 250 volts)
F02 and F03, MIL-F-15160/2 and /3,
FM09, MIL-F-23419/9

Supersedes page 202.13 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-25T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.14

FUSEHOLDERS, STYLE FHL34W, TWO POLE INDICATING,
MIL-F-19207/23
(NEON)

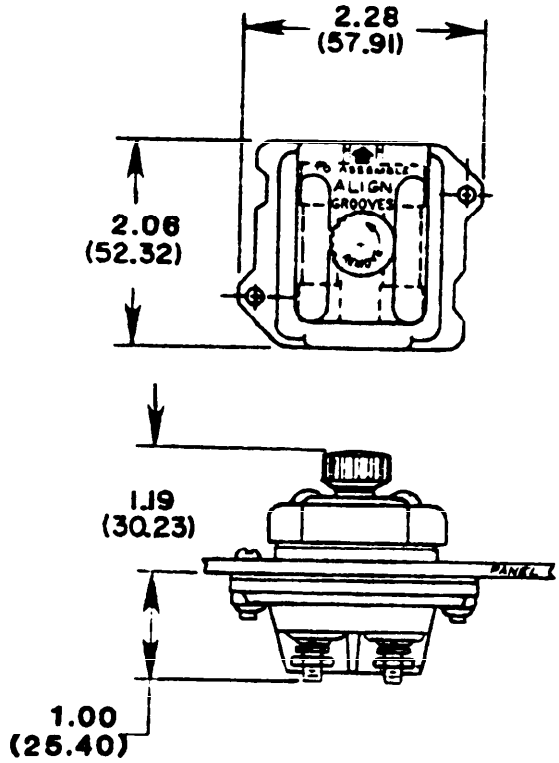


For ferrule type fuses (95 to 500 volts)
F09 and F60, MIL-F-15160/9 and /60

Supersedes page 202.14 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.14a

FUSEHOLDERS, EXTRACTOR POST TYPE, STYLE FHL35W, BLOWN FUSE INDICATING,
MIL-F-19207/24
(NEON)

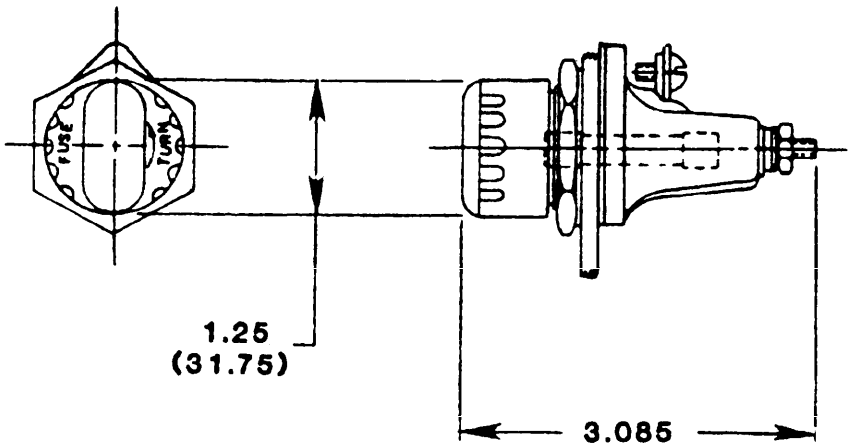


For ferrule type fuse (90 to 500 volts)
F09 and F60, MIL-F-15160/9 and /60

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.23

FUSEHOLDERS, STYLE FHN55W, R.F. SHIELDED,
MIL-F-19207/36

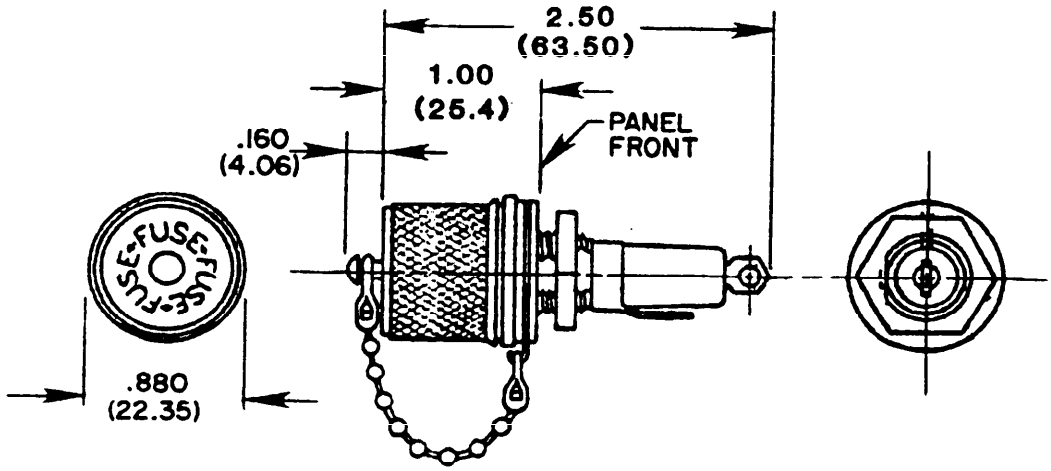


For ferrule type fuses (250 volts max)
F02 and F03, MIL-F-15160/2 and/3,
FM09, MIL-F-23419/9

Supersedes page 202.23 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.24

FUSEHOLDER, STYLE FHL57G, EXTRACTOR POST TYPE, BLOWN FUSE, INDICATING,
MIL-F-19207/38
(NEON)

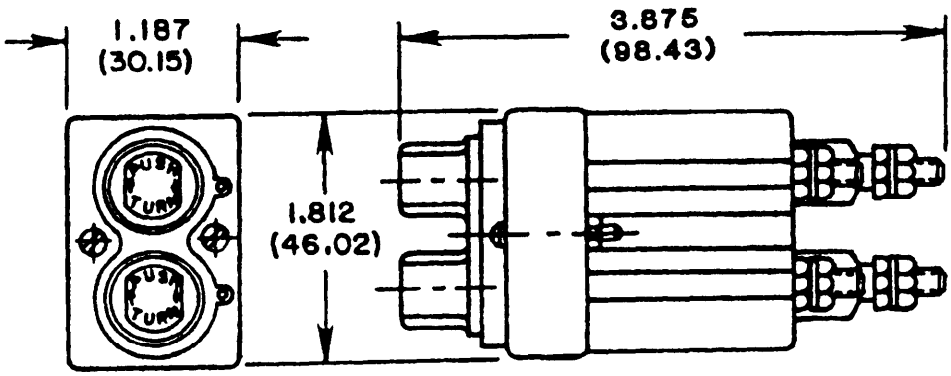


For ferrule type fuses (125 volts max)
F77, MIL-F-15160/77

Supersedes page 202.24 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

SECTION 202.25

FUSEHOLDERS, STYLE FHL58G, EXTRACTOR POST TYPE, BLOWN FUSE, INDICATING,
MIL-F-19207/39
(NEON)

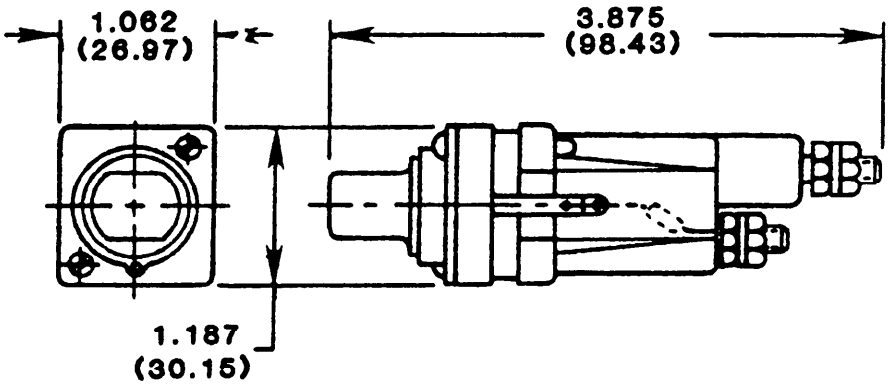

For ferrule type fuses (125 volts max)
F77, MIL-F-15160/77

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 605 034 4161

Supersedes page 202.25 of 26 September 1979.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.