MIL-STD-1375 (NAVY)

23 November 1970
SUPERSEDING
MIL-P-21873 (NAVY)
10 May 1968

MILITARY STANDARD

PROVISIONING, INITIAL SUPPORT

GENERAL REQUIREMENTS FOR

MISC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE

Washington, D. C. 20301

Provisioning, Initial Support,
General Requirements For
MIL-STD-1375

1. This Military Standard is mandatory for use by the Navy Department.

2. Application of this Military Standard to Contractor Furnished Equipment provided on a ship construction or conversion contract shall be at the discretion of the procuring activity.

3. Recommended corrections, additions, or deletions should be addressed to:

Department of the Navy
Commander, Naval Supply Systems Command
NAVSUP 0431
Washington, D. C. 20390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

CONTENTS

			PAGE
Paragraph	1	Scope	4
	2	Reference Documents	4
	3	Definitions	5
	4	General Requirements	11
	4.1	Provisioning Requirements Statement	11
	4.2	Integrated Logistic Support Management Team	11
	4.3	Interim Repair Parts Support	11
	5.	Detailed Requirements	12
	5.1	Provisioning Technical Documentation Requirements	12
	5.2	Provisioning Functions	14
	5.3	Design Change Notices	18
	5.4	Provisioning Technical Documentation Quality	19
	5.5	Preparation for Delivery	20

FIGURES

Figure	1.	Provisioning Requirements Statement	21
	2.	Sample Certificate of Prior Submission	22
	3.	Design Change Notice	23
	4.	Standard Provisioning Format	24
	5.	Data Elements That May Be Required by the Requiring Activity	25
	6.	Multipurpose Provisioning Card Format	26

APPENDIX

Appendix	A.	Instructions for Preparation of Provisioning Lists	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

Provisioning, Initial Support,

General Requirements For

1. SCOPE

1.1 This standard prescribes the procedures, formats, terms, and conditions governing the provisioning of end items of equipments. It specifies the actions to be performed, the schedules to be met, and the instructions for the preparation of Provisioning Technical Documentation (PTD). It specifies the range of documentation and requirements that may prescribe. Specific requirements for an individual contract(s) will be contained in the Provisioning Requirements Statement (PRS).

2. REFERENCE DOCUMENTS

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein.

SPECIFICATIONS

Military

MIL-D-1000	Drawings, Engineering and Associated Lists.
MIL-I-45208	Inspection System Requirements.
MIL-P-84000	Provisioning Screening Data to be Furnished by Government Suppliers.
MIL-Q-9858	Quality Program Requirements.
MIL-C-9877	Cards, Aperture.

STANDARDS

Federal

FED-STD-5	Standard Guides for Preparation of Item Description by Government Suppliers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-12	Abbreviations for Use on Drawings and in Technical Publications.
MIL-STD-100	Engineering Drawing Practices.

Industry

USASI-Y32.16-1965	Electrical and Electronic Reference Designations.

PUBLICATIONS

Department of Defense

H4-1	Federal Supply Codes for Manufacturers, Part I, Name to Code.
H4-2	Federal Supply Codes for Manufacturers, Part II, Code to Name.
H6-1	Federal Item Identification Guides for Supply Cataloging, Part I, Names and Description Pattern Indexes.
M1-6	Federal Manual for Supply Cataloging.

(Copies of specifications, publications, drawings, and other government data required by the contractor in connection with specific functions under this standard should be obtained from, or as directed by, the Contracting Officer. Referenced publications may be purchased or obtained from the Business Service Center, General Services Administration, Regional Office Building, 7th and D Streets, SW., Washington, D. C. 20360)

3. DEFINITIONS. For the purpose of this standard the following definitions shall apply.

3.1 Assembly. A number of parts or subassemblies, or any combination thereof, joined together to perform a specific function.

3.2 Attaching Part. An item used to attach assemblies or parts to the equipment or to each other.

3.3 Certificate of Prior Submission. A statement submitted by the contractor, certifying that he has previously furnished acceptable provisioning technical documentation to a Government activity, and which the contractor believes will satisfy the requirements of the present contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

3.4 Common and Bulk Item List. A list of all standard hardware and bulk items, except those of special design, intended for use in maintenance and repair of the end item or component.

3.5 Component. An assembly or any combination of parts, subassemblies and assemblies mounted together normally capable of independent operation.

3.6 Contract. The contract, letter contract, letter of intent, purchase order, or Government Project Order in which this standard is incorporated by reference. It also includes duly executed amendments, modifications and supplemental agreements with respect to any of the foregoing.

3.7 Contractor. The supplier of material or services to the Government under the terms of a specific contract.

3.8 Days. Calendar days are to be used whenever a number of "days" is specified.

3.9 Design Change Notice. A document utilized by the contractor to revise or recommend items for procurement by the Government for introduction into the physical stock-numbered inventory for eventual utilization in supporting the end item.

3.10 Drawings. Graphic data including drawings in accordance with MIL-STD-100, aperture cards in accordance with MIL-C-9877, graphs or diagrams, industry standards and specification, on which details are represented with sufficient information to define completely, directly or by reference, the end result in the procurement, reprocurement, or manufacture in the item required.

3.11 End Item. A component or components, necessary assemblies, subassemblies, and parts connected or associated together to perform an operational function.

3.12 Federal Supply Code for Manufacturers. A five-digit numeric code which identifies the manufacturer of an item. Assigned codes are contained in Cataloging Handbooks H4-1 and H4-2.

3.13 Federal Item Identification. A complete description in accordance with FED-STD-5. A Federal Item Identification consists of all descriptive data necessary to establish definitively the essential characteristics of the item which makes it what it is and differentiates it from every other item used by the Federal Government.

3.14 Initial Period of Service. If a date is established for all support to be provided by the supply system, the initial period of service will be the ninety (90) day period commencing with the supply system support date. If no supply system support date is established, the initial period of service will be the 90 day period commencing with the initial equipment installation date.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

3.15 Interim Repair Parts. Repair parts furnished with the end article to insure support to the equipment end user between initial receipt of the equipment and a point in time when the supply system can assume full support.

3.16 Logistics Policy Statement. A statement prepared by the Requiring Activity which outlines the developed policy for logistic support of the end item. This statement provides guidance/direction in the areas of planning, programming, budgeting, funding, supply, maintenance, engineering, procurement, manpower, training, provisioning etc.

3.17 Long Lead Time Items. Those items which, because of their complexity of design, complicated manufacturing processes, or limited production capacity, may cause production or procurement cycles which would preclude timely and adequate delivery, if not ordered in advance of normal provisioning.

3.18 Long Lead Time Items List. A listing containing that information required to provision long lead time items and shall be prepared in same format as specified for provisioning lists.

3.19 Maintenance Significant. An item subject to wearout, failure, or replacement and required for corrective or preventive maintenance.

3.20 Manufacturer or Commercial Manuals. All publications prepared and printed by a manufacturer or vendor without regard to Government furnished format and outline.

3.21 Modified Commercial Item. An item which is altered or changed by the contractor to accommodate a military requirement without essential change in the basic design or function.

3.22 Modular Assembly or Module. An assembly constructed on the basis of a standard pattern or standard dimensions and capable of being easily joined to or arranged with other parts or units or into a next higher assembly.

3.23 Part. One piece, or two or more pieces joined together which are not normally subject to disassembly without destruction or impairment of designed use.

3.24 Part Number. A contractor, vendor, government, or manufacturer's drawing or reference number which provides positive identification without further reference to specific parts lists, model number, symbol numbers, special coding or any other additional data when used in combination with the Federal Supply Code for Manufacturers.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

3.25 Preproduction Model. A model suitable for complete evaluation of mechanical and/or electrical form, design and performance. It shall be the first equipment produced under a production contract and shall be of final mechanical and electrical form, employing approved parts and completely representative of final equipment.

3.26 Procurement Lead Time. The time interval between the initiation of procurement action and receipt into the supply system of material purchased as a result of such action. It is composed of two elements, production lead time and administrative lead time.

1. Production Lead Time. The time interval between the placement of a contract and receipt into the supply system of material purchased.

2. Administrative Lead Time. The time interval between initiation of procurement action and letting of contract or placing of order.

3.27 Provisioning. Provisioning is the process of determining the range and quantity (depth) of items (i.e., spares and repair parts, special tools, test equipment, and support equipment) required to support and maintain an end item of material for an initial period of service. Its phases include the identification of items of supply, the establishment of data for catalog, technical manual, and allowance list preparation, and the preparation of instructions to assure delivery of necessary support items with related end articles. The process involves, as well, full consideration of inputs and of necessary actions related to assuring the required provisioning results.

3.28 Provisioning Conference. A meeting of the Government's provisioning team and contractor's representatives for the purpose of establishing the Government's maintenance requirements for the end items on contract.

3.29 Provisioning Lists. Listings of all maintenance significant parts or an end item or major component. They are used as the basis for the determination of the Government's concurrent repair parts requirements (e.g., LLIL, RIL, PPL, et al).

3.30 Provisioning Parts List. A listing which includes the end item and reflects all assemblies, subassemblies, and detail parts that can be removed without destruction of the part to which they are attached.

3.31 Provisioning Preparedness Review Conference. A conference conducted for the purpose of reviewing the provisioning documentation, facilities, and over-all preparations made by the contractor to conduct a formal provisioning conference.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

3.32 Provisioning Requirement Statement. A document which specifies the milestones, schedules, actions, and specific PTD requirements applicable to a particular contract.

3.33 Provisioning Requirements Statement Conference. A meeting of the Government provisioning representative and the contractor on an "as required" basis to exchange information leading to a mutual interpretation and understanding of the requirements, procedures, and schedules imposed by the PRS.

3.34 Provisioning Technical Documentation. That documentation furnished by contractors for the purpose of identification, determination of repair parts requirements, cataloging and contractual formalization of items to be procured through the provisioning process. As used in this standard, provisioning technical documentation includes, but is not limited to, provisioning lists, associated drawings, item descriptions, and EAM cards, as specified in the PRS.

3.35 Reference Symbol Number. A combination of letters and numbers which identifies parts, assemblies, subassemblies, and units of a set on equipment diagrams, drawings, parts lists, technical manuals, etc.

3.36 Repairable Items List. A listing of the prime contractor and vendor items which are economically and practically repairable according to guidelines furnished by the Requiring Activity.

3.37 Repair Part. Any individual part, subassembly or assembly required for the maintenance or repair of an end item.

3.38 Requiring Activity. The Naval Material Command Activity which originates a requisition, purchase request, or contract for the end item being provisioned, or its designated representative. (Note - The Requiring Activity as referenced throughout this standard may be a single activity or several activities.)

3.39 Spare Part. A subassembly, assembly, component, or end item used to complete an equipment or system while the failed item is undergoing maintenance or repair.

3.40 Standard Hardware. Unmodified items of hardware such as nuts, bolts, screws, and similar parts, for which complete descriptive information is obtainable from Military Standards, Federal Specifications or Commercial Standards.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the currentversion before use.

3.41 Subassembly. Two or more parts which form a portion of an assembly or a component replaceable as a whole but having a part or parts which are individually replaceable.

3.42 Support Equipment. The tools and test equipment designed and developed to perform a specific operation necessary to the servicing, testing, adjusting and maintaining of the end item.

3.43 Support Equipment List. A listing which includes the support equipment necessary for servicing, testing, adjusting, and maintaining the end item.

3.44 Vendor Item. An item procured by the contractor from a manufacturer or supplier and incorporated into the end item exactly as procured.

3.45 Abbreviations and Acronyms. For the purpose of this standard the following abbreviations and acronyms shall apply:

CBIL - Common and Bulk Items List
CFE - Contractor Furnished Equipment
CPS - Certificate of Prior Submission
DCL - Design Change Listing
DCN - Design Change Notice
DLSC - Defense Logistic Services Center
EAM - Electric Accounting Machine
EDPE - Electronic Data Processing Equipment
FSCM - Federal Supply Code for Manufacturers
FSN - Federal Stock Number
IFB - Invitation for Bid
ILSMT - Integrated Logistic Support Management Team
LMT - Logistics Management Team
IRPL - Interim Repair Parts List
LLIL - Long Lead Time Items List
LPS - Logistics Policy Statement
NMC - Naval Material Command
PPL - Provisioning Parts List
PRS - Provisioning Requirements Statement
PTD - Provisioning Technical Documentation
RFP - Request for Proposal
RFQ - Request for Quotation
RIL - Repairable Items List
RPO - Repair Parts Order
SM&R - Source Maintenance and Recoverability
SEL - Support Equipment List
VRPS - Vendor Repairable Provisioning Schedule

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Provisioning Requirements Statement (PRS). Specific provisioning requirements will be stated in a PRS issued by the Requiring Activity. The PRS will be issued concurrently with the Invitation for Bid (IFB), Request for Proposal (RFP), or Request for Quotation (RFQ), or will be issued within thirty (30) days subsequent to the award of the contract as stated in the contract schedule. The PRS will specify milestones, establish schedules, identify actions, and delineate the specific requirements and PTD applicable to a particular contract. See figure 1 for an example of a PRS.

4.2 Integrated Logistic Support Management Team. The Requiring Activity may, upon award of contract, establish a team to initiate specific support actions and to provide guidance to the contractor in fulfilling the requirements of this standard. Membership on this team, chaired by the Requiring Activity, shall be maintained at a minimum. The chairman will establish a date mutually agreeable to the Requiring Activity and to the contractor for convening a logistic management team conference, issue a letter of invitation to activities concerned, and provide the agenda. Complete minutes of each meeting shall be prepared and distributed to activities concerned within ten (10) days after each conference. The PRS shall specify if a logistic management team will be established.

4.3 Interim Repair Parts Support. The Requiring Activity will (after a review of the contract delivery dates, equipment installation dates, and dates negotiated for the receipt of PTD) determine if interim repair parts are required to support part or all of the end items scheduled for delivery on the contract. The purpose of these parts would be to provide interim support to the end user of the equipment between initial receipt of the equipment until a point in time that the supply system can assume full support. If interim repair parts are required, the necessary requirements will be stated in the PRS or modification thereto.

4.3.1 Government Selected Repair Parts. If the Requiring Activity selects the interim repair parts, the Requiring Activity will provide the contractor with a definitive listing (for example, a noun/nomenclature listing) of the items required to provide interim support.

4.3.2 Contractor Selected Repair Parts. If the contractor selects the interim repair parts, then the Requiring Activity will provide guidelines to the contractor for this selection. The contractor shall use these guidelines and his experience gained in developing, maintaining, or evaluating the end item to determine the range and depth of interim repair parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

4.3.3 Approval of Contractor Selected Interim Repair Parts. If the contractor selects the interim repair parts, the Requiring Activity will review the contractor's selection of parts and quantities and approve or reject all or part of the items within forty five (45) days after receipt of the contractor's list.

5. DETAILED REQUIREMENTS

5.1 Provisioning Technical Documentation (PTD) Requirements. This section describes the range of PTD which may be required for any contract. Specific PTD requirements for each contract cannot be defined in this standard due to the variation of provisioning requirements among end items. The PRS will state if the contractor will be required to develop, prepare, or participate in all or part of the cited PTD requirements. The PRS will indicate the requirement and the milestones for submission for each item or list identified in this section. Unless otherwise specified by the PRS, each provisioning list shall be prepared in accordance with the format specified in Appendix A.

5.1.1 Certificate of Prior Submission (CPS). Unless otherwise specified by the PRS, the contractor shall submit a CPS to identify approved provisioning documentation previously submitted to a Government activity which may satisfy the PTD requirements as specified in the PRS. This certificate may be applicable to the complete end item on the contract or any component thereof. The CPS shall be in letter format and must contain the following data: (a) a statement certifying the two-way interchangeability (electrically, mechanically, physically) of the end items and the identicality of the piece parts as previously documented, including design changes submitted under previously contracts; (b) information necessary to identify the previously submitted documentation (e.g., contract or purchase number, item number, equipment model, nomenclature, etc.); and (c) a statement and brief description of changes to any component, assembly, or part. The contractor may be required to submit PTD, if not previously submitted, to support the changes. See figure 2 for an example of a CPS. (See 5.4.2.1).

5.1.2 Long Lead Time Item List(s) (LLIL). The LLIL shall include those items which, because of their complexity of design, complicated manufacturing processes, or limited production capacity, may cause production or procurement cycles which would preclude delivery concurrent with the end item or the date scheduled for full supply system support of the end item if not ordered in advance of normal provisioning. The contractor shall provide a LLIL together with drawings, sketches, or descriptive data for the selected items and for the next higher assemblies or shall provide written notice to the Requiring Activity that no long lead time items exist. Within fifteen (15) days after receipt of a LLIL, the Requiring Activity shall notify the contractor whether or not a need exists for a long lead time item provisioning conference to review and select repair parts. A conference date will be negotiated between the Requiring Activity and the contractor. (See 5.2.1.3.).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

5.1.3 Provisioning Parts List (PPL). The PPL shall include the end item, all components, assemblies, subassemblies, and piece parts, including parts covered by Military, Government, or Industry Standards unless the PRS specifically states that certain classes are to be excluded. If an exclusion statement is made, standard items may be submitted as required in a common and bulk Items List. Requirements for inclusion of an alpha-numerical index will be indicated in the PRS.

5.1.4 Support Equipment List (SEL). The SEL shall include the tools and test equipment used to perform a specific operation on specific pieces of material and necessary to the servicing, testing, adjusting, and maintaining of the end item. This list shall not include tools or equipment which are a part of the end item, such as built in monitoring equipment.

5.1.5 Common and Bulk Items List (CBIL). The CBIL shall include all standard hardware and bulk items, except those of special design, intended for use in maintenance and repair of the end item.

5.1.6 Repairable Item List (RIL). The RIL shall include all prime contractor and vendor items, including assemblies, which are practically and economically repairable according to guidelines provided by the Requiring Activity.

5.1.7 Repairable Provisioning Schedule (RPS). The VRPS shall include the planned schedule for provisioning major vendor repairable items when large numbers of complex vendor equipments are involved.

5.1.8 Design Change Notice (DCN). The DCN shall transmit all engineering changes incorporated into the end item which modify, add, delete, or supersede parts in the end item. (See 5.3.)

5.1.9 Design Change Listing (DCL). The DCL shall include revisions, additions, and deletions of common hardware items or Government Standards. DCLs shall be limited to ten (10) items per page. (See 5.3.)

5.1.10 Interim Repair Parts List (IRPL). The IRPL shall include all items selected to provide interim support. For each item included in the IRPL the contractor shall enter "IRPL" in the remarks column of the PPL submitted for the complete end item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

5.1.11 Drawings. A drawing is required for each item listed in any provisioning list unless specifically excluded by 5.1.11.1. Drawings to be provided for provisioning purposes shall be prepared in accordance with the provisioning drawing requirements incorporated in the contract. In the event that no drawing requirement is incorporated in the contract, drawings provided shall at a minimum be in accordance with the requirements of MIL-D-1000, Category D, Form 1 or 2. .Unless otherwise specified by the PRS, the contractor shall provide either reproducible or non-reproducible copies instead of original drawings.

5.1.11.1 Exceptions to Required Drawings. A drawing need not be furnished if: (a) the PRS specifies drawings need not be furnished; (b) the contractor has submitted a CPS and received approval; (c) the item is identified by a Government or Industry association specification or standard (i.e., MIL, FED, JAN, AN, NEMA, SAE, etc.) which completely identifies the item including its physical, mechanical, electrical, and diminsional characteristics. Drawings in the last category may be requested to be made available during the provisioning conference.

5.1.11.2 Sequence and Number. The PRS will specify the sequence and number of drawings.

5.1.11.3 General Drawings. The contractor shall furnish assembly and general arrangement drawings which indicate the location and function of each item listed on the applicable provisioning list. The PRS will state whether schematic drawings are required.

5.1.11.4 Special Markings. Unless otherwise specified by the PRS, the contractors shall mark each drawing with the contract number and item sequence number of first occurrence applicable to the provisioning list for which the drawing is required. Control drawings shall be clearly marked. If the contractor has assigned a number to a vendor item, both numbers shall appear on the drawing. Rights in data limitations shall be marked on applicable drawings.

5.1.12 Item Identifications. Unless otherwise specified by the PRS, the contractor shall prepare item identifications in accordance with FED-STD-5. Items having a definite shelf life, including items where experience on similar type items indicates a definite shelf life, shall be so identified on the item identification.

5.2 Provisioning Functions. The Requiring Activity and the contractor must perform certain functions related to the submission of PTL in order to complete the required provisioning procedures. These

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

functions include conferences chaired and convened by the Requiring Activity and attended by representatives of the Requiring Activity, the contractor, and other organizations as required to accomplish a desired purpose.

5.2.1 Joint Functions

5.2.1.1 PRS Conference. A PRS conference will be convened if required by the Requiring Activity or the contractor. The primary purpose of this conference is the exchange of information leading to a mutual understanding of the requirements, procedures, and schedules imposed by the PRS and this standard. In addition, the contractor can use this conference to provide the conferees with a briefing on the end item requiring provisioning.

5.2.1.2 Provisioning Preparedness Review Conference. The purpose of this conference is to review the provisioning documentation, facilities and the over-all preparations made by the contractor to conduct a formal provisioning conference.

5.2.1.3 Long Lead Time Item Provisioning Conference. The purpose of this conference is to review and select the long lead time items required for support of the end item. This conference will be convened if required by the Requiring Activity. If the contractor has submitted PTD, the Requiring Activity will make such documentation available for the conference. (See 5.2.3.3)

5.2.1.4 Provisioning Conferences. The purpose of the provisioning conference is to make supply and maintenance decisions in consonance with the established logistics policy for support of the end item. These decisions include: assignment of source, maintenance, and recoverability codes; assignment of military essentiality codes; item range and depth determinations; assignment of replacement failure rates; and determination of additional support requirements for item identifications, drawings, or other related data for cataloging purposes. The conference will be held as specified in the PRS. Normally, this will be within thirty (30) days after acceptance of PTD.

5.2.1.5 Integrated Support Management Team Conferences. When a Integrated Logistic Support Management Team (ILMT) has been established, the LMT shall meet as necessary to accomplish the actions required during the provisioning process.

5.2.2 Contractor Functions

5.2.2.1 Requirements for the PRS Conference. The contractor shall take the following pre-conference actions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

a. Thoroughly review the requirements as stated in this standard and the PRS.

b. Prepare and have available at the time of the conference all questions and recommendations pertaining to provisioning requirements.

c. Have available an updated schedule reflecting the current drawing and production release schedules for major components and assemblies.

d. Be prepared to present the organizational structure, responsibilities, and procedures of the contractor's organization assigned to fulfill provisioning requirements.

e. Insure the availability of fully qualified representation during the conference.

5.2.2.2 Requirements for the Long Lead Time Item Provisioning Conference. The contractor shall have PTD for the long lead time items and qualified technical and documentation representatives available for the long lead time item provisioning conference.

5.2.2.3 Requirements for Provisioning Conferences held at the Contractor's Plant. When the provisioning conference is held at the contractor's plant or office, the contractor shall provide complete facilities, including PTD (as applicable), technical data, a sample article if available competent personnel with expert knowledge of the equipment being provisioned, and clerical assistance and office space as specified in the PRS, or which are mutually agreed upon between the contractor and the Requiring Activity during the provisioning preparedness review conference.

5.2.2.4 Requirements for Provisioning Conferences held at the Requiring Activity. When a provisioning conference is held at the Requiring Activity, the contractor shall provide competent personnel with expert technical knowledge of the equipment being provisioned to assist the provisioning team, and a sample article, as mutually agreed to between the contractor and the Requiring Activity. Specified requirements will be stated in the PRS or made known to the contractor subsequent to review and acceptance of the PTD.

5.2.2.5 Federal Stock Number Requirements. Unless otherwise specified by the PRS, the contractor shall include Federal Stock Numbers on applicable provisioning lists.

5.2.2.6 Provisioning Screening Requirements. Unless otherwise specified by the PRS, the contractor shall screen all items in the PPL with the master catalog file at the Defense Logistics Services Center (DLSC) to obtain all applicable Federal Stock Numbers in the Military or Federal Supply System. Screening shall be accomplished in accordance with MIL-P-84000 and the PRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

5.2.2.7 Incremental Submission of Provisioning Technical Documentation. Unless otherwise specified by the PRS, the contractor shall not submit provisioning technical documentation incrementally.

5.2.3 Requiring Activity Functions

5.2.3.1 Post PRS/Provisioning Preparedness Review Conference Actions. The Requiring Activity will update the PRS for any change in requirements, procedures, or schedules developed during the PRS or the provisioning preparedness review conference. Changes resulting from these conferences shall be subject to the appropriate contract coverage.

5.2.3.2 Repairable Item List (RIL) Requirements. If the contractor has submitted a RIL the Requiring Activity will complete necessary screening and advise the contractor within thirty (30) days of necessary PTD requirements.

5.2.3.3 Long Lead Time Items Repair Parts Orders. If a long lead time item provisioning conference is required, then the Requiring Activity will, within thirty (30) days after the conference, initiate an order to the contractor for the required long lead time items or will provide written notice to the contractor that no long lead time items are required. If a long lead time item conference is not required, then the Requiring Activity will, within forty-five (45) days after receipt of the LLIL, initiate an order for the necessary long lead time items or will provide written notice to the contractor that no long lead time items are required.

5.2.3.4 Repair Parts Order (RPO). If the Requiring Activity elects to place an RPO with the contractor when exercising the repair parts procurement option contained in the contract, then that RPO will be released no later than forty-five (45) days after the completion of the provisioning decisions and assignments described in 5.2.1.4.

5.2.3.5 Federal Stock Numbers (FSNs) for Items on the RPO. The Requiring Activity will provide the contractor with FSNs for the items on the RPO within forty-five (45) days after the PRO is placed or within forty-five (45) days after receipt of item identifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

5.2.3.6 Provisioning Reviews. The Requiring Activity may conduct provisioning reviews during the life of the contract in order to insure conformance with the requirements of this standard. The Requiring Activity will negotiate revised PTD and contractor services to conduct such reviews. The PRS will be revised as necessary.

5.2.3.7 Contact with Subcontractors. The Requiring Activity may, under the terms of the contract and after coordination with the contractor, make direct contact with the contractor's suppliers, source coding, and coordination as the selection of repair parts and related support equipment.

5.3 Design Change Notices (DCNs)

5.3.1 General. The contractor shall submit Design Change Notices (DCNs) for Government approved engineering changes which are incorporated into the end item furnished under the contract and which modify, add to, delete, or supersede parts in the end item. The DCN shall be accompanied by all detail drawings and by either the next higher assembly drawings or the engineering order which revises or adds to the next higher assembly.

5.3.2 Submission Requirements. The contractor shall submit DCNs within twenty-one (21) days after official release of approved engineering changes. The Requiring Activity will, within thirty (30) days after receipt of DCNs, initiate an order for the items required to support the changes or will provide written notice to the contractor that no items are required. DCNs shall be submitted whenever an item has been added to, deleted from, or superseded by another item in the equipment. Unless otherwise specified by the PRS, (a) changes occurring during or after the provisioning conference shall be submitted after receipt of the RPO, and (b) only items source coded "P" or "A" (items to be procured and stocked or supplied by the supply system; or items to be assembled and not procured or stocked in the supply system, respectively) shall be submitted as DCNs. The DCN shall indicate if item proration is being accomplished. The DCNs shall be prepared in the format shown in figure 3 and according to the instructions of Appendix A. DCNs shall be limited to two (2) line entries per page (e.g., superseded and superseding, deleted and added). Additions with no deletions or deletions with no additions shall be indicated as one (1) line entry per page.

5.3.3 Design Change Listing (DCL). Revisions, additions, and deletions of standard hardware items or Government Standards (e.g., nuts, bolts, screws, keys, washers) may be submitted on a DCL if so specified in the PRS. DCLs shall be limited to ten (10) items per page. Unless otherwise specified in the PRS, the format and submission requirements shall be the same as the DCN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

5.3.4 Deletion of Parts from End Item. Upon approval of engineering changes which reduce or eliminate the need for repair parts, the contractor shall take immediate action to reduce the production or procurement of such parts which have been ordered. The RPO for the parts affected shall be reduced in the same ratio as the number of end items on order that are affected by the design change. Items completely removed from the end item as a result of design changes shall not, in any case, be delivered to the Government.

5.3.5 Adjustment of FSNs. When an approved engineering change adds to or alters the required repair parts, the Requiring Activity will provide applicable FSNs to the contractor as soon as possible after submission of acceptable PTD. Provisioning screening, if invoked for the original equipment, is applicable to DCNs. Results for DCN screening should be sent directly to the Requiring Activity. New Items will not be shipped under the FSNs assigned to the superseded items.

5.4 Provisioning Technical Documentation Quality

5.4.1 Contractor Responsibility. The contractor shall provide complete and accurate PTD. Depending upon the end item's complexity and the degree of desired control, the requirements for quality assurance will be indicated in the contract or order and will range from the detailed requirements of Appendix A to the requirements of MIL-I-45208 or MIL-Q-9858. Inaccurate or incomplete PTD will cause a delay in PTD acceptance and may result in return of the PTD for correction. The contractor shall reference this standard in contracts or purchase orders to suppliers, vendors, and subcontractors and shall insure that the necessary vendor documentation, including drawings, is available in time for submission with the contractor's documentation. The contractor shall communicate with the Requiring Activity to secure assistance on specific technical problems concerning PTD and related procedures. The contractor shall immediately notify the Requiring Activity regarding any foreseeable delay in meeting established documentation schedules. If a suppler, vendor, or subcontractor refuses to supply data, documentation, or drawing to either the contractor or the Requiring Activity, then the contractor shall forward all correspondence substantiating such refusal to the Requiring Activity.

5.4.2 Government Responsibility. The Requiring Activity will receive and review the PTD submitted by the contractor and will provide assistance to the contractor as requested to insure complete understanding of the PRS.

5.4.2.1 Acceptance or Rejection of the CPS. The Requiring Activity will inform the contractor, in writing, within fifteen (15) days after receipt of the contractor's CPS that all, part or none of the previously submitted documentation is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

5.4.2.2 Acceptance or Rejection of Provisioning Technical Documentation. The Requiring Activity will accept or reject the PTD within thirty (30) days after receipt of such documentation. Acceptance of the documentation will not relieve the contractor from the responsibility for submitting data concerning design and production changes made to the end item or for providing additional documentation if the Requiring Activity determines during the provisioning process that the documentation originally submitted was incomplete.

5.5 Preparation for Delivery. The contractor shall preserve, package, pack, and mark the required PTD as specified in the contract and as modified by the PRS.

Custodian:
Navy - SA

Preparing Activities:
Navy - SA

Review Activities:
Navy - SH, YD, AS, OS, EC
TD

Project Number:
MISC-N654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

PROVISIONING REQUIREMENT STATEMENT (4423)
NAVSUP FORM 1319 (9-70)

NOTE: DOCUMENTATION AND SERVICES SHALL BE PROVIDED AS SPECIFIED IN THIS STATEMENT WHICH IS FURNISHED TO ASSIST THE CONTRACTOR IN COMPLYING WITH MIL-STD-1375 (NAVY)

DATE

REQUIRING ACTIVITY (Name and address)

CONTRACTOR (Name and address)

EQUIPMENT NAME/NOMENCLATURE

INVITATION FOR BID NO.	DATE	REQUEST FOR QUOTATION NO.	DATE	CONTRACT NO.	DATE
CONTRACT AMENDMENT/MODIFICATION NO.			DATE	MIPR NO.	DATE

PROVISIONING REQUIREMENTS

NOTE: REQUIREMENTS ARE SCHEDULED BY INSERTION OF A DATE OR A LEAD TIME (IN CALENDAR DAYS) SUBSEQUENT TO CONTRACT AWARD DATE. THE WORD(S) "(AS) REQUIRED" INDICATES A SCHEDULE TO BE NEGOTIATED. N/A INDICATES REQUIREMENTS NOT APPLICABLE.

ITEM NO.	REQUIREMENTS			REFER TO PARA NO.	SCHEDULE	SEE APPEN.
1	PROVISIONING REQUIREMENT STATEMENT CONFERENCE	☐ CONTRACTOR'S FACILITY ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	5.2.1.1		
2	PROVISIONING PREPAREDNESS REVIEW CONFERENCE	☐ CONTRACTOR'S FACILITY ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	5.2.1.2		
3	LONG LEAD TIME ITEM PROVISIONING CONFERENCE	☐ CONTRACTOR'S FACILITY ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	5.2.1.3		
4	PROVISIONING CONFERENCE	☐ CONTRACTOR'S FACILITY ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	5.2.1.4		
5	INTEGRATED LOGISTICS SUPPORT MANAGEMENT TEAM CONFERENCE	☐ CONTRACTOR'S FACILITY ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	5.2.1.5		
6	INTERIM REPAIR PARTS	TO BE SELECTED BY: ☐ CONTRACTOR ☐ REQUIRING ACTIVITY	☐ OTHER *(Specify)*	4.3		
7	REPAIRABLE PROVISIONING SCHEDULE			5.1.7		
8	CERTIFICATE OF PRIOR SUBMISSION			5.1.1		
9	LONG LEAD TIME ITEM LIST (LLIL)			5.1.2		
10	PROVISIONING PARTS LIST (PPL)	ARRANGE ITEMS IN SEQUENCE AS FOLLOWS: ☐ DISASSEMBLY ☐ TOP DOWN ☐ REFERENCE SYMBOL NO. ☐ OTHER ALPHA-NUMERIC INDEX REQUIRED ☐ YES ☐ NO		5.1.3		
11	REPAIRABLE ITEM LIST (RIL)	☐ PRIME ITEMS ONLY ☐ VENDOR ITEMS ONLY ☐ BOTH		5.1.6		
12	SUPPORT EQUIPMENT LIST (SEL)			5.1.4		
13	COMMON AND BULK ITEM LIST			5.1.5		
14	DESIGN CHANGE NOTICES (DCN)			5.1.8		
15	DESIGN CHANGE LISTINGS			5.1.9		
16	EAM CARDS/MAGNETIC TAPE	☐ EAM CARDS ☐ MAGNETIC TAPE		20.3		
17	DLSC PRESCREENING FOR FSN'S	CONTRACT CONTROL NO.	CONTRACTOR'S DLSC ADDRESS	5.2.2.6		
18	PROVISIONING DRAWINGS	DRAWINGS TO BE SEQUENCED AS FOLLOWS: ☐ PROVISIONING PARTS LIST ☐ PART NUMBER ☐ OTHER _____ COMPLETE SET(S) IN THE ABOVE SEQUENCE ARE REQUIRED		5.1.11		
19	PREPARATION OF ITEM IDENTIFICATION			5.1.12		
20	ADDITIONAL SPECIFIC REQUIREMENTS	ATTACHMENTS PERMISSABLE, IDENTIFY BY ITEM NO. AND SPECIFIC REQUIREMENT		4.1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

APPENDIX A - PROVISIONING LIST

Indicate, in the columns below, whether mandatory (M) or optional if available (O)

BLOCK NO.	DATA ELEMENTS (See MIL-STD-1175, Appendix A)	LLTL	PPL	RTL	SEL	CBTL	DCN	IRPL	OPT. 1*	OPT. 2*	OPT. 3*
1	ITEM OR SEQUENCE NUMBER										
2	INDENTURE NUMBER										
3	REFERENCE SYMBOL NUMBER										
4	ITEM NAME										
5	PRIME CONTRACTOR'S PART NUMBER										
6	QUANTITY PER ASSEMBLY										
7	QUANTITY PER COMPONENT										
8	QUANTITY PER END ITEM										
9	SHELF LIFE										
10	TOTAL QTY. RECOMMENDED/ORDERED										
11	UNIT PRICE										
12	EXTENDED UNIT PRICE										
13	S. M. AND R CODES										
14	FEDERAL STOCK NUMBER										
15	ITEM AND LOT NUMBER										
16	FEDERAL MANUFACTURERS CODE										
17	MANUFACTURER'S PART NUMBER										
18	RECOMMENDED MAINT. QTY/FACTOR										
19	RECOMMENDED OVHL QTY/FACTOR										
20	USABLE ON CODE										
21	OPTIONAL (See Item No. 20) 2/										
22	SPARES ALLOCATION 2/										
23	DCN NUMBER										
24	NHA/NEXT HIGHER REP./ASSY.										
25	INTERCHANGEABILITY CODE										
26	ECP/TECH DIRECTIVE NUMBER										
27	NHA/NHRA FOR MANUFACTURER										
28	TOTAL QUANTITY SHIPPED										
29	PACK. AND PRESERV. CODES										

WHEN USED IN DCN FORMAT ——→ 1/ SECURITY CLASSIFICATION AND TOTAL QUANTITY PRORATED

2/ OUTFITTING/ALLOWANCE LIST DATA

*Refer to Item 20 on front of this sheet when option columns above are utilized.

APPENDIX B - DISTRIBUTION REQUIREMENTS

PROVISIONING TECHNICAL DOCUMENTATION	TOTAL NO. REQUIRED	DISTRIBUTION A	B	C	D	E	F	G	H	I
LLTL										
PPL										
RTL										
SEL										
CBTL										
CPS										
DCN										
IRPL										
DRAWINGS (SETS)										
EAM CARDS (SETS)										
MAGNETIC TAPE										
OPTION 1										
OPTION 2										
OPTION 3										

A

B

C

MAILING ADDRESSES

D

F

F

G

H

I

NAVSUP FORM 1319 (9-69) BACK S/N 0105-[illegible]-9101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

MAJOR ELECTRONICS
8308 - 26th Avenue
Kenosha, Wisconsin

14 January 19--

Commanding Officer,
Navy Electronics Supply Office
Great Lakes, Illinois 60088

Subject: NObsr 12345 for TP-65/U; Certificate of Prior Submission

Reference: (a) MIL- STD-1375

Enclosure: (1) Statement and Description of Changes

Gentlemen:

In accordance with paragraph 5.1.1 of reference (a) it is requested that this letter be considered a Certificate of Prior Submission. This letter certifies that:

(a) The equipments being furnished under item 1 of the subject contract are electrically, physically, and mechanically two-way interchangeable with the equipment previously furnished under Contract NObsr 67890.

(b) All changes to equipments furnished under the Contract NObsr 67890 are contained in enclosure (1).

(c) Subsequent changes to the equipments being furnished under the subject contract will be supported by Design Change Notices.

It is requested that this Certificate of Prior Submission be acknowledged in accordance with paragraph 5.5.2.2.1 of reference (a).

Very truly yours,

MAJOR ELECTRONICS

S. A. Marshall
President

Figure 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

SYMBOL NO. PREFIX OR UNIT NOMENCLATURE XXXX10XXXX

DESIGN CHANGE NOTICE

ITEM OR SEQUENCE NUMBER 1	INDENT 2	REFERENCE SYMBOL NO. 3	ITEM NAME 4	PRIME CONTRACTORS 5 PART NUMBER	LONG PART NUMBER CODE	QTY. PER ASSY. 6	QTY. PER COMP. 7	QTY. PER END ITEM 8	SL HI EF LE F 9	TOTAL RECM/ ORDERED 10	UNIT PRICE 11 DOLLARS CTS M	EXTENDED UNIT PRICE 12 DOLLARS CTS	REMARKS
SMR CODE 13		FEDERAL STOCK NUMBER 14	ITEM AND LOT NO. 15 / FEDERAL MFR. CODE 16	MANUFACTURERS 17 PART NUMBER	LONG PART NUMBER CODE	RECM MAINT QTY/ FACT 18	RECM OVHL QTY/ FACT 19	USABLE ON CODE 20	SECURITY CLASSIFICATION AND TOTAL QUANTITY PRORATED 21		OUTFITTING/ALLOWANCE LIST DATA 22		
DCN NUMBER 23		NEXT HIGHER ASSEMBLY/NEXT HIGHER REPAIRABLE ASSEMBLY FOR BLOCK NO. 5 (PRIME CONTRACTOR'S PART NUMBER) 24	INTER-CHANGEABIL-ITY CODE 25 / ECP/ TECHNICAL DIRECTIVE NUMBER 26	NEXT HIGHER ASSEMBLY/NEXT HIGHER REPAIRABLE ASSEMBLY FOR BLOCK NO. 17 (MANUFACTURER'S PART NUMBER) 27						TOTAL QUANTITY SHIPPED 28	PACKAGING AND PRESERVATION CODES 29		
XXX6XX	I	XXXXXXXX19XXXXXXXXX	XXXXXX15XXXXXXX	XXXXXXX16XXXXXXXXX	XXXX	XXXX	XXXX	XXXX	X3X	XX6XXX	XXXX11X.XXXX	XXXXX12XXX.XX	
XXX6XX		XXXXXXXX19XXXXXXXXX	XXXX XX5XX	XXXXXXX16XXXXXXXXX	XXXX	XXXX	XXXX	XXXX	I	XX6XXX	XXXXXXXXXXX25	XXXXXXXXXXXX	
			* X	XXXXXXX16XXXXXXXXX	XXXX								
			* X	XXXXXXX16XXXXXXXXX	XXXX								
XXX6XX		XXXXXXXXX20XXXXXXXXX	X3X XX6XXX	XXXXXXX20XXXXXXXXX	XXXX					XX6XXX	XXXXXXXXX23	XXXXXXXXXXXX	

* THESE LINES ILLUSTRATE THE PRINTING OF (1) THE LETTERS "P" AND "M;" (2) THE OVERFLOW PORTIONS OF LONG PART NUMBERS; AND (3) THE LONG PART-NUMBER CODES. ALSO, SEE INSTRUCTIONS FOR MORE DETAIL.

CONTRACT NUMBER | NOMENCLATURE | MODEL/TYPE NO.

CONTRACTOR | DATE OF LIST | REVISION | PAGE OF

C-8488

Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:46Z
Check the source to verify that this is the current version before use.

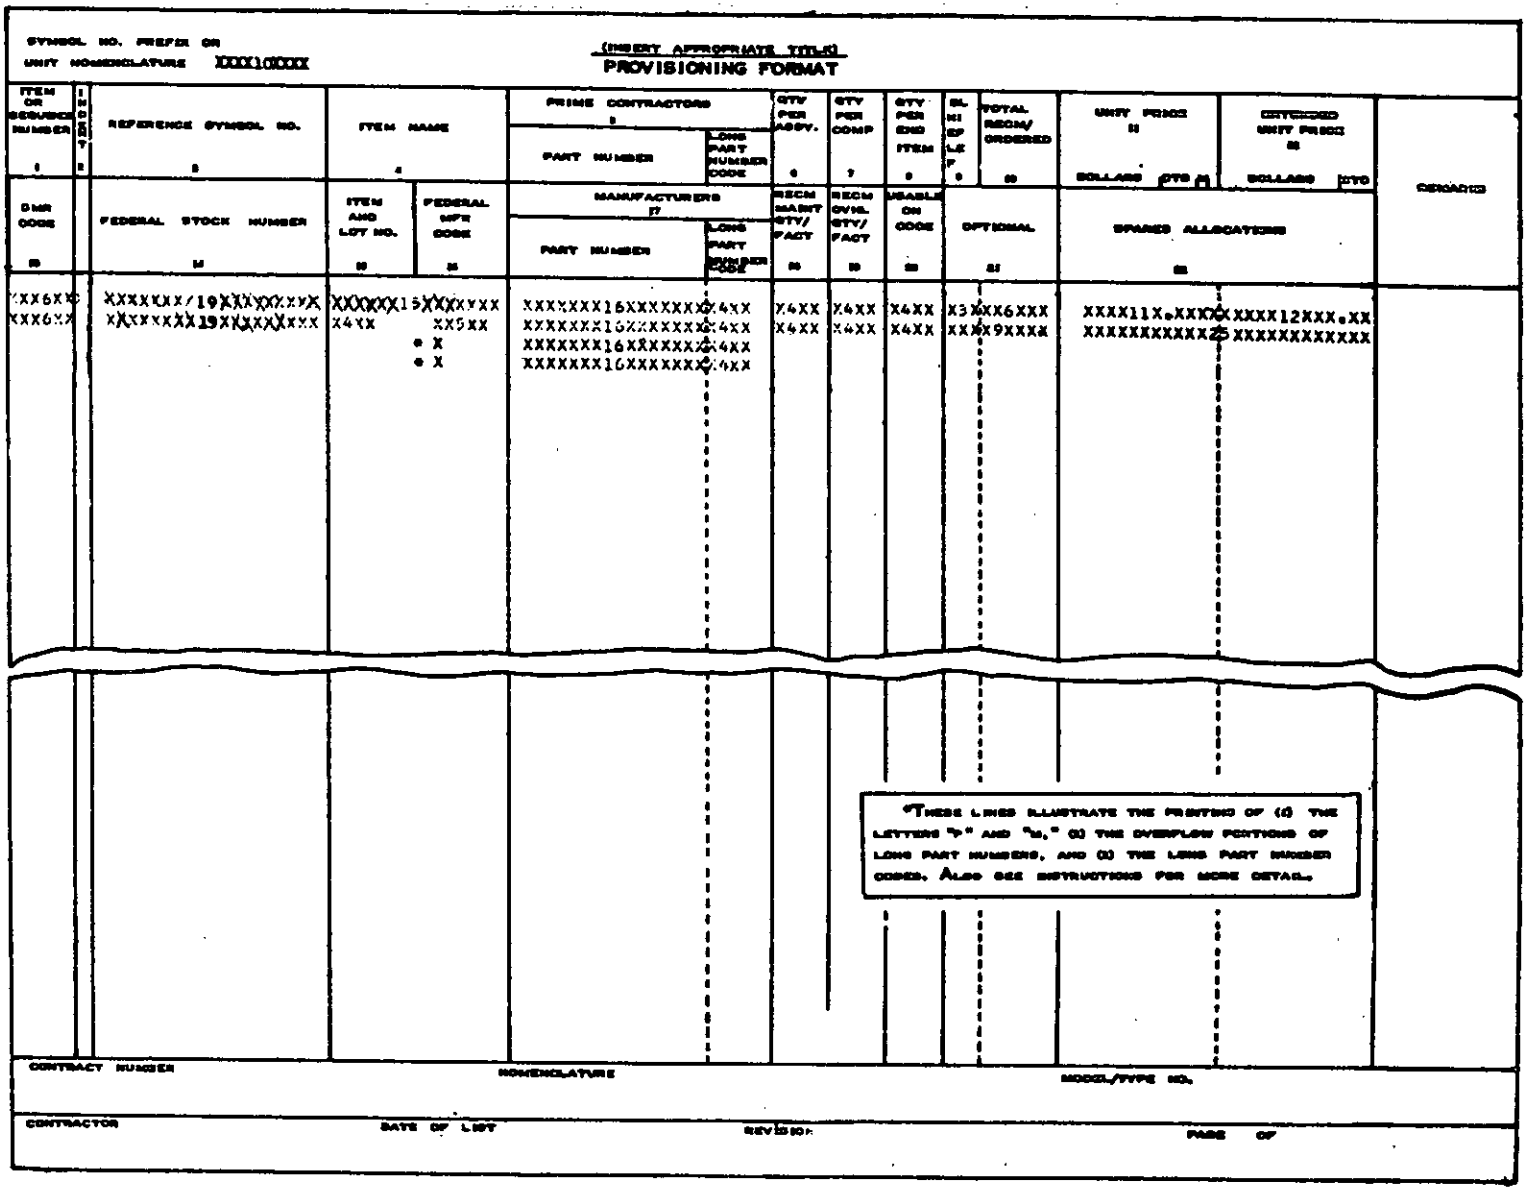


Figure 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

DATA ELEMENTS THAT MAY BE REQUIRED BY REQUIRING ACTIVITY

BLOCK	DATA ELEMENT	PPL	RIL	CBIL	LLIL	DCN	IRPL	SEL
1	Item or Sequence Number	X	X	X	X	X	X	X
2	Indenture Number	X				X	X	
3	Reference Symbol Number	X			X	X	X	X
4	Item Name	X	X	X	X	X	X	X
5	Prime Contractor's Part No.	X	X	X	X	X	X	X
6	Quantity Per Assembly	X			X	X	X	
7	Quantity Per Component	X			X	X	X	
8	Quantity Per End Item	X		X	X	X	X	X
9	Shelf Life	X	X	X	X	X	X	X
10	Total Quantity Recommended/Ordered	X				X	X	X
11	Unit Price	X	X	X	X	X	X	X
12	Extended Unit Price							
13	SM&R Code	X				X		X
14	Federal Stock Number	X	X	X	X	X	X	X
15	Item and Lot Number							
16	Federal Manufacturer's Code	X	X	X	X	X	X	X
17	Manufacturer's Part Number	X	X	X	X	X	X	X
18	Recommended Maintenance Qty/Factor	X				X	X	
19	Recommended Overhaul Qty/Factor	X				X	X	
20	Usable on Code	X				X		
21	Optional[1]					X		
22	Spares Allocation[2]					X		
23	DCN Number					X		
24	NHA/Next Higher Rep Assy for Prime					X		
25	Interchangeability Code					X		
26	ECP/Tech. Directive Number					X		
27	NHA/NHRA for Manufacturer					X		
28	Total Quantity Shipped					X		
29	Packaging and Preservation Codes					X		
	Remarks	X	X	X	X	X	X	X

1 "Security Classification and Total Quantity Prorated" in DCN
2 "Outfitting/Allowance List Data" in DCN

Figure 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

MULTIPURPOSE

PROVISIONING CARD FORMAT

80 COLUMN

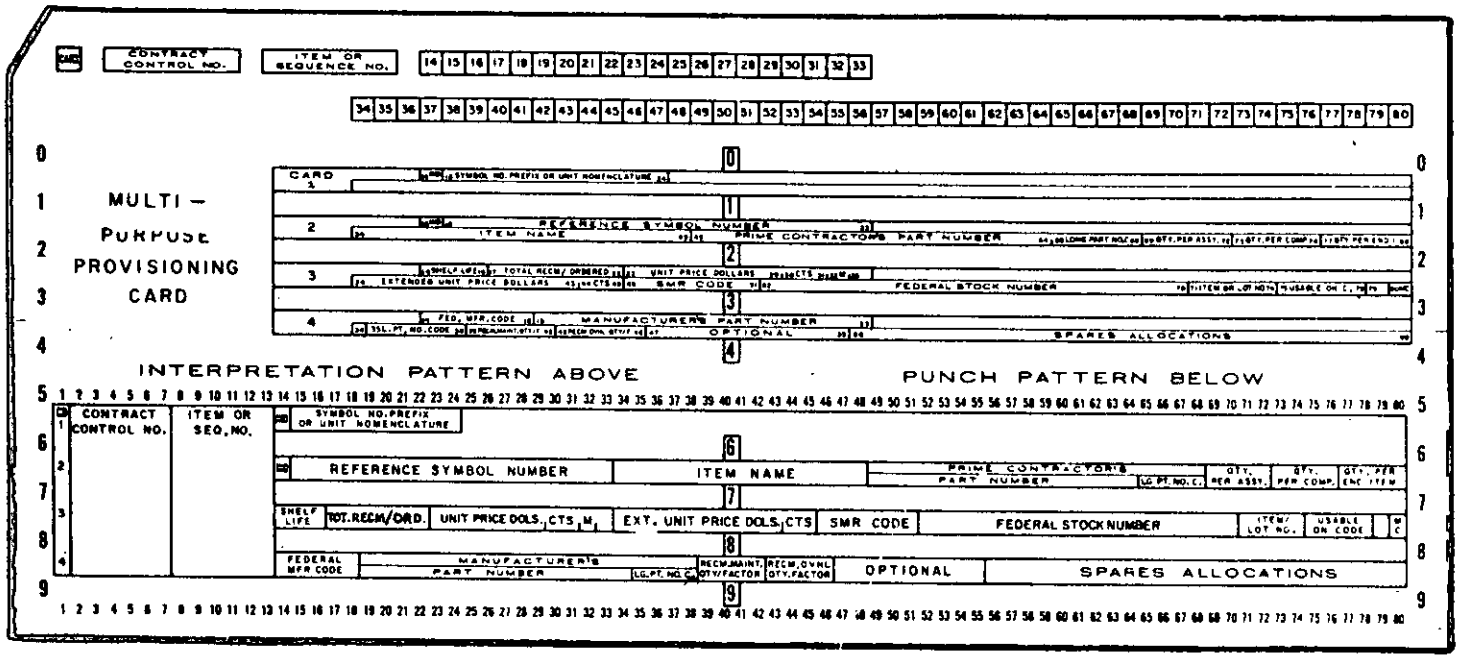


Figure 6

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:46Z
Check the source to verify that this is the current version before use.

APPENDIX A

INSTRUCTIONS FOR PREPARATION OF PROVISIONING LISTS

10. SCOPE

10.1 This appendix shall be considered as forming a part of the basic standard. The primary purpose of this appendix is to provide detailed procedures for implementing the basic requirements of this specification concerning the preparation of provisioning lists.

20. PREPARATION OF PROVISIONING LISTS

20.1 General Requirements. The detailed preparation of provisioning documentation shall be in accordance with the requirements of this section as modified by the PRS. Figures 4 and 5 illustrate the standard provisioning format that shall be used for both manually and mechanically prepared parts lists. This one format shall be used by all contractors for the preparation of a parts list and for all other special listings required by the PRS.

20.2 Manually and Mechanically Prepared Provisioning Lists. Unless otherwise specified by the PRS, manually and mechanically prepared provisioning lists shall be prepared in accordance with this section and shall conform to the format illustrated in figure 4. Master copies of the provisioning lists shall be prepared on pre-printed, reproducible forms. Reproduced copies shall be legible and be prepared on durable white paper that will accept ink, pencil, or typewriter insertions. Only one side of a page shall be used. Carbon copies of typed material, copies on tissue, white-lined blueprints, or photostats will not be accepted as masters. The PRS will specify the number of copies required. Manually prepared forms shall be typed using "pica" or "elite" size type. Mechanically prepared forms shall be burst and assembled in consecutive order. Reproduced copies shall conform to the size limitations as stated in 20.2.1.

20.2.1 Size. Page size shall be not less than $8\frac{1}{2}$ (L) x 11 (W) inches nor more than 11 (L) x 17 (W) inches.

20.2.2 Binding. Each copy of the provisioning documentation lists shall be securely bound at the left side of the document by a suitable removable fastener. The format shall be arranged so that data will not be obscured on the left margin of any page of the document. The parts list shall be protected by a suitable cover stock on both top and bottom.

20.2.3 Markings. The front cover of each provisioning list shall include the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

a. The manufacturer's end item model designation or military nomenclature, as applicable.

b. The contractor's name.

c. The contract number.

d. Type of list (e.g., provisioning list, revision, long lead list, etc.).

e. Total number of pages.

f. Volume number.

g. Security classification.

20.2.4 Volume Marking. If more than one volume is required, each volume shall be marked as in 20.2.3 and each volume numbered consecutively.

20.2.5 Arrangement of Items in the Parts Lists. Items shall be arranged in alpha-numeric reference symbol number sequence, top down breakdown sequence, disassembly sequence, or other sequence as specified in the PRS.

20.2.6 Item or Sequence Numbers. The item or sequence numbers on each provisioning list shall be consecutively assigned.

20.2.7 Page Numbers. The page numbers within each provisioning list shall be consecutively assigned.

20.3 Electric Accounting Machine (EAM) or Electronic Data Processing Equipment (EDPE) Prepared Provisioning Documentation. Unless otherwise specified by the PRS, machine produced provisioning documentation shall be prepared in accordance with the instructions and the data elements provided in this section. When provisioning lists are prepared by mechanical process and when requested by the PRS, the contractor will furnish a deck of interpreted EAM cards or magnetic tape(s) from which the provisioning lists were prepared. EAM cards or magnetic tapes may also be required for all subsequent revisions submitted by the contractor. Figure 6 illustrates the standard multipurpose EAM provisioning card format. If magnetic tape is to be utilized, the contractor will contact the PSICP prior to data submission to insure compatibility of tape format and characteristics. These instructions are applicable when standard interpreted EAM provisioning cards are required from a contractor and whenever the order of listing the items is by "Item Number". The contractor may, at his option, use these instructions to punch a deck of EAM cards for printing the standard provisioning format, figure 4, by machine listings.

20.4 Header Data for Standard Provisioning Format. The contractor shall insert the appropriate title of the lists in the upper center of each page of the standard format, and will provide the following data on the bottom lines of each page:

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the current version before use.

Data Element	Comment
Contract Number	Self-explanatory
Nomenclature	Insert name of equipment being provisioned and contractor's provisioning control number.
Model/Type Number	Self-explanatory.
Contractor	Insert prime contractor's Name
Date of List	Insert preparation cut-off date.
Revision	Used only for revisions after initial preparation. Revisions should be lettered serially commencing with the letter "A". Insert the date of the revision after the serial letter.
Page Number	Self-explanatory.
Security classification	Self-explanatory.

20.5 Header Data for EAM Preparation. The instructions given herein apply to the standard EAM provisioning card format (80-column) shown by figure 6. The standard method for key punching manufacturer's numbers as described in the Federal Cataloging Manual M1-6 will be used in the preparation of a deck of EAM provisioning cards. This standard method of punching is applicable to the "Prime Contractor's Part Number" (Cards 2 and 6), and the "Manufacturer's Part Number" Cards 4 and 5). All data elements that are punched in the EAM provisioning cards will be interpreted. A deck of EAM provisioning cards normally consists of three cards (Cards 2, 3, and 4) of data for each line item. Card 1 is used for additional data when provisioning electronic equipments. For items with part numbers exceeding 16 digits, or for DCNs, special provisions are made for the use of additional cards (Cards 5, 6, 7, and 8). A single EAM format, figure 6, serves a multipurpose use as Cards 1, 2,

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the currentversion before use.

3, 4, 5, 6, 7, and 8. The PRS will specify the EAM provisioning cards required, special data element requirements, and the requirement for a special header card to identify the deck of EAM cards. The applicable block number is given with each punching instruction to indicate the location of each data element on the standard provisioning format.

20.5.1 "Card No." Use card column 1 of Cards 1, 2, 3, 4, 5, 6, 7, and 8. The card number is used for control purposes and is never printed on the standard provisioning format.

20.5.2 "Contract Control Number." Use card columns 2-7 of Cards 1, 2, 3, 4, 5, 6, 7, and 8. The Contract Control Number is never printed on the standard provisioning format. This number identifies, and is peculiar to, the contract for the equipment or end item being provisioned. This number will be cited in the PRS if EAM provisioning cards are required. When decks of EAM cards are not required, the contractor may assign a Contract Control Number that suits his internal requirements. The Contract Control Number is intended primarily for control of EAM decks (e.g., to permit reassembly of given decks).

20.6 Data Elements. The standard provisioning list format contains 22 data elements (or blocks) of provisioning technical data. Except for the Design Change Notice format, which requires 29 blocks of data, these 22 elements of data are the maximum allowable for provisioning technical documentation. The location of each element of data is fixed and the digital limitations are specified. In no case will the digital limitations be exceeded. The "Block No." referred to in the following paragraphs locates the columnar position of each data element on the standard provisioning list format. The standard format normally consists of two lines of data for each line item of the provisioning list; the first line contains blocks 1 through 12, and the second line, blocks 13 through 22. See Figure 4.

20.6.1 Block 1, "Item or Sequence Number" (6-digits). This block is used for the sequential line item control, commencing with the first line item on the listing and continuing alpha-numerically to the last line item entry of the listing. The first four positions of the "Item or Sequence Number" shall be for alpha-numeric sequential control of line items on the list and shall be constructed as follows:

The first, second, and third positions may be either alpha or numeric beginning with A or 1 in ascending order excluding alpha characters I and O; the fourth position shall always be a numeric digit. However, the item or sequence number shall be constructed within one of the following options:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

Card Columns		8	9	10	11	Number of Items
	(1)	N	N	N	N	less than 10,000
	(2)	A	N	N	N	10,000 to 24,000
	(3)	A	A	N	N	24,000 to 138,240
	(4)	A	A	A	N	138,240 to 331,776

The contractor may select the option but once an option is selected it must remain constant in any one provisioning list.

20.6.1.1 Changes to the Item or Sequence Number. The fifth and sixth digits shall be used to indicate additions, modifications, deletions and to identify typographical and quantity changes to the initial assignment of the "Item or Sequence Numbers." Alpha characters "I" and "O" shall not be used. See paragraphs concerning DCNs for additional information.

a. Additions. The fifth digit shall be used to indicate additions to the list. For this purpose, the letters A through Z (except D, M, Q, T) inclusive, and the numbers 1 through 9 inclusive, shall be used. An item entry, identified by the letters A, B, C, etc., in the fifth digit of block 1, is sequenced for inserting new items in the provisioning list either as first or subsequent (same as) item entry and will be used for regular additions or replacing items.

(NOTE - In some instances it may be more advantageous to begin with the letter Q for the first addition. The second addition shall be indicated by letters halfway between the series Q-A or Q-9, depending upon the placement relationship of the additional part or item to those previously assigned. Succeeding additions will be assigned halfway between the previously assigned addition and A or 9. The PRS shall indicate if this procedure will be applicable to the contract.)

b. Deletions or Modifications. The sixth digit in block 1 shall be used to indicate deletions, modifications, typographical errors and quantity changes. A deleted item shall be indicated by a D in the sixth digit and is required to identify items shown on the provisioning lists which were never used in the production equipment or when completely removed from the production equipment during subsequent production. A modified item shall be indicated by an M in the sixth digit of block 1 and is required if a change occurs to the prime contractor's part number, federal manufacturer's code, manufacturer's part number, or item name. A "T" shall be indicated in the sixth digit of block 1 if a change is required to correct a typographical error. Quantity changes to blocks 6, 7, or 8 shall be indicated by entering the letter Q in the sixth digit of block 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

20.6.1.2 Examples of Item or Sequence Numbers.

Card Columns Allocated for block No. 1						Explanation
1	2	3	4	5	6	
A	1	2	0			Item as originally listed
A	1	2	0	A		First addition between item Nos. A120 and A121
A	1	2	0	B		Second addition between item Nos. A120 and A121
A	1	2	0	C	M	Third addition between item Nos. A120 and A121 which has been subsequently modified
A	1	2	1			Item as originally listed
A	1	2	2		M	Modified Item
A	1	2	4		D	Deleted Item
A	1	2	4		T	Typographical error
A	1	2	5		Q	Quantity adjustment

20.6.1.3 EAM Preparation. Use card columns 8-13 of Cards 1, 2, 3, 4, 5, and 6 starting in column 8.

20.6.2 Block 2, "Indenture No." (1 digit). This block is used only when sequence of listing is in top-down or disassembly order. A letter shall be inserted in this block to indicate the relation of the line item to the end item as follows:

A	B	C	D	E	F	G
Complete Item, Main Group, or Main Assembly						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

A	B	C	D	E	F	G
.	Assembly					
	...*...					
.	Attaching parts for assembly					
	Detail parts of assembly					
.	.	Subassemblies				
	...*...					
.	.	Attaching parts for subassemblies				
.	.	.	Detail parts of subassemblies			
.	.	.	Sub-subassemblies			
	...*...					
.	.	.	Attaching parts for sub-subassemblies			
.	.	.	.	Detail parts of sub-subassemblies		

20.6.2.1 EAM Preparation. Use card column 14 in Cards 1 and 2. This information is printed in block 2 on the standard provisioning format from Card 2.

20.6.3 Block 3, "Reference Symbol No." (19 digits). Reference symbol numbers shall conform to USASI Y32.16 and shall be entered as stated herein. A reference symbol number may contain 29 digits of numbers and letters. The first ten digits containing the major unit and subassembly data shall be posted on the top left-hand side of each page of the parts lists. A new page shall be started for each new unit/subassembly. The remaining 19 digits shall be posted in Block 3. For equipment not requiring reference symbol numbers, the PRS will specify the data required for Block 3.

20.6.3.1 EAM Preparation.

a. "Prefix or Unit Nomenclature." Use columns 15-24 of Card 1 only. This card is required when provisioning electronic equipments. This number used to identify individual parts in electronic end items. The symbol number prefix is constructed as follows:

Card Columns	Data Element
15-17	Unit number of the major unit.
18-21	Unit number of the first subassembly, Post the alpha in column 18. Post the numeric from right to left in columns 19-21 (units in cc21, tens in cc20, hundreds in cc19).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

Card Columns	Data Element
22-24	Unit number of second subassembly. Post the alpha in column 22. Post the numeric from right to left in columns 23-24 (units in cc24, tens in cc23).

b. "Reference Symbol Numbers." Use columns 15-33 in Card 2 only. This information is printed in block 3 of the standard provisioning format. The reference symbol number is constructed as follows:

Card Columns	Data Element
15-17	Unit number of the third subassembly. Post the alpha in column 15. Post the numeric from right to left in columns 16-17 (units in cc17, tens in cc16).
18-19	Unit number of the fourth subassembly. Post alpha in cc18 and numeric cc19.
20-22	Alpha portion of reference symbol. Post from right to left.
23	Post a dash.
24-29	Post from right to left the numeric portion of the reference symbol.
30	If a tertiary number is used, post a dash.
31-33	Post, from right to left, the tertiary alpha/numeric designator.

20.6.4 Block 4, "Item Name" (15 digits). The item name, as contained in Handbook H6-1, or the name assigned by the manufacturer when an applicable item name is not contained in the handbook, shall be inserted in this block. The item name may be abbreviated as necessary in accordance with MIL-STD-12.

20.6.4.1 EAM Preparation. Use card columns 34-48 of Card 2. This information is printed in block 4 of the standard provisioning format.

20.6.5 Block 5, "Prime Contractor's Part No." and "Long Part No. Code" (16 and 4 digits respectively). This block is used exclusively to indicate the prime contractor's part, drawing, or catalog number assigned to the item listed in the parts list, if different from the manufacturer's part number (see block 17). Block 5 should be left blank,

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the current version before use.

if the part number assigned is the same as that contained in block 17. Block 5 allocates 16 digits to a part number.

20.6.5.1 When the part number exceeds 16 digits, long part number codes will be assigned in accordance with Appendix B of the Federal Cataloging Manual M1-6 and both the part number and the number code will be entered in block 5. The overflow portion(s) of the part number and the number code(s) will be entered directly below block 17 (and below any overflow long manufacturer's part numbers. The letter "P", indicating the prime manufacturer's part number, will be printed in the same line as the overflow part number in the first number position in block 16, Federal Manufacturer's Code. A new line will be required for each; 16 digit increment of a part number.

20.6.5.2 The prime contractor's part number shall be entered only on the first appearance of an item in the provisioning list for electronics. For subsequent appearances of the same item on the provisioning list, the words "same as" followed by the item or sequence number assigned to the line item on its first appearance shall be printed in block 5.

20.6.5.3 EAM Preparation. Use card columns 49-64 for part numbers, and card columns 65-68 for the long part number code of Cards 2 and 6.

a. When the part number is 16 digits or less in length, the long part number code is not applicable and card columns 65-68 will be left blank. Punching of the part number will always begin in column 49. The part number (and the number code when applicable) is printed in block 5 of the standard provisioning format.

b. When the part number exceeds 16 digits in length, long part number codes will be assigned in accordance with Appendix B of the Federal Cataloging Manual M1-6 except card columns 14 and 31-33 of Appendix D becomes card columns 65-68 of Card 2 and 6. The overflow portion(s) of the part number in increments of 16 digits, is punched in card columns 49-64 of Card 6. A letter "P", indicating Prime Contractor's Part Number, is punched in column 14 of Card 6. One or more Card 6's will be used as necessary to complete the punching of the part numbers. Punching of the overflow portion(s) will always begin in column 49 of Card 6. The overflow portions and the number code(s) will be printed directly below block 17 and after the Card 5's, if any. Card 6 will be used only when the Prime Contractor's Part Number exceeds 16 digits.

20.6.6 Block 6, "Quantity Per Assembly" (4 digits). The contractor shall insert a figure indicating the total number of times that the item is used in the assembly of which it is a part. A figure should only be entered for the first appearance of the item. Subsequent appearances of the item in the same assembly will be indicated by printing the letters

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

REF in this block.

20.6.6.1 EAM Preparation. Use card columns 69-72 of Card 2. When the letters "REF" are used, this will be punched in columns 69-71.

20.6.7 Block 7, "Quantity Per Component" (4 digits). The contractor shall insert a figure indicating the number of times the item is used in the component of which it is a part. A figure should be entered only for the first appearance of the item in the component. Subsequent appearances of the item in the same component will be indicated by printing the letters REF in this block.

20.6.7.1 EAM Preparation. Use card columns 73-76 of Card 2. When the letters "REF" are used, they will be punched in columns 73-75. This information is printed in block 7 of the standard provisioning format.

20.6.8 Block 8, "Quantity Per End Item" (4 digits). The contractor shall insert a figure indicating the number of times the item is used in the equipment or end item. A figure should only be entered for the first appearance of the item in the equipment or end item. Subsequent appearances will be indicated by printing the letters REF in this block.

20.6.8.1 EAM Preparation. Use card columns 77-80 of Card 2. When the letters "REF" are used, they will be punched in Card columns 77-79. This completes the punching of Card 2.

20.6.9 Block 9, "Shelf-Life" (3 digits). In this block the contractor shall insert a number to indicate the expected shelf-life in number of months, e.g., 6, 12, 36. This number indicates that the item has certain physical and material characteristics which limits its storage or shelf-life. It is used as a guide by the government for assuring that such items are not procured to meet requirements in excess of the shelf-life of an item, e.g., 12 months of stock procured for an item having a shelf-life of six months. If the shelf-life of the item is indefinite, (i.e., unlimited under reasonable care) the letters "IND" should be inserted in this column.

20.6.9.1 EAM Preparation. Use card columns 14-16 of Card 3.

20.6.10 Block 10, "Total Quantity Recommended/Ordered" (6 digits). The contractor inserts the total quantity of the line item recommended, or the Requiring Activity will enter the total quantity ordered, for each item in support of the end item. The quantity ordered, when provided to the contractor, will be entered on any subsequent documentation the contractor submits under the contract.

20.6.10.1 EAM Preparation. Use card columns 17-22 of Card 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

20.6.11 Block 11, "Unit Price" (11 digits). The contractor shall enter either the proposed (offering) price or the best estimated unit price. Proposed prices shall be identified by a suffix letter "P" and estimated prices by a suffix letter "E." The price shall be determined by consideration of concurrent fabrication and/or procurement for both production and provisioning requirements. A decimal point will be used to divide dollars from cents and mils.

20.6.11.1 EAM Preparation. Use card columns 23-33 of Card 3 as follows:

Card columns 23-29	-	Dollars
Card columns 30-31	-	Cents
Card column 32	-	Mils
Card column 33	-	Use a letter "P" when proposed price; "E" when estimated price.

20.6.12 Block 12, "Extended Unit Price" (12 digits). The contractor will enter the total proposed or estimated price of the item. This price will be determined by multiplying the quantity in Block 10 times the unit price in Block 11. The contractor shall use a decimal point to divide dollars and cents.

20.6.12.1 EAM Preparation. Use card columns 34-45 of Card 3 as follows:

Card columns 34-43	-	Dollars
Card columns 44-45	-	Cents

20.6.13 Block 13, "Source, Maintenance, and Recoverability (SM&R) Codes" (6 digits). Unless otherwise specified by the PRS, the contractor shall leave this block blank.

20.6.13.1 EAM Preparation. Use card columns 46-51 of Card 3.

20.6.14 Block 14, "Federal Stock Numbers" (19 digits). Unless otherwise specified by the PRS, the contractor shall enter the Federal Stock Number obtained from the Defense Logistic Services Center (DLSC).

20.6.14.1 EAM Preparation. Use card columns 52-70 of Card 3.

20.6.15 Block 15, "Item and Lot Number" (4 digits). The contractor shall indicate in this block the appropriate contract line item number for the spares and repair parts item of the contract covering the applicable line item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

20.6.15.1 EAM Preparation. Use card columns 71-74 of Card 3.

20.6.16 Block 16, "Federal Supply Code For Manufacturer's" (5 digits). The contractor shall insert the 5 digit Federal Supply Code for Manufacturer's (FSCM) to identify the actual manufacturer (or typical manufacturer) including the FSCM of Government Standards, Military Standards and Military Specifications, for the part number entered in block 17. The manufacturer's code shall be obtained from the Federal Handbook H4-1 and H4-2. The data for block 16 shall be printed at the extreme right of the applicable column in the standard provisioning format.

20.6.16.1 EAM Preparation. Use card column 14-18 of Card 4.

20.6.17 Block 17, "Manufacturer's Part Number" and "Long Part Number Code" (16 digits and 4 digits respectively). This block is used exclusively to indicate the actual manufacturer's part, drawing, or catalog number assigned to the item in the parts list. For purposes of this block, the manufacturer is the company or government activity exercising design control over the item. If more than one source of supply is used by the contractor in the production of the end item for a given line item in the parts list, the contractor need only enter a typical manufacturer's part number in this block. However, the contractor shall be consistent in the use of a typical manufacturer throughout the parts list. Where the line item is identified by a government specification, drawing, or standard number (e.g., FED, MIL, JAN, AN) which completely identified the item, this number is the preferred number and must be furnished in this block. If the government specification or standard number does not fully identify the item, the manufacturer's number should be used. When the part number is 16 digits or less, the long part number code field will be left blank.

20.6.17.1 EAM Preparation. Use card columns 19-34 for part number, and card columns 35-38 for long part number code of Cards 4 and 5.

a. When the part number is 16 digits or less in length, the Long Part Number Code is not applicable and card columns 35-38 will be left blank. Punching of the part number will always begin in card column 19. The part number and number code, when applicable, is printed in block 17 of the standard provisioning format.

b. When the part number exceeds 16 digits in length, Long Part Number Codes will be assigned in accordance with Appendix B of the Federal Cataloging Handbook MI-6, except card columns 14 and 31-33 of Appendix B become card columns 35-38 of Cards 4 and 5. The overflow portion(s) of the part number, in increments of 16 digits, is punched in columns 19-34 of Card 5. A letter "M," indicating Manufacturer's Part Number, is punched in column 14 of Card 5. One or more Card 5's will be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

used as necessary to complete the punching of the part number. Punching of the overflow portion(s) and the number code(s) will be printed directly below block 17 on the standard provisioning format. The letter "M" will be printed in the first position directly below block 16, Federal Manufacturer's Code. Card 5 will only be used when the Manufacturer's Part Number exceeds 16 digits.

20.6.18 Block 18, "Recommended Maintenance Quantity Factor" (4 digits). If required by the PRS and according to instructions provided by the Requiring Activity, the contractor shall insert in this block a quantity or a wearout, replacement, or failure factor applicable to maintenance aspects of the item.

20.6.18.1 EAM Preparation. Use card columns 39-42 of Card 4.

20.6.19 Block 19, "Recommended Overhaul Quantity Factor" (4 digits). The contractor shall insert in this block a wearout, replacement, or failure factor or a quantity applicable to overhaul aspects of the items.

20.6.19.1 EAM Preparation. Use card columns 43-46 of Card 4.

20.6.20 Block 20, "Usable on Code" (4 digits). The contractor shall enter an alphabetic code in this block to indicate the applicability of the line item to the next higher assembly, or component, or to the end item if an item used has only limited use in the equipment. The code shall indicate the specific usability of the line item by citing the serial, type, model, or number of articles. This code shall be explained in the front page of the provisioning list or, if the contractor desires, in the "Remarks" column of the form. As an alternate use for this block and, when directed by the PRS, the contractor shall enter an alphabetic code to indicate the configuration of the end item, if the end item was procured under a variable nomenclature (basic equipment with variations as to quantity or combination of units).

20.6.20.1 EAM Preparation. Use card columns 75-78 of Card 3.

20.6.21 "Multiline Control." Punch a letter "B" in card column 80 of Card 3 for multiline print control. This completes punching of Card 3. This letter is never printed on the standard provisioning format. Card column 79, Card 3, shall be left blank.

20.6.22 Block 21, "Optional" (9 digits). This block may be used for data specified in the PRS.

20.6.22.1 EAM Preparation. Use card columns 47-55 of Card 4.

20.6.23 Block 22, "Spares Allocation" (25 digits). Unless otherwise specified by the PRS, the contractor shall leave this block blank.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

20.6.23.1 EAM Preparation. Use card columns 56-80 of Card 4. This punching completes Card 4.

20.6.24 "Remarks Column." The contractor shall enter in this column, as required, data that is considered pertinent to the line item entries in the parts list but cannot be described by the standard data blocks. This column shall also be used to indicate special data as specified in the PRS.

20.7 Design Change Notice Data Elements. Design Change Notices (DCN) shall be submitted on the standard provisioning list format as modified herein to provide for the additional data elements that are required for DCN processing. Figure 3, illustrates the DCN format to be used. Mechanical submission of DCNs, if required, will be so stated in the PRS. 20.2 states basic requirements for mechanical submission of PTD. Additional specifications shall be delineated in the PRS. Header format, etc., will be as specified in 20.4 and 20.5 with the exception that the page will be titled "Design Change Notice."

20.7.1 Block 1, Item or Sequence Number (6 digits). The Design Change Notice Item or Sequence Number shall be compatible to the item or sequence number contained in the basic provisioning parts list. Additions, modifications or deletions that are submitted as Design Change Notices shall have the item or sequence number constructed as stated in 20.6.1.

20.7.2 Block 2, "Indenture Number" (1 digit). Same as 20.6.2. Not normally required for DCN. PRS will state if required on DCN.

20.7.3 Block 3, "Reference Symbol Number" (19 digits). Same as 20.6.3.

20.7.4 Block 4, "Item Name" (15 digits). Same as 20.6.4.

20.7.5 Block 5, "Prime Contractor's Part Number" and "Long Part Number Code" (16 and 4 digits respectively). Same as 20.6.5.

20.7.6 Block 6, "Quantity Per Assembly" (4 digits). Same as 20.6.6.

20.7.7 Block 7, "Quantity Per Component" (4 digits). Same as 20.6.7.

20.7.8 Block 8, "Quantity Per End Item" (4 digits). Same as 20.6.8.

20.7.9 Block 9, "Shelf Life" (3 digits). Same as 20.6.9.

20.7.10 Block 10, "Total Quantity Recommended/Ordered. The contractor shall insert the quantity of the original/revised repair parts recommended/ordered. Zeros shall be indicated for a negative situation.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the current version before use.

20.7.10.1 EAM Preparation. Use card columns 17-22 of Card 3.

20.7.11 Block 11, "Unit Price" (11 digits). Same as 20.6.11.

20.7.12 Block 12, "Extended Unit Price" (12 digits). Same as 20.6.12.

20.7.13 Block 13, "Source, Maintenance and Recoverability (SM&R) Codes" (5 digits). The contractor shall insert the SM&R code previously established for the deleted, superseded or limited item. Insert the recommended SM&R code for the added or superseding item.

20.7.13.1 EAM Preparation. Use card columns 46-51 of Card 3.

20.7.14 Block 14, "Federal Stock Number" (19 digits). The contractor shall insert the FSN if previously furnished by the Requiring Activity or by DLSC screening procedures.

20.7.14.1 EAM Preparation. Same as 20.6.14.1.

20.7.15 Block 15, "Item and Lot Number" (4 digits). Same as 20.6.15.

20.7.16 Block 16, "Federal Supply Code for Manufacturer's" (5 digits). Same as 20.6.16.

20.7.17 Block 17, "Manufacturer's Part Number" and "Long Part Number Code" (16 digits and 4 digits respectively). Same as 20.6.17.

20.7.18 Block 18, "Recommended Maintenance Quantity/Factor" (4 digits). Leave blank unless specified by PRS as required in initial provisioning list. If required, enter factor code for deleted and/or added/superseding item.

20.7.18.1 EAM Preparation. Same as 20.6.1.1.

20.7.19 Block 19, "Recommended Overhaul Quantity Factor" (4 digits). Leave blank unless specified by the PRS as required in the initial provisioning list. If required, enter factor code for deleted and/or added/superseding item.

20.7.19.1 EAM Preparation. Same as 20.6.19.1.

20.7.20. Block 20, "Usable on Code" (4 digits). Same as 20.6.20.

20.7.21 Block 21, "Security Classification and Total Quantity Prorated" (9 digits).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:46Z
Check the source to verify that this is the current version before use.

20.7.21.1 Security Classification (1 digit). In the first (high order) position of Block 21 enter an alpha code to indicate the security classification of the contract or equipment. A letter "U" shall be entered if the item(s) is unclassified. Following are the appropriate codes:

U Unclassified

M Confidential - Modified Handling

A Confidential - Formerly Restricted Data

B Confidential - Restricted Data

C Confidential

G Secret - Formerly Restricted Data

H Secret - Restricted Data

S Secret

K Top Secret - Formerly Restricted Data

L Top Secret - Restricted Data

T Top Secret

20.7.21.2 Total Quantity Prorated (6 digits). In the last six (low order) position of Block 21 original/revised repair parts order prorated to the new item.

20.7.21.3 EAM Preparation. Use card columns 47-55 of Card 4.

a. Enter security classification in column 47.

b. Leave card columns 48-49 blank.

20.7.22 Block 22, "Outfitting/Allowance List Data" (25 digits). Enter the previously established outfitting/allowance data for the deleted, superseded, or limited item. Enter recommendation for the added or superseded item. Identify the outfitting/allowance list designator if appropriate.

20.7.22.1 EAM Preparation. Use card columns 56-80 of Card 4.

20.7.23 Block 23, "Design Change Notice Number and Status Code" (6 digits). The PRS shall state if Block 23 is to contain the Design Change Notice number and Status Code. The first four (4) digits of Block 23 shall be the DCN number. This number shall be constructed as described in 20.6.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

20.7.23.1 Status Codes. The fifth (5) and sixth (6) digit shall be alphabetic and used to indicate the status of the DCN as follows:

SD - Superseded Item. If the item is not deleted, and an improved item is submitted.

LT - Item Limited not Superseded. If the item is required for support of a limited number of end articles.

DL - Deleted Item. If the item is no longer a useable spare for any article delivered.

SG - Superseding Item. If the item can be used in all applications in place of the superseded item (SD), and if the item is not an alternate.

AD - Added Item. If there is no predecessor item, or if the item cannot be used in all applications.

AL - Alternate Item. If two (2) items are interchangeable (no product improvement).

20.7.23.2 Examples of the DCN Number.

Digits allocated for Block 23.

123456	Explanation
A001SD	Superseded Item
A001SG	Superseding Item
A002DL	Deleted Item
A999LT	Limited Item
B001AD	Added Item
B002AL	Alternate Item

20.7.23.3 EAM Preparation. Use card columns 44-49 of Card 7.

20.7.24 Block 24, "Next Higher Assembly/Next Higher Repairable Assembly for Prime" (20 digits). Enter the NHA/NHRA of the prime contractor number entered in Block 5.

20.7.24.1 EAM Preparation. Use card columns 50-69 of Card 7.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

20.7.25 Block 25, "Interchangeability" Code (3 digits). Enter the appropriate interchangeability code as follows:

Code	Explanation
NOT	Not Interchangeable
ONE	One Way Interchangeable
TWO	Two Way Interchangeable

20.7.25.1 Guidelines to Assigning Interchangeability Codes.

NOT (Not Interchangeable)

Old Part: Specific end article or equipment effectivity.

New Part: Specific end article or equipment effectivity.

Remarks: These items are usable only on the specific articles or equipment reflected in Block 20.

ONE (One Way Interchangeable)

Old Part: Specific end article or equipment effectivity.

New Part: May be used on all applications previously shown for old part.

Remarks: Use old item until stock exhausted. Future procurement and distribution of new part for all applications previously shown for old part.

NOTE: This code should not be assigned merely to show preferred spare.

TWO (Two Way Interchangeable)

Remarks: Either the new or the old supply item is usable on all end articles or equipment. Indicate in "Remarks" block whether new item is a preferred item for procurement purposes, or an alternate item.

20.7.25.2 Remarks: The PRS shall state any significant data to be inserted in the remarks block. In the absence of special instruction, the contractor may indicate any pertinent data useful in processing the DCN.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:46Z
Check the source to verify that this is the current version before use.

20.7.25.3 EAM Preparation. Use card columns 70-72 of Card 7.

20.7.26 Block 26, "Engineering Change Proposal/Technical Directive Number" (6 digits). Insert the Engineering Change Proposal Number and approved Technical Directive Number when applicable.

20.7.26.1 EAM Preparation. Use card columns 73-78 of Card 7.

20.7.27 Multiline Control. Punch a letter "B" in card column 80 of Card 7 for multiline print control. This completes punching of Card 7. This letter is never printed on the DCN format. Card column 79, Card 3, shall be left blank.

20.7.28 Block 27, "Next Higher Assembly/Next Higher Repairable Assembly for Manufacturer" (20 digits). Enter the NHA/NHRA of the manufacturer's number entered in Block 17.

20.7.28.1 EAM Preparation. Use card columns 19-38 of Card 8.

20.7.29 Block 28, "Total Quantity Shipped" (6 digits). Insert the quantity shipped of the original/revised repair parts order.

20.7.29.1 EAM Preparation. Use card columns 51-55 of Card 8.

20.7.30 Block 29, "Packaging and Preservation Codes" (23 digits). Enter the previous unit packaging and preservation codes for the superseded/deleted/limited item. Enter recommendation for the added/superseding item.

20.7.30.1 EAM Preparation. Use card columns 56-78 of Card 8.

☆U.S. GOVERNMENT PRINTING OFFICE: 1973-714-916/1175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Supply Systems Command (SUP 0321)
Washington, DC 20376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:46Z
Check the source to verify that this is the current version before use.